





**Fantastic
Furniture**

Version 1.0

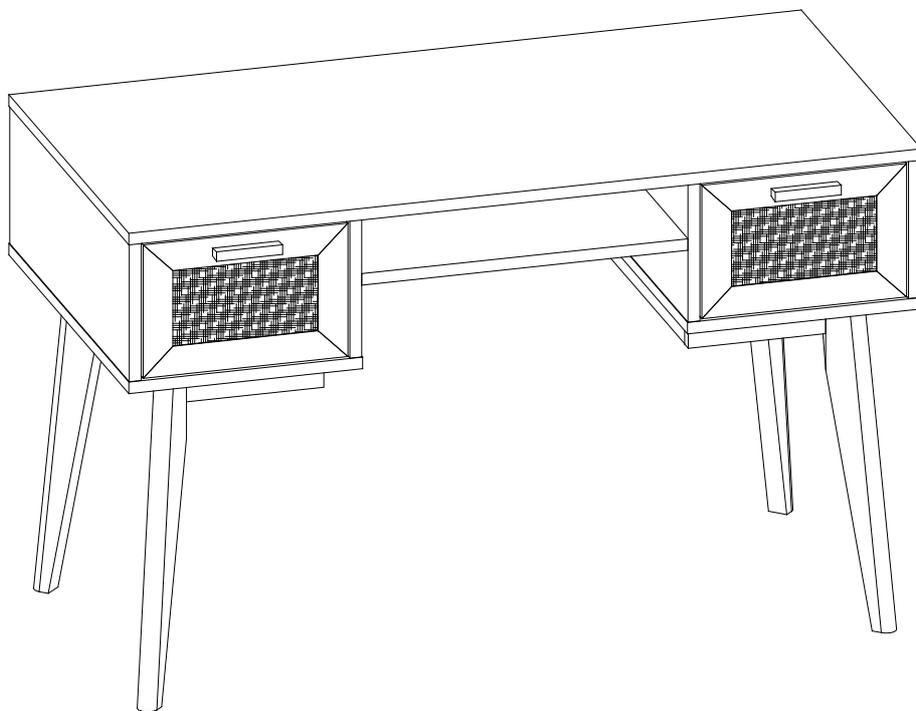

Two People



Required

Java
Desk 2 Drawer
fantasticfurniture.com.au

Rattan

Rattan is a natural material that will respond to humidity in the environment. Low humidity may cause the rattan to shrink. High humidity may cause the rattan to absorb moisture and expand, causing the weaving to look loose and wavy.

This is a natural phenomenon and not a defect.

Recommended weight capacity: 60kgs on top

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram
for your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist



Read through the instructions carefully before you begin.

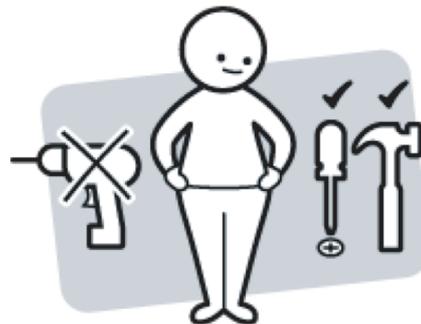

Make sure you have all the required tools. Never use power tools unless instructed.

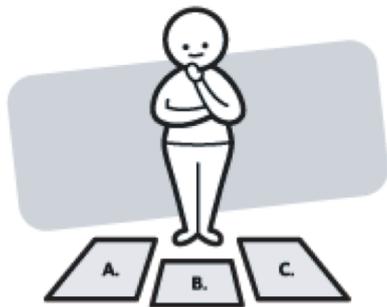

Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product




DO NOT USE



Other tools you need

Phillips Head Screwdriver

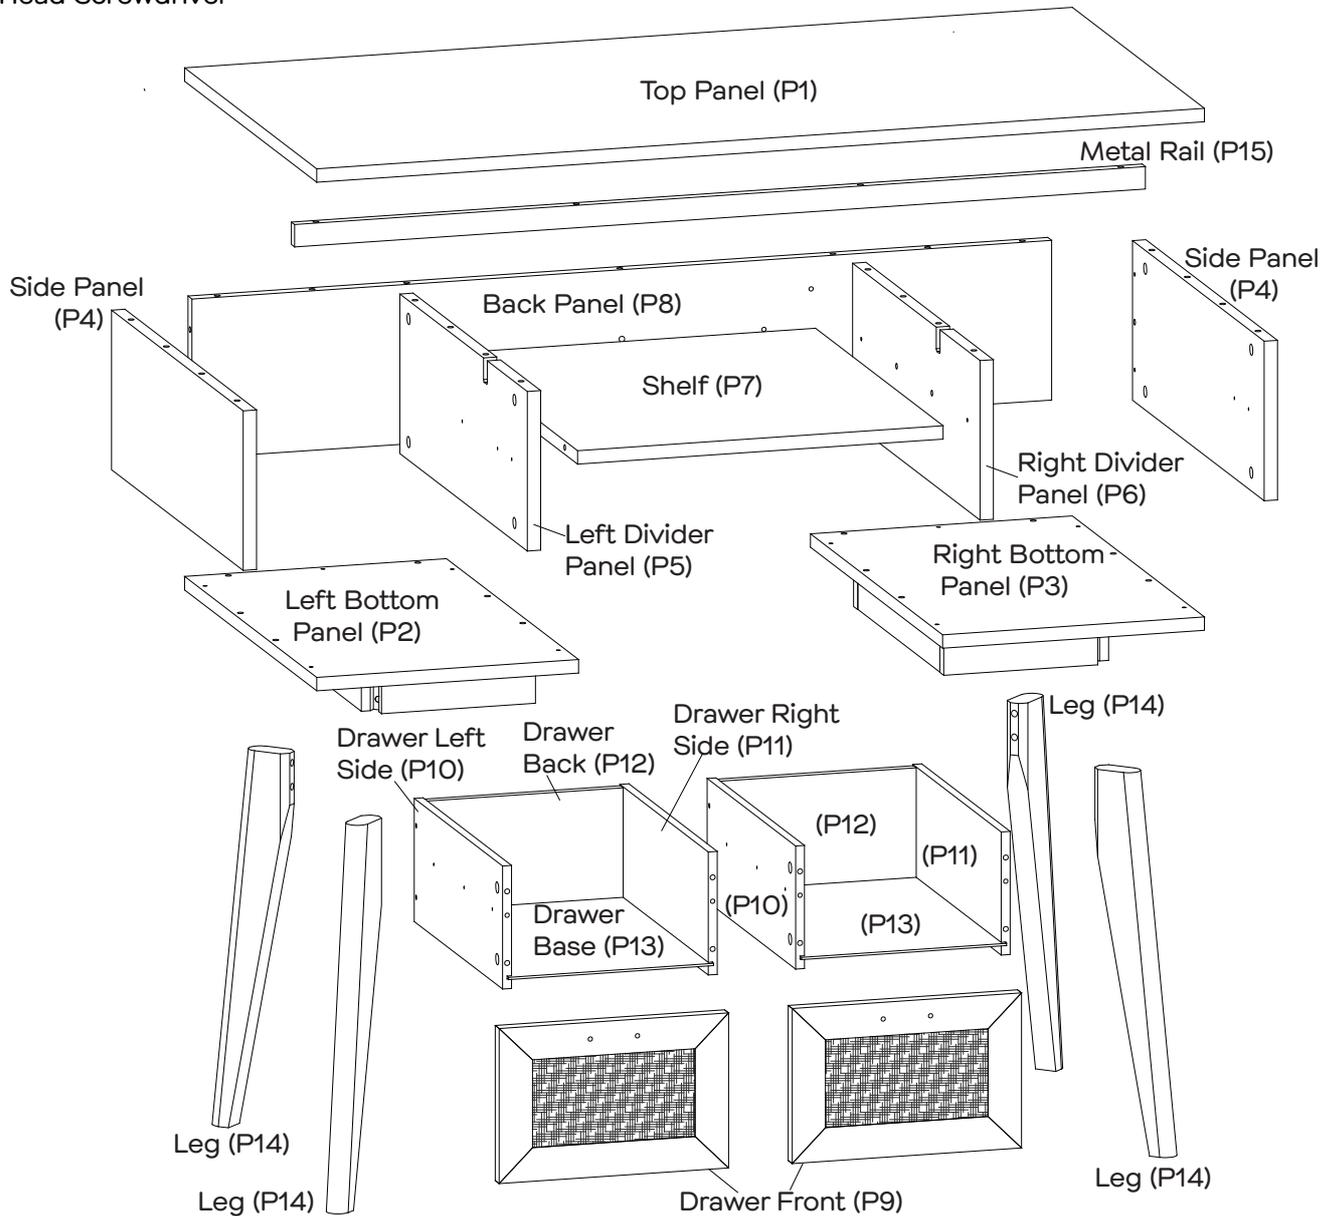

Parts list

Carton 1:

- 1 x Left Bottom Panel (P2)
- 1 x Right Bottom Panel (P3)
- 2 x Drawer Fronts (P9)
- 2 x Drawer Left Sides (P10)
- 2 x Drawer Right Sides (P11)
- 2 x Drawer Backs (P12)
- 2 x Drawer Bases (P13)
- 4 x Legs (P14)

Carton 2:

- 1 x Top Panel (P1)
- 2 x Side Panels (P4)
- 1 x Left Divider Panel (P5)
- 1 x Right Divider Panel (P6)
- 1 x Shelf (P7)
- 1 x Back Panel (P8)
- 1 x Metal Rail (P15)

Hardware Pack



37 x Large Cam Bolts (H1)



29 x Large Cam Nuts (H2)



33 x Large Dowels (H3)



2 x Handles (H4)



4 x Felt Pads (H5)



8 x Bolts (H6)



8 x Flat Washers (H7)



8 x Spring Washers (H8)



4 x Handle Screws (H9)



1 x Allen Key (H10)



8 x Small Cam Nuts (H11)



4 x Small Dowels (H12)



14 x Long Screws (H13)



24 x Slide Screws (H14)



4 x Slides (H15)




4 x Rail Bolts (H16)

Step 1

You will need	
4 x Slides (H15)	


Separate 4 x Slides (H15) into Slide Tracks (H15-1) and Slide Runners (H15-2) as shown below:

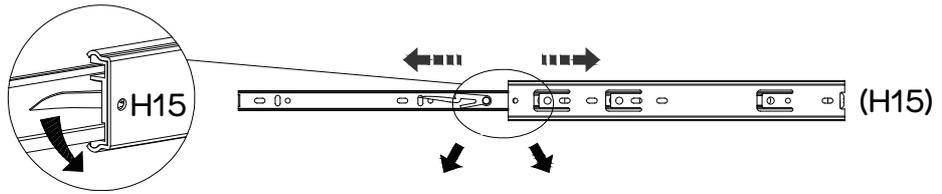

Press down on the plastic release lever to extend the Slide Runner (H15-2) from Slide Track (H15-1) and then separate the two pieces completely.




Adjust runner to access the screw holes.

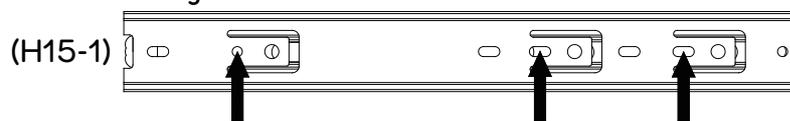


Step 2

You will need	
2 x Slide Tracks (H15-1)	6 x Slide Screws (H14)
4 x Cam Bolts (H1)	Phillips Head Screwdriver
8 x Large Dowels (H3)	

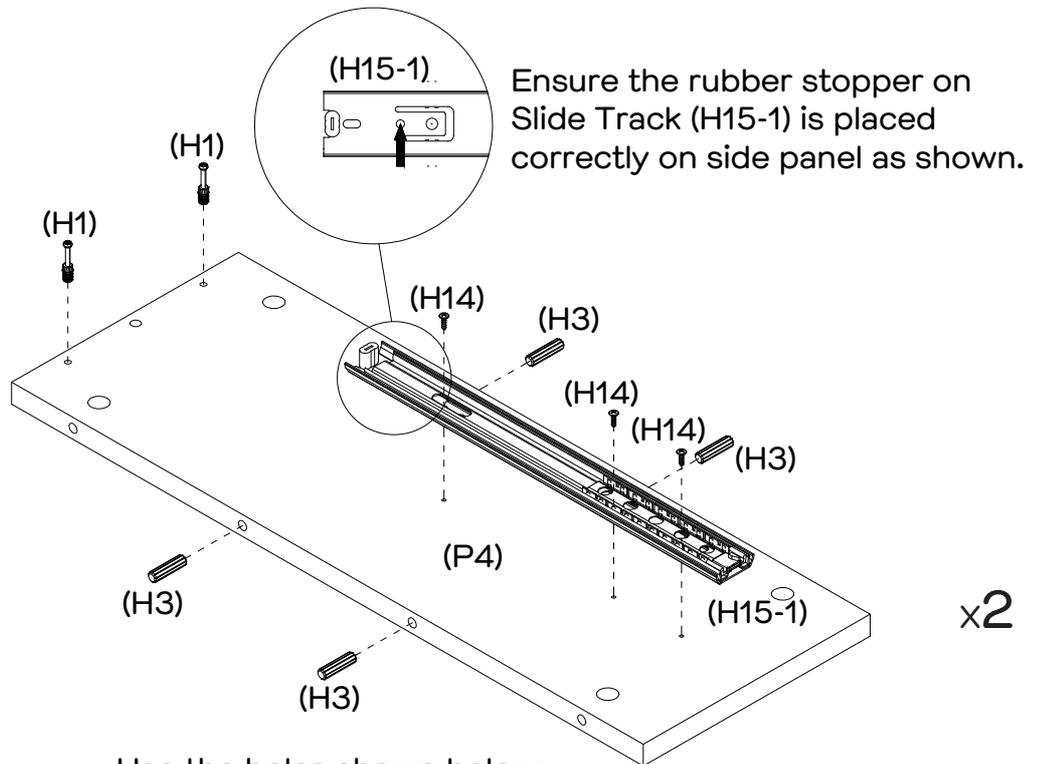

Use the holes shown below on the Slide Track (H15-1) to secure the screws




Insert 4 x Large Dowels (H3) into Side Panel (P4).

Secure 1 x Slide Track (H15-1) to Side Panel (P4) with 3 x Slide Screws (H14) as shown by tightening with the Phillips Head Screwdriver.



Attach 2 x Cam Bolts (H1) to Side Panel (P4) by tightening with the Phillips Head Screwdriver. Repeat steps for the second Side Panel (P4).

Step 3


You will need	
	
2 x Slide Tracks (H15-1)	6 x Slide Screws (H14)
	
10 x Large Dowels (H3)	Phillips Head Screwdriver

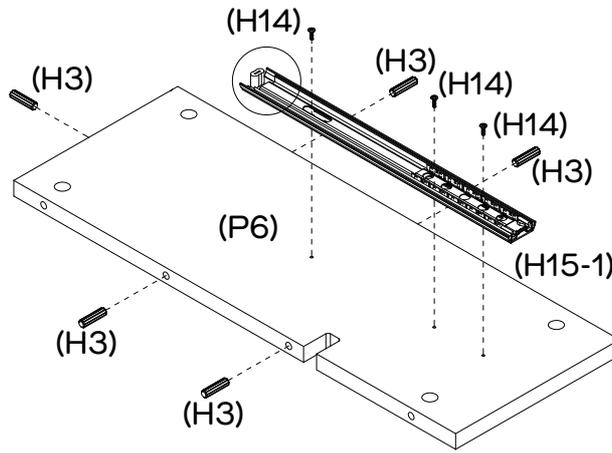

Ensure the rubber stopper on Slide Track (H15-1) is placed correctly on side panel as shown.

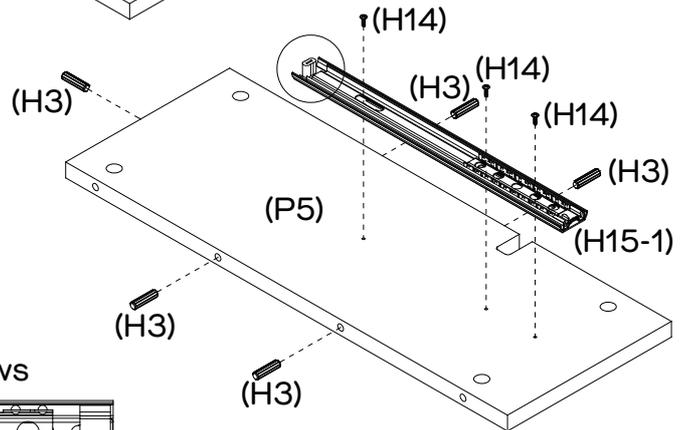



Use the holes shown below on the Slide Track (H15-1) to secure the screws

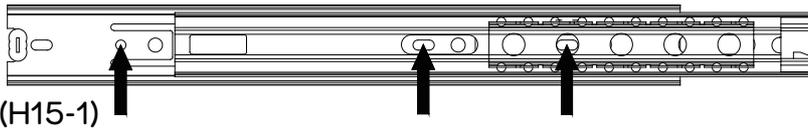

Insert 10 x Large Dowels (H3) into Left & Right Divider Panels (P5&P6) as shown. Secure 2 x Slide Tracks (H15-1) to Left & Right Divider Panels (P5&P6) with 6 x Slide Screws (H14) as shown by tightening with the Phillips Head Screwdriver.

Step 4


You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver

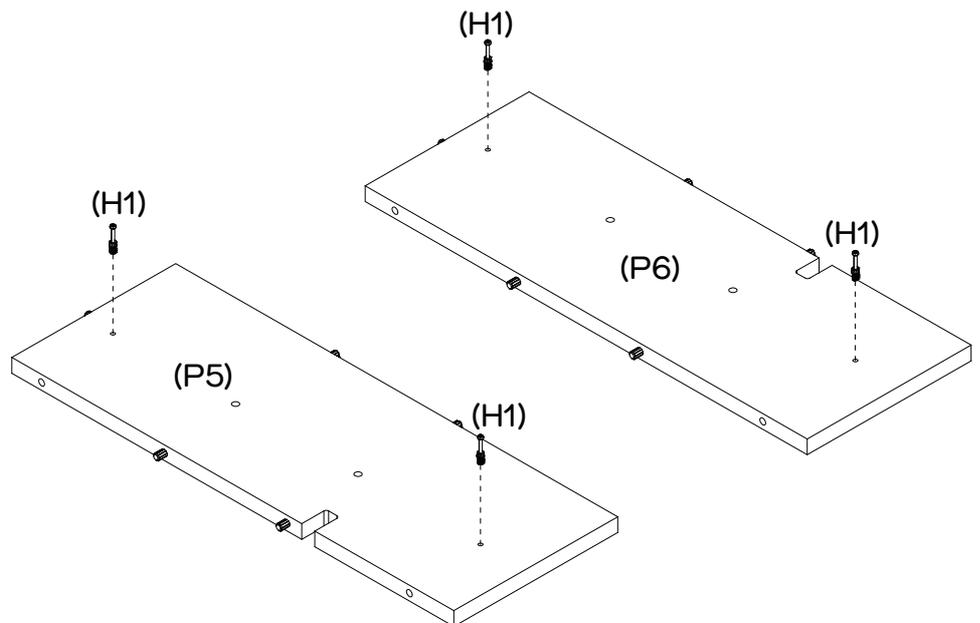

Turn Left & Right Divider Panels (P5&P6) over and attach 4 x Cam Bolts (H1) as shown by tightening with the Phillips Head Screwdriver.

Step 5

You will need	
	
5 x Large Dowels (H3)	

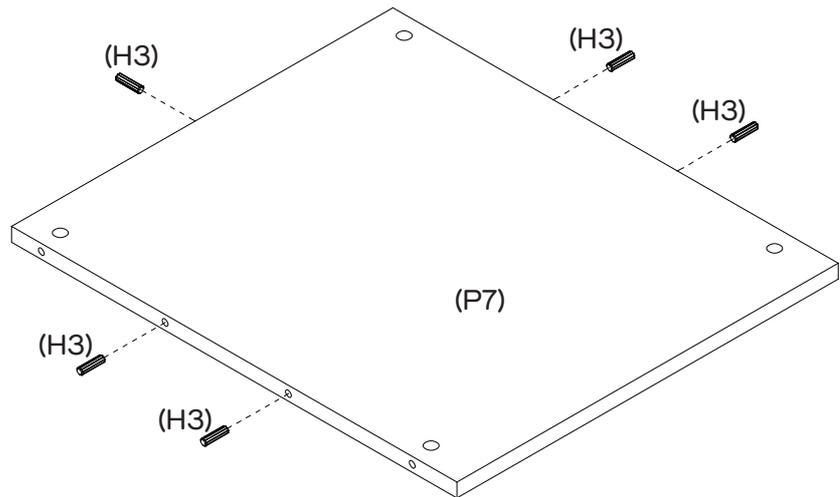


Insert 5 x Large Dowels (H3) into Shelf (P7) as shown.


Step 6

You will need	
	
4 x Large Cam Nuts (H2)	Phillips Head Screwdriver

Ensure all raw edges on the divider panels and shelf are at the back of the desk

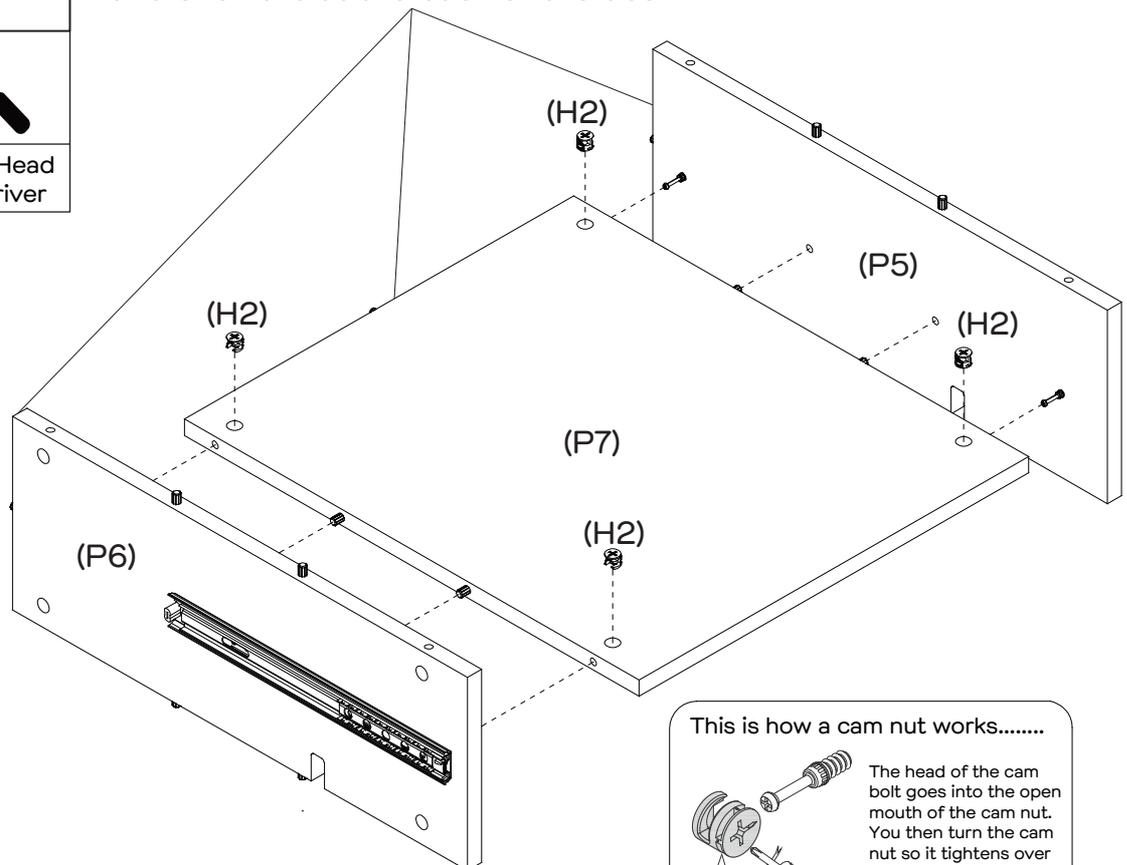

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 4 x Large Cam Nuts into Shelf (P7) and rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Left & Right Divider Panels (P5&P6) to Shelf (P7) by tightening the cam nuts with the Phillips Head Screwdriver.

Step 7

You will need	
	
10 x Large Dowels (H3)	

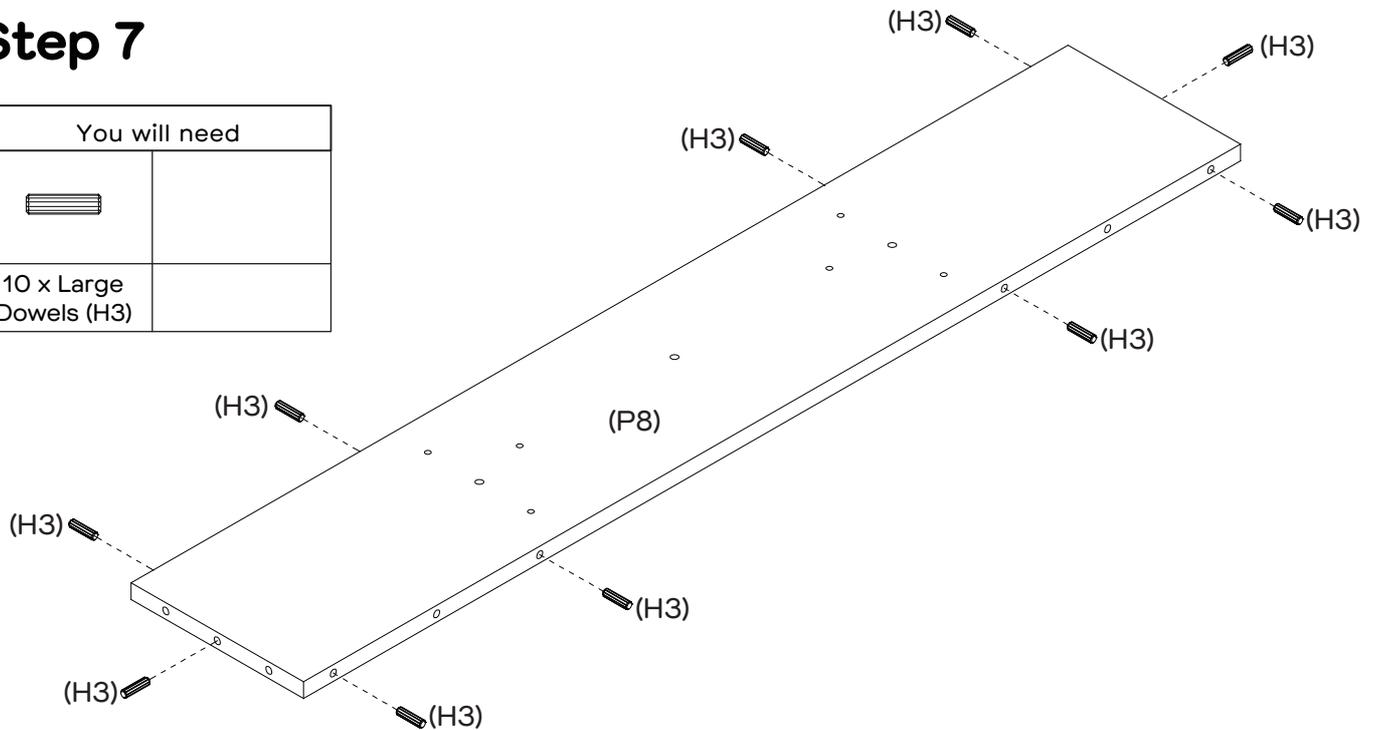


Insert 10 x Large Dowels (H3) into Back Panel (P8) as shown.

Step 8

Ensure the cam nut hole in the middle of back panel is aligned on the same side as the grooves in left & right dividers as shown before securing


You will need	
	
6 x Long Screws (H13)	Phillips Head Screwdriver

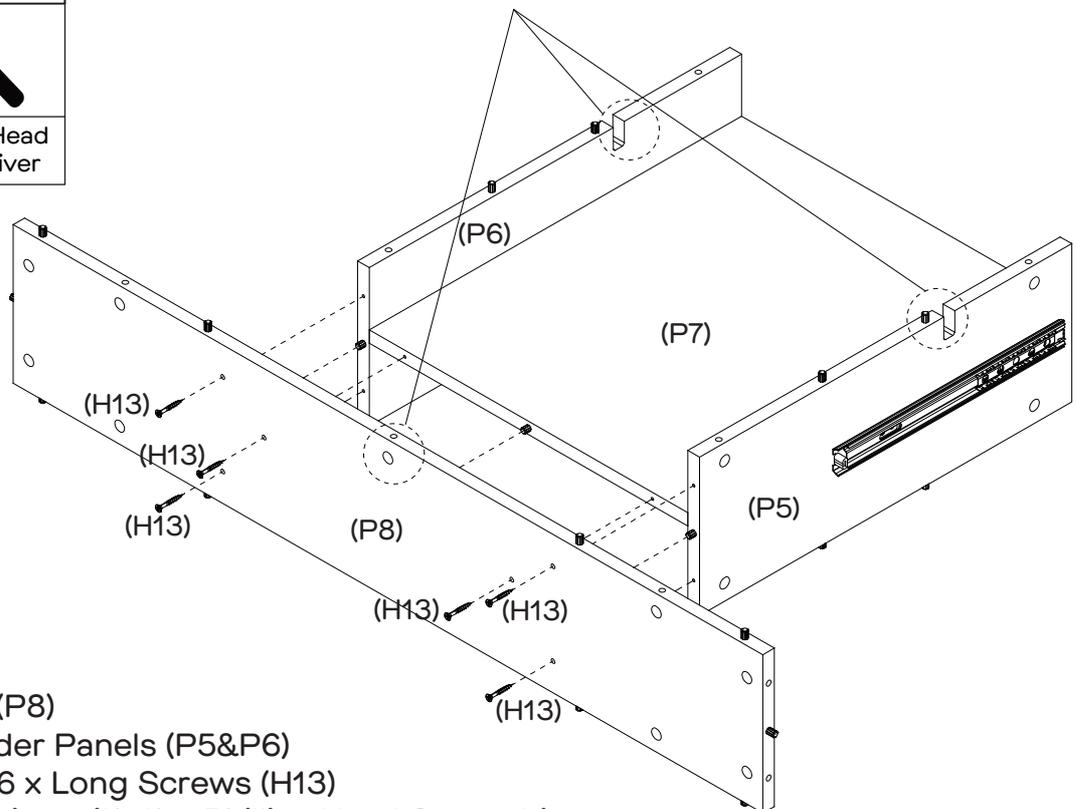

Attach Back Panel (P8) to Left & Right Divider Panels (P5&P6) and Shelf (P7) with 6 x Long Screws (H13) as shown by tightening with the Phillips Head Screwdriver.

Step 9


You will need	
	
4 x Large Cam Nuts (H2)	Phillips Head Screwdriver

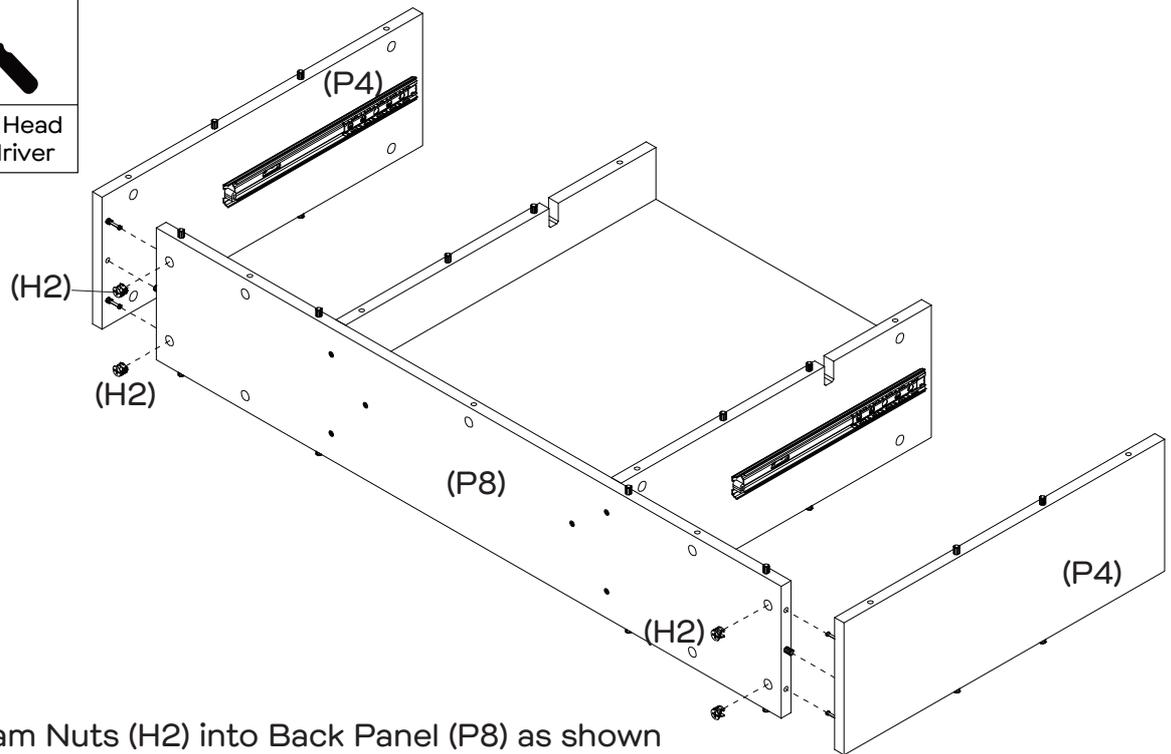

Insert 4 x Large Cam Nuts (H2) into Back Panel (P8) as shown and rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Side Panels (P4x2) to Back Panel (P8) by tightening the cam nuts with the Phillips Head Screwdriver.

Step 10


You will need	
	
10 x Cam Bolts (H1)	Phillips Head Screwdriver

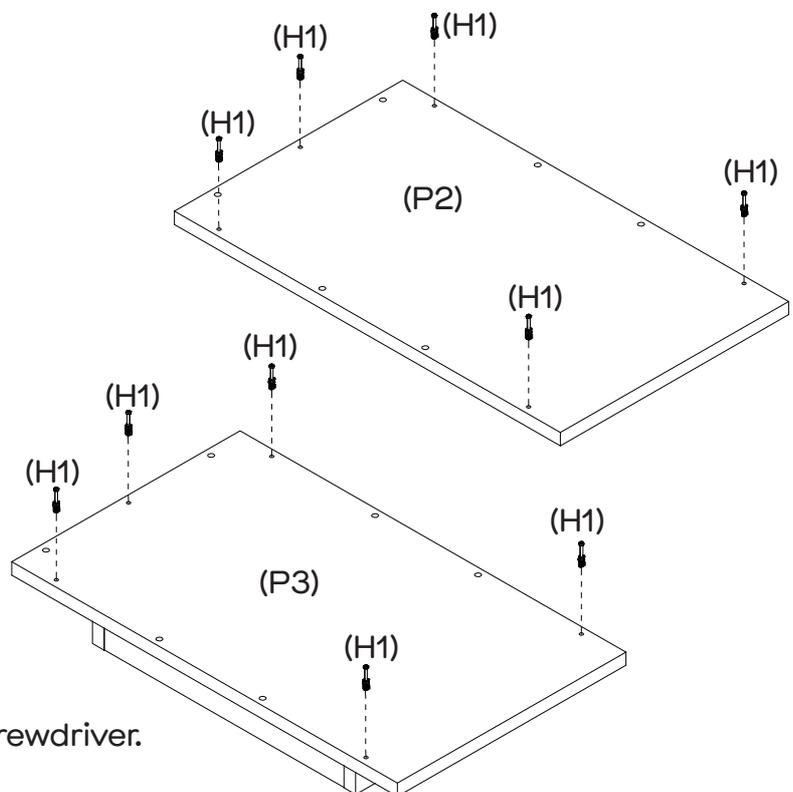

Attach 10 x Cam Bolts (H1) to Left & Right Bottom Panels (P2&P3) by tightening with the Phillips Head Screwdriver.

Step 11


You will need	
	
8 x Large Cam Nuts (H2)	Phillips Head Screwdriver

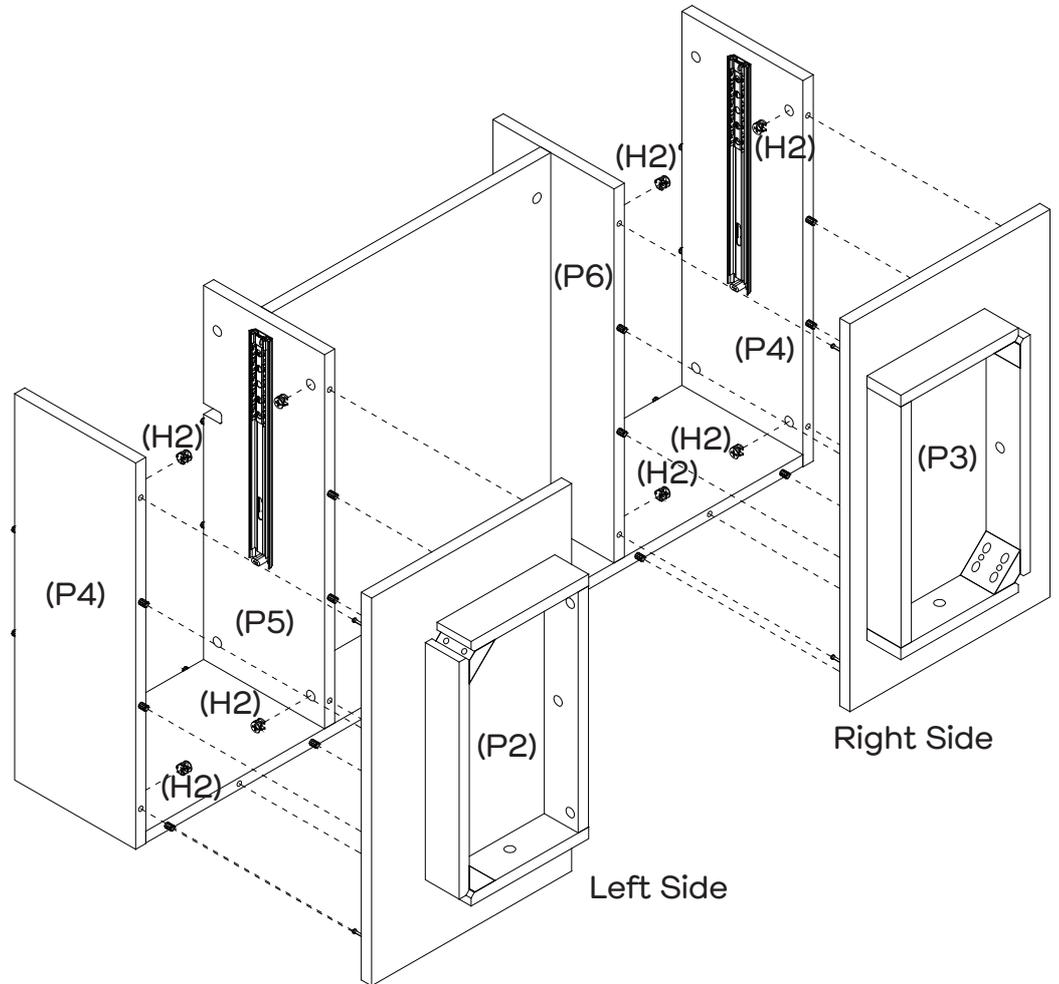

Insert 8 x Large Cam Nuts into Side Panels (P4x2) and Left & Right Divider Panels (P5&P6) as shown and rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Left & Right Bottom Panels (P2&P3) to Side Panels (P4x2) and Left & Right Divider Panels (P5&P6) by tightening the cam nuts with the Phillips Head Screwdriver.

Step 12


You will need	
	
2 x Large Cam Nuts (H2)	Phillips Head Screwdriver

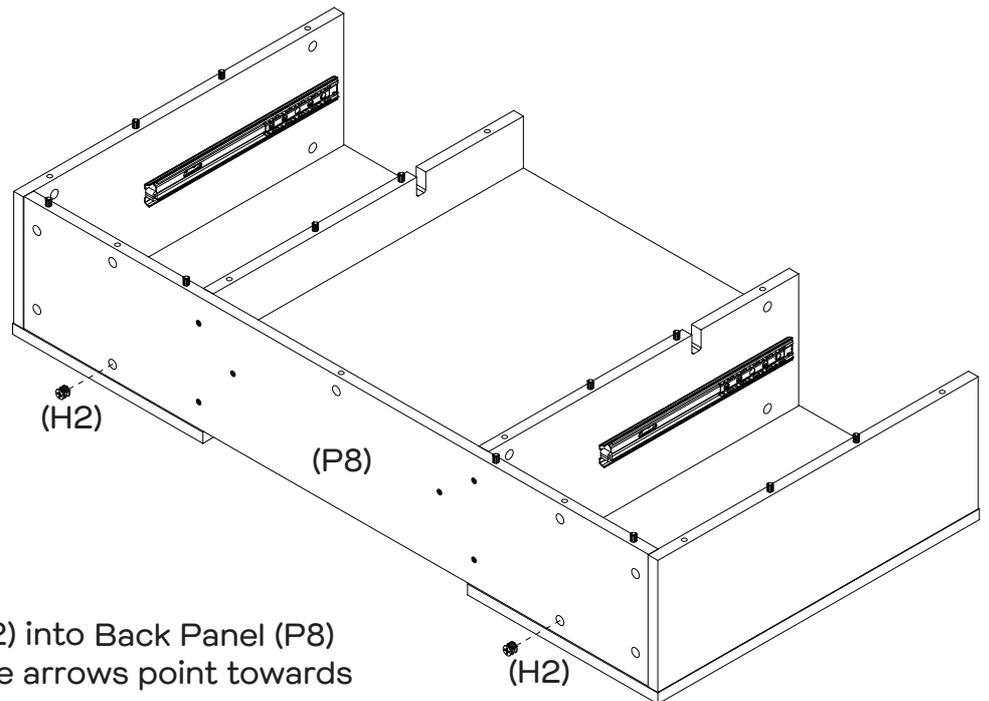

Insert 2 x Large Cam Nuts (H2) into Back Panel (P8) and rotate the cam nuts so the arrows point towards the incoming cam bolts. Tighten the cam nuts with the Phillips Head Screwdriver.

Step 13



You will need	
	
11 x Cam Bolts (H1)	4 x Rail Bolts (H16)
	
Phillips Head Screwdriver	

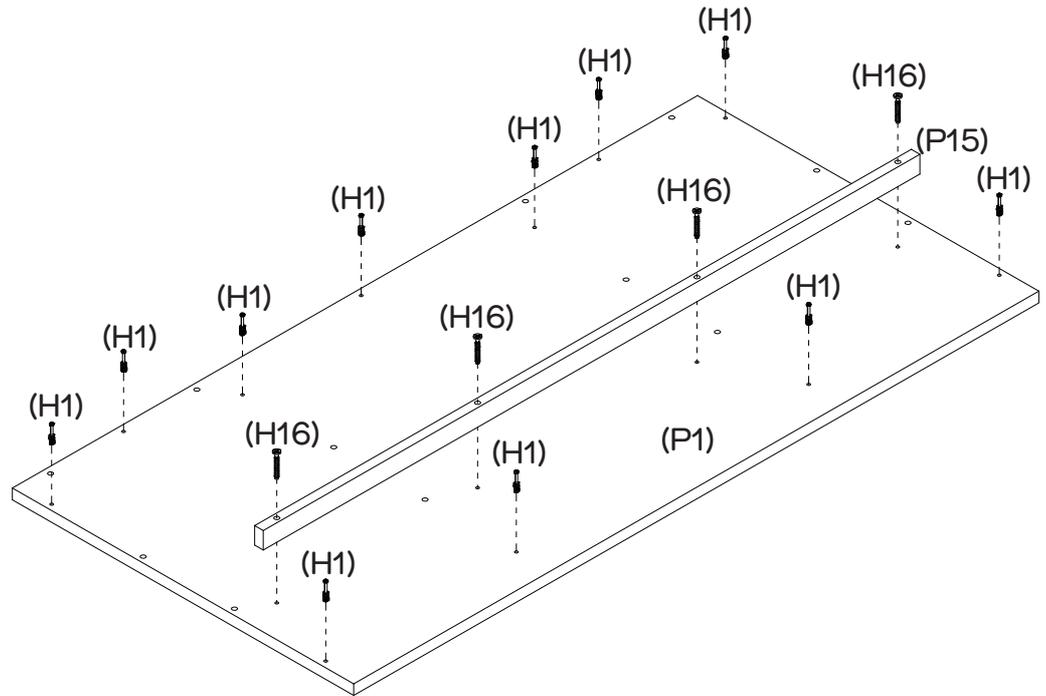

Attach 11 x Cam Bolts (H1) to Top Panel (P1) by tightening with the Phillips Head Screwdriver. Secure Rail (P15) to Top Panel (P1) with 4 x Rail Bolts (H16) by tightening with the Phillips Head Screwdriver.

Step 14

You will ne	
	
11 x Large Cam Nuts (H2)	Phillips Head Screwdriver

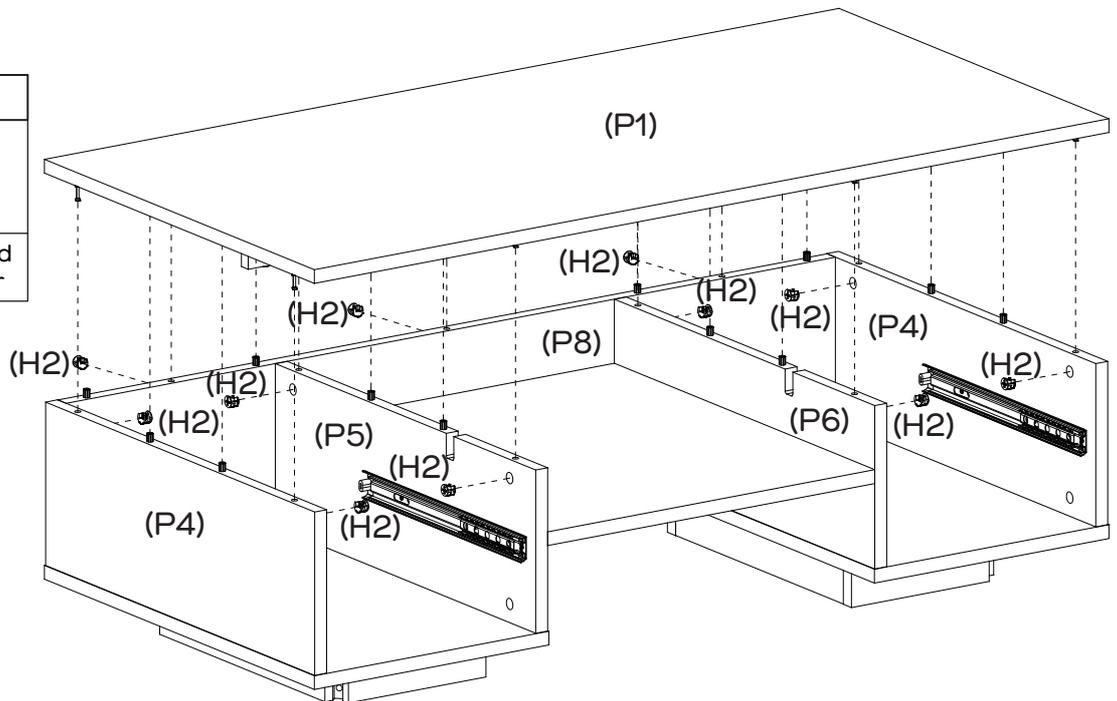


Insert 11 x Large Cam Nuts (H2) into Side Panels (P4x2), Left & Right Divider Panels (P5&P6) and Back Panel (P8) as shown and rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Top Panel (P1) to Side Panels (P4x2), Left & Right Divider Panels (P5&P6) and Back Panel (P8) by tightening the cam nuts with the Phillips Head Screwdriver.

Step 15



You will need	
4 x Felt Pads (H5)	

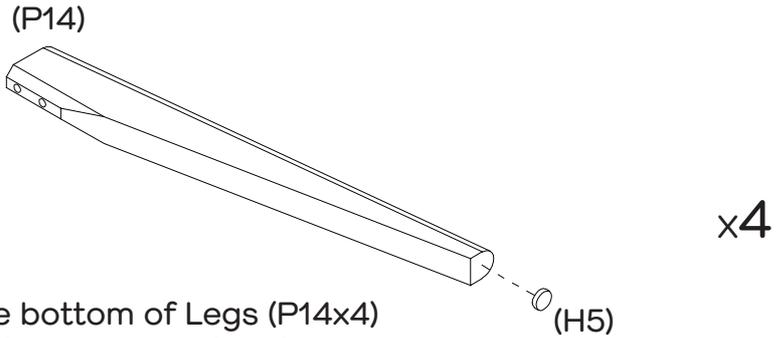

Attach 4 x Felt Pads (H5) to the bottom of Legs (P14x4) by removing the adhesive backing and pressing firmly.

Step 16


You will need	
8 x Bolts (H6)	8 x Flat Washers (H7)
8 x Spring Washers (H8)	1 x Allen Key (H10)

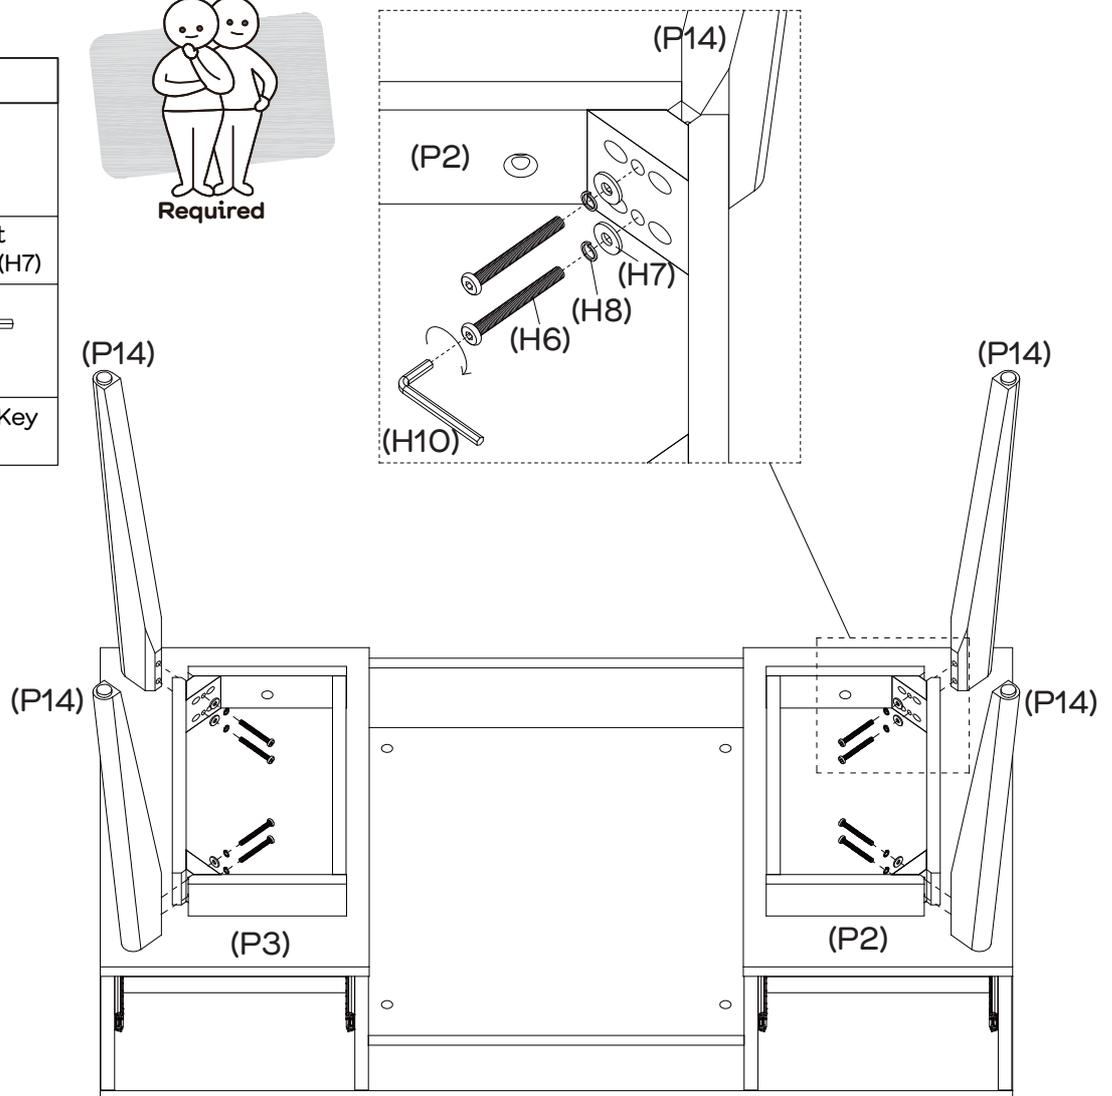

Attach Legs (P14x4) to Left & Right Bottom Panels (P2&P3) with 8 x Bolts (H6), 8 x Spring Washers (H8) and 8 x Flat Washers (H7) as shown by tightening with the Allen Key (H10).


Step 17


You will need	
	
4 x Small Dowels (H12)	

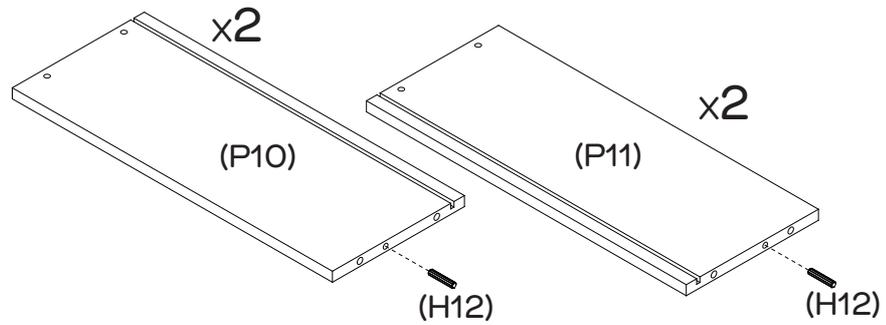

Insert 4 x Small Dowels (H12) into Drawer Left & Right Sides (P10x2 & P11x2).

Step 18

You will need	
	
8 x Cam Bolts (H1)	Phillips Head Screwdriver

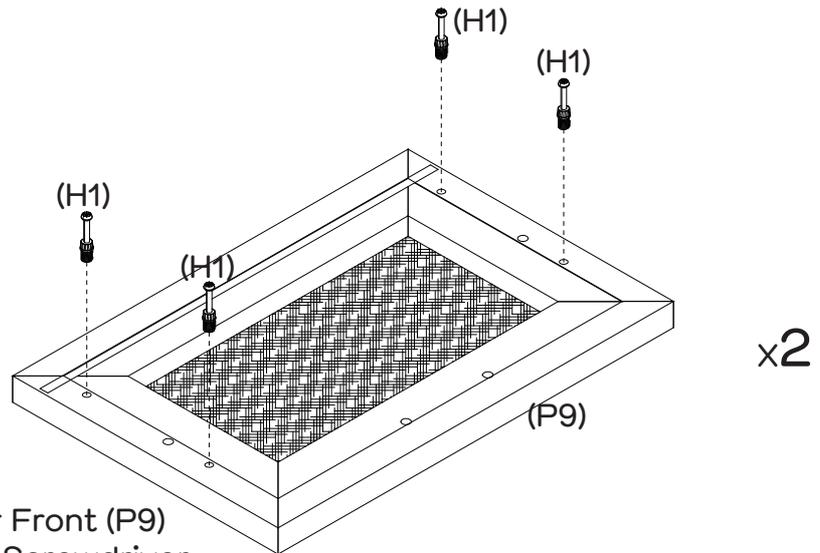


Attach 4 x Cam Bolts (H1) to Drawer Front (P9) by tightening with the Phillips Head Screwdriver. Repeat steps for second Drawer Front (P9).


Step 19

You will need	
	
8 x Small Cam Nuts (H11)	Phillips Head Screwdriver

Insert 4 x Small Cam Nuts (H11) into Drawer Left & Right Sides (P10&P11) and rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Left & Right Sides (P10&P11) to Drawer Front (P9) by tightening the cam nuts with the Phillips Head Screwdriver. Repeat steps for the second Drawer Left & Right Sides (P10&P11) and Drawer Front (P9).

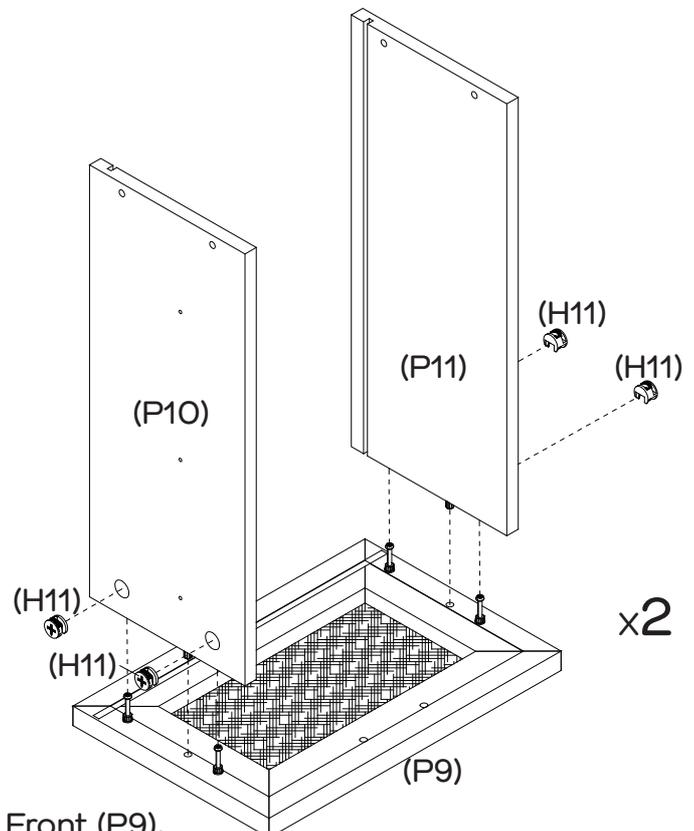



Step 20

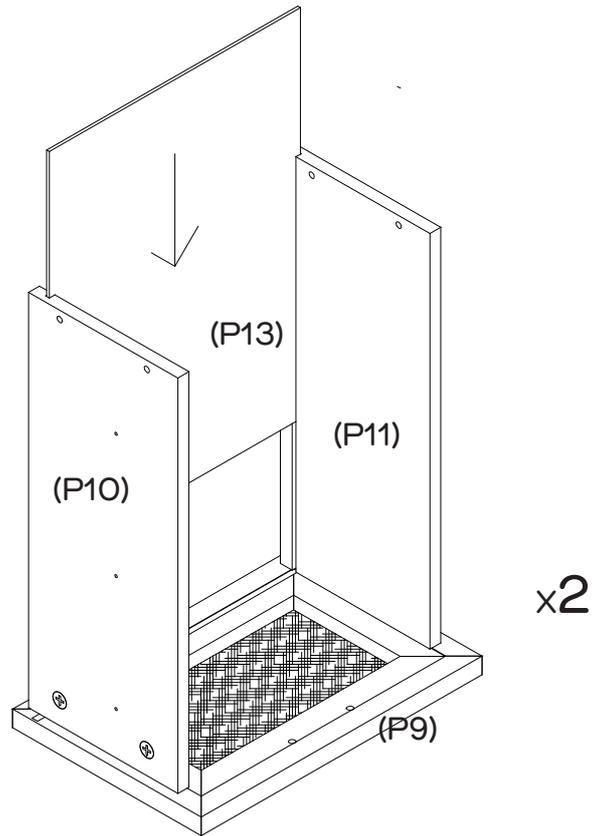

Slide the Drawer Base (P13) into the grooves of Drawer Left & Right Sides (P10&P11) and Drawer Front (P9). Repeat for the second Drawer Base (P13).

Step 21

You will need	
	
8 x Long Screws (H13)	Phillips Head Screwdriver

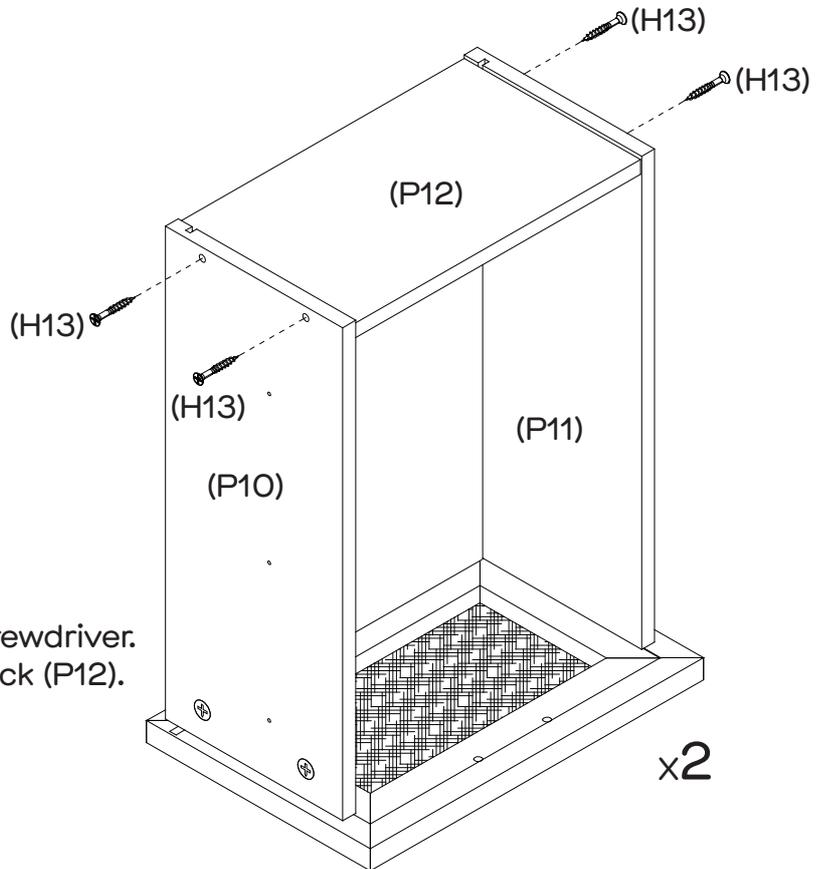


Secure Drawer Back (P12) to Drawer Left & Right Sides (P10&P11) with 4 x Long Screws (H13) as shown by tightening with the Phillips Head Screwdriver. Repeat steps for the second Drawer Back (P12).

Step 22

Use the holes shown below on the Slide Runner (H15-2) to secure the screws


You will need	
4 x Slide Runners (H15-2)	12 x Slide Screws (H14)
Phillips Head Screwdriver	

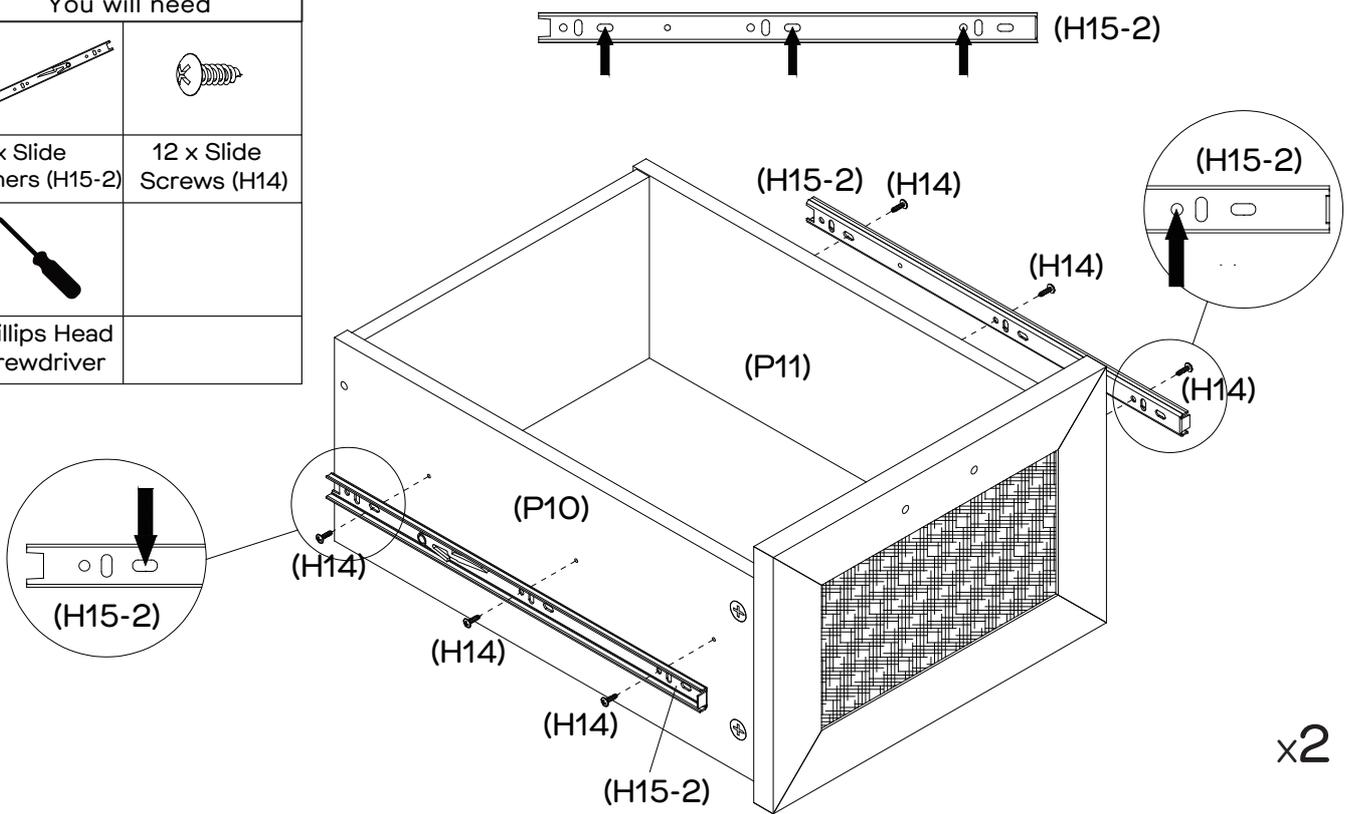

Attach 2 x Slide Runners (H15-2) to Drawer Left & Right Sides (P10&P11) with 6 x Slide Screws (H14) as shown by tightening with the Phillips Head Screwdriver. Repeat steps for the second set of Slide Runners (H15-2).



Step 23

You will need	
4 x Handle Screws (H9)	2 x Handles (H4)
Phillips Head Screwdriver	


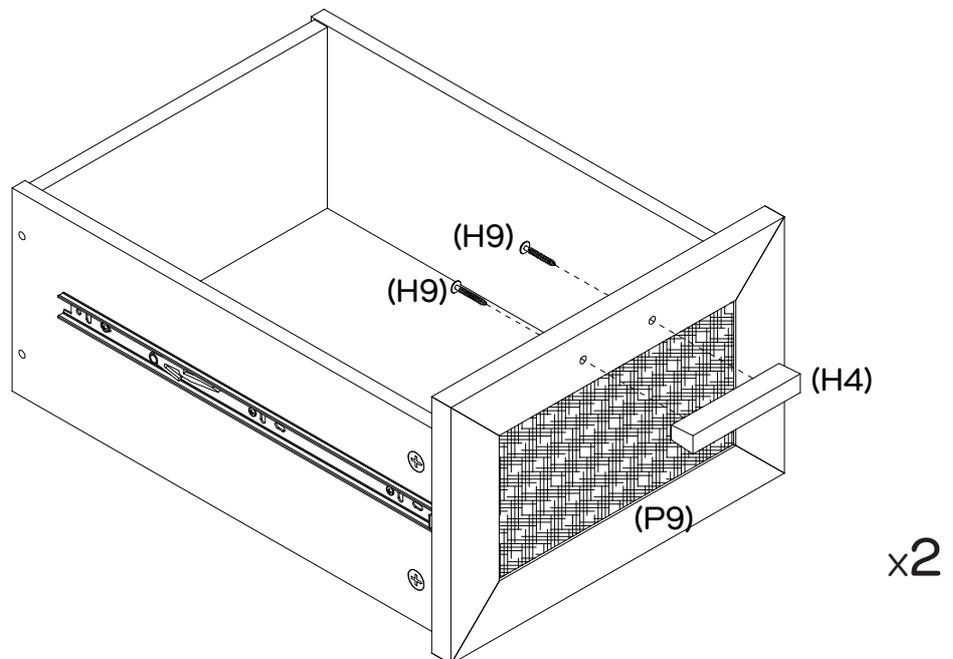


Secure 1 x Handle (H4) to Drawer Front (P9) with 2 x Handle Screws (H9) by tightening with the Phillips Head Screwdriver. Repeat steps for the second Handle (H4).



Step 24

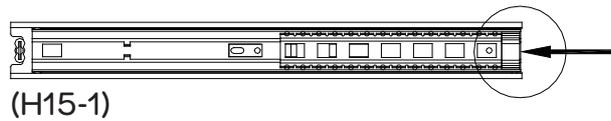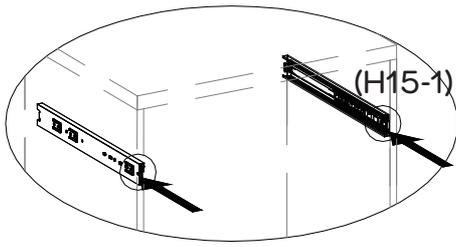


Before inserting the assembled drawers into the desk, adjust 4 x Slide Tracks (H15-1) on Side Panels (P4x2) and Left & Right Divider Panels (P5&P6) to bring the slide to the front.

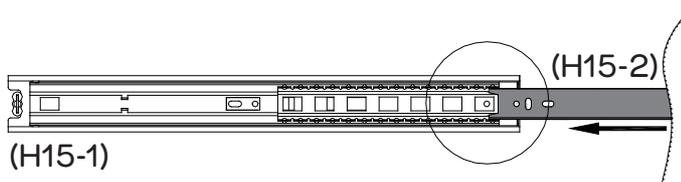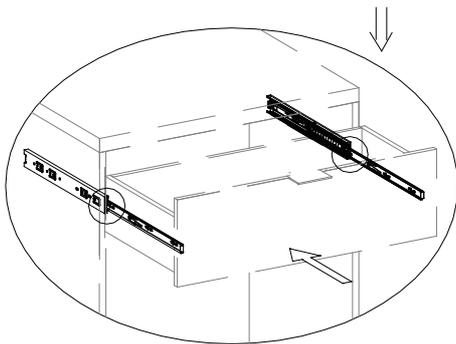

Gently insert the assembled drawers into the desk by aligning the 2 x Slide Runners (H15-2) with the 2 x Slide Tracks (H15-1). Ensure that you insert the drawers into the desk at a straight angle.

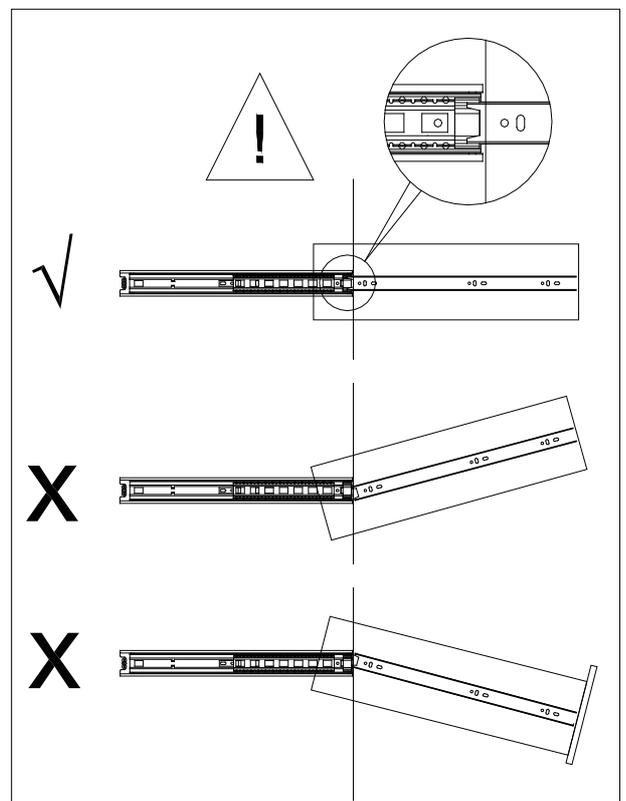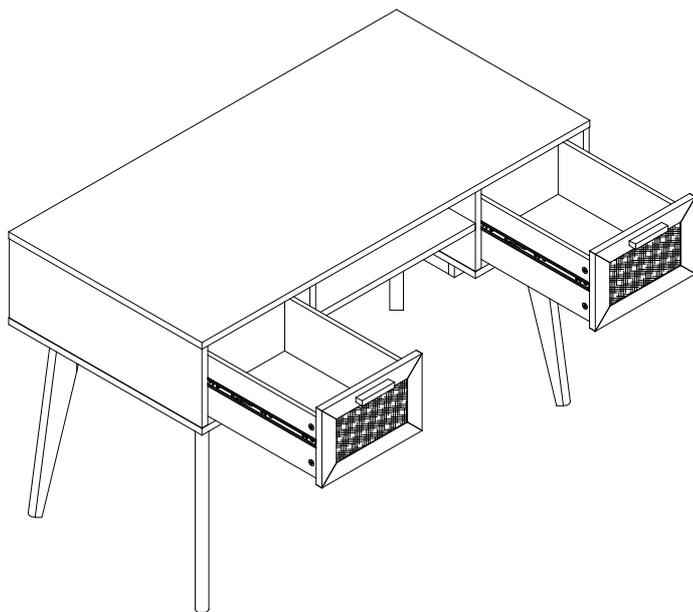

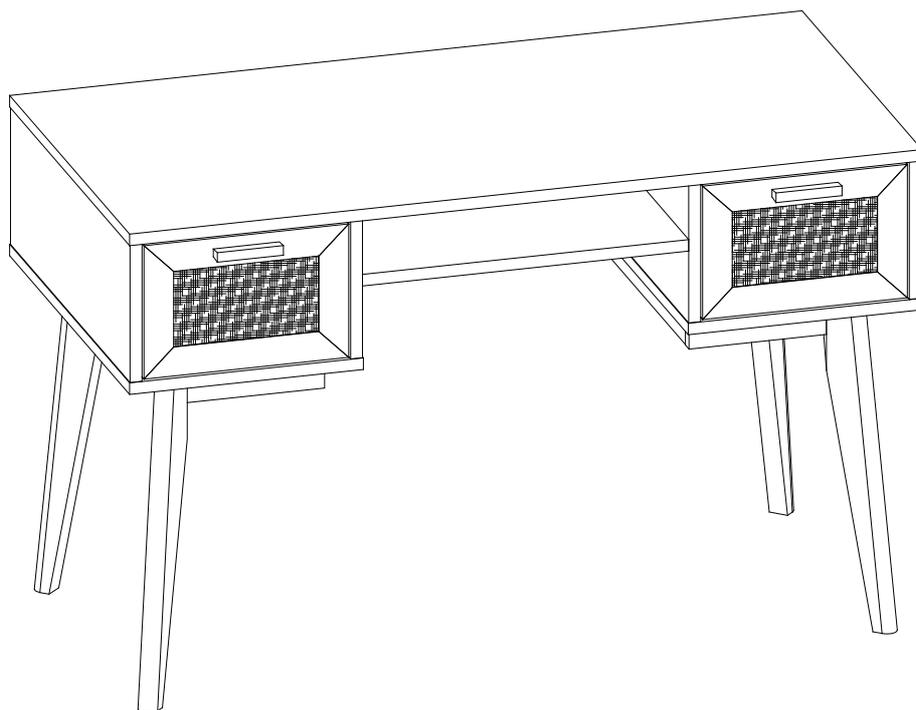

Job complete!

In the interest of our environment please dispose
of all packaging thoughtfully.