

Version 1.3



Two People



Jordan Triple Bunk

HELPFUL BUNK BED SAFETY TIPS

Bunk beds should be checked periodically to ensure that the guardrail, ladder and other components are secure and in the correct position and all connectors are tight.

We recommend that children under the age of nine (9) do not use the upper bunk. Children should be discouraged from playing on the bunk bed.

No more than one occupant should use the upper bunk at any time (unless otherwise stated).

Bunk beds should be placed a minimum of 2 metres away from any ceiling fans to prevent any injury to the upper bunk occupant.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture




Assembly Checklist



Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



before you begin assembly.



Identify and lay out all of the components Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.

The most common mistake made during assembly are using the wrong hardware or getting components back to front.

Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.

Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used as they may not fit through a door once assembled.

Never use any glue until you are certain that the parts belong together.

Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.

If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.


Please see page 2 for any safety requirements or weight restrictions.

What You Need

to assemble the product



Other tools you need

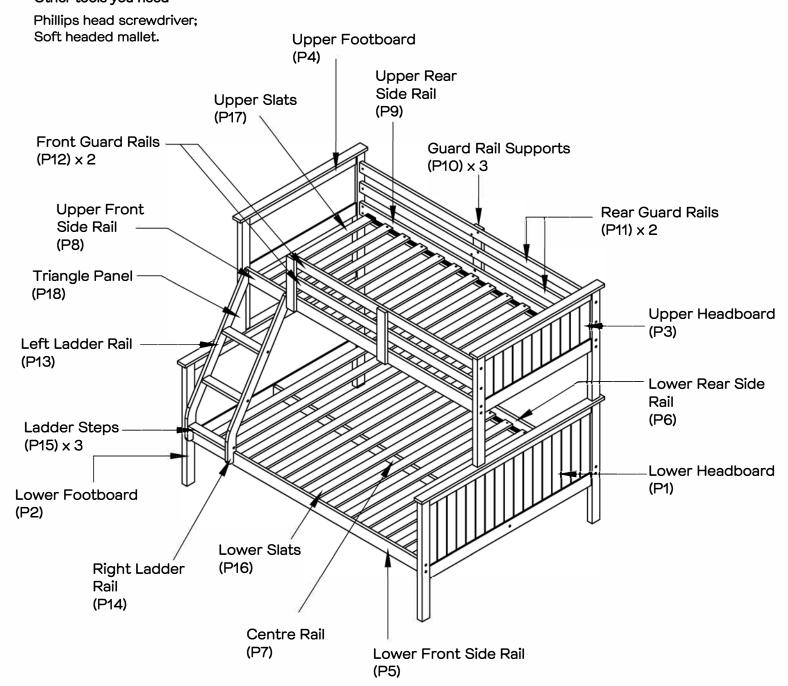

Part list

Box 1:

Lower Set of Slats (P16);

Upper Set of Slats (P17).

Box 2:

Upper Headboard (P3);

Upper Footboard (P4).

Box 3:

Lower Headboard (P1);

Lower Footboard (P2).

Box 4:

Lower Front Side Rail (P5);

Lower Rear Side Rail (P6);

Centre Rail (P7);

Upper Front Side Rail (P8);

Upper Rear Side Rail (P9);

3 x Guard Rail Supports (P10);

2 x Rear Guard Rail (P11);

2 x Front Guard Rail (P12);


Left Ladder Rail (P13);


Right Ladder Rail (P14);

3 x Ladder Steps (P15);


Triangle Panel (P18).

Hardware Pack

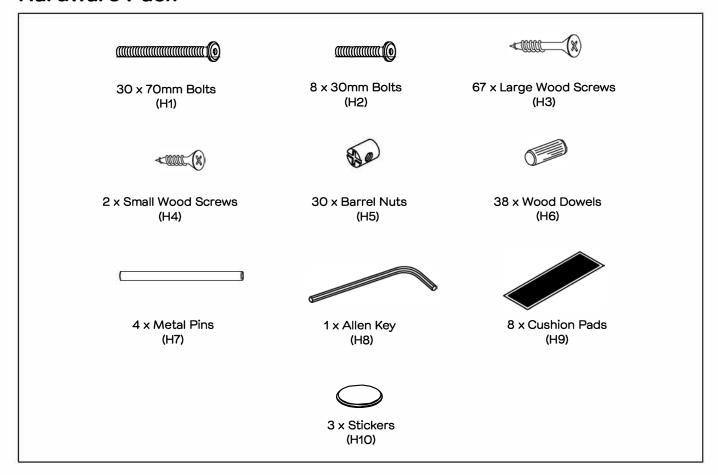

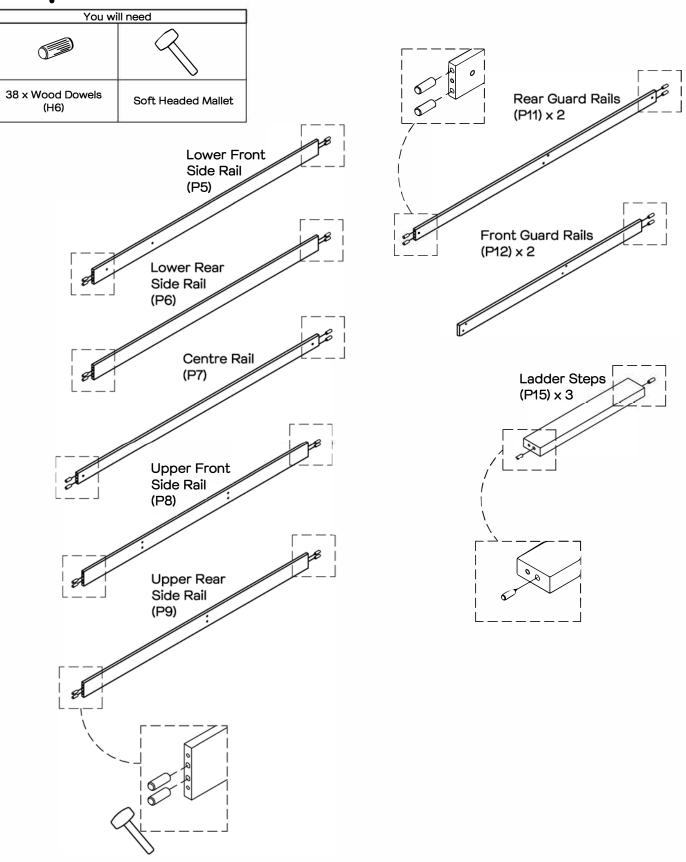

Insert 38 x wood dowels (H6) into the rails as shown by hand or gently using a soft headed mallet.

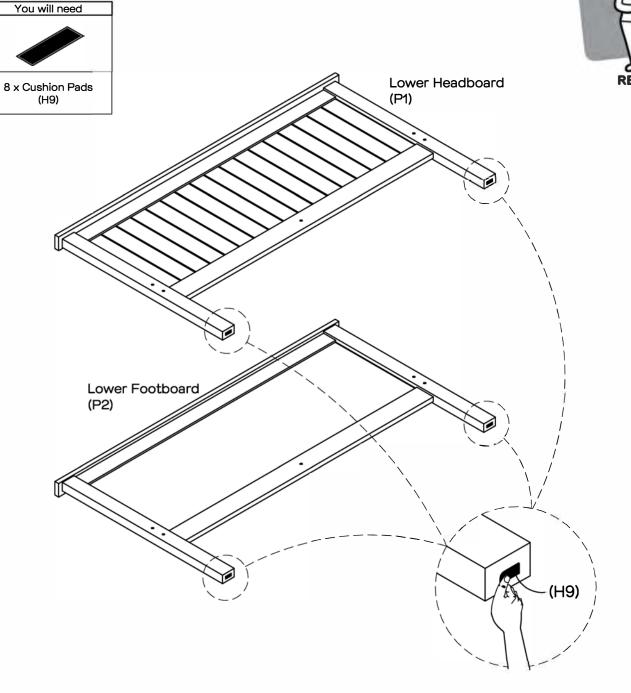





Remove cushion pads from adhesive stickers and paste them underneath the headboard & footboard (P1 & P2). Keep the remaining 4 x cushion pads (H9) for future use. The cushion pads are required if you wish to convert the bunk to 2 beds by attaching them underneath the upper bunk headboard & footboard (P3 & P4).



TWO PEOPLE

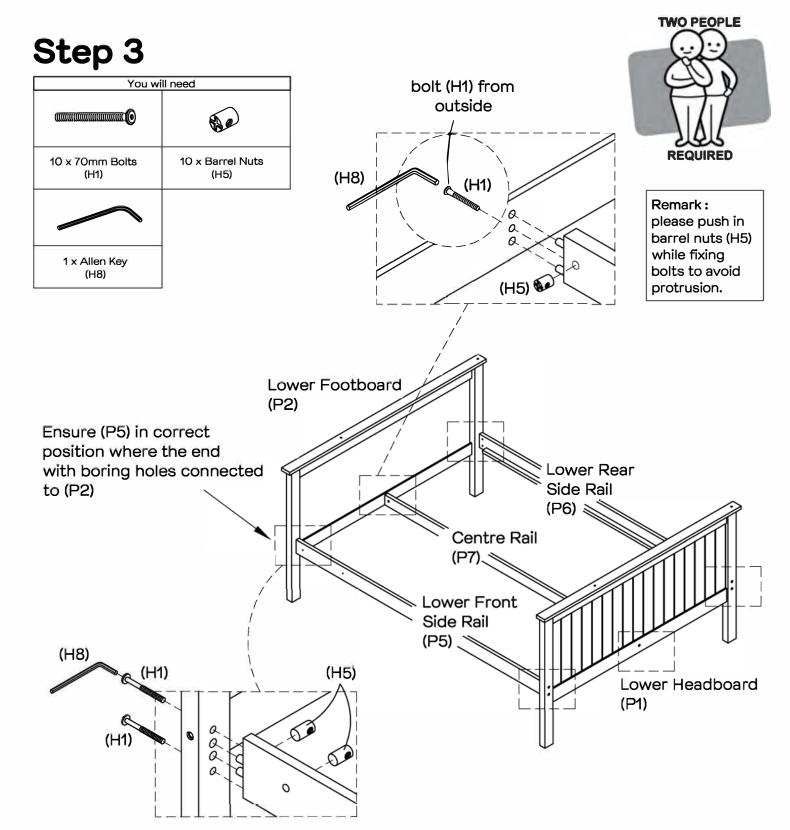


Attach the headboard & footboard (P1 & P2) to the lower front side rail (P5), lower rear side rail (P6) & centre rail (P7) by using 10 x bolts (H1) and 10 x barrel nuts (H5) tightening with the allen key (H8).

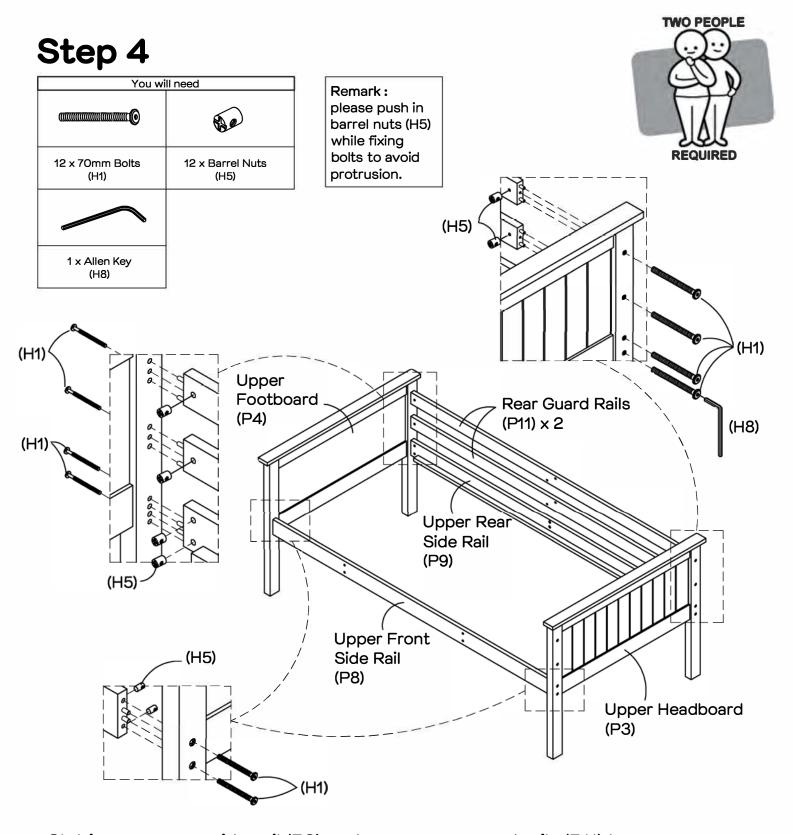

Slot in upper rear side rail (P9) and upper rear guard rails (P11) to upper headboard & footboard post (P3 & P4).

Then fix with 8 x bolts (H1) and 8 x barrel nuts (H5) tightening with the allen key (H8). Do not fully tighten bolts (H1).

Slot in the upper front side rail (P8) to upper headboard and footboard post (P3 & P4) and fix with $4 \times$ bolts (H1) and $4 \times$ barrel nuts (H5) tightening with the allen key (H8). Do not fully tighten the bolts (H1).

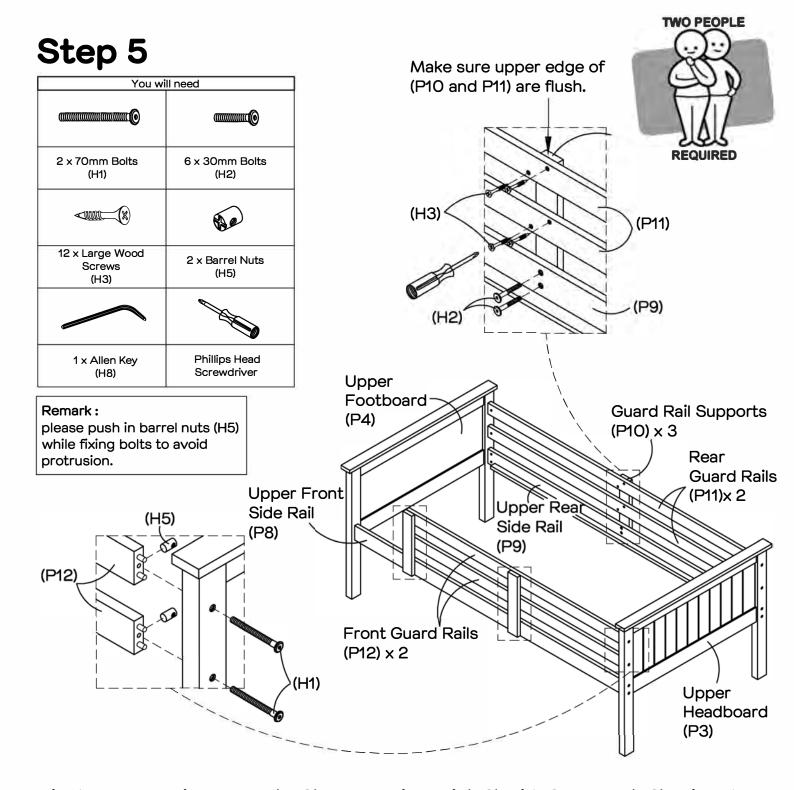


Fix the guard rail support (P10) to rear side rail (P9) with $2 \times 100 \times 1000 \times$

Repeat this process to attach the other guard rail supports (P10) to front side rail (P8).


Then tighten rear guard rails (P11) with 4×1 large wood screws (H3) by aligning the pre-drilled holes on the guard rail support (P10).

Slot front guard rails (P12) to upper headboard post (P3) and fix 2 x bolts (H1) with 2 x barrel nuts (H5), tightening with the allen key (H8).

Tighten front guard rail supports (P10) to front guard rails (P12) with 4 x large screws (H3) by aligning the pre-drilled holes on the guard rail supports (P10). Tighten all bolts (H1 & H2) from step 4.






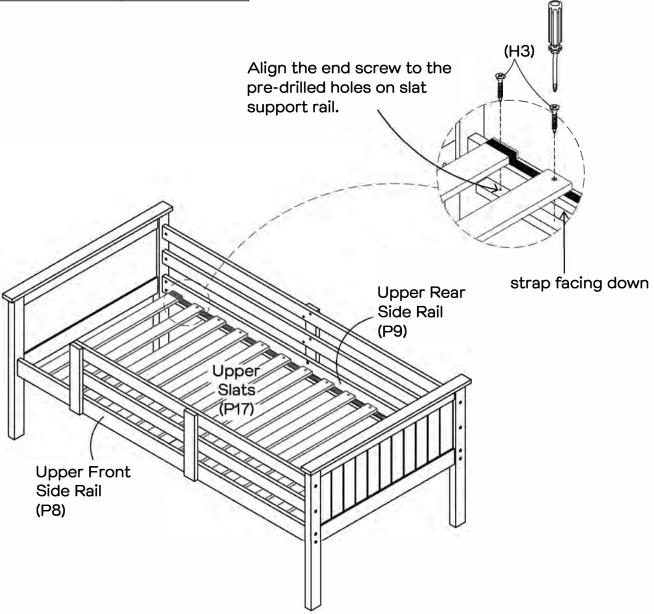

Fix upper slats (P17) to upper front & rear side rail (P8 & P9) at screw holes with 26 x large wood screws (H3) by using phillips head screwdriver.





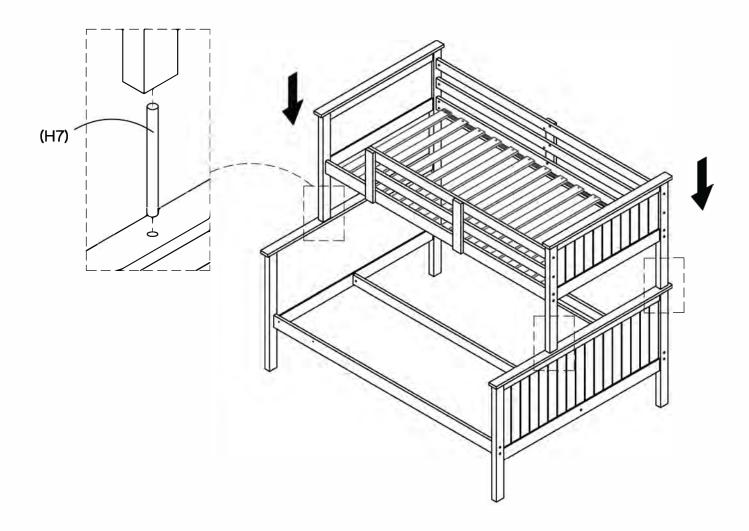


Insert 4 x metal pins (H7) into the holes of the lower bed headboard & footboard. Carefully position the upper bed above the lower bed. Put the upper bed into position.



BE CAREFUL TO NOT JAM YOUR FINGERS DURING THIS ASSEMBLY STEP. DON'T LET THE METAL PIN SCRATCH THE LEGS OF THE UPPER BUNK.



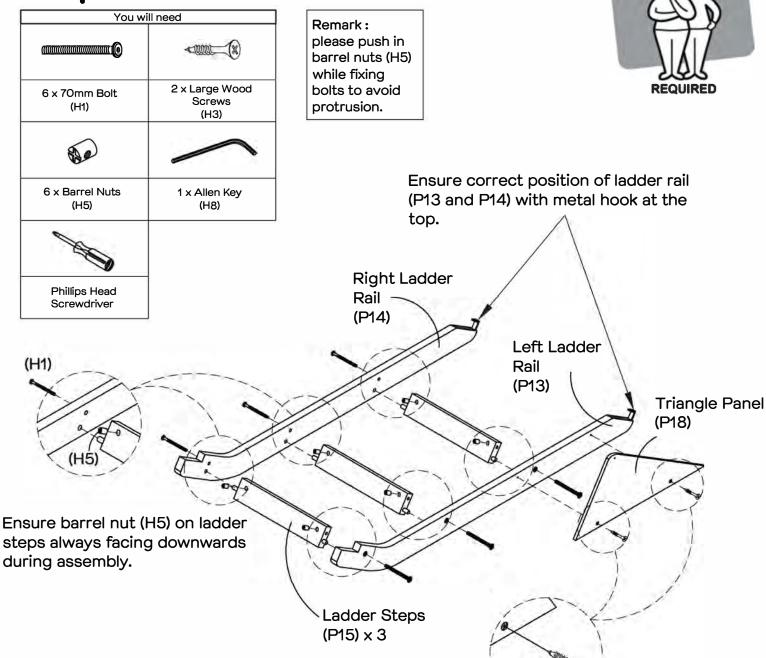


Fix the left ladder rail (P13) to the 3×1 ladder steps (P15) by using 3×1 bolts (H1) and 3×1 barrel nuts (H5) tightening with the allen key (H8).

Fix the right ladder rail (P14) to the 3×1 ladder steps (P15) by using 3×1 bolts (H1) and 3×1 barrel nuts (H5) using the allen key (H8).


Fix triangle panel (P18) to left ladder rail (P13) by using 2×1 large wood screws (H3). Please follow the pilot hole at left ladder rail (P13).



TWO PEOPLE

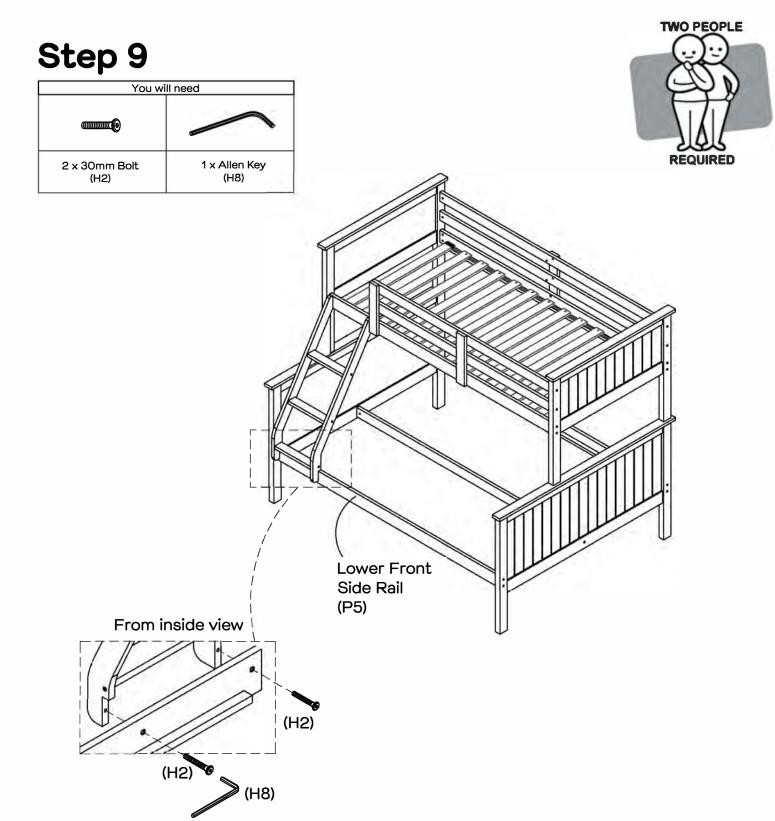


Remove plastic cover from the metal hook of left & right ladder rails (P13 & P14). Attach the ladder to bunk. Fix left & right ladder rails (P13 & P14) to lower front side rail (P5) using 2 x bolts (H2) from inside, tightening with the allen key (H8).

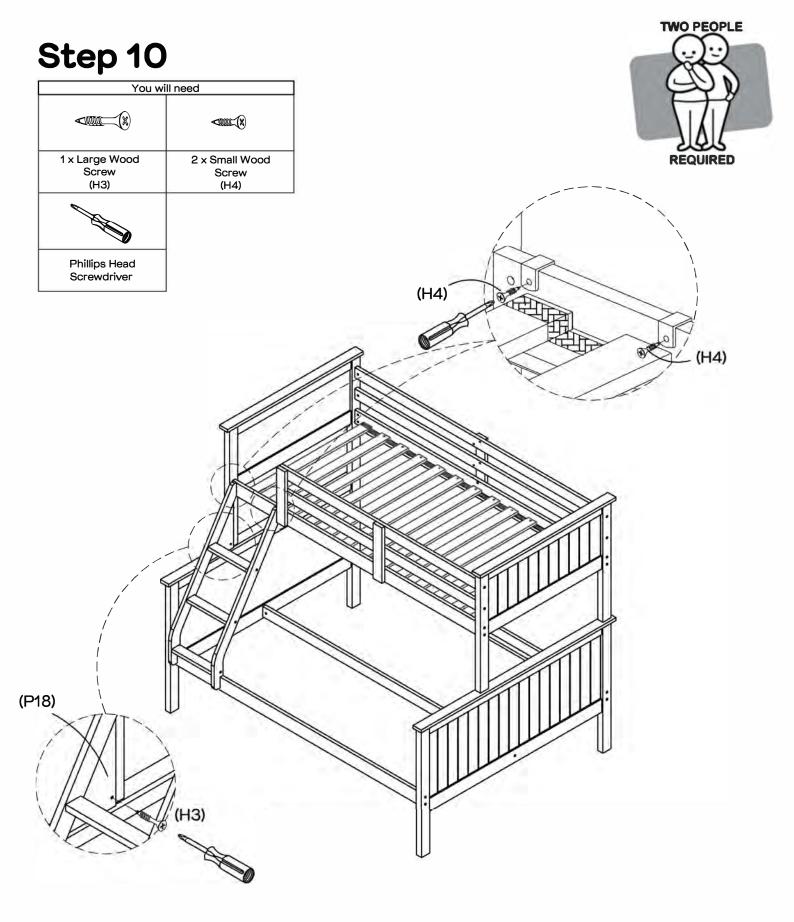


Fix triangle panel (P18) to upper footboard post (P4) using large wood screw (H3) from inside, tightening with the phillips head screwdriver.

Then fix the metal hook of ladder with 2 x small wood screws (H4) from inside, tightening with the phillips head screwdriver.









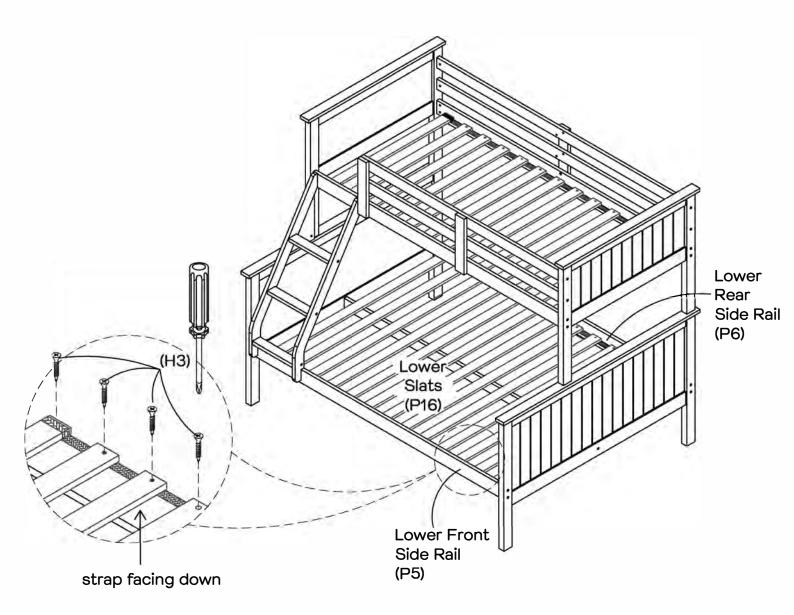

Fix lower slats (P16) to lower front & rear side rail (P5 & P6) at screw holes with 26 x large wood screws (H3) by using a phillips head screwdriver.





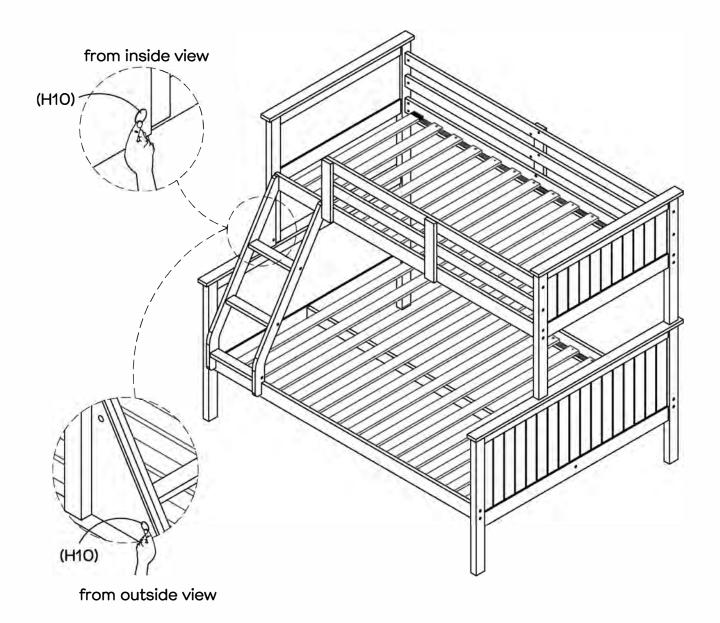

Cover all screw holes on triangle panel (P18) with 3 x stickers (H10).



Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.

