




**Fantastic
Furniture**

Version 1.0

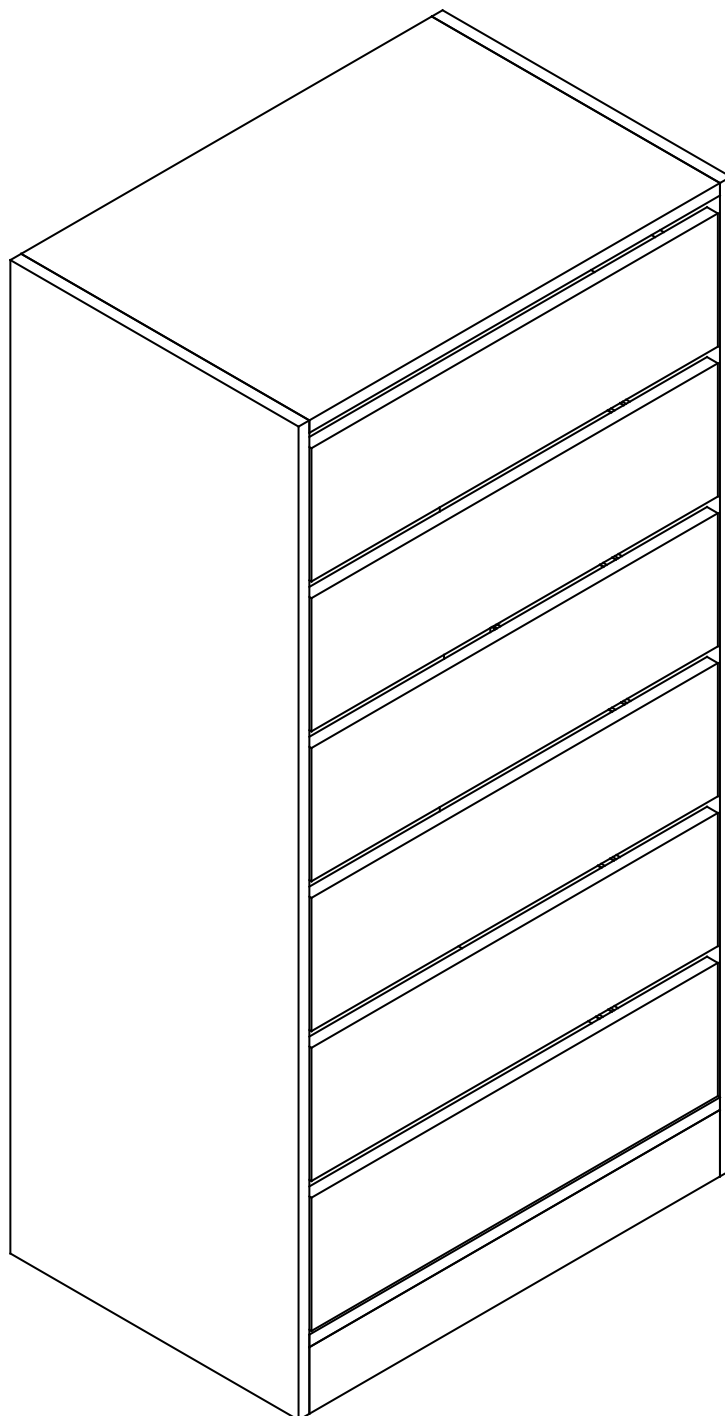

Eden

Utility 6 Drawer MK2

fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments.

Please seek professional advice if you are in doubt of what fixing device to use.

Recommended Weight Capacity :15kg/drawer

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.



For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

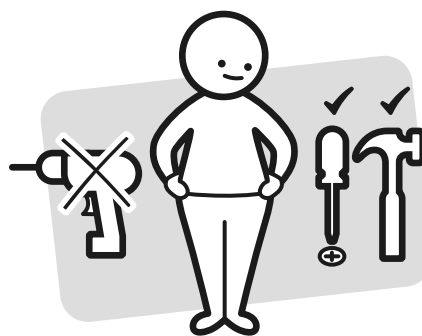

Make sure you have all the required tools. Never use power tools unless instructed.

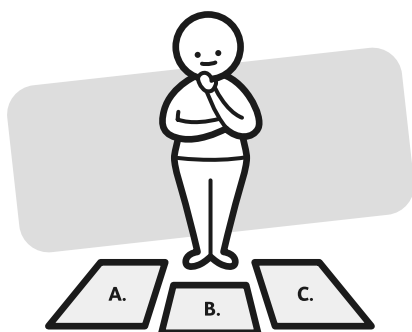

Identify and lay out all of the components before you begin assembly.

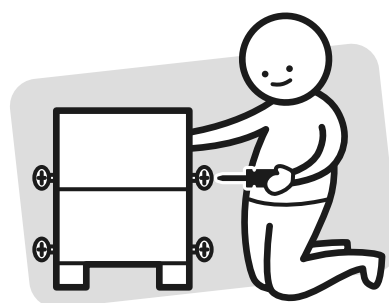

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE






Other tools you need:

Phillips head screwdriver;
Hammer




Parts list


Top Panel (P1);
Base Panel (P2);
Left Side Panel (P3);
Right Side Panel (P4);
3 x Back Panels (P5);
2 x Rails (P6);
2 x Rails (P7);
2 x Rails (P8);
6 x Drawer Fronts (P9);
6 x Left Drawer Sides (P10);
6 x Right Drawer Sides (P11);
6 x Drawer Bases (P12);
6 x Drawer Backs (P13);
6 x Support Rails (P14)

Hardware pack

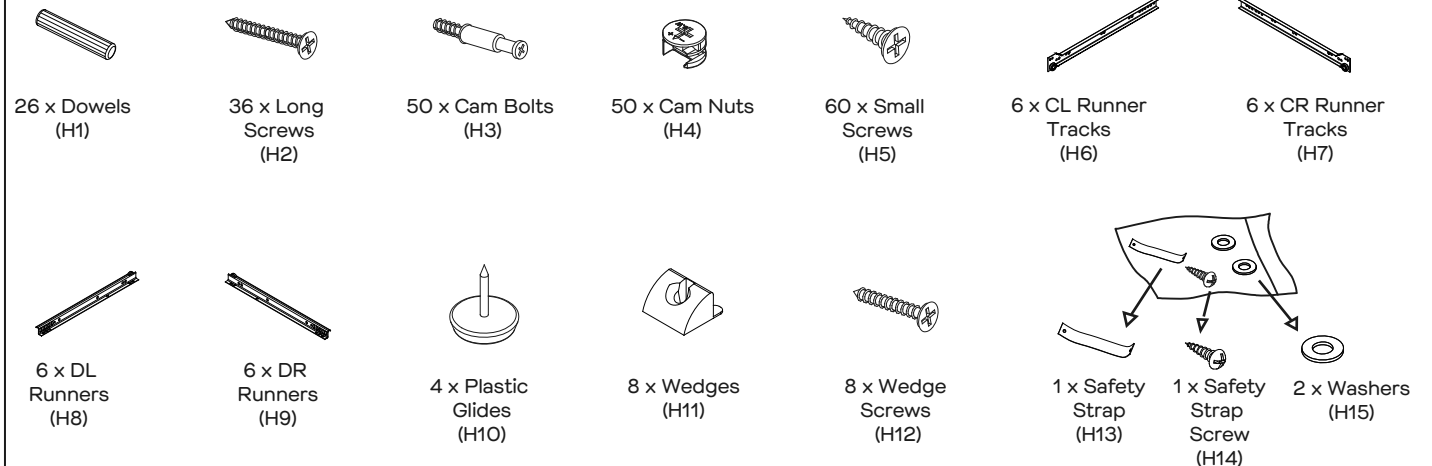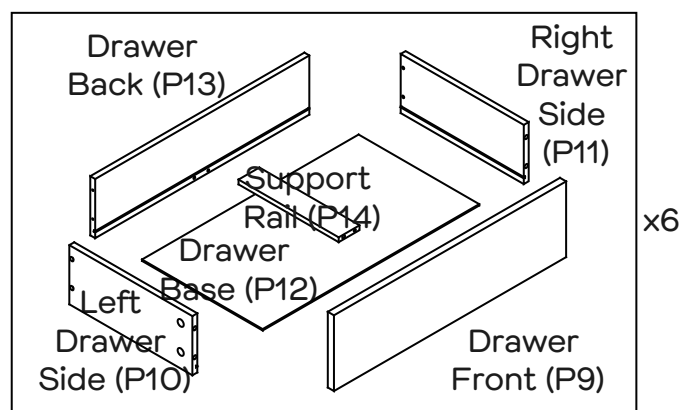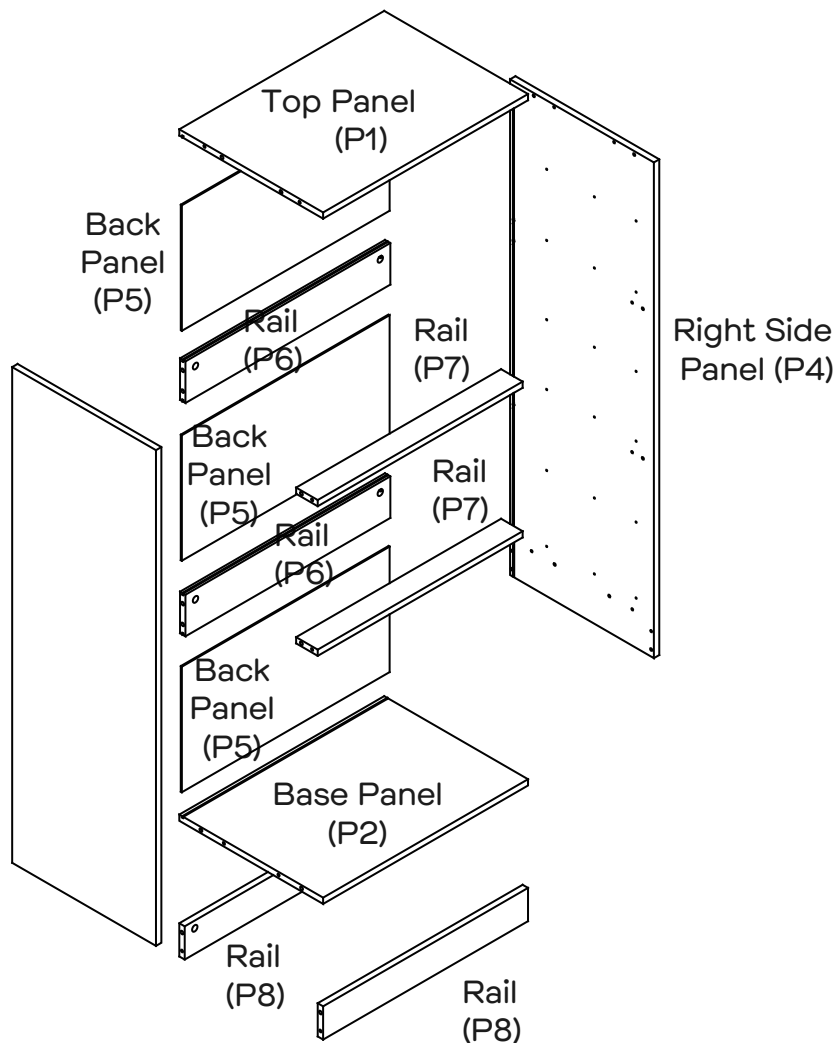



Step 1


You will need	
	
18 x Small Screws (H5)	6 x CL Runner Tracks (H6)
	
Phillips Head Screwdriver	

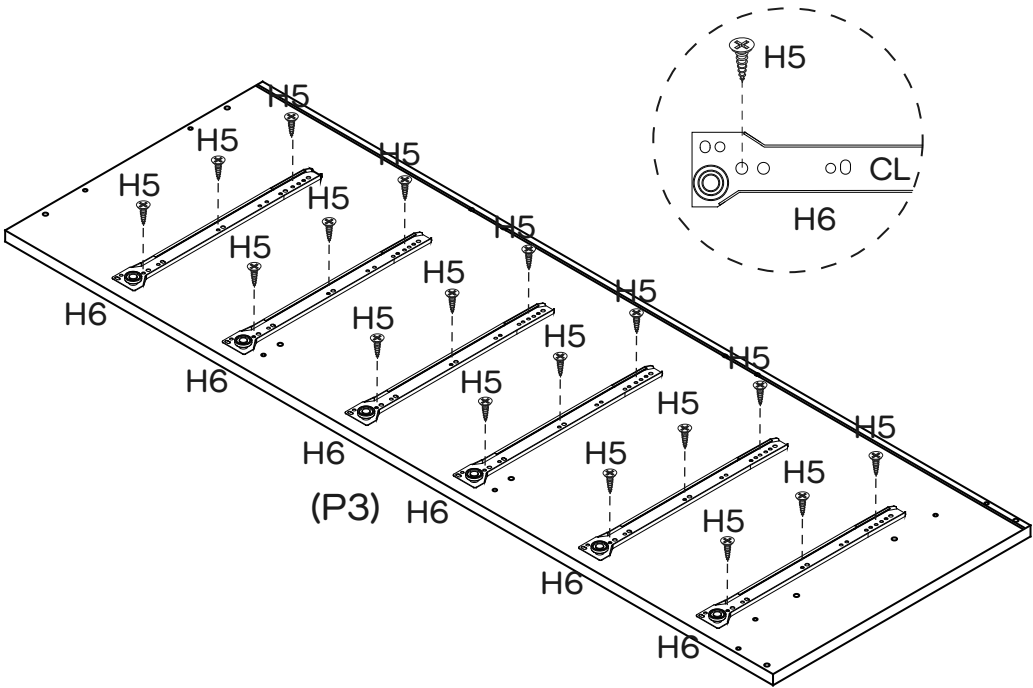

Attach 6 x CL Runner Tracks (H6) to Left Side Panel (P3) with 18 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.




Step 2


You will need	
	
10 x Cam Bolts (H3)	Phillips Head Screwdriver

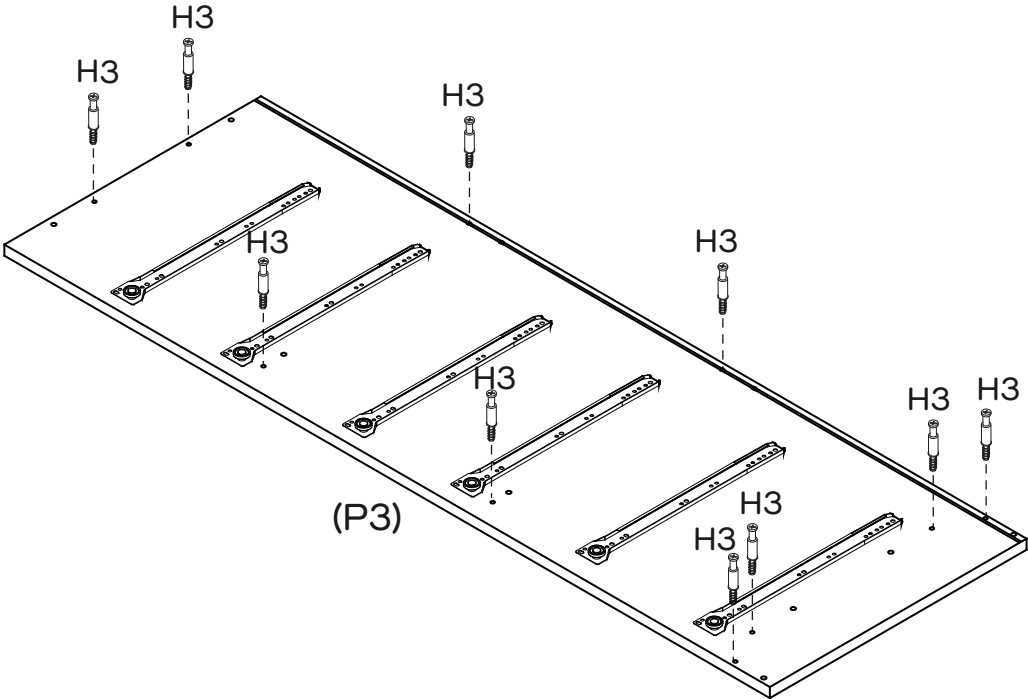

Attach 10 x Cam Bolts (H3) to Left Side Panel (P3) as shown by tightening with the Phillips Head Screwdriver.



Step 3


You will need	
	
18 x Small Screws (H5)	6 x CR Runner Tracks (H7)
	
Phillips Head Screwdriver	

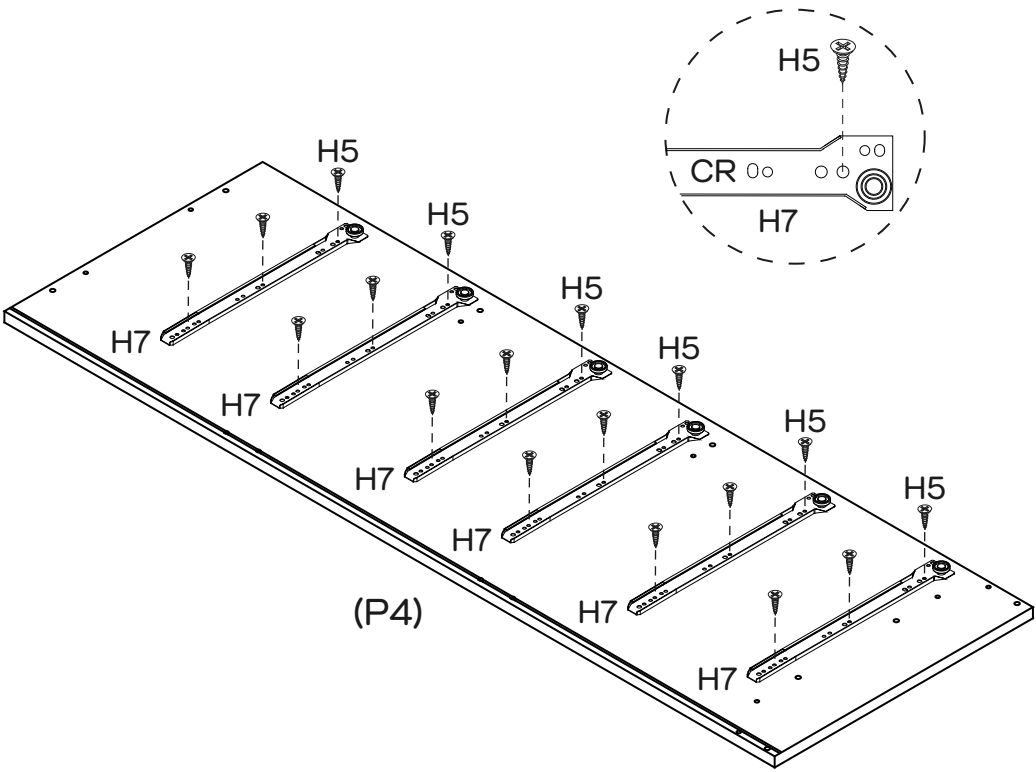

Attach 6 x CR Runner Tracks (H7) to Right Side Panel (P4) with 18 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.


Step 4


You will need	
	
10 x Cam Bolts (H3)	Phillips Head Screwdriver

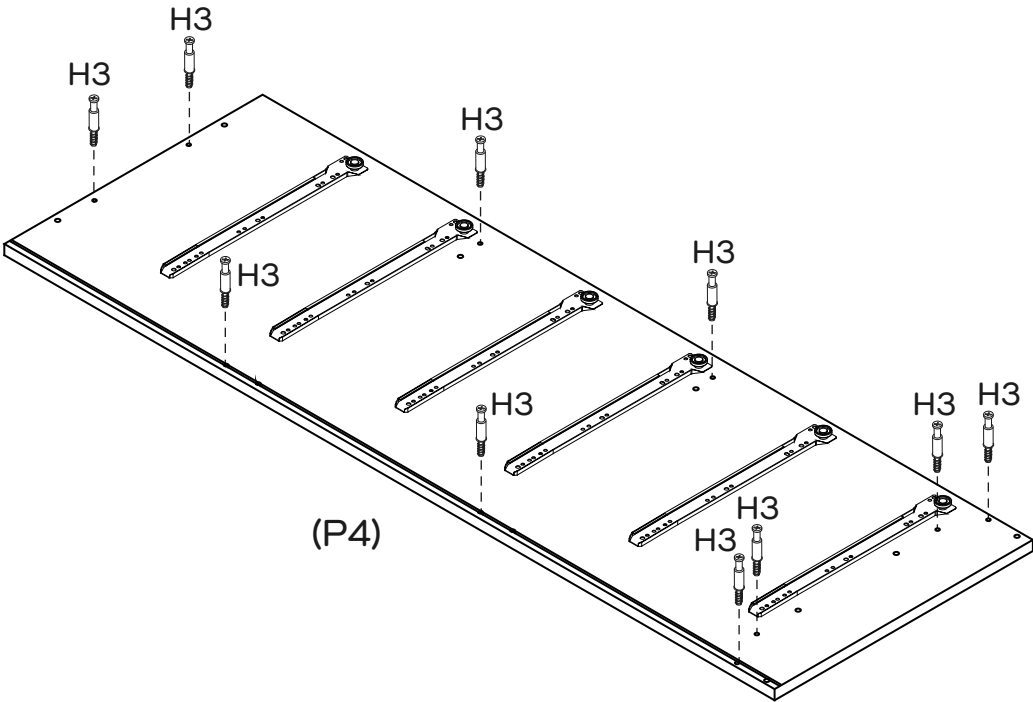

Attach 10 x Cam Bolts (H3) to Right Side Panel (P4) as shown by tightening with the Phillips Head Screwdriver.



Step 5

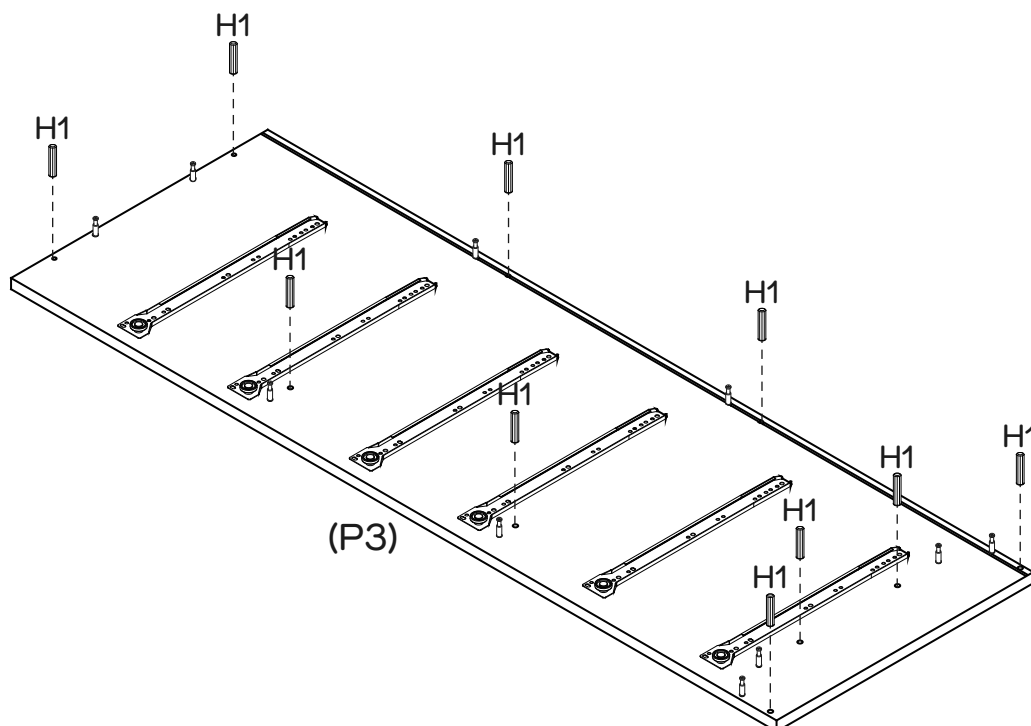
You will need	
	
10 x Dowels (H1)	




Insert 10 x Dowels (H1) into Left Side Panel (P3) as shown.

Step 6

You will need	
	
10 x Cam Nuts (H4)	Phillips Head Screwdriver

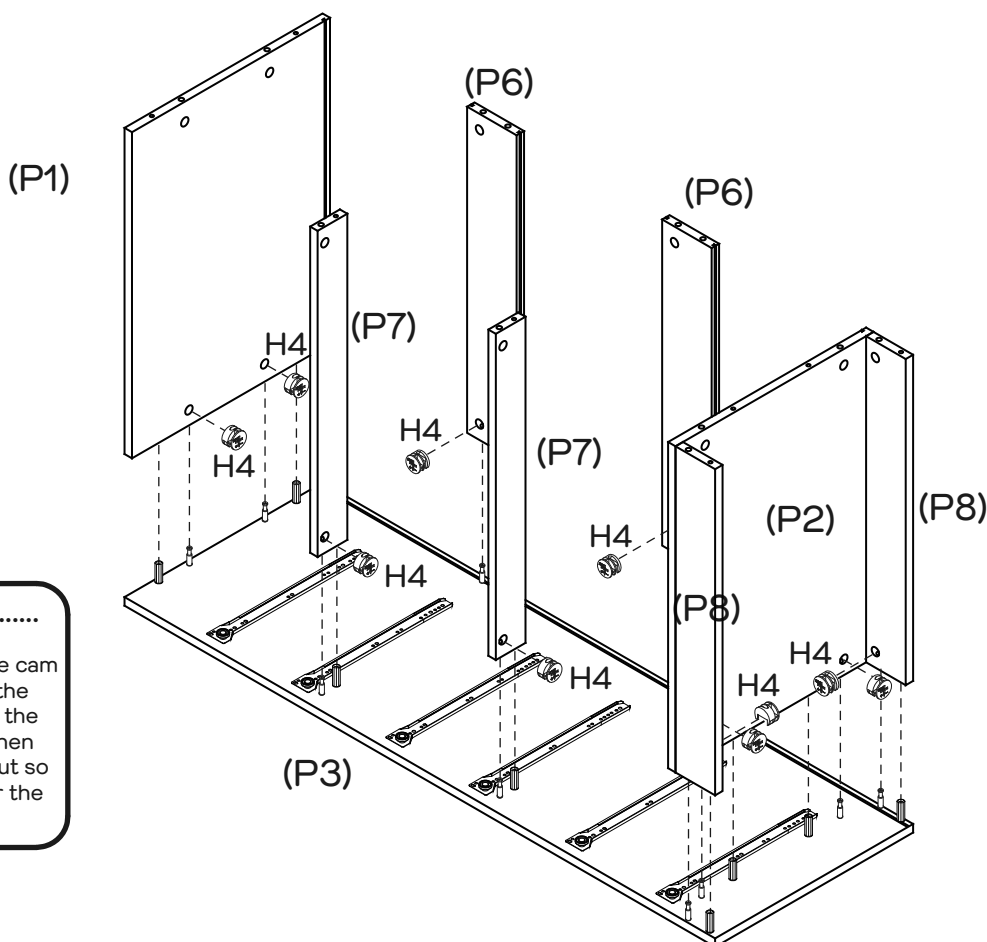


This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so the arrow points towards the incoming bolt. You then turn the cam nut so it tightens over the bolt.

Insert 10 x Cam Nuts (H4) into Top Panel (P1), Base Panel (P2) and Rails (P6 x 2, P7 x 2, P8 x 2). Rotate the nuts so the arrows point towards the incoming bolts. Attach Top Panel (P1), Base Panel (P2) and Rails (P6 x 2, P7 x 2, P8 x 2) to Left Side Panel (P3) by tightening all nuts with the Phillips Head Screwdriver.


Step 7

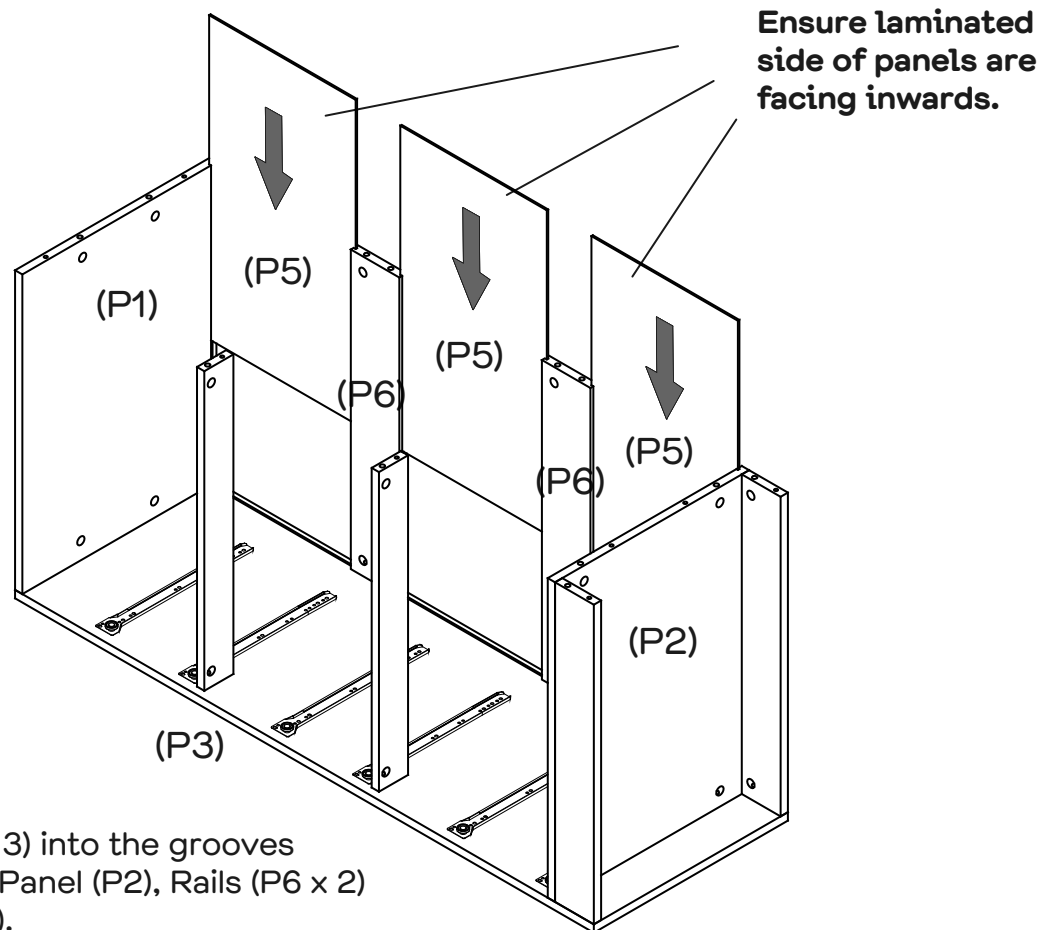

Slide Back Panels (P5 x 3) into the grooves of Top Panel (P1), Base Panel (P2), Rails (P6 x 2) and Left Side Panel (P3).

Step 8


You will need	
10 x Dowels (H1)	

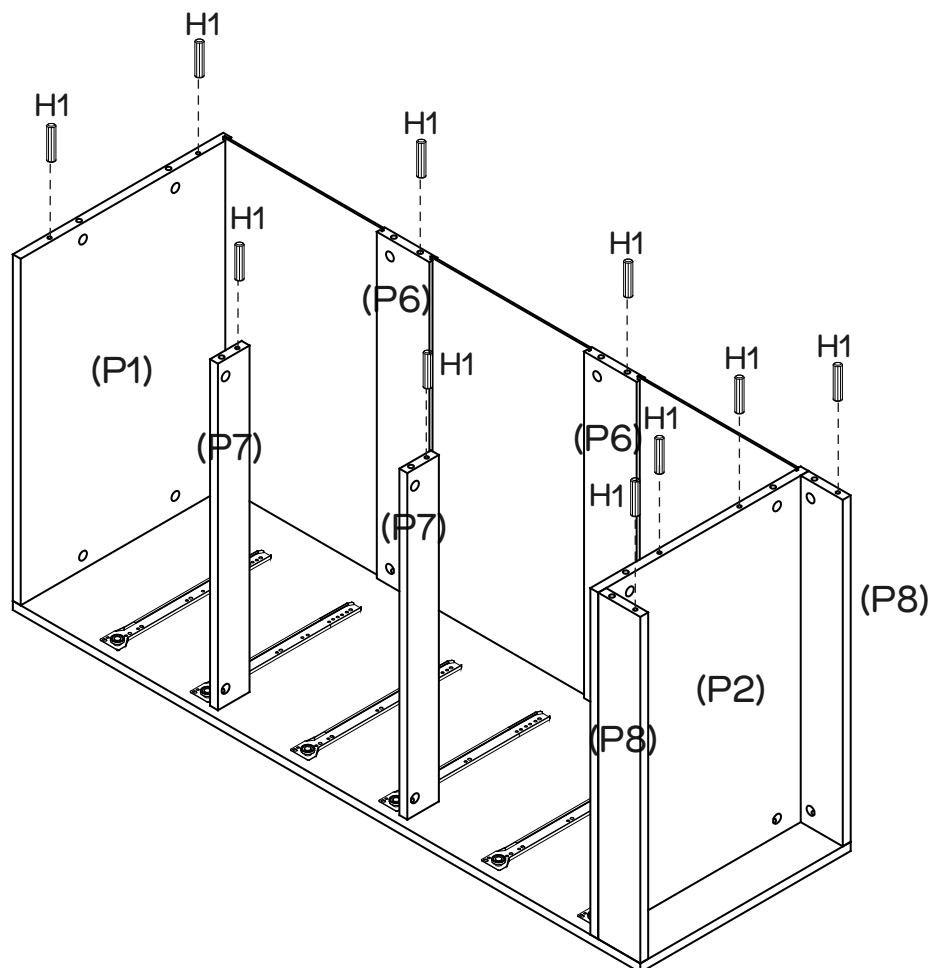

Insert 10 x Dowels (H1) into Top Panel (P1), Base Panel (P2) and Rails (P6 x 2, P7 x 2, P8 x 2) as shown.



Step 9

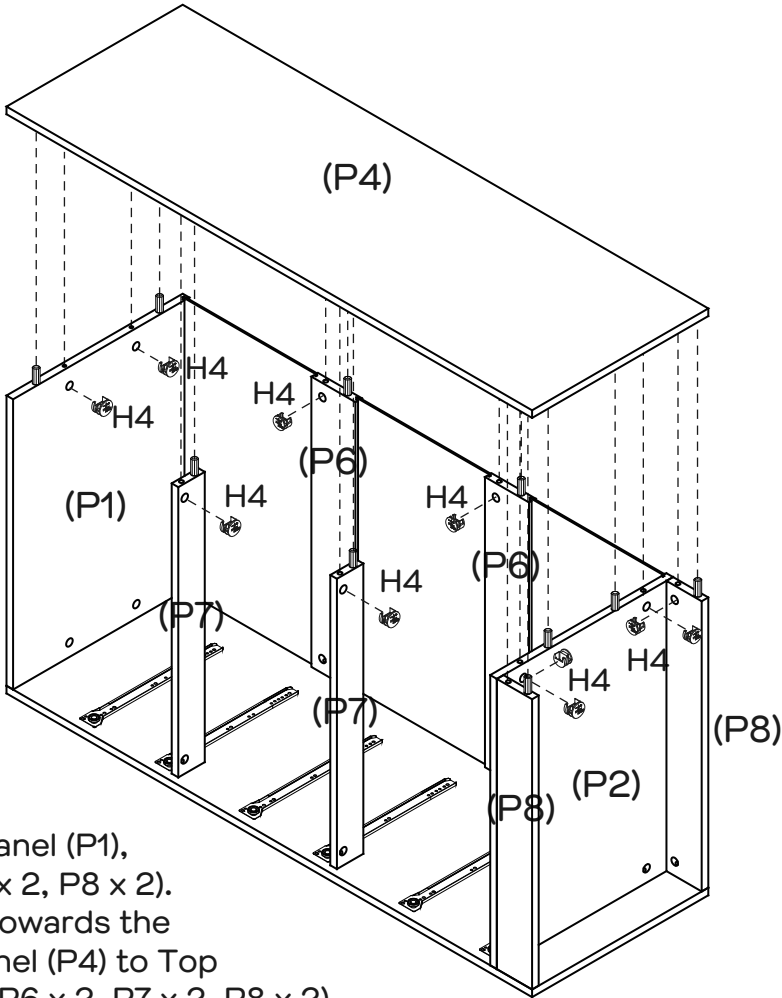
You will need	
	
10 x Cam Nuts (H4)	Phillips Head Screwdriver



Insert 10 x Cam Nuts (H4) into Top Panel (P1), Base Panel (P2) and Rails (P6 x 2, P7 x 2, P8 x 2). Rotate the nuts so the arrows point towards the incoming bolts. Attach Right Side Panel (P4) to Top Panel (P1), Base Panel (P2) and Rails (P6 x 2, P7 x 2, P8 x 2) by tightening all nuts with the Phillips Head Screwdriver.



Step 10


You will need	
	
4 x Plastic Glides (H10)	Hammer

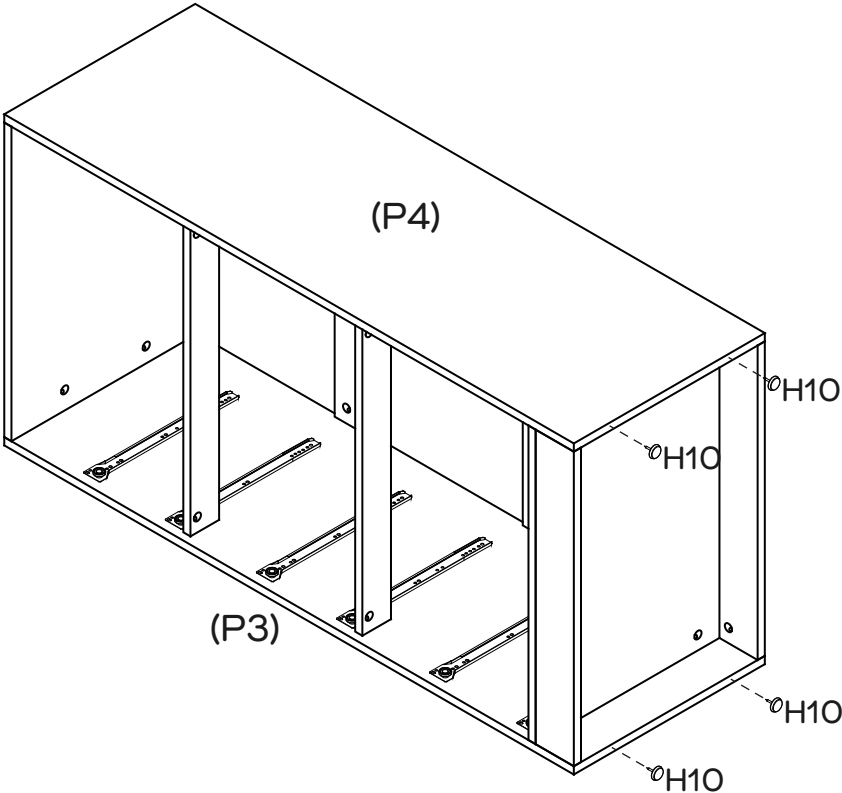

Secure 4 x Plastic Glides (H10) to the bottom of Left & Right Side Panels (P3 & P4) as shown using the Hammer.


Step 11


You will need	
	
30 x Cam Bolts (H3)	Phillips Head Screwdriver

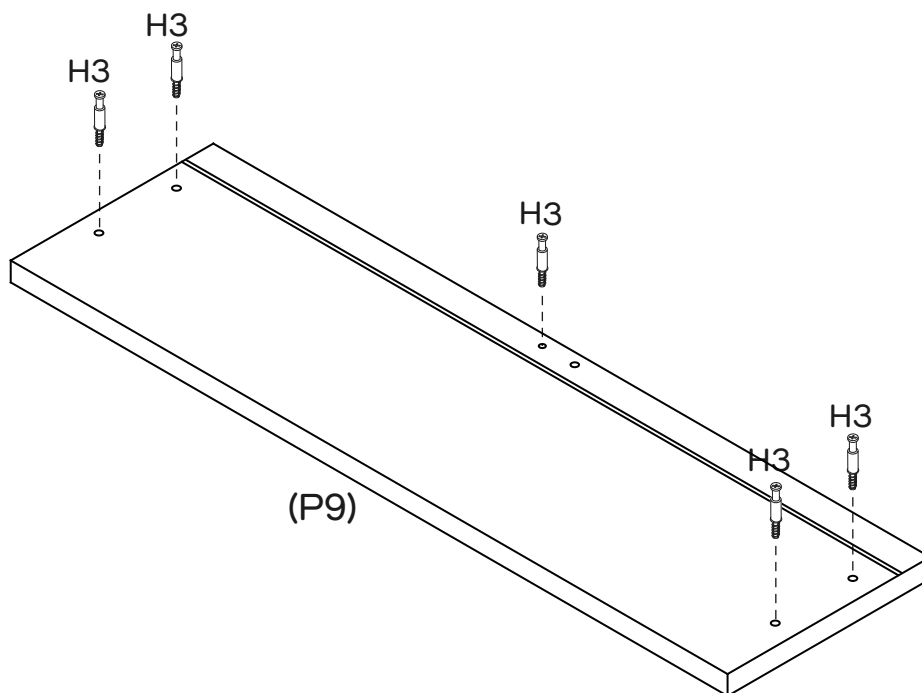

Attach 5 x Cam Bolts (H3) to Drawer Front (P9) as shown by tightening with the Phillips Head Screwdriver. Repeat this step for the remaining five Drawer Fronts (P9 x 5).


Step 12

You will need	
	
36 x Long Screws (H2)	Phillips Head Screwdriver

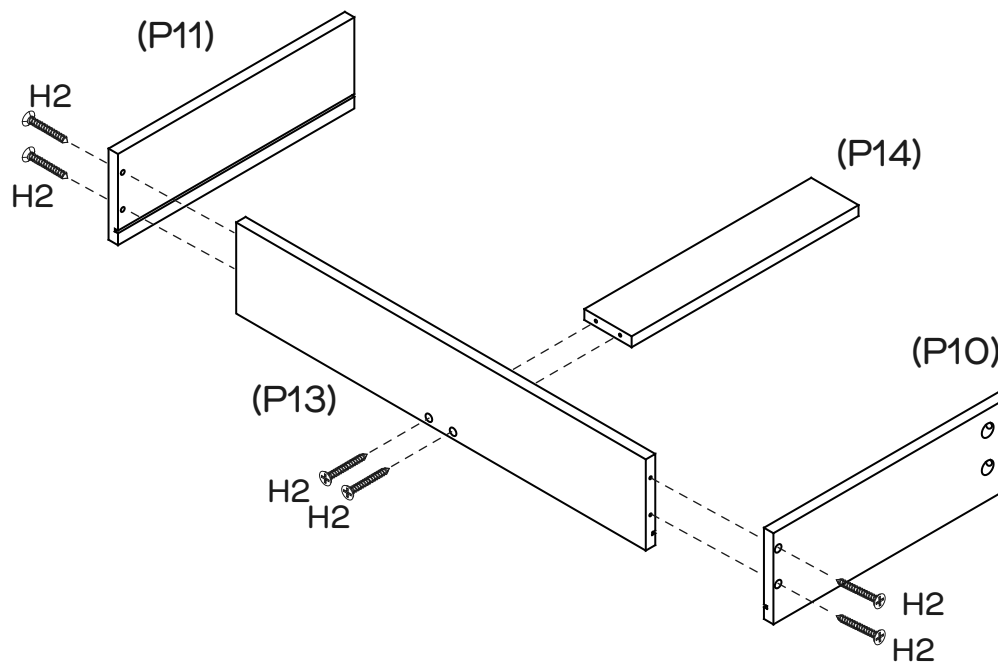




Attach Drawer Back (P13) to Left & Right Drawer Sides (P10 & P11) and Rail (P14) with 6 x Long Screws (H2) by tightening with the Phillips Head Screwdriver. Repeat this step for the remaining Drawer Backs (P13 x 5), Drawer Sides (P10 x 5 & P11 x 5) and Rails (P14 x 5).

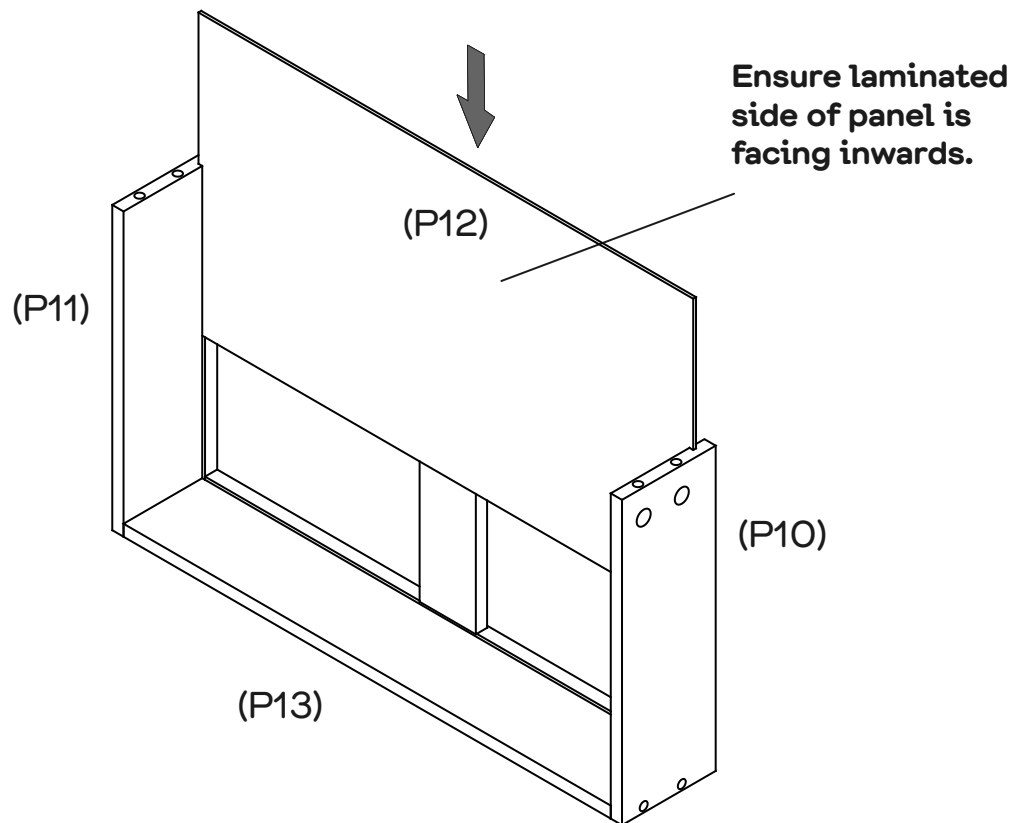
Step 13



Slide Drawer Base (P12) into the grooves of Left & Right Drawer Sides (P10 & P11) and Drawer Back (P13). Repeat this step for the remaining Drawer Bases (P12 x 5).





Step 14

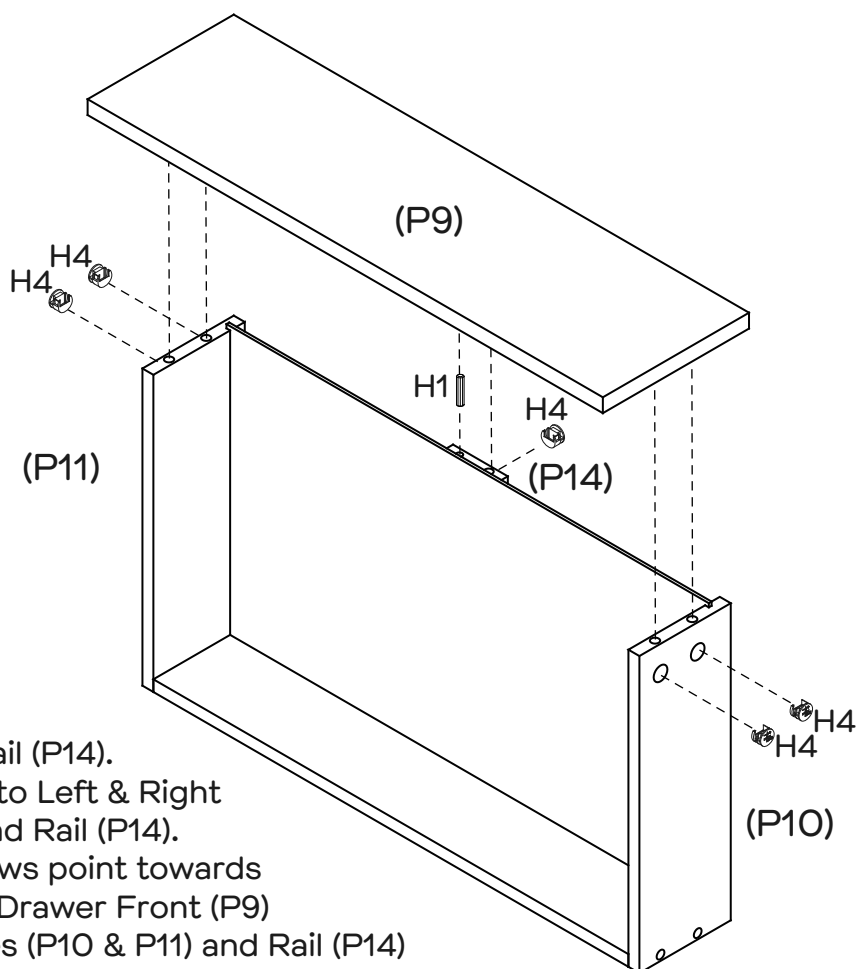
You will need	
	
6 x Dowel (H1)	30 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 1 x Dowel (H1) into Rail (P14).
 Insert 5 x Cam Nuts (H4) into Left & Right Drawer Sides (P10 & P11) and Rail (P14).
 Rotate the nuts so the arrows point towards the incoming bolts. Attach Drawer Front (P9) to Left & Right Drawer Sides (P10 & P11) and Rail (P14) by tightening all nuts with the Phillips Head Screwdriver.
 Repeat this step for the remaining Drawer Sides (P10 x 5 & P11 x 5) and Drawer Fronts (P9 x 5).


Step 15

You will need	
	
24 x Small Screws (H5)	6 x DL Runners (H8)
	
6 x DR Runners (H9)	Phillips Head Screwdriver

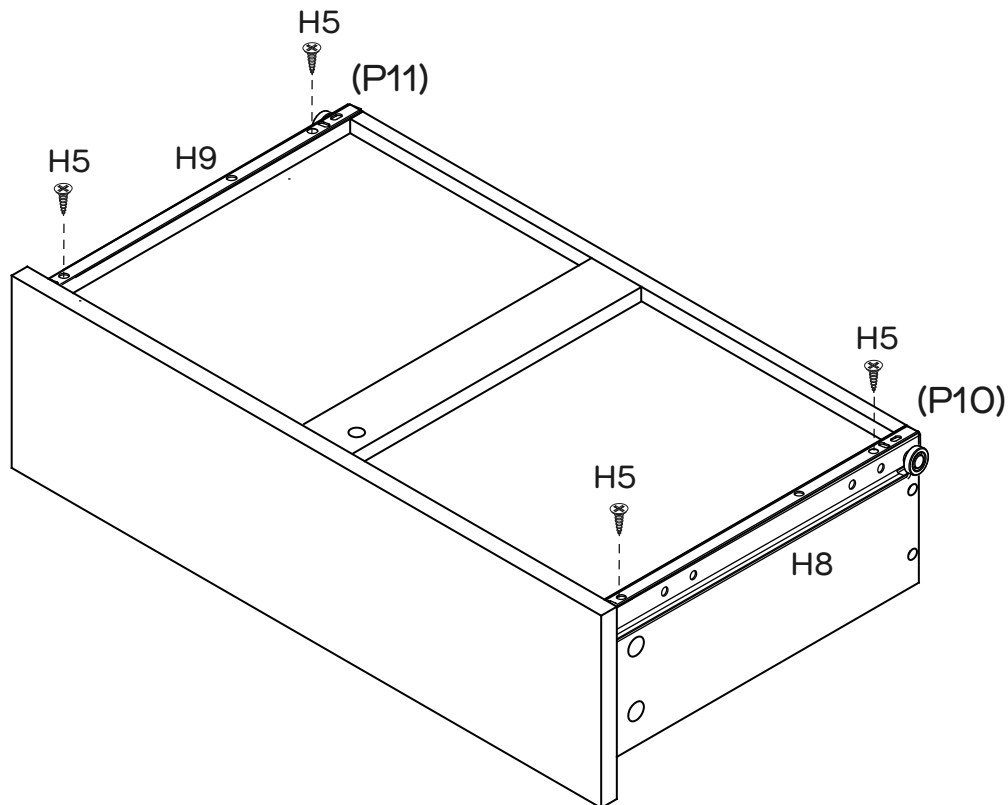







Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P10) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P11) with 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver. Repeat this step for the remaining five Drawers.



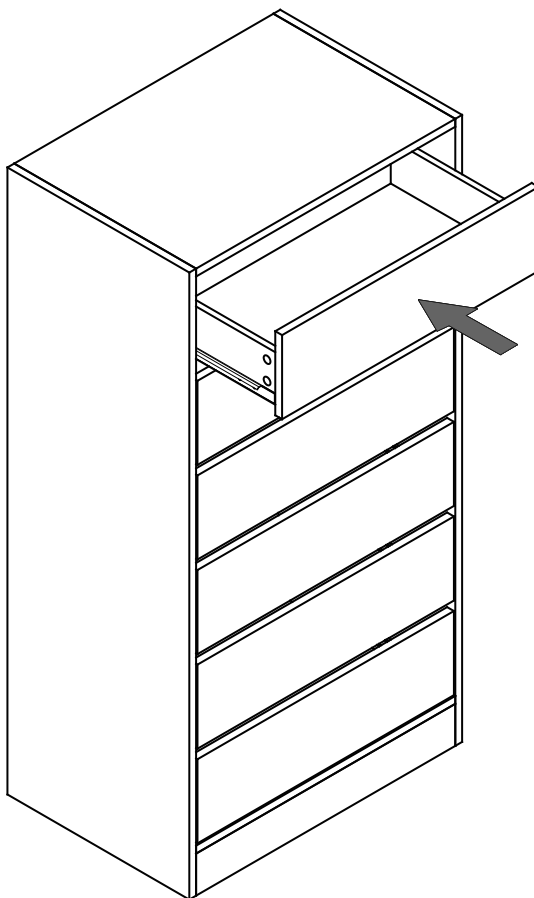
Step 16



Gently insert the assembled drawers into the unit by carefully lining up the drawer runners with the drawer runner tracks.

Step 17


You will need	
	
8 x Wedges (H11)	8 x Wedge Screws (H12)
	
1 x Safety Strap (H13)	1 x Safety Strap Screw (H14)
	
1 x Washer (H15)	Phillips Head Screwdriver

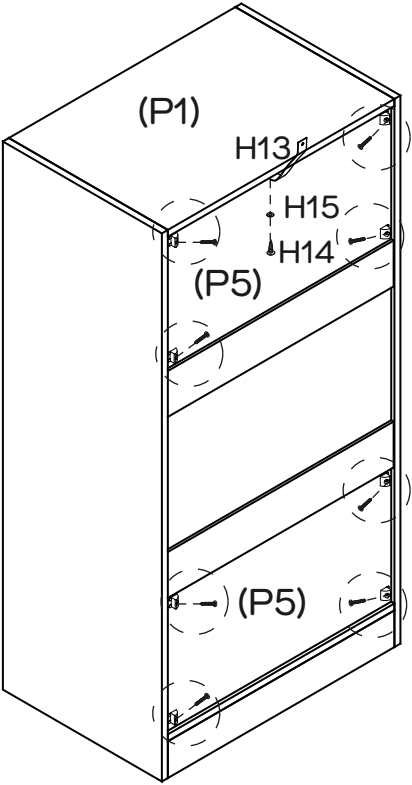



We strongly advise that you use the wall safety strap provided to prevent the unit toppling.

Secure Back Panels (P5 x 2) in place with 8 x Wedges (H11) and 8 x Wedge Screws (H12) by tightening with the Phillips Head Screwdriver. Attach the Safety Strap (H13) to the Top Panel (P1) with 1 x Safety Strap Screw (H14) & 1 x Washer (H15) by tightening with the Phillips Head Screwdriver.

Step 18

You will need	
	
1 x Washer (H15)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

Move the unit to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

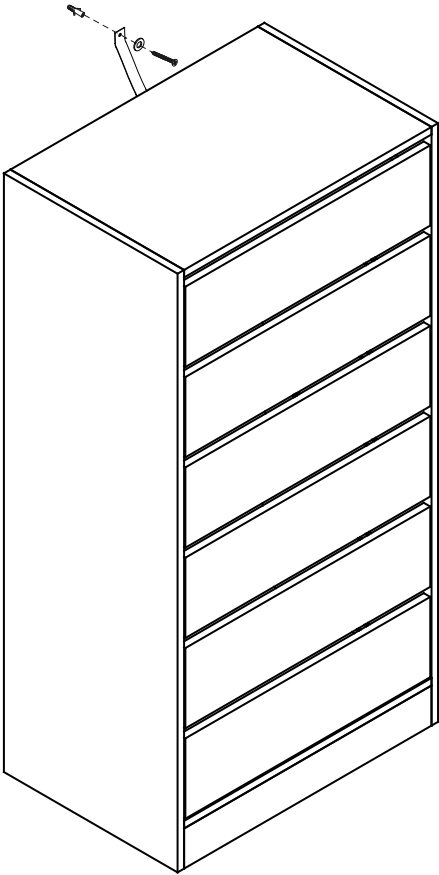

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.