




**Fantastic
Furniture**

Version 1.0

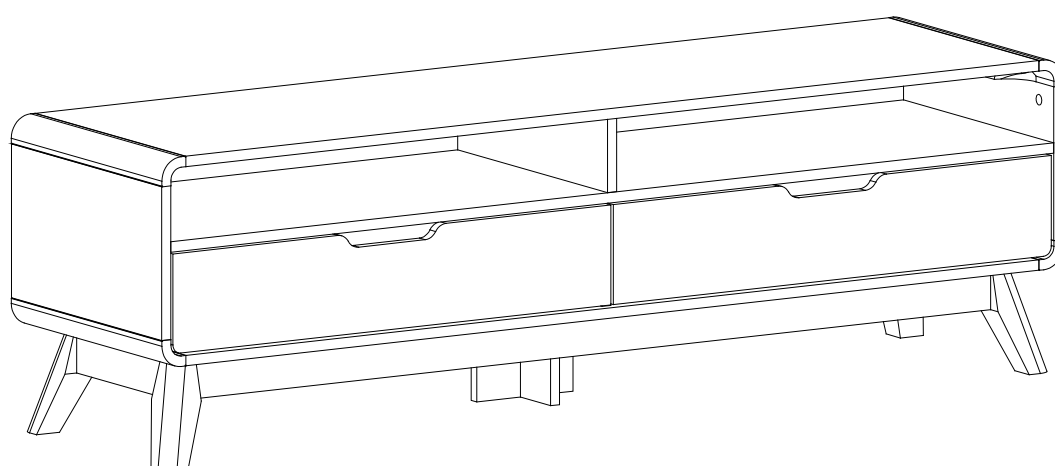

Two People



Required

Niva
Lowline 1500mm
fantasticfurniture.com.au

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram
for you chance to win a \$250 Fantastic Furniture Gift Card!
@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

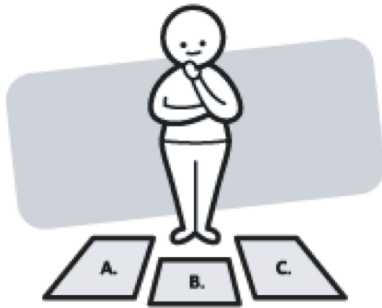

Identify and lay out all of the components before you begin assembly.

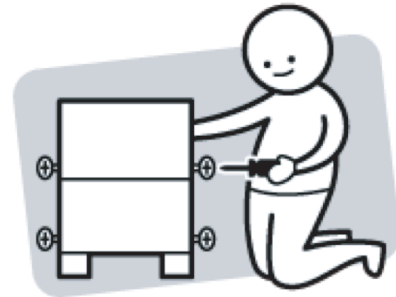

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product




DO NOT USE



Othe tools you need

Flat head screwdriver; Phillips head screwdriver; Mallet

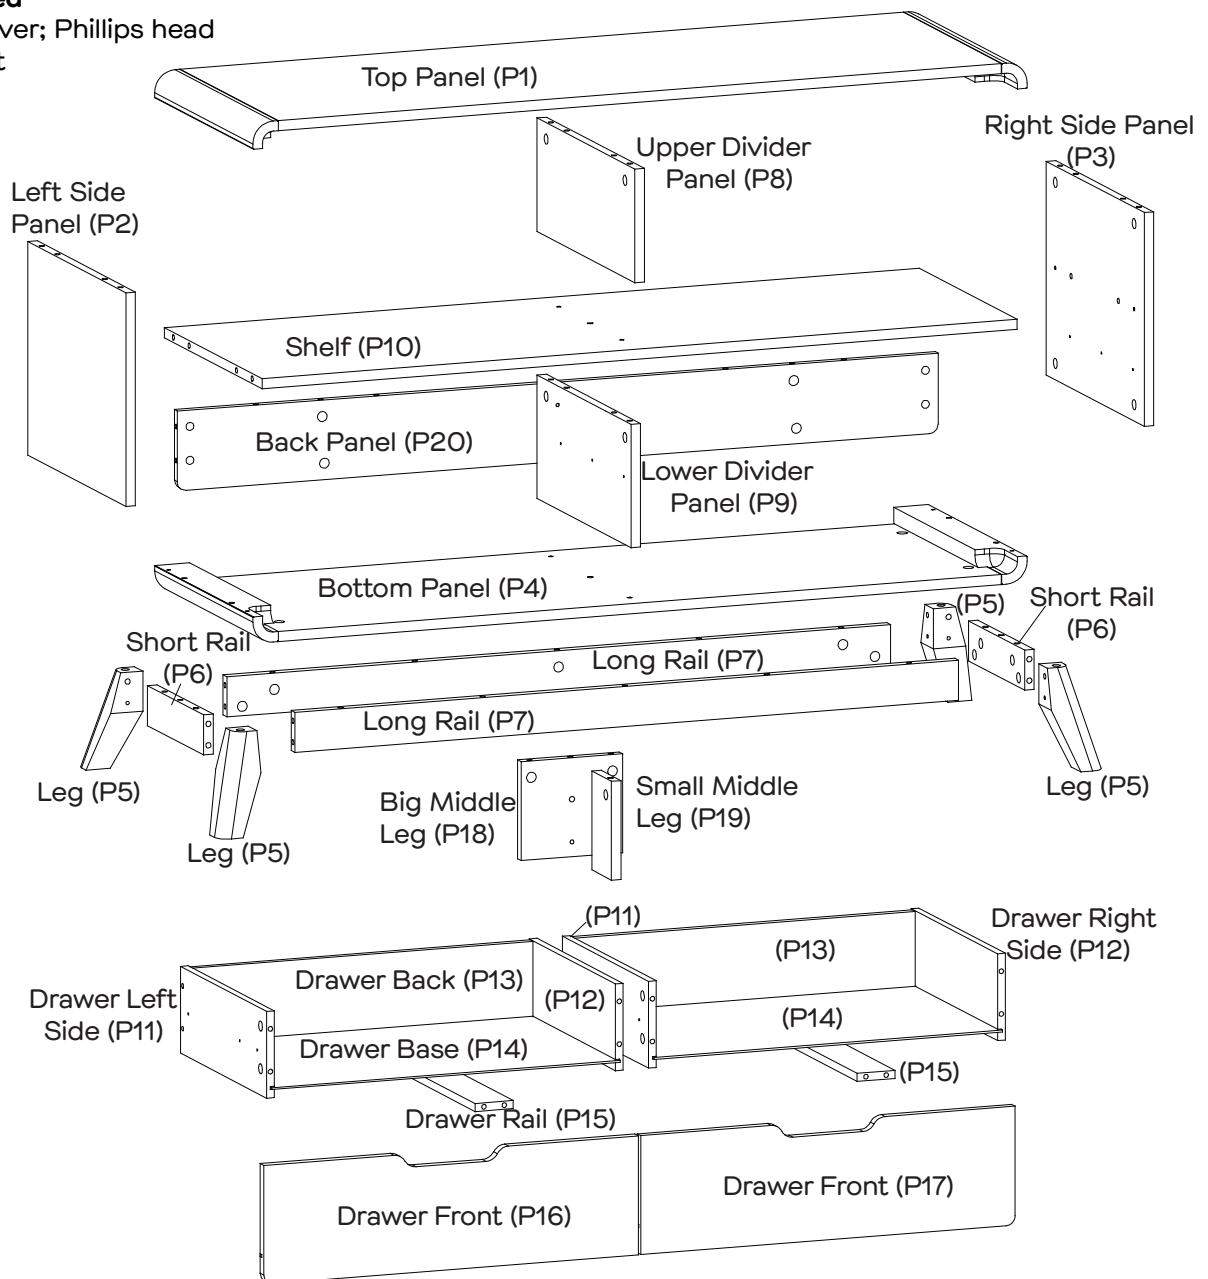


Parts list

Box 1: Top Panel (P1); Left Side Panel (P2); Right Side Panel (P3); 4 x Leg (P5); Lower Divider Panel (P9); 2 x Drawer Left Side (P11); 2 x Drawer Right Side (P12); 2 x Drawer Back (P13); 2 x Drawer Base (P14); 2 x Drawer Rail (P15); Drawer Front (P16); Drawer Front (P17); Big Middle Leg (P18); Small Middle Leg (P19); Hardware Pack.

Box 2: 2 x Short Rail (P6); 2 x Long Rail (P7); Upper Divider Panel (P8); Shelf (P10); Back Panel (P20).

Hardware Pack



57 x Cam Bolts
(H1)




45 x Big Cam
Nuts (H2)



44 x Dowels
(H3)




12 x Small Cam
Nuts (H4)



19x Screws
(H5)
#10x38 mm



24 x Screws
(H6)
#6x12 mm



4 x Slides
(H7)



4 x Felt Feet
(H8)






4 x Screws
(H9)
#10x38 mm



1 x Adjustable
Foot (H10)



Step 1

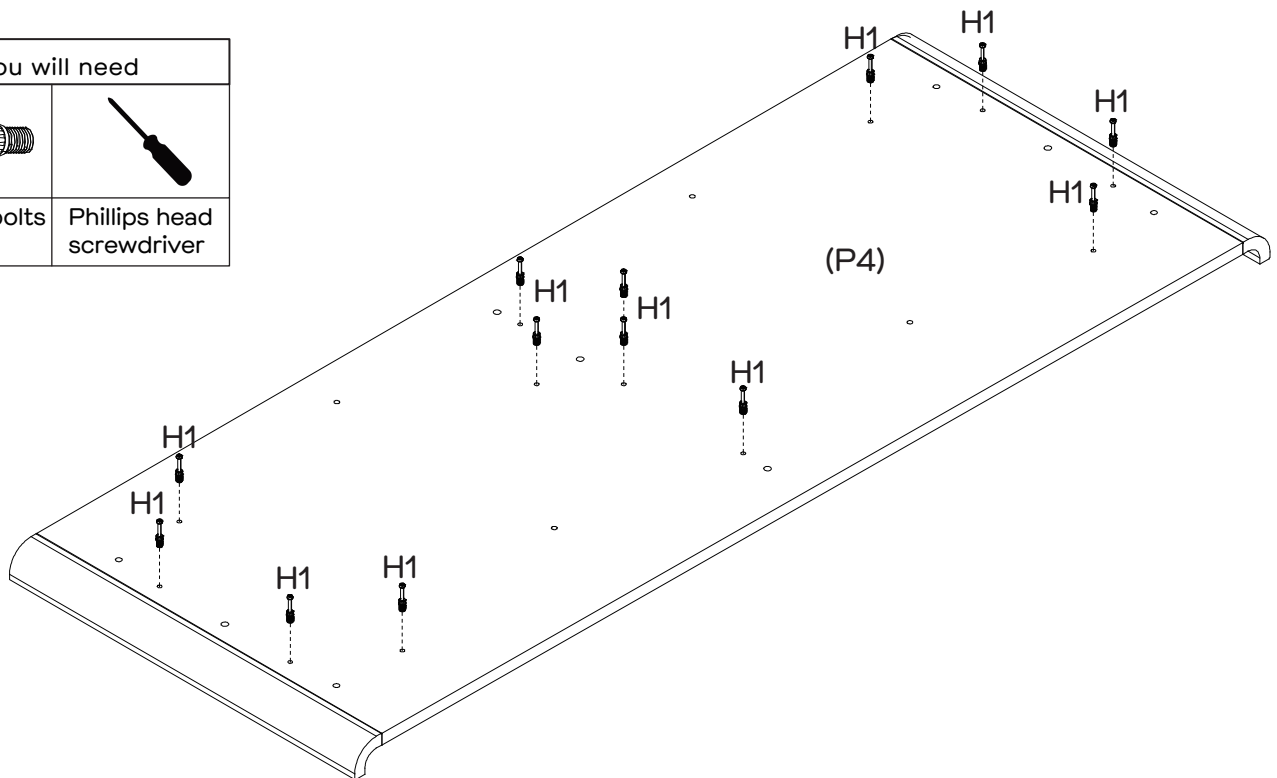
You will need	
	
13 x Cam bolts (H1)	Phillips head screwdriver



Screw 13 x cam bolts (H1) into bottom panel (P4) as shown, tighten with a Phillips head screwdriver.




Step 2

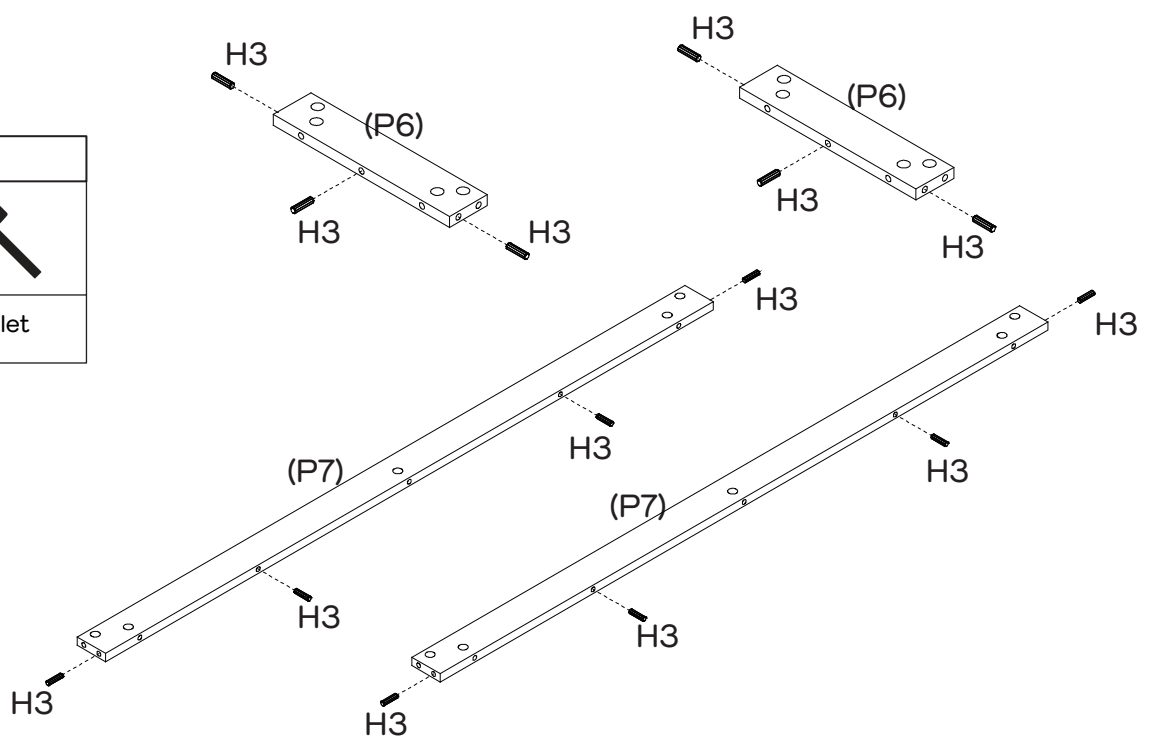
You will need	
	
14 x Dowels (H3)	Mallet



Insert 3 x dowels (H3) into each short rail (P6) as shown.
Insert 4 x dowels (H3) into each long rail (P7) as shown.
Use a mallet to gently tap the dowels into place if needed.



Step 3

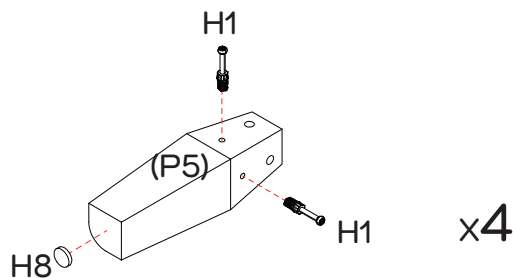You will need	
	
8 x Cam bolts (H1)	Phillips head screwdriver
	
4 x Felt feet (H8)	




Screw 2 x cam bolts (H1) into each leg (P5) using a Phillips head screwdriver.
Attach 1 x felt foot (H8) onto each leg (P5) as shown.


Step 4

You will need	
	
4 x Big cam nuts (H2)	Flat head screwdriver

This is how a cam nut works.....



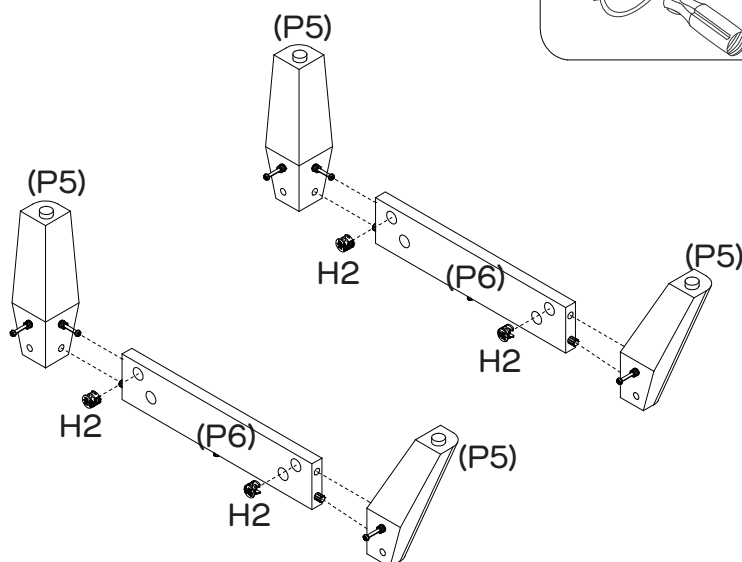


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Fit each short rail (P6) between 2 x legs (P5).
Insert 2 x big cam nuts (H2) each into short rail (P6).
Using a flat head screwdriver, turn the big cam nuts (H2) clockwise to lock.



Step 5

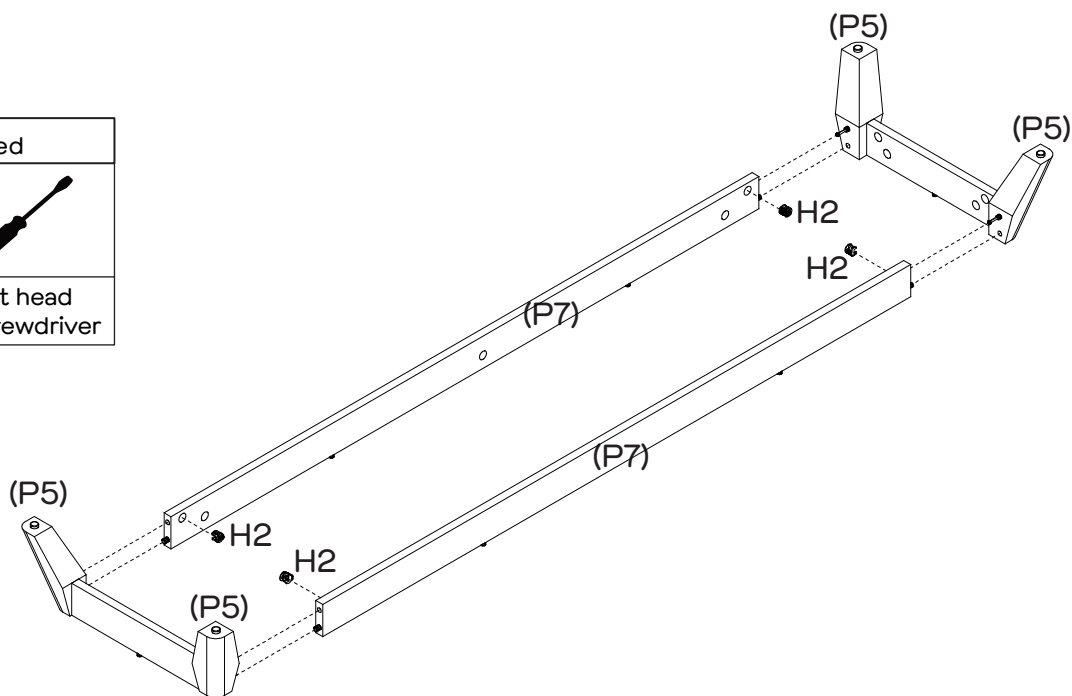
You will need	
	
4 x Big cam nuts (H2)	Flat head screwdriver



Position 2 x long rails (P7) between the assembled units as shown. Insert 4 x big cam nuts (H2) into long rails (P7), using a flat head screwdriver turn clockwise to lock.




Step 6



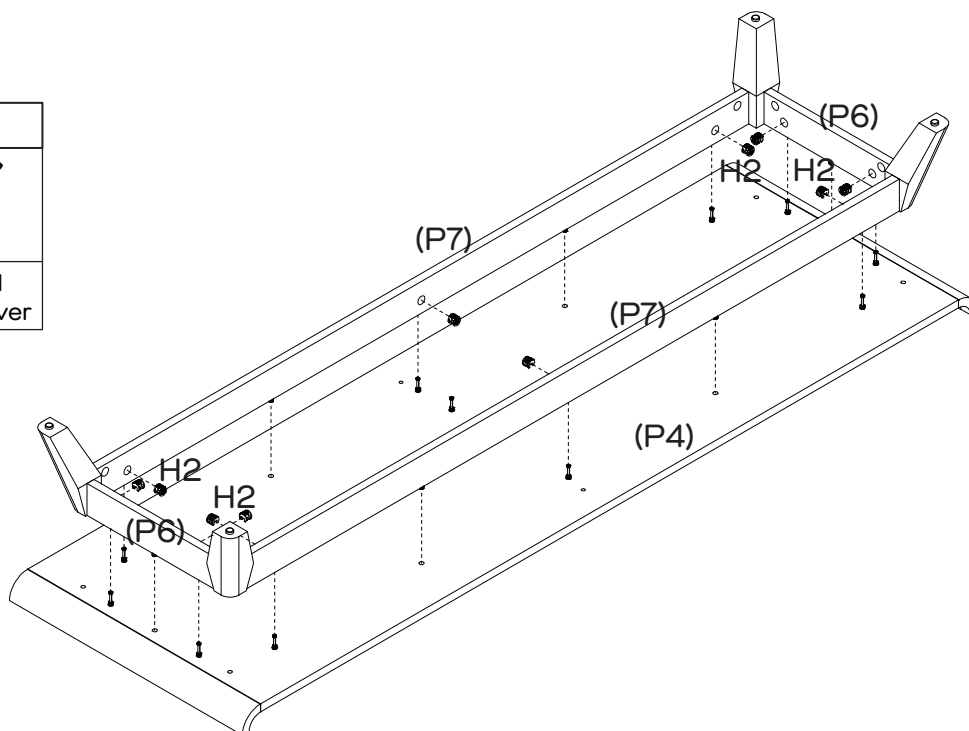
You will need	
	
10 x Big cam nuts (H2)	Flat head screwdriver



Position the leg assembly onto bottom panel (P4), making sure the cam bolts on the bottom panel (P4) are inserted into the holes on the leg assembly. Insert 10 x big cam nuts (H2) into short rails (P6) and long rails (P7), using a flat head screwdriver turn clockwise to lock. Carefully turn the unit over.




Step 7


You will need	
	
2 x Dowels (H3)	Phillips head screwdriver
	
#10x38 mm 1 x Screw (H5)	



Insert 2 x dowels (H3) into small middle leg (P19) and big middle leg (P18). Attach small middle leg (P19) to big middle leg (P18) with 1 x screw (H5), tighten with a Phillips head screwdriver.




Step 8

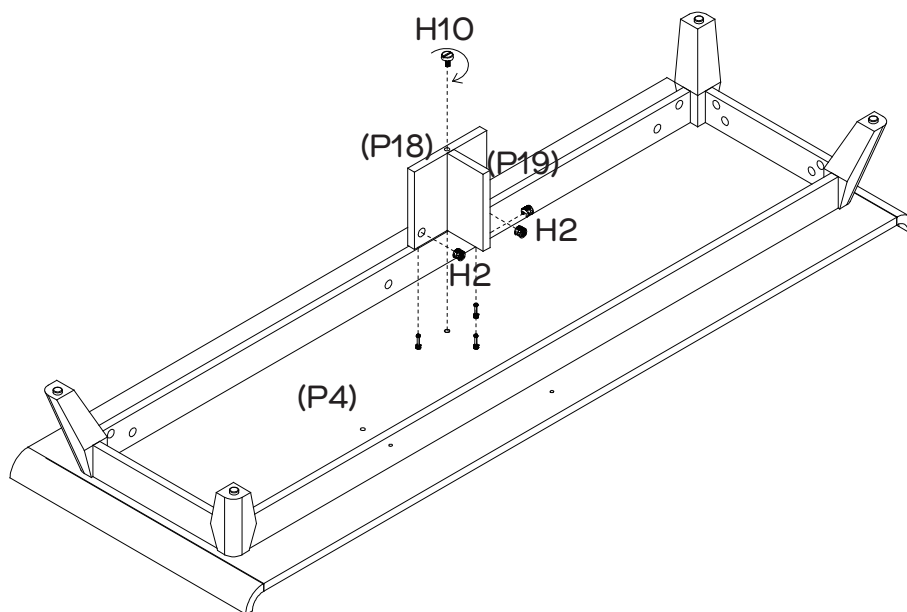
You will need	
	
3 x Big cam nuts (H2)	1 x Adjustable foot (H10)
	
Flat head screwdriver	



Position middle legs (P18) & (P19) to bottom panel (P4). Insert 3 x big cam nuts (H2) into middle legs (P18) & (P19), and turn clockwise to lock using a flat head screwdriver. Screw 1 x adjustable foot (H10) into big middle leg (P18) as shown.

Step 9



You will need	
	
6 x Cam bolts (H1)	Phillips head screwdriver
	
#10x38 mm	
4 x Screws (H9)	

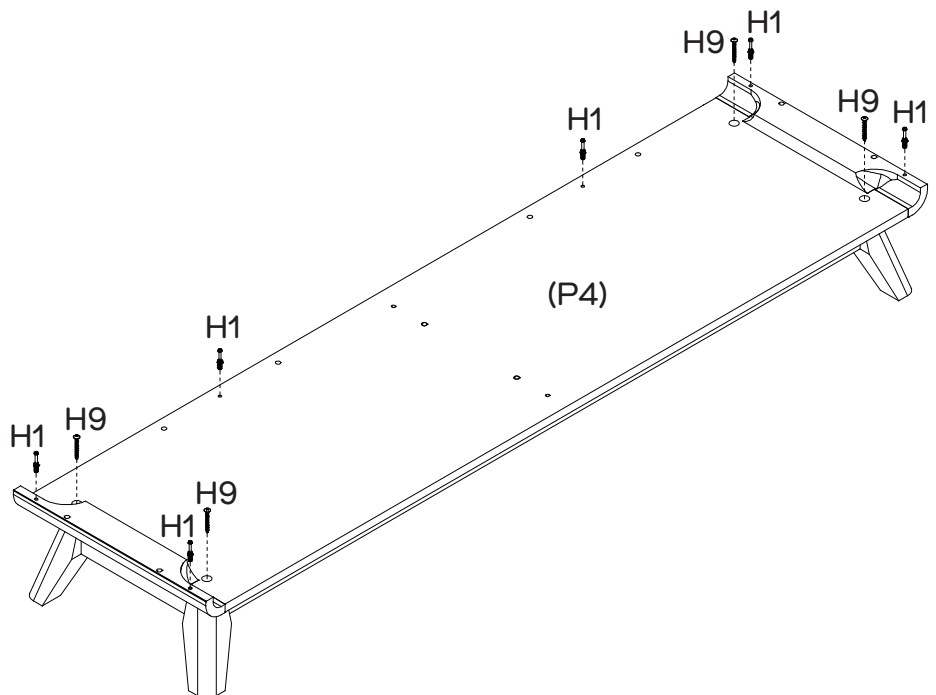


Screw 6 x cam bolts (H1) into bottom panel (P4) as shown, tighten with a Phillips head screwdriver.

Screw 4 x screws (H9) into bottom panel (P4), tighten with a Phillips head screwdriver.





Step 10

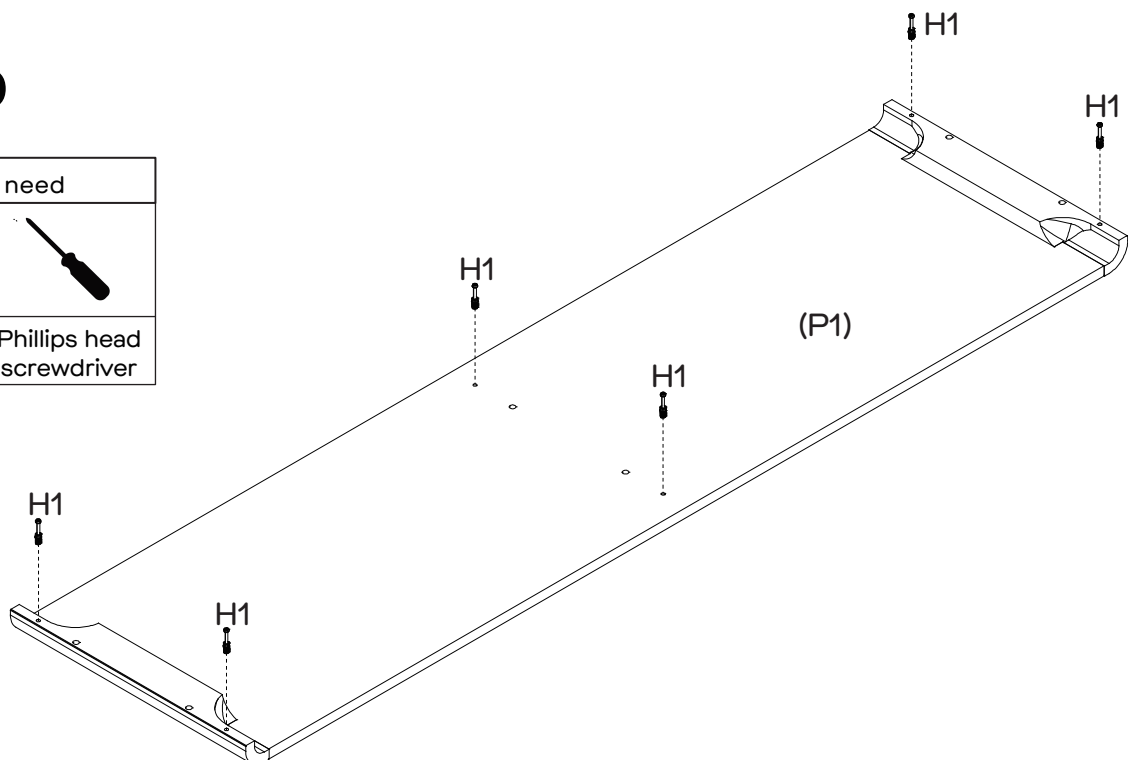
You will need	
	
6 x Cam bolts (H1)	Phillips head screwdriver



Screw 6 x cam bolts (H1) into top panel (P1), tighten with a Phillips head screwdriver.





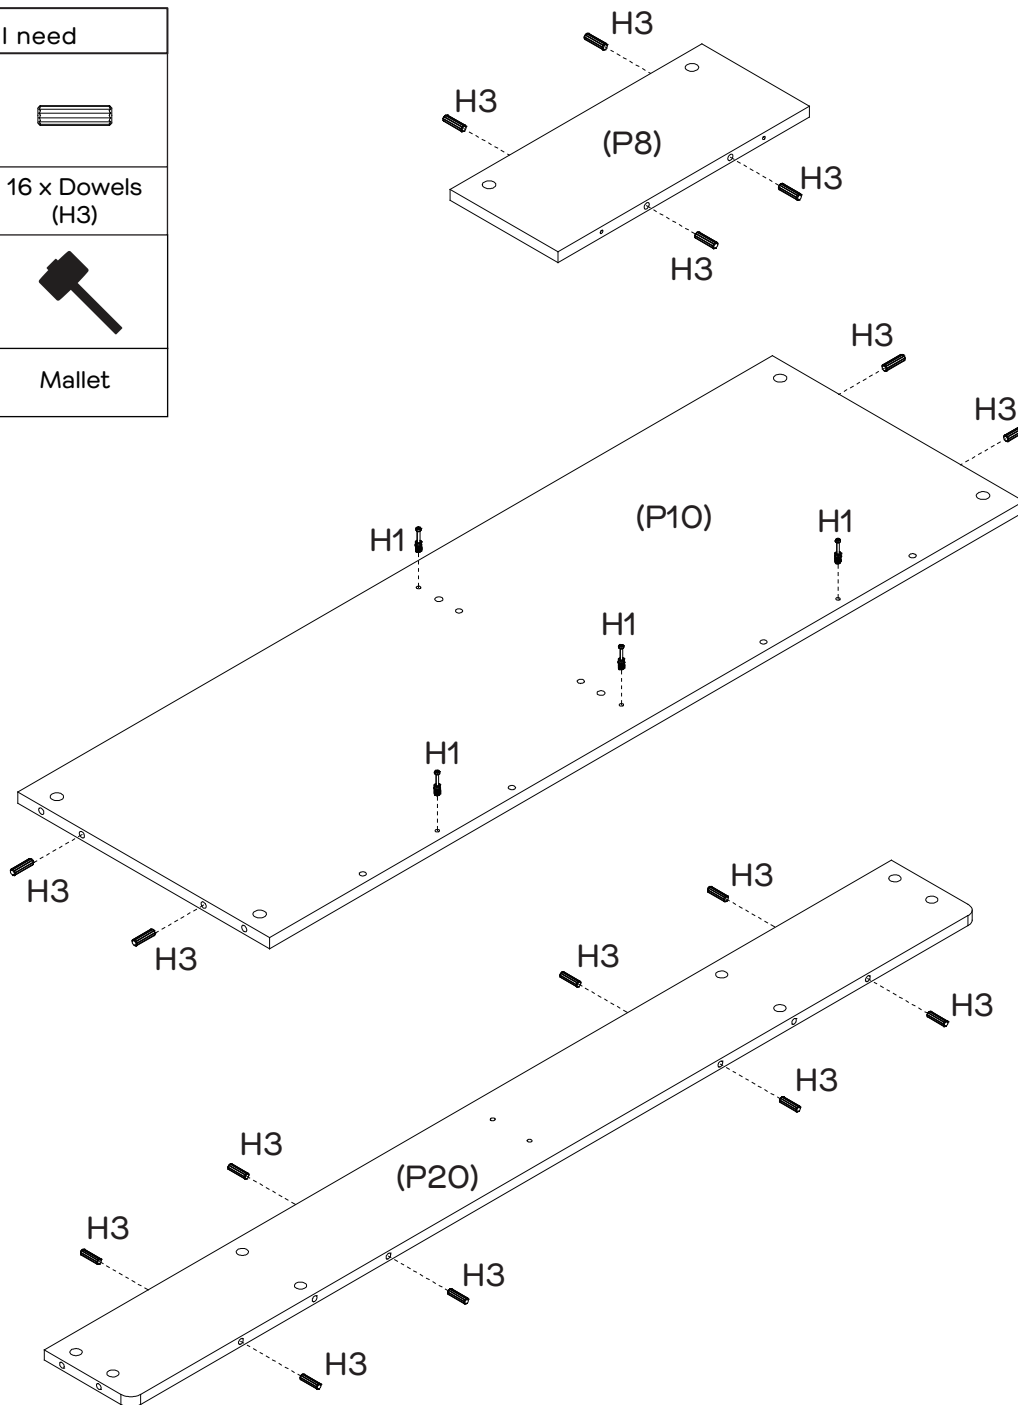

Step 11

You will need	
	
4 x Cam bolts (H1)	16 x Dowels (H3)
	
Phillips head screwdriver	Mallet




Insert 4 x dowels (H3) into upper divider panel (P8) as shown.
 Insert 4 x dowels (H3) into shelf (P10) as shown.
 Insert 8 x dowels (H3) into back panel (P20) as shown.
 Use a mallet to gently tap the dowels into place if needed.
 Screw 4 x cam bolts (H1) into shelf (P10) using a Phillips head scredriver.


Step 12

You will need	
	 #6x12 mm
8 x Cam bolts (H1)	6 x Screws (H6)
	
4 x Slides (H7)	Phillips head screwdriver
	
8 x Dowels (H3)	Mallet

Separate the 4 sets of slide runners (H7-2) and slide tracks (H7-1) from slides (H7) by following the steps below: Extend the slide runner all the way forward. Press the plastic release lever of the slide down and pull the slide runner (H7-2) completely out.


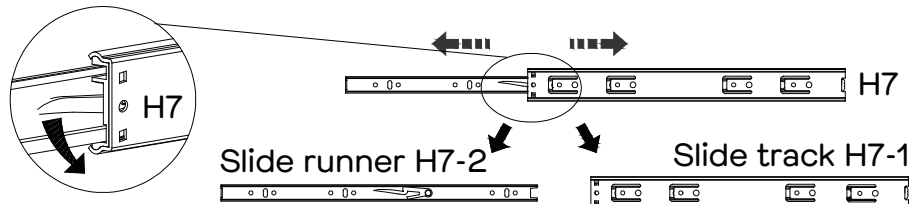


Adjust runner to access the screw holes.

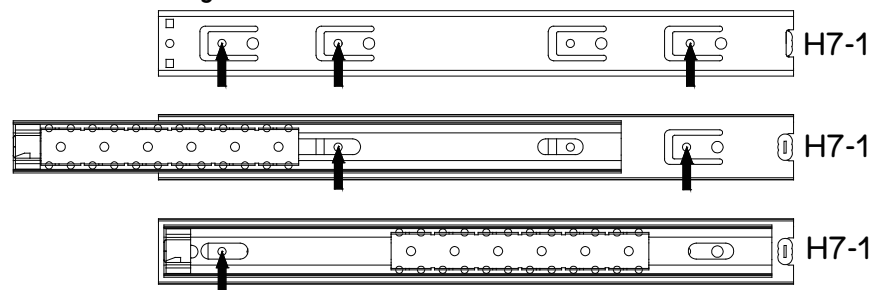

Note the position of the rubber stopper

Note the position of the rubber stopper

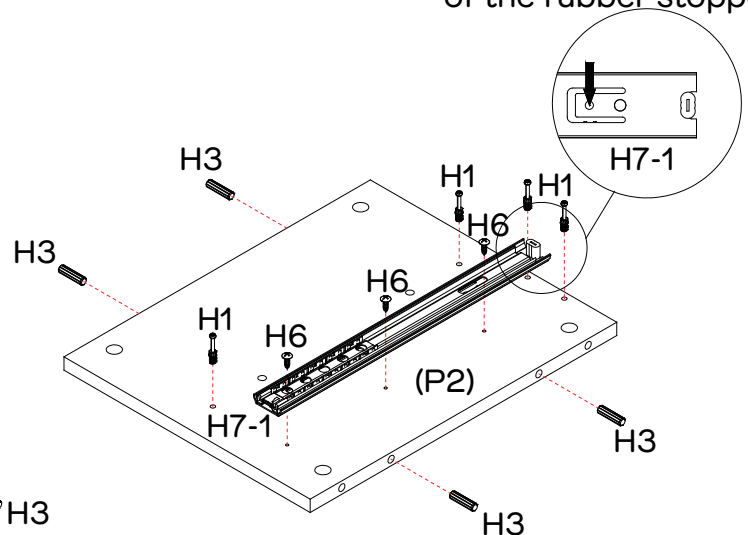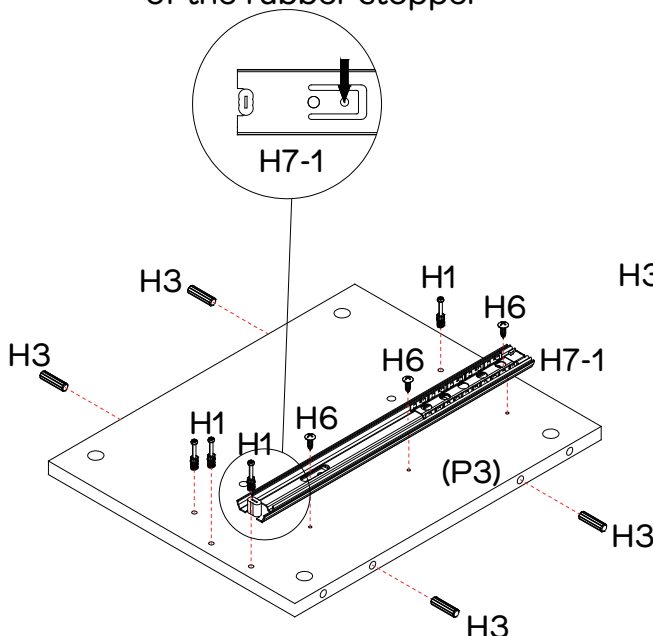

Attach 2 x separated slide tracks (H7-1) onto side panels (P2) & (P3) with 6 x screws (H6), using a Phillips head screwdriver as shown.






Pay attention to ensure the slide are in correct direction as shown.

Screw 8 x cam bolts (H1) into side panels (P2) & (P3), using a Phillips head screwdriver as shown.


Insert 8 x dowels (H3) into side panels (P2) & (P3) as shown.

Use a mallet to gently tap the dowels into place if needed.

Step 13

You will need	
 #6x12 mm	
6 x Screws (H6)	4 x Dowels (H3)
	
Phillips head screwdriver	Mallet
	
2 x Slide tracks (H7-1)	

Note the position of the rubber stopper

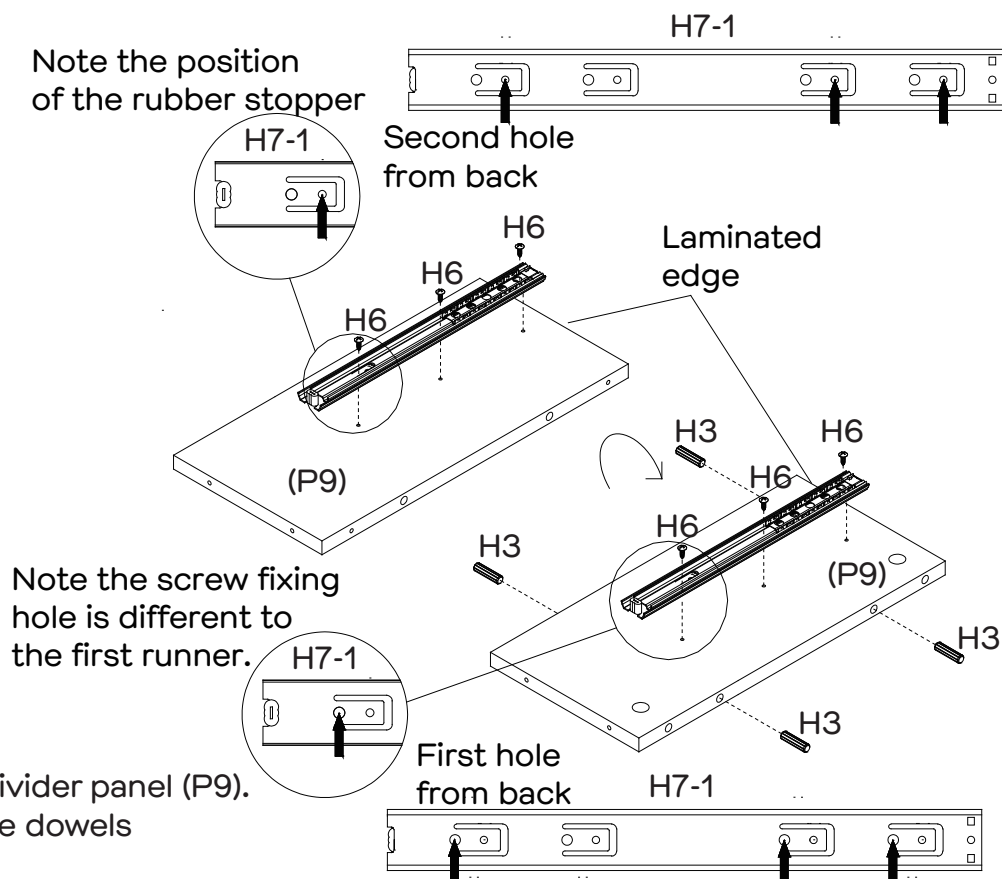

Insert 4 x dowels (H3) into divider panel (P9).



Use a mallet to gently tap the dowels into place if needed.


Attach 1 x slide track (H7-1) onto divider panel (P9) with 3 x screws (H6).

Turn divider panel (P8) over.

Attach 1 x slide track (H7-1) onto divider panel (P9) with 3 x screws (H6) using a Phillips head screwdriver.



Step 14

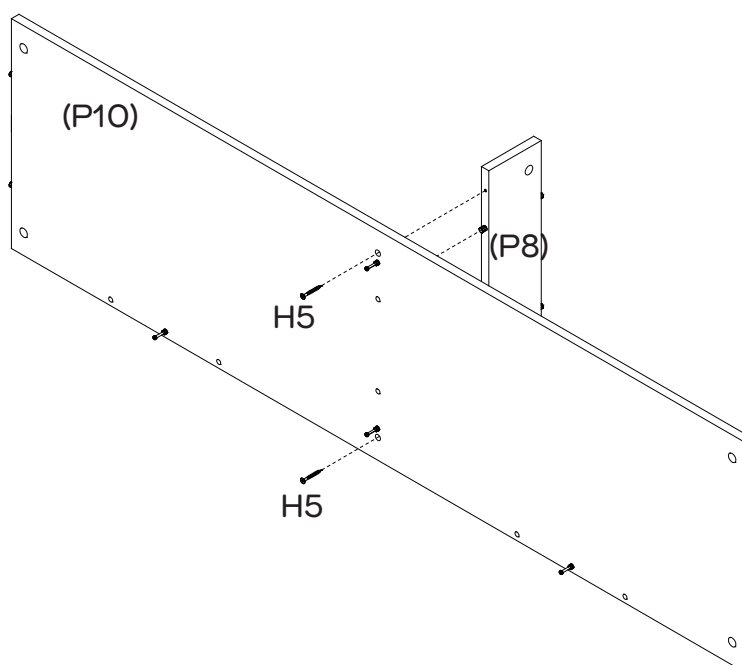
You will need	
 #10x38 mm	
2 x Screws (H5)	Phillips head screwdriver



Attach upper divider panel (P8) to shelf (P10) with 2 x screws (H5) using a Phillips head screwdriver.



Step 15

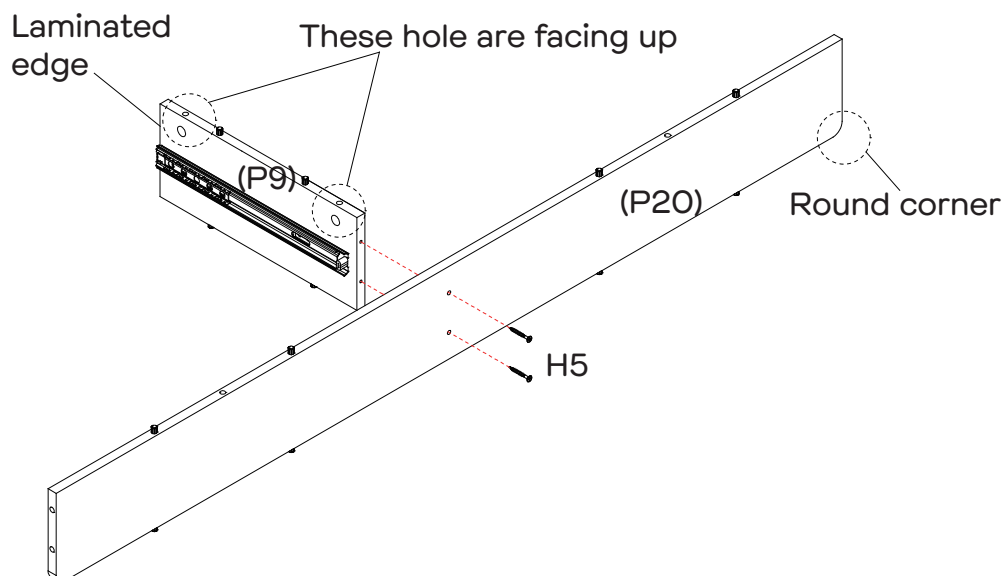
You will need	
 #10x38 mm	
2 x Screws (H5)	Phillips head screwdriver



Attach lower divider panel (P9) to back panel (P20) with 2 x screws (H5) using a Phillips head screwdriver as shown.



Step 16

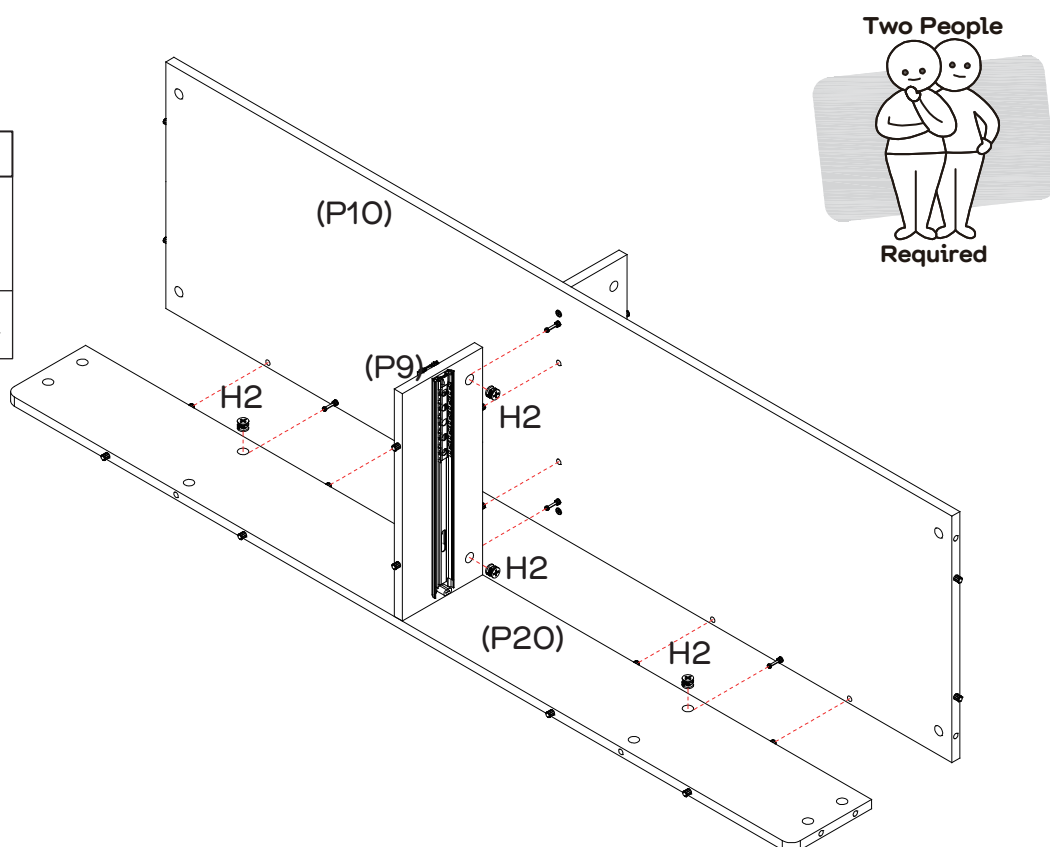
You will need	
 4 x Big cam nuts (H2)	
4 x Big cam nuts (H2)	Flat head screwdriver



Attach back panel (P20) and lower divider panel (P9) onto shelf (P10) as shown. Insert 4 x big cam nuts (H2) into panels (P9) & (P20), turn clockwise to lock using a flat head screwdriver.



Step 17

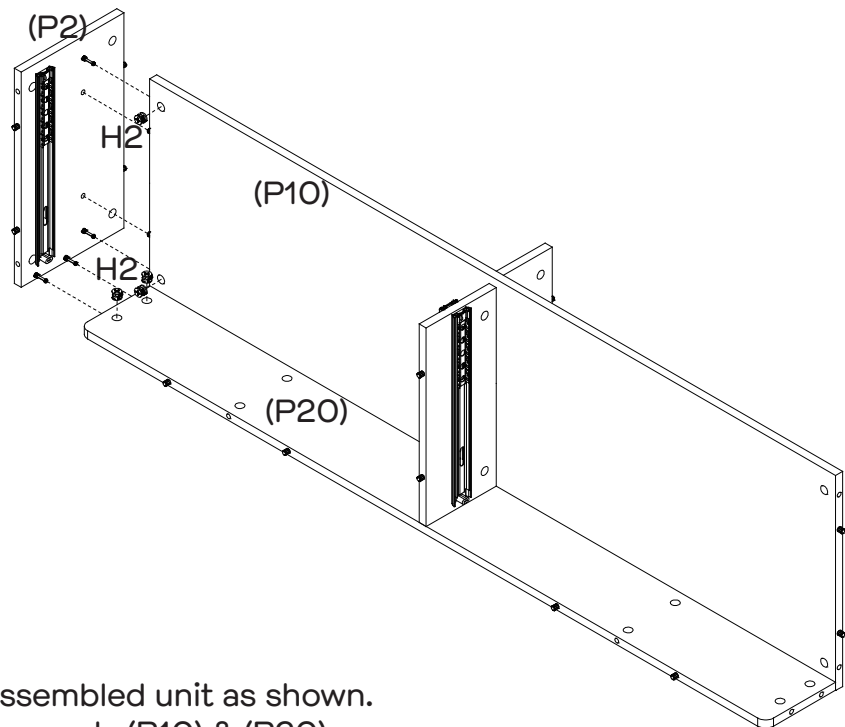
You will need	
	
4 x Big cam nuts (H2)	Flat head screwdriver



Position left side panel (P2) to assembled unit as shown.
Insert 4 x big cam nuts (H2) into panels (P10) & (P20).
Turn clockwise to lock using a flat head screwdriver.

Step 18


You will need	
	
4 x Big cam nuts (H2)	Flat head screwdriver

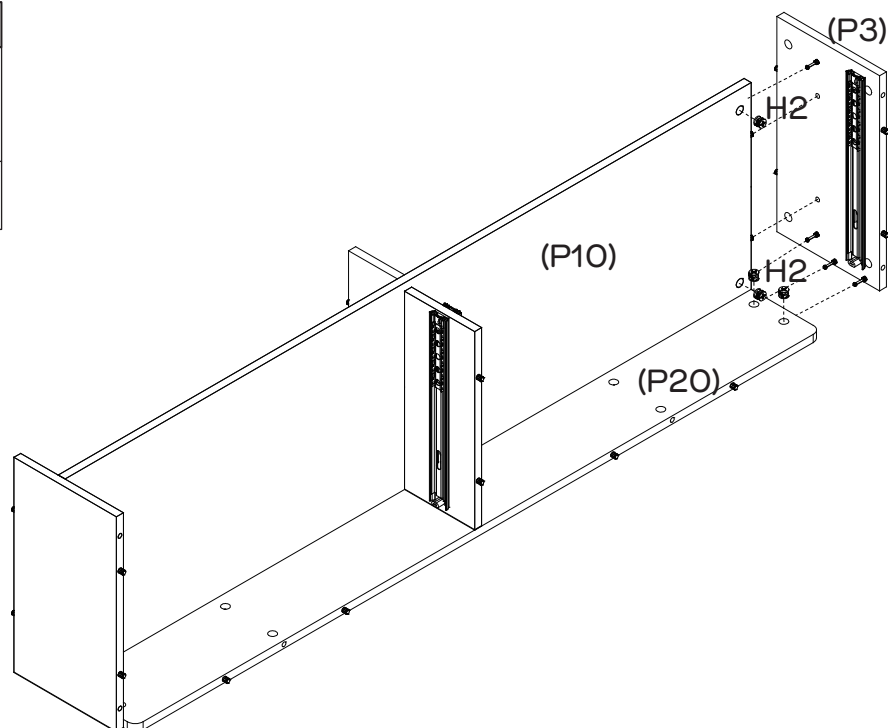



Position right side panel (P3) to assembled unit as shown.
Insert 4 x big cam nuts (H2) into panels (P10) & (P20).
Turn clockwise to lock using a flat head screwdriver.

Step 19

Two People




Required



You will need	
	
6 x Big cam nuts (H2)	Flat head screwdriver

Position assembled unit onto bottom panel (P4) as shown.

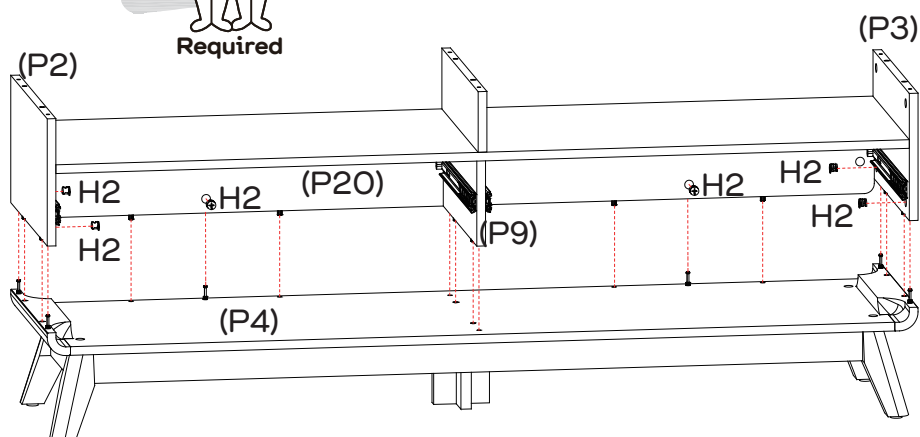
Insert 6 x big cam nuts (H2) into panels (P2), (P3) & (P20), turn clockwise to lock using a flat head screwdriver.





Step 20

You will need	
	
#10x38 mm 2 x Screws (H5)	Phillips head screwdriver

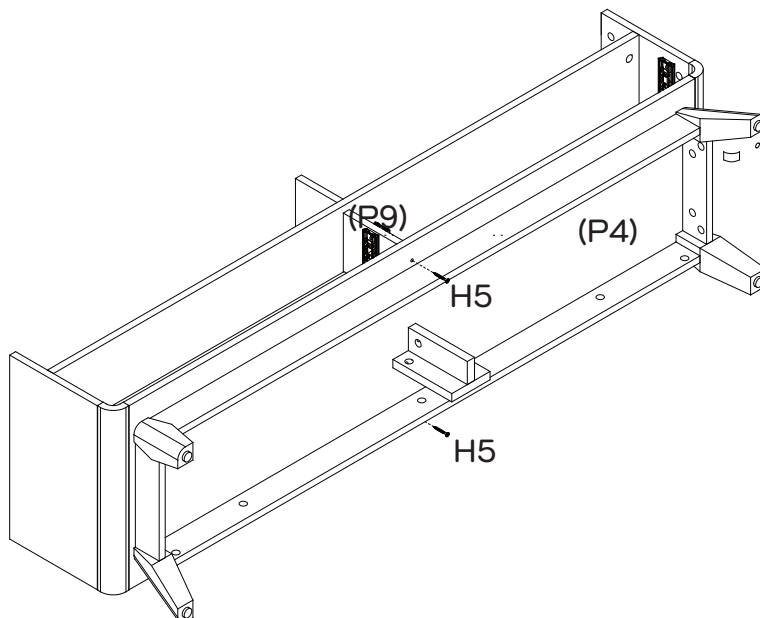Fasten lower divider panel (P9) with 2 x screws (H5) through the bottom panel (P4) using a Phillips head screwdriver.




Step 21


You will need	
	
6 x Big cam nuts (H2)	Flat head screwdriver

Position top panel (P1) to assembled unit as shown.

Insert 6 x big cam nuts (H2) into panels (P2), (P3) & (P8), turn clockwise to lock using a flat head screwdriver.

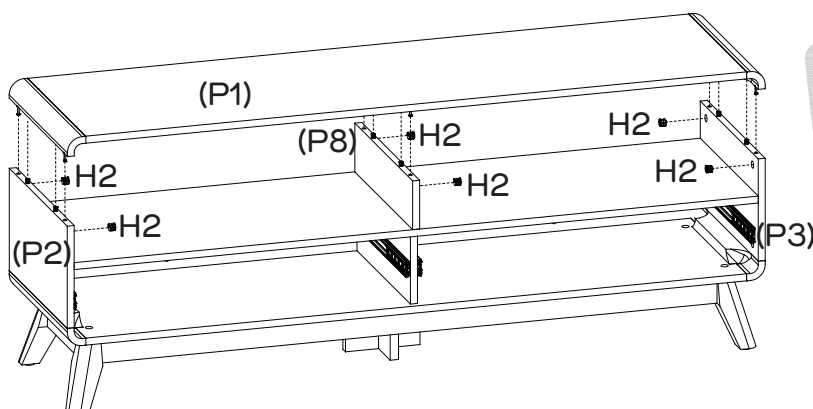



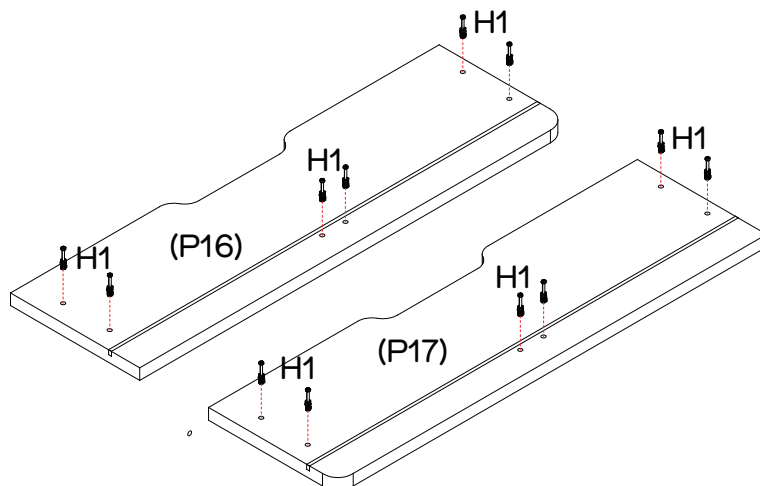
Two People



Required



Step 22


You will need	
	
12 x Cam bolts (H1)	Phillips head screwdriver



Screw 6 x cam bolts (H1) into each drawer fronts (P16) and (P17), using a Phillips head screwdriver as shown.

Step 23



You will need	
	
12 x Small cam nuts (H4)	Flat head screwdriver

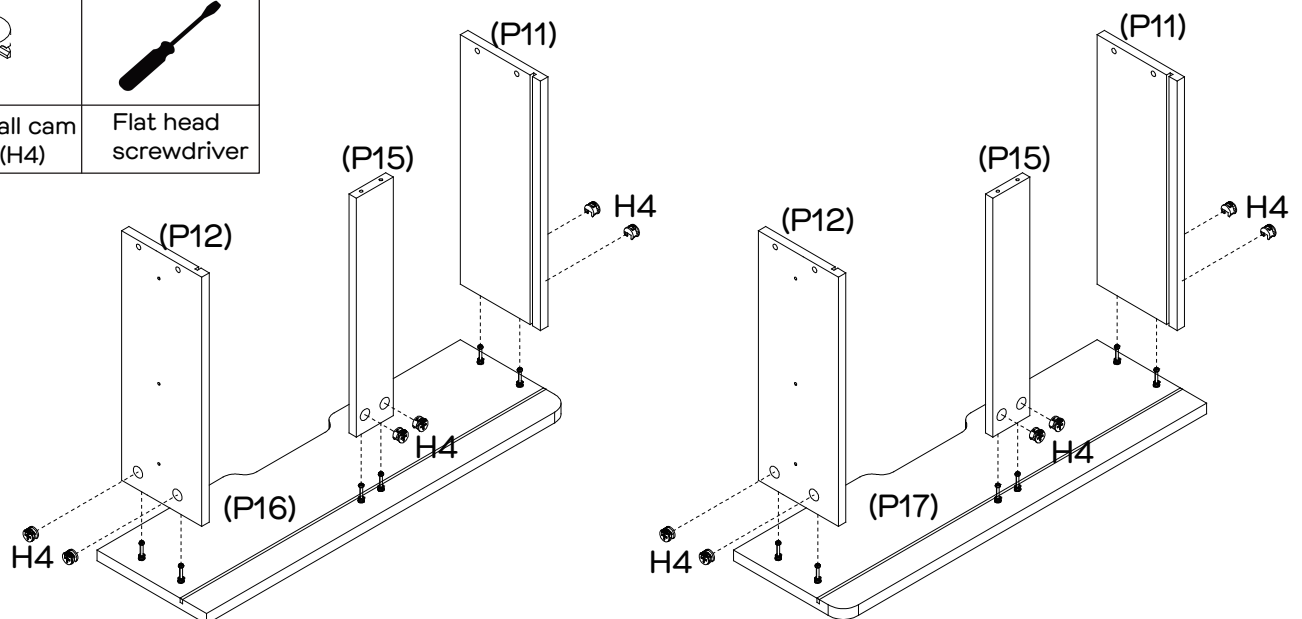


Position each drawer sides (P11), (P12) and drawer rail (P15) onto drawer fronts (P16) and (P17).

Insert 12 x small cam nuts (H4) into drawer sides (P11), (P12) and drawer rails (P15). Turn small cam nuts to lock using a flat head screwdriver.

Step 24




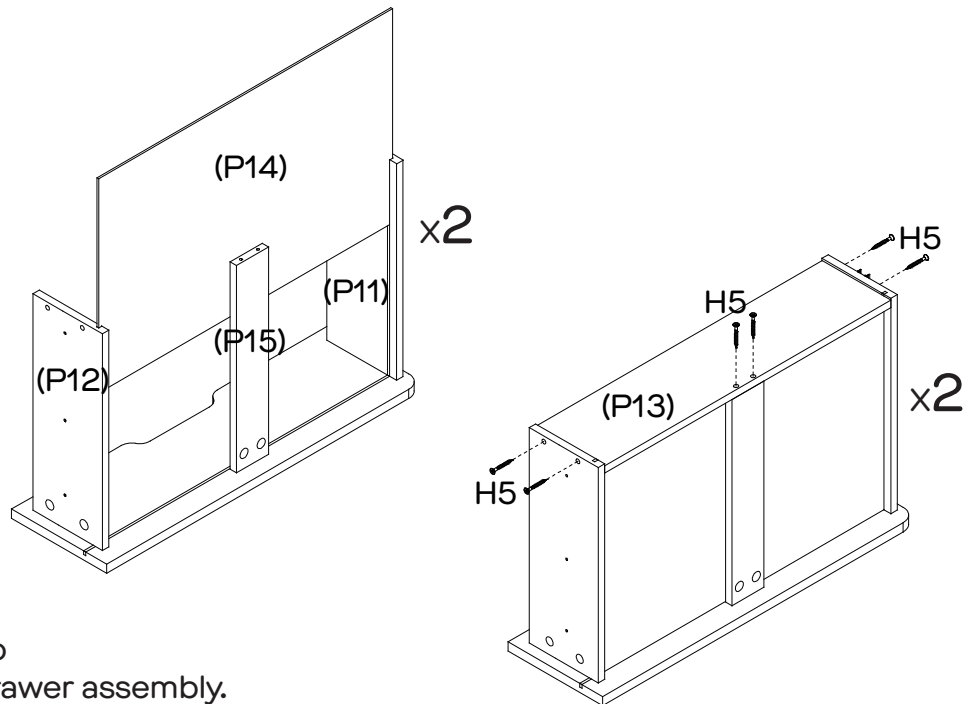You will need	
	
#10x38 mm	
12 x Screws (H5)	Phillips head screwdriver




Slide drawer base (P14) into the grooves of panels of drawer assembly.

Attach drawer back (P113) to each drawer assembly with 6 x screws (H5), using a Phillips head screwdriver as shown.




Step 25

You will need	
	
#6x12 mm	
4 x Slide runners (H7-2)	12 x Screws (H6)
	
Phillips head screwdriver	

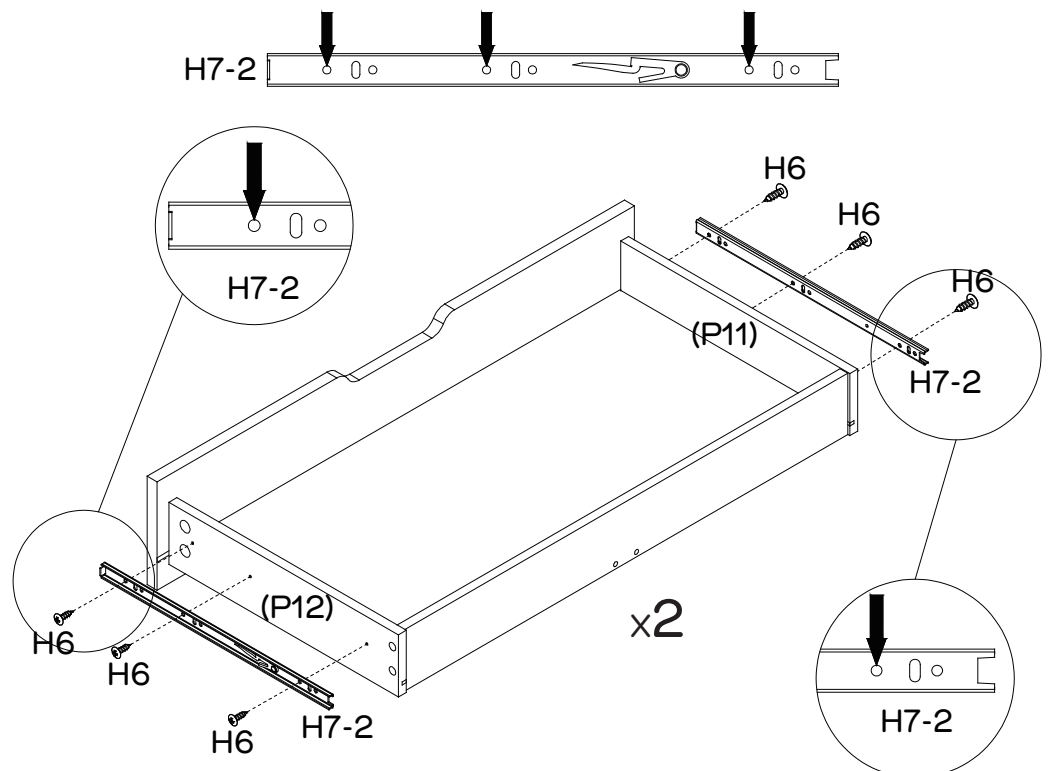


Attach 1 x slide runners (H7-2) to each drawer sides (P12) and (P11) with 3 x screws (H6), using a Phillips head screwdriver as shown.


Step 26

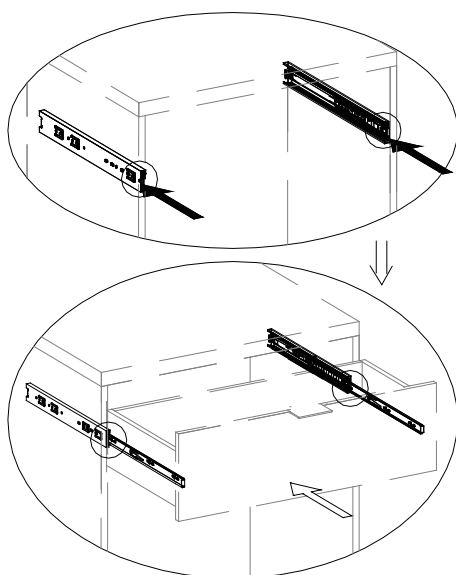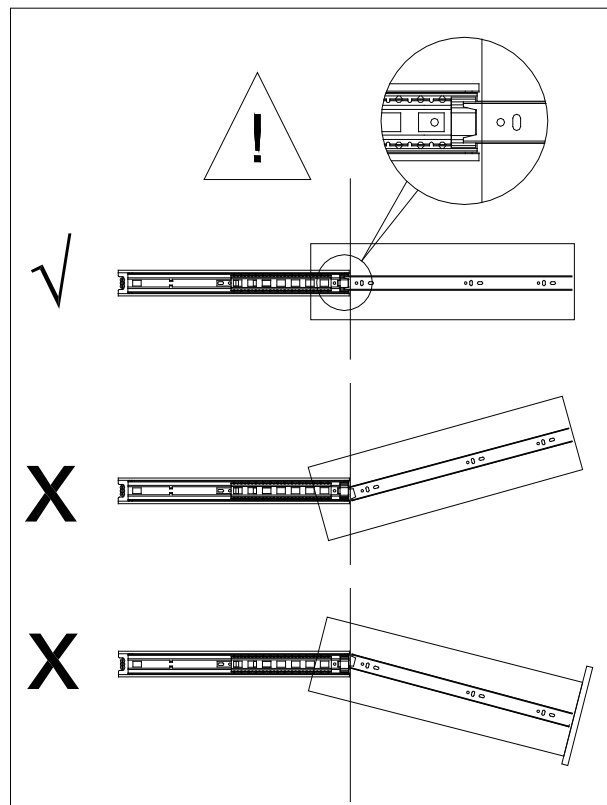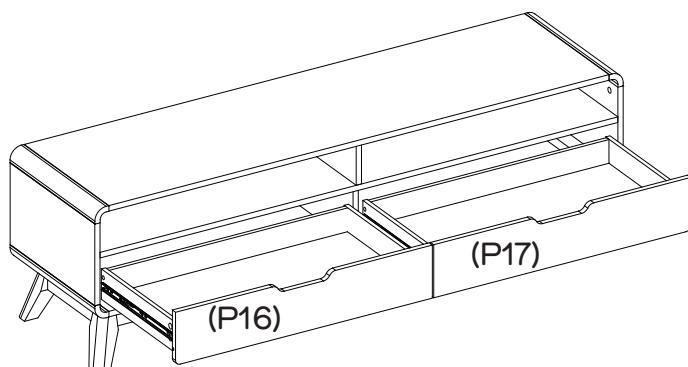

Move inner ball bearing track to front of slide track (H7-1).




Gently insert drawer slide runner into ball bearing Track.

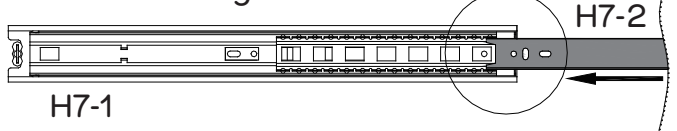

Position drawer so that slide runners (H7-2) aligns with slide tracks (H7-1) as shown. Gently push drawer into the closed position.

Step 27

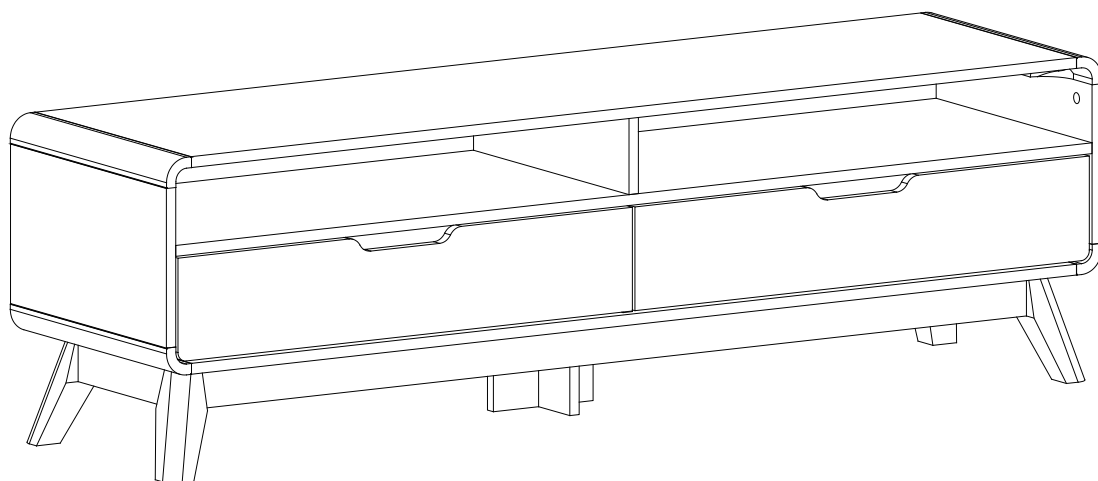

Job complete!

In the interest of our environment please dispose
of all packaging thoughtfully.