




**Fantastic
Furniture**

Version 1.0

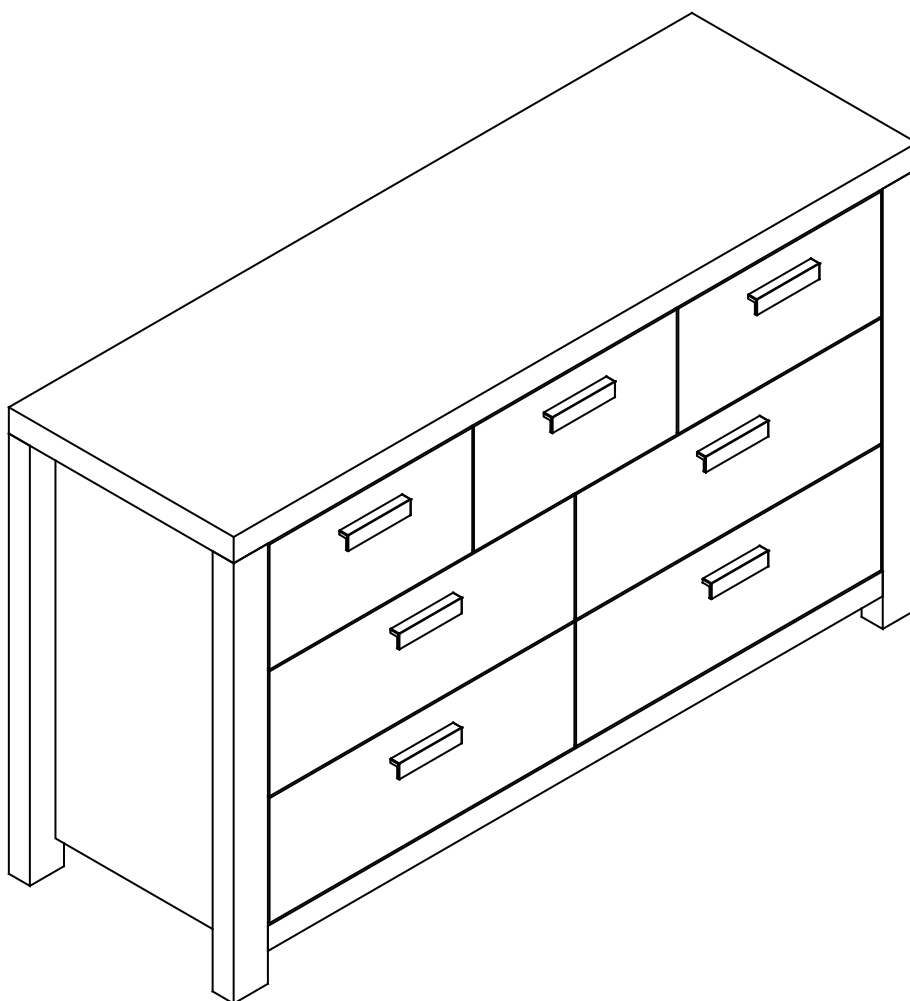

Two People



Required

Havana
Dresser 7 Drawer

fantasticfurniture.com.au

Recommended weight capacity : 18kgs /Drawer.



**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Connecting attachments for your wall are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what wall connections to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

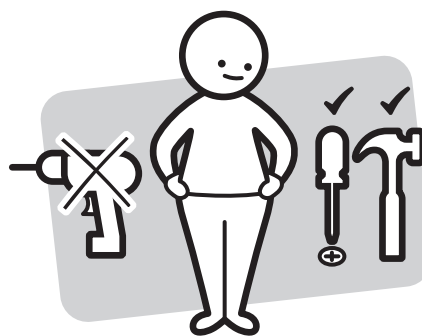

Make sure you have all the required tools. Never use power tools unless instructed.

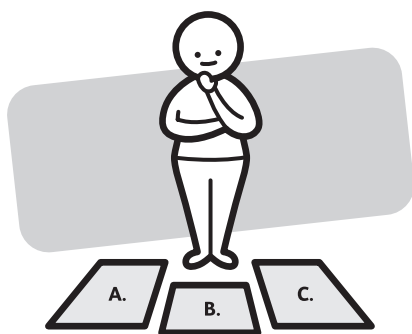

Identify and lay out all of the components before you begin assembly.

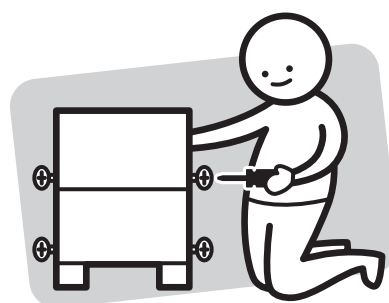

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE






Other tools you need:


Phillips head screwdriver;
Hammer

Parts list

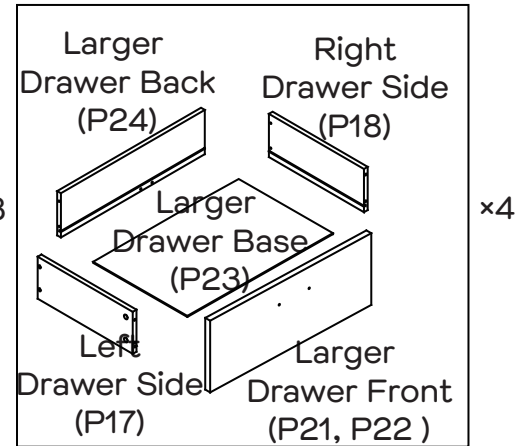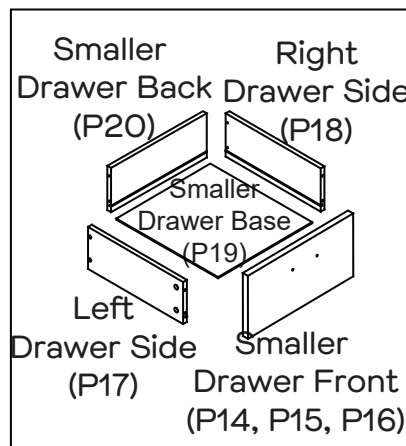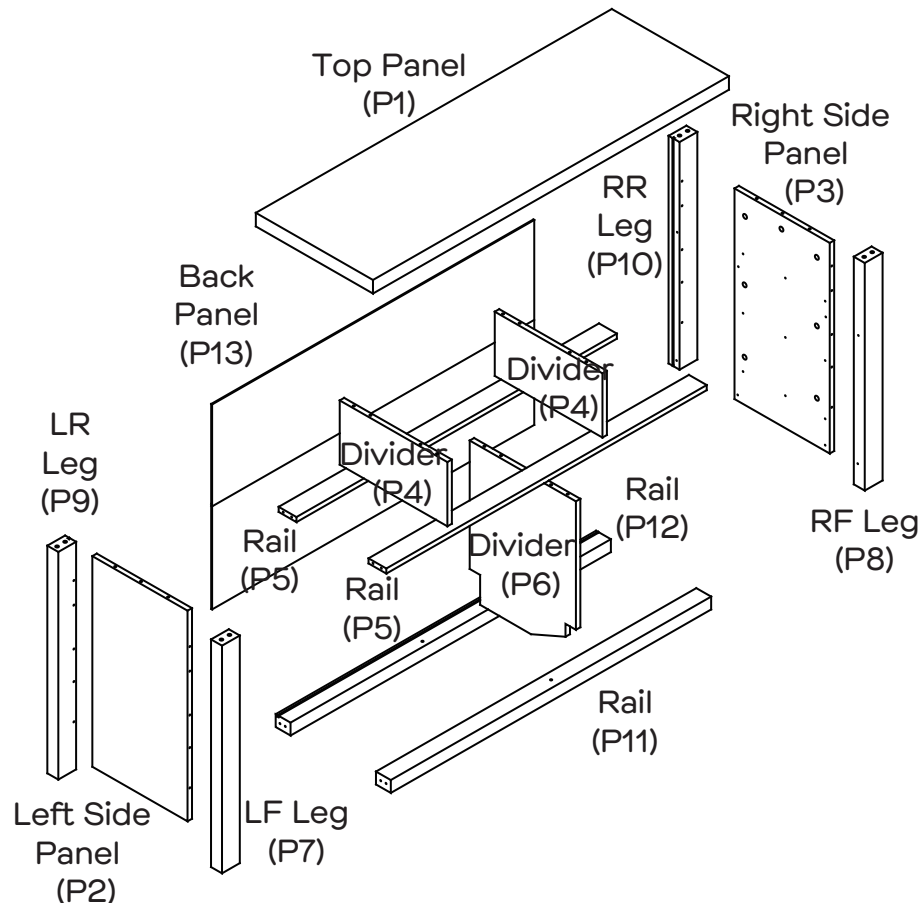

Top Panel (P1);
Left Side Panel (P2);
Right Side Panel (P3); 2 x Dividers (P4);
2 x Rails (P5); Divider (P6);
LF Leg (P7); RF Leg (P8);
LR Leg (P9); RR Leg (P10);
Rail (P11); Rail (P12);
Back Panel (P13);
Smaller Drawer Front (P14);
Smaller Drawer Front (P15);
Smaller Drawer Front (P16);
7 x Left Drawer Side (P17);
7 x Right Drawer Side (P18);
3 x Smaller Drawer Base (P19);
3 x Smaller Drawer Back (P20);
2 x Larger Drawer Front (P21);
2 x Larger Drawer Front (P22);
4 x Larger Drawer Base (P23);
4 x Larger Drawer Back (P24);

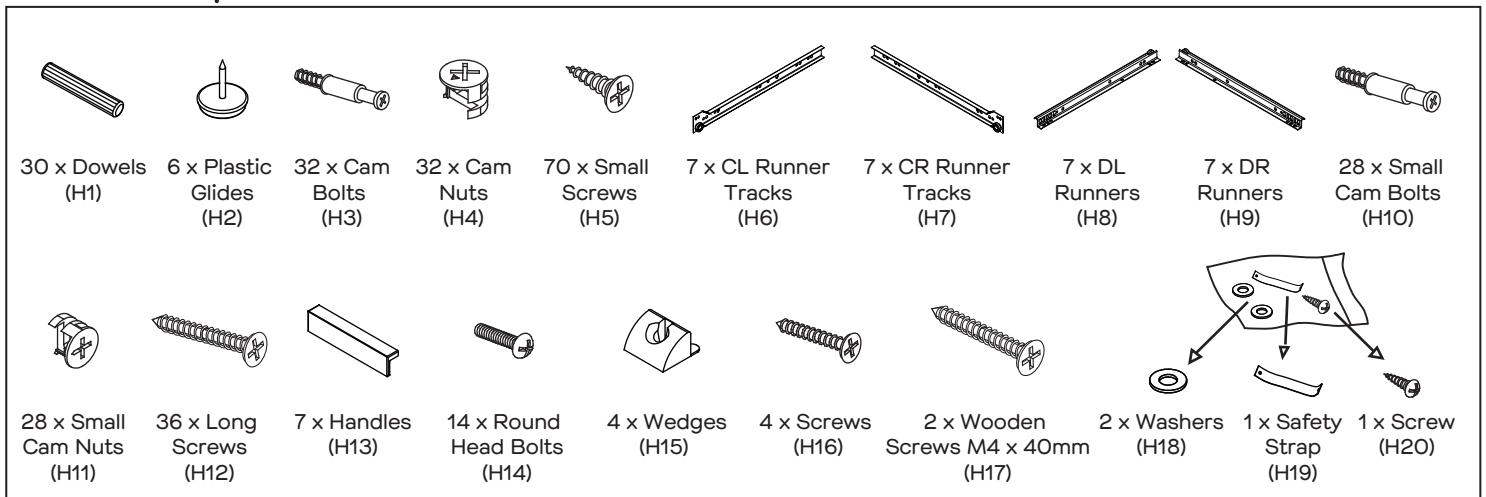


Hardware pack






Step 1

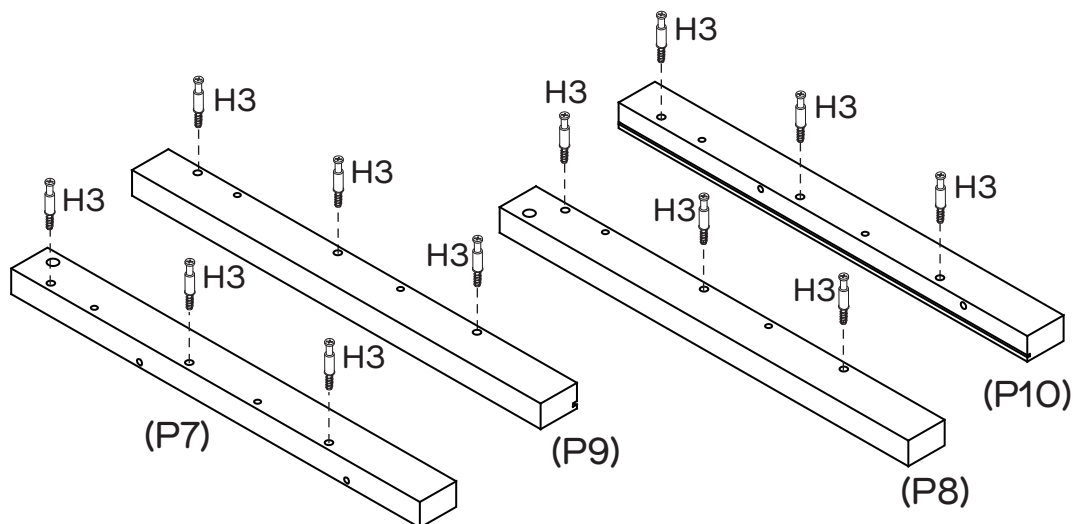
You will need	
	
12 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 12 x Cam Bolts (H3) into Legs (P7, P8, P9, P10).


Step 2

You will need	
	
4 x Dowels (H1)	6 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

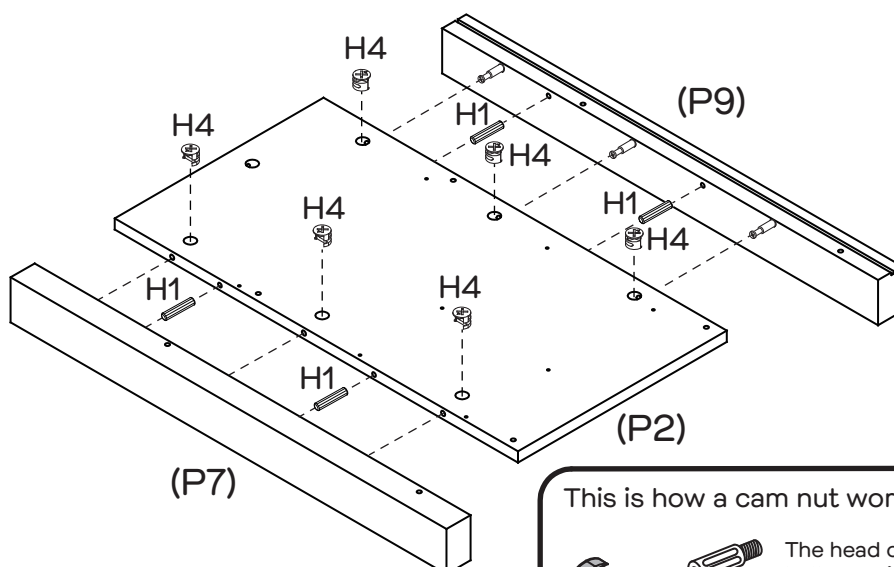




Insert 4 x Dowels (H1) into the holes of Left Side Panel (P2).
Insert 6 x Cam Nuts (H4) into the holes of Left Side Panel (P2).
Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Legs (P7, P9) to Left Side Panel (P2), then tighten the cam nuts.


This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so the arrows point towards the incoming cam bolts. You then turn the cam nut so it tightens over the bolt.





Step 3



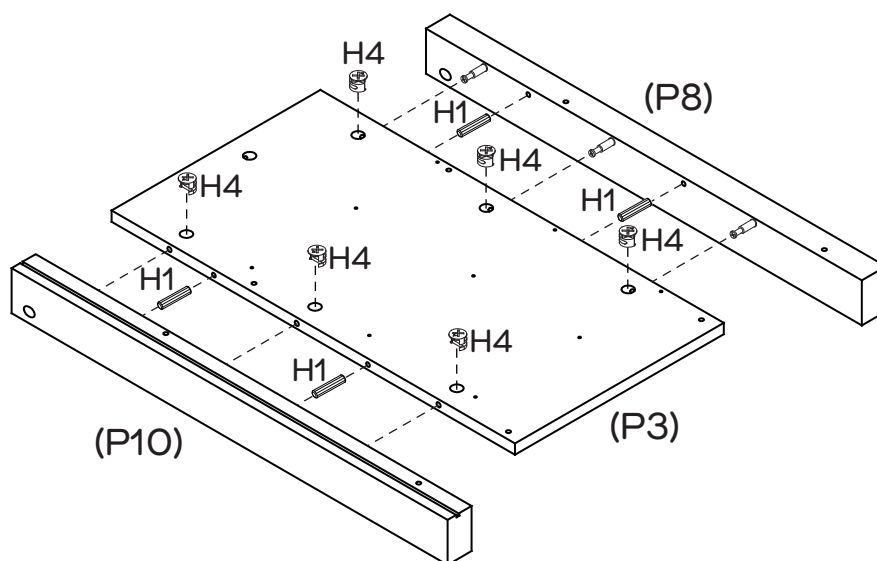
You will need	
	
4 x Dowels (H1)	6 x Cam Nuts (H4)
	
Phillips head screwdriver	



Insert 4 x Dowels (H1) into the holes of Right Side Panel (P3).
Insert 6 x Cam Nuts (H4) into the holes of Right Side Panel (P3).
Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Legs (P8, P10) to Right Side Panel (P3), then tighten the cam nuts.



Step 4


You will need	
	
3 x CL Runner Tracks (H6)	3 x CR Runner Tracks (H7)
	
18 x Small Screws (H5)	Phillips Head Screwdriver

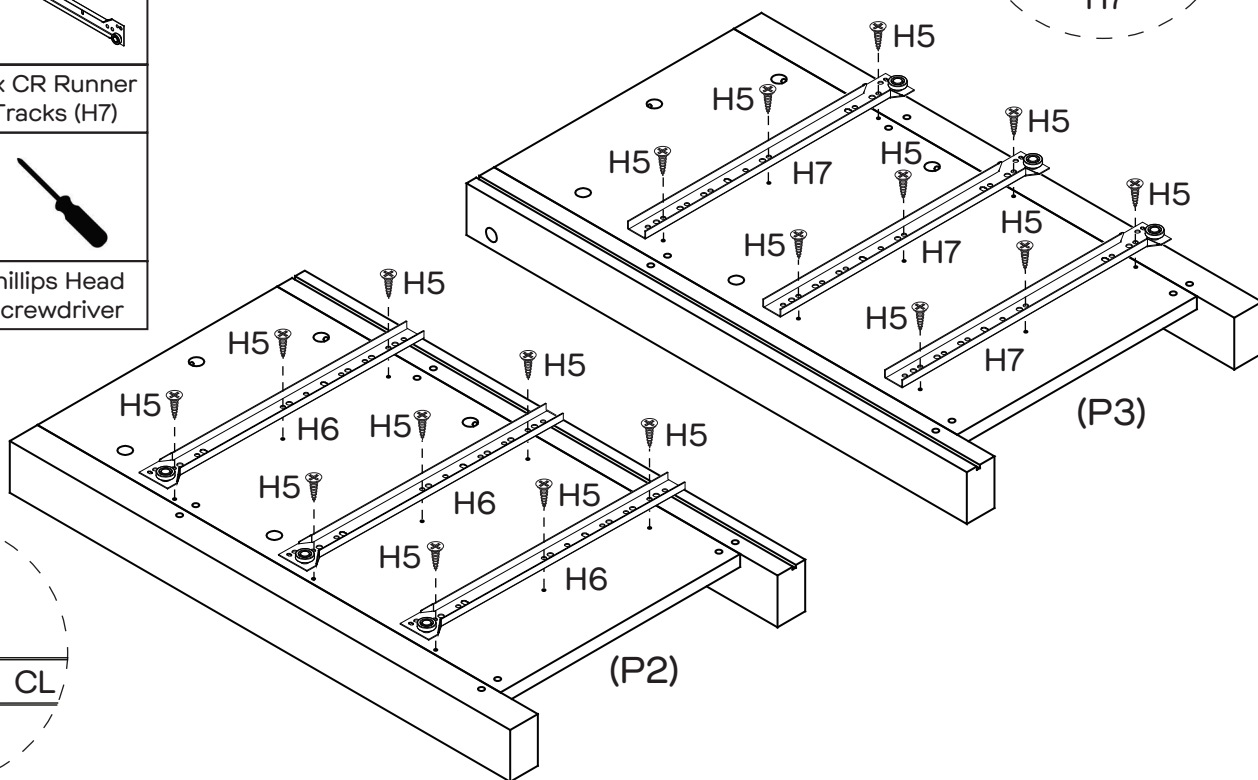

Attach 3 x CL Runner Tracks (H6) to Left Side Panel (P2) with 9 x Small Screws (H5).
Attach 3 x CR Runner Tracks (H7) to Right Side Panel (P3) with 9 x Small Screws (H5).





Step 5

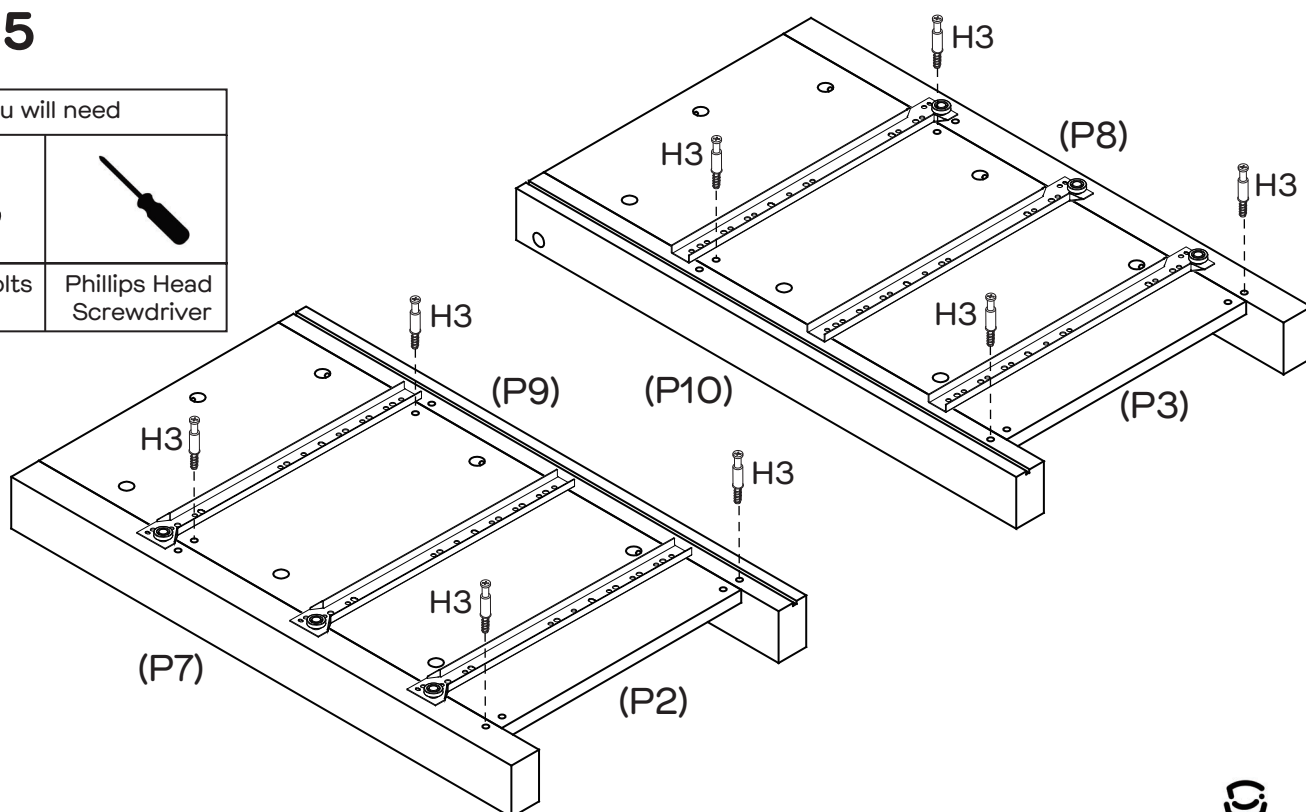
You will need	
	
8 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 8 x Cam Bolts (H3) into Side Panels (P2, P3) and Legs (P7, P8, P9, P10).




Step 6

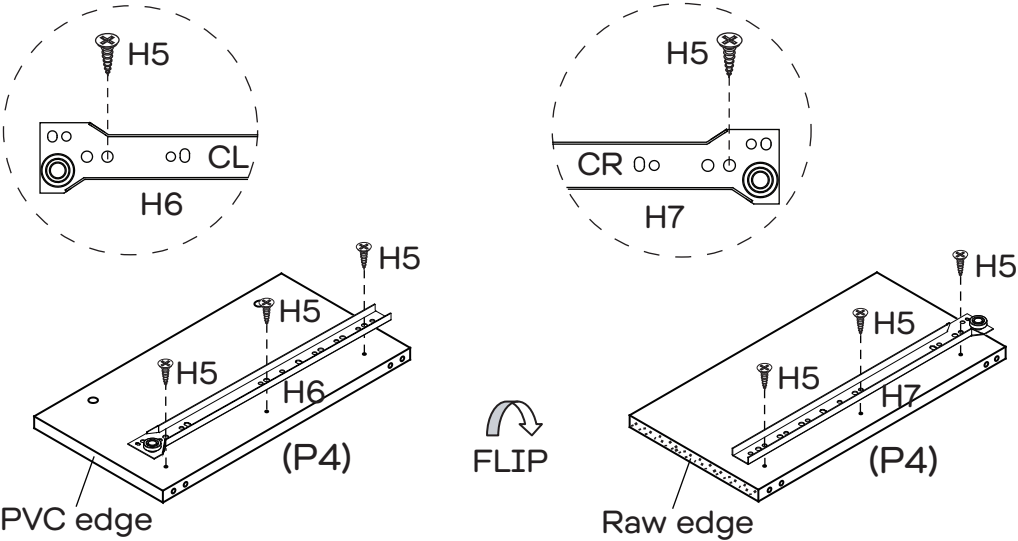
You will need	
	
2 x CL Runner Tracks (H6)	2 x CR Runner Tracks (H7)
	
12 x Small Screws (H5)	Phillips Head Screwdriver



Attach 1 x CL Runner Track (H6) to Divider (P4) with 3 x Small Screws (H5). Turn Divider (P4) over to the other side, then attach 1 x CR Runner Track (H7) with 3 x Small Screws (H5). Repeat Step 6 for the other Divider (P4).





Step 7

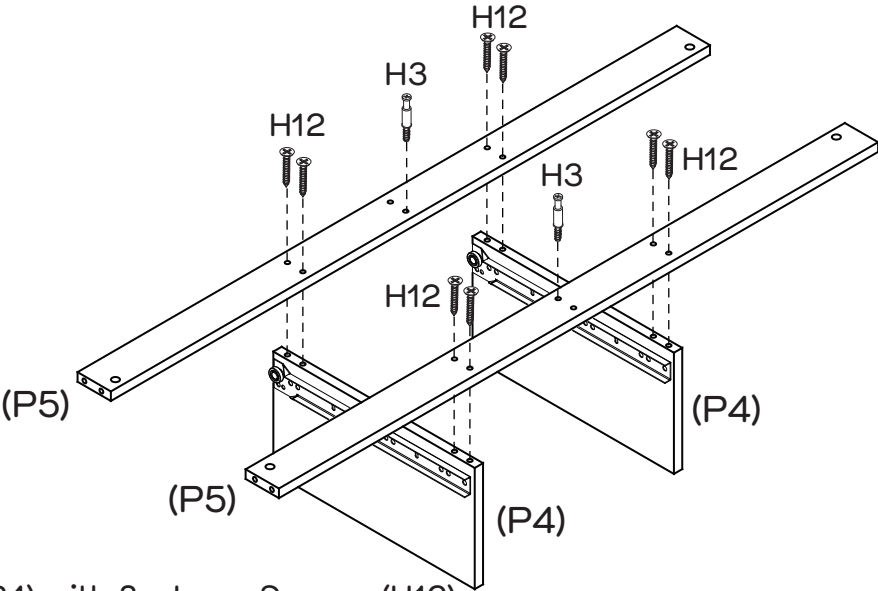
You will need	
	
2 x Cam Bolts (H3)	8 x Long Screws (H12)
	
Phillips Head Screwdriver	



Attach Rails (P5) to Dividers (P4) with 8 x Long Screws (H12). Insert 2 x Cam Bolts (H3) into the holes of Rails (P5).



Step 8

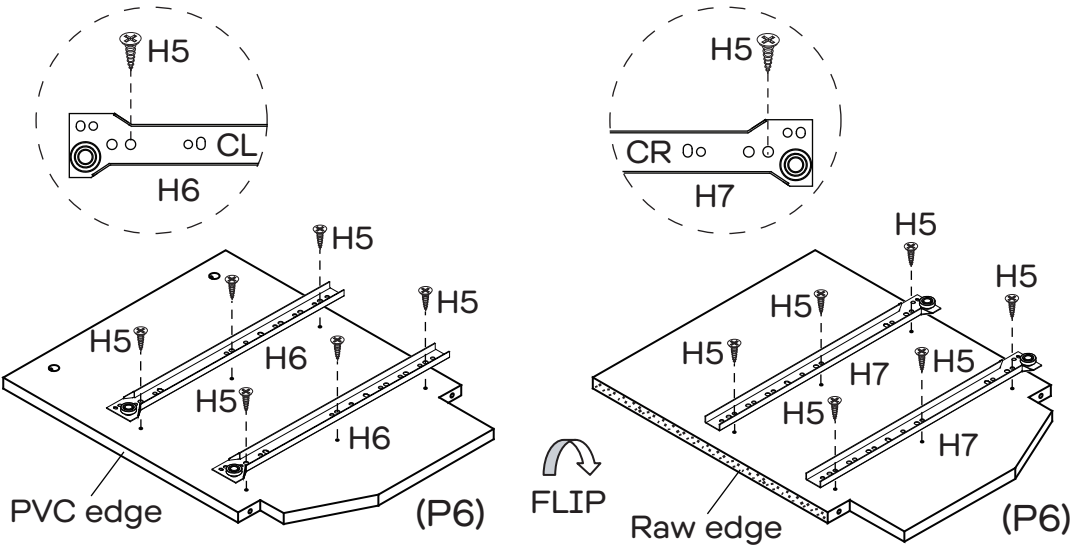You will need	
	
2 x CL Runner Tracks (H6)	2 x CR Runner Tracks (H7)
	
12 x Small Screws (H5)	Phillips Head Screwdriver



Attach 2 x CL Runner Tracks (H6) to Divider (P6) with 6 x Small Screws (H5). Turn Divider (P6) over to the other side, then attach 2 x CR Runner Tracks (H7) with 6 x Small Screws (H5).


Step 9

You will need	
	
2 x Wooden Screws M4 x 40mm (H17)	Phillips Head Screwdriver

Two People



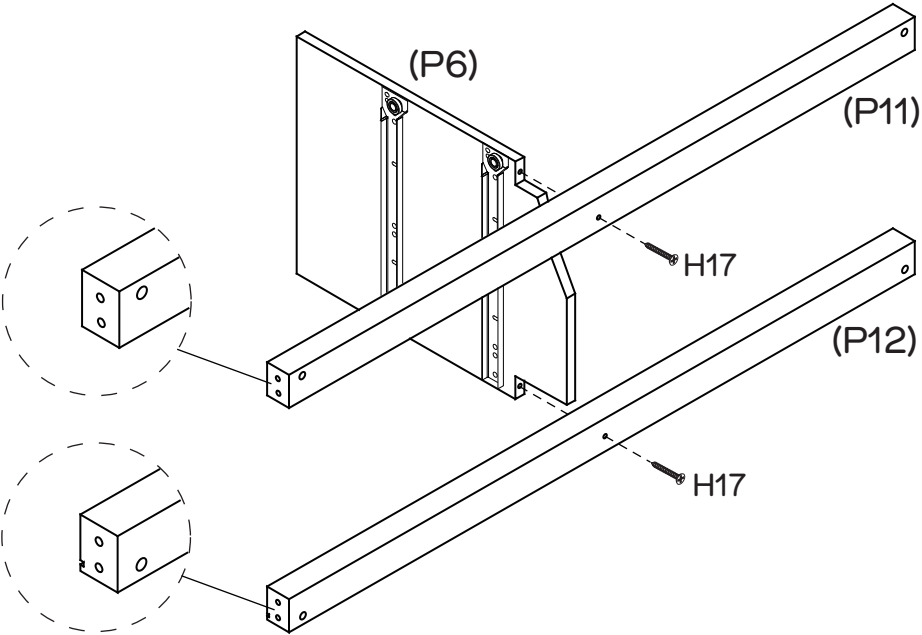


Required



Attach Rails (P11, P12) to Divider (P6) with 2 x Wooden Screws (H17) using a Phillips head screwdriver.


Step 10

You will need	
	
2 x Dowels (H1)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

Two People





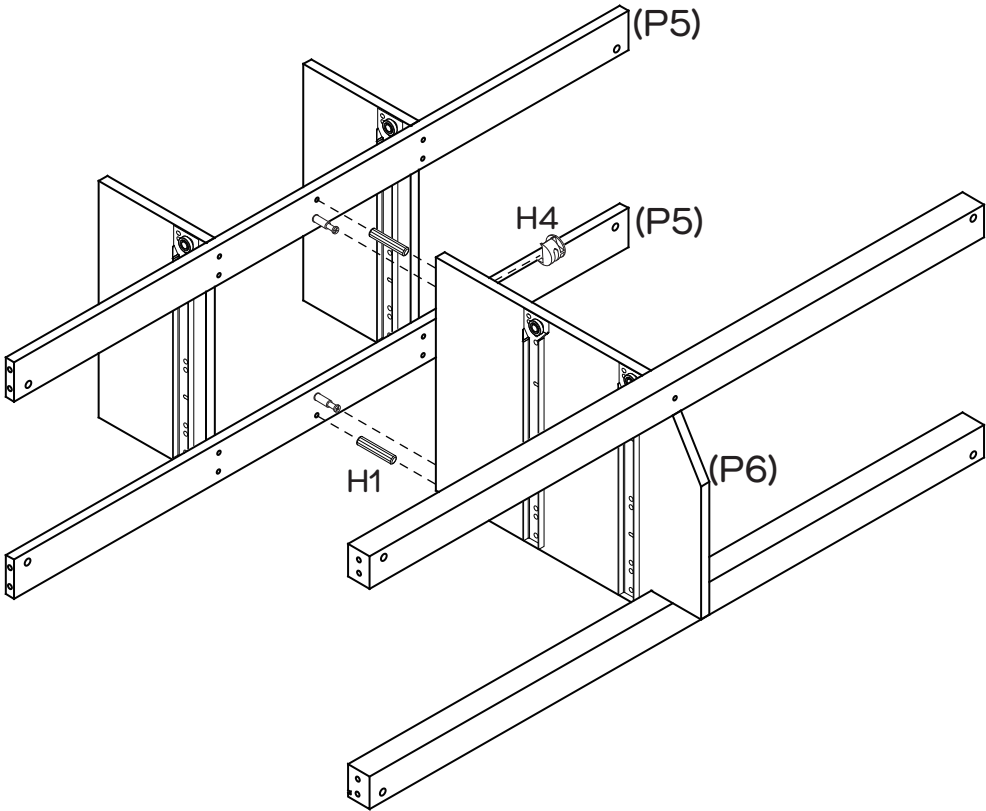


Required



Insert 2 x Dowels (H1) into the holes of Rails (P5).
Insert 2 x Cam Nuts (H4) into the holes of Divider (P6).
Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Push Rails (P5) into place and tighten the cam nuts.

Step 11

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	Hammer

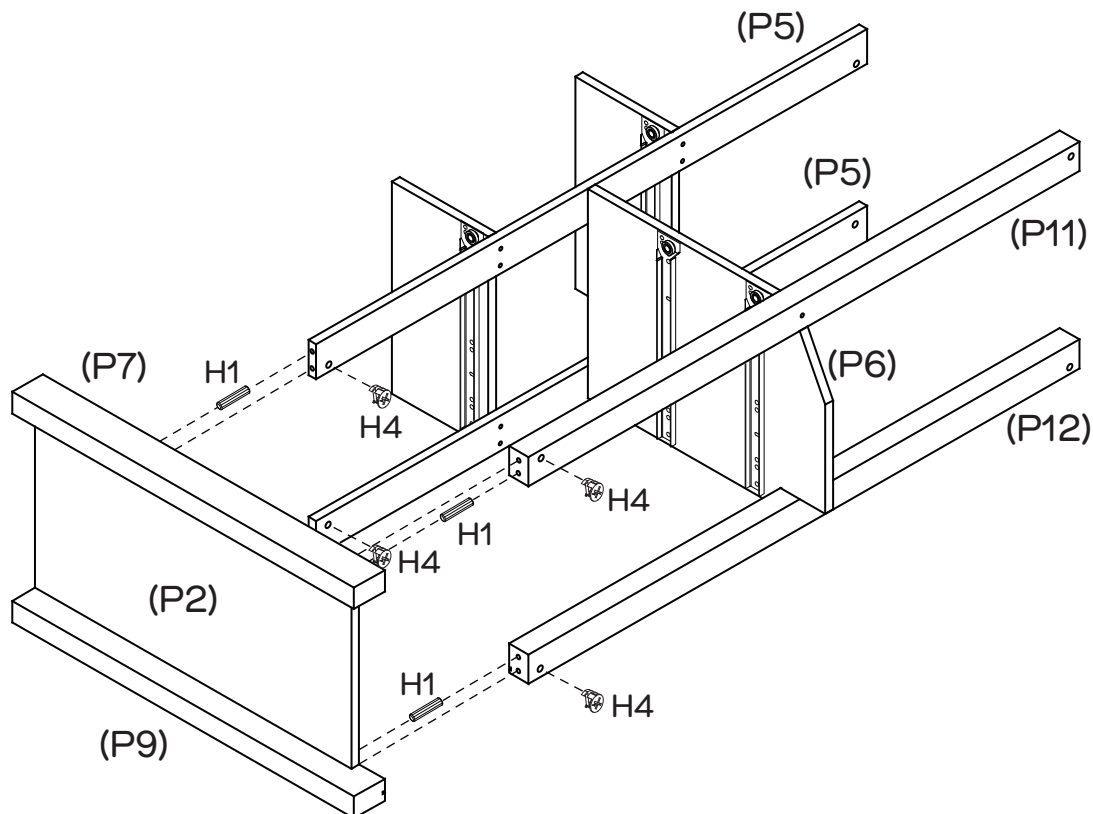






Insert 4 x Dowels (H1) into Rails (P5, P11, P12).


Insert 4 x Cam Nuts (H4) into the holes of Rails (P5, P11, P12).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Left Side Panel (P2) with Rails (P5, P11, P12) securely, and tighten the cam nuts.

Step 12

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
6 x Plastic Glides (H2)	Phillips Head Screwdriver
	
Hammer	

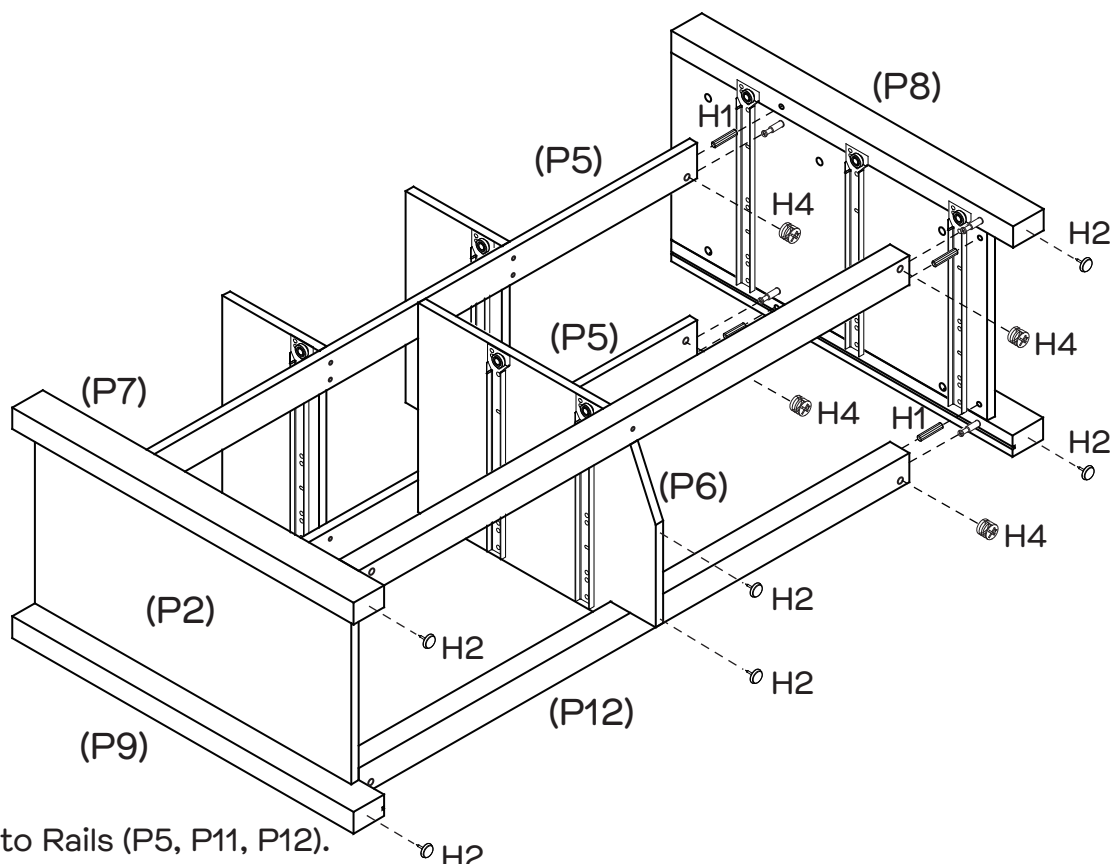

Insert 4 x Dowels (H1) into Rails (P5, P11, P12).


Insert 4 x Cam Nuts (H4) into the holes of Rails (P5, P11, P12).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Right Side Panel (P2) with Rails (P5, P11, P12) securely and tighten the cam nuts.



Attach 6 x Plastic Glides (H2) on Legs (P7, P8, P9, P10) and Divider (P6) with a Hammer.


Step 13

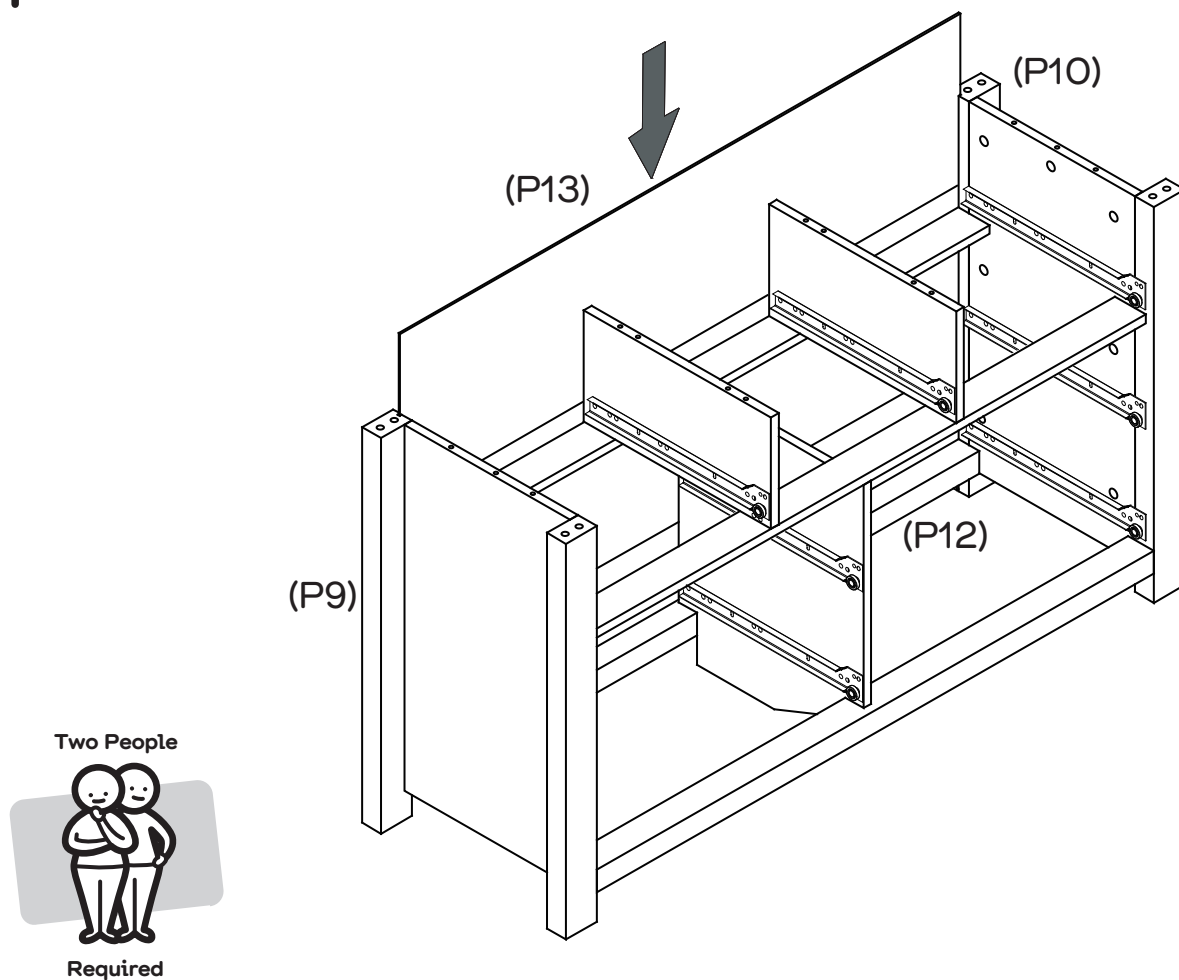

Carefully turn the cabinet over to an upright position.
Slide Back Panels (P13) in through the grooves of Legs (P9, P10) and Rail (P12).


Step 14


You will need	
	
10 x Cam Bolts (H3)	Phillips Head Screwdriver

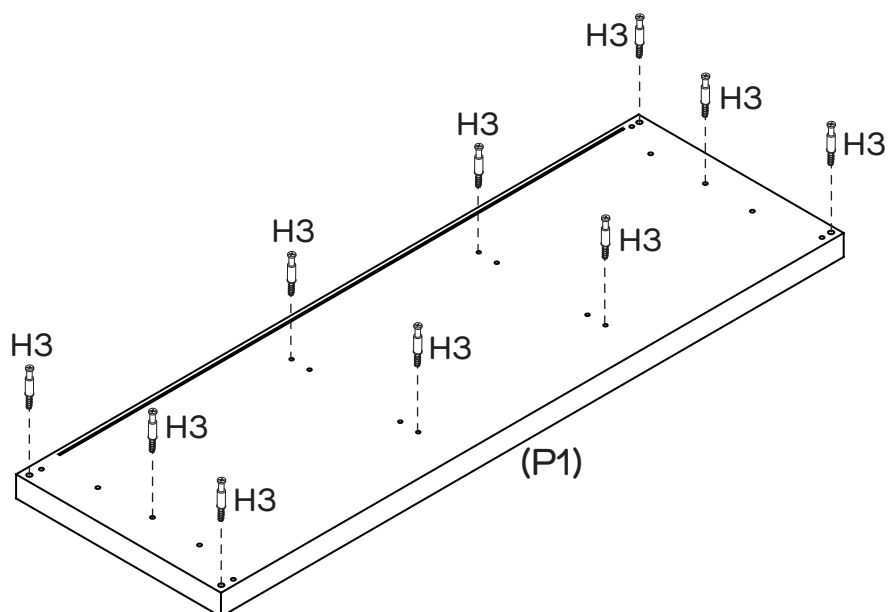

Attach 10 x Cam Bolts (H3) into Top Panel (P1) as shown.



Step 15

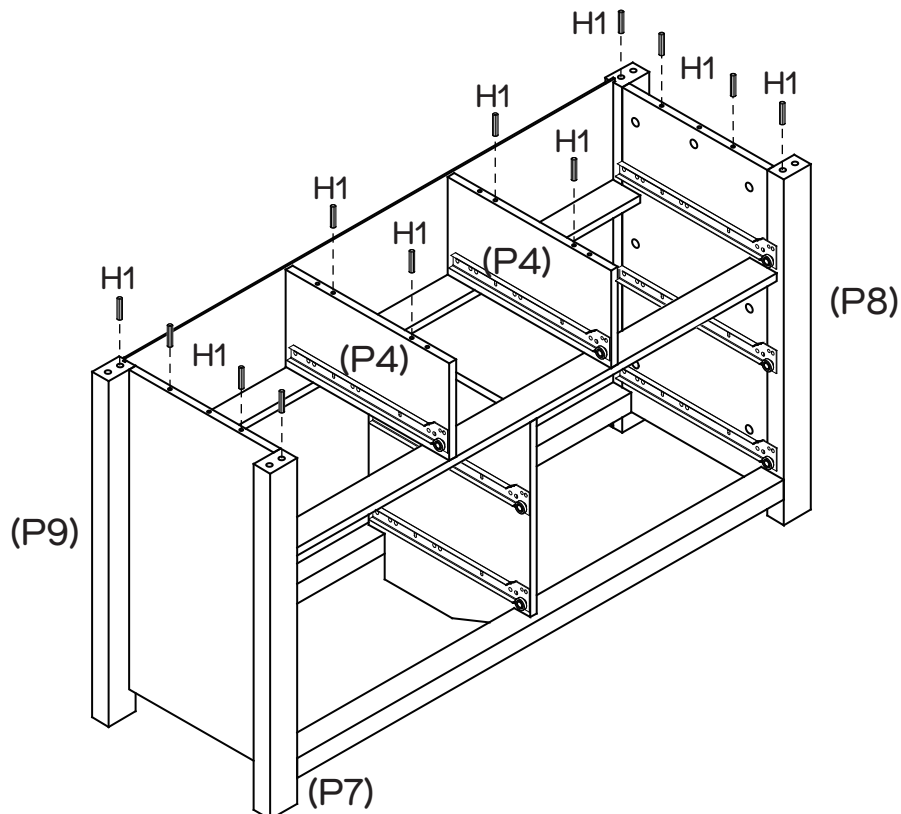
You will need	
	
12 x Dowels (H1)	



Insert 12 x Dowels (H1) into Side Panels (P2, P3), Dividers (P4) and Legs (P7, P8, P9, P10) as shown.

Step 16




You will need	
	
10 x Cam Nuts (H4)	Phillips Head Screwdriver


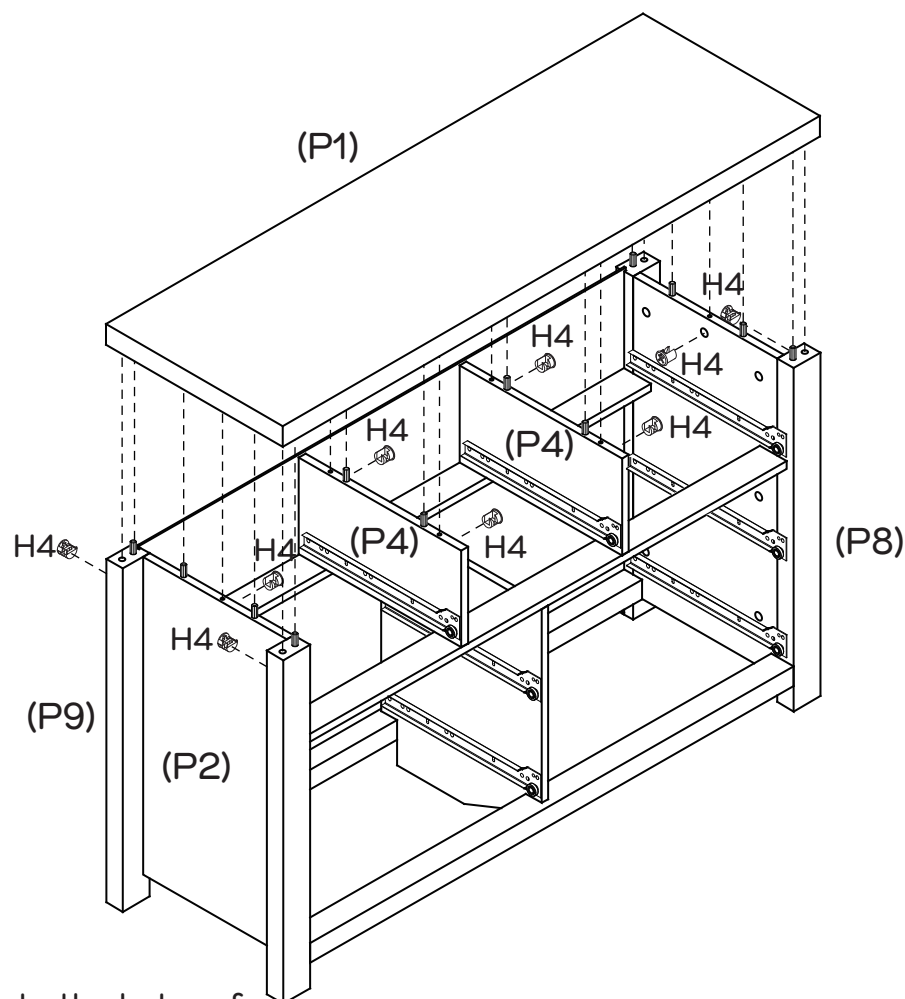


Insert 10 x Cam Nuts (H4) into the holes of Side Panels (P2, P3), Dividers (P4) and Legs (P7, P8, P9, P10). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to the frame and then tighten the cam nuts using a Phillips head screwdriver.

fantasticfurniture.com.au



Step 17


You will need	
	
4 x Wedges (H15)	4 x Screws (H16)
	
Phillips Head Screwdriver	

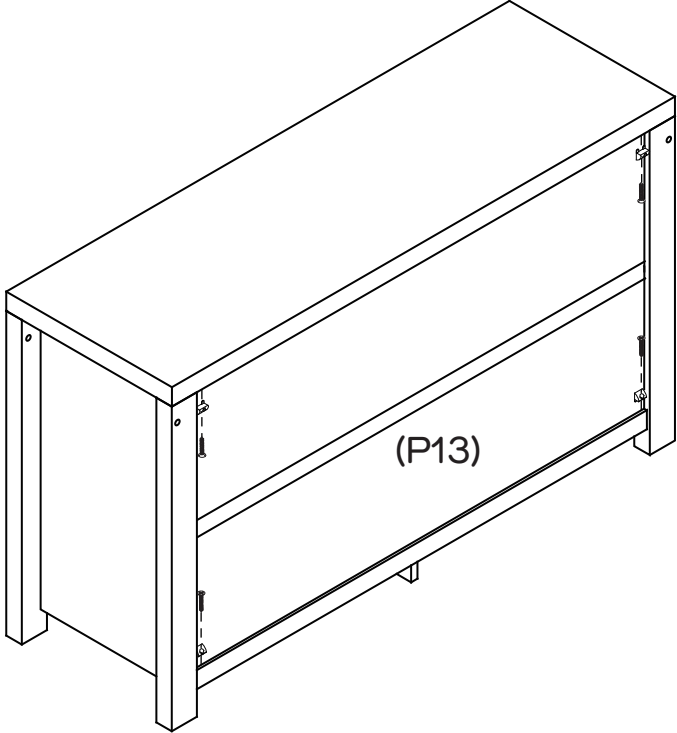

Secure Back Panel (P13) in place with 4 x Wedges (H15) using 4 x Screws (H16).



Step 18

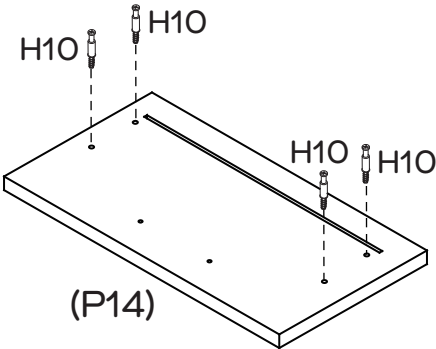
You will need	
	
4 x Small Cam Bolts (H10)	Phillips Head Screwdriver



Screw 4 x Small Cam Bolts (H10) into Smaller Drawer Front (P14) with a Phillips head screwdriver.


Step 19

You will need	
	
4 x Small Cam Nuts (H11)	Phillips Head Screwdriver

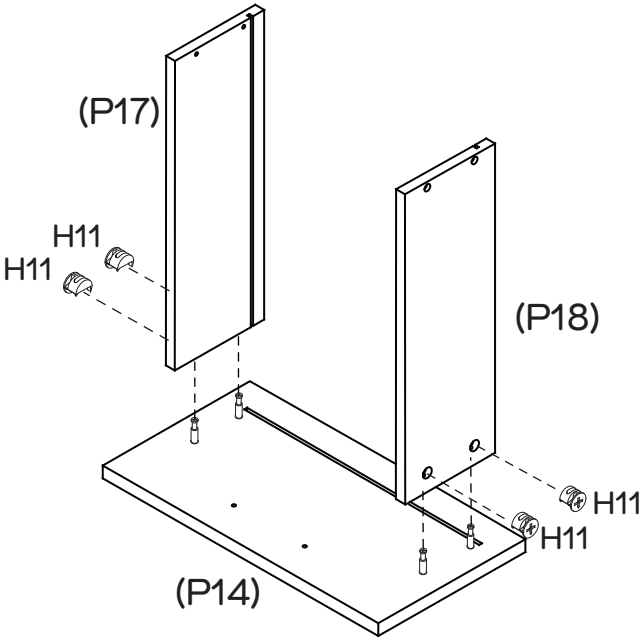

Insert 4 x Small Cam Nuts (H11) into the holes of Drawer Sides (P17, P18). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Sides (P17, P18) with Smaller Drawer Front (P14), and then tighten the cam nuts.


Step 20

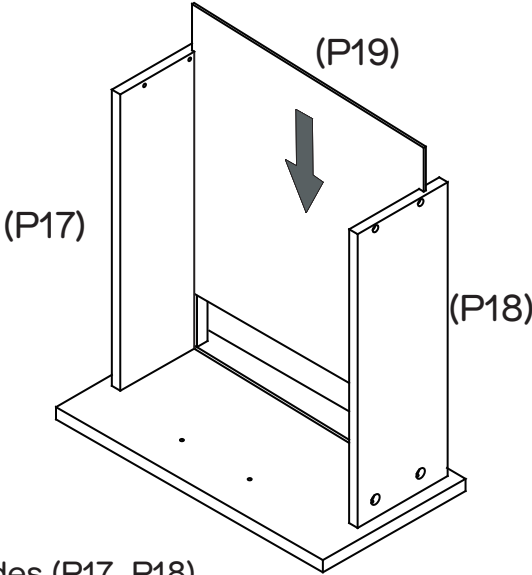

Slide Smaller Drawer Base (P19)
in through the grooves of Drawer Sides (P17, P18).

Step 21



You will need	
4 x Long Screws(H12)	Phillips Head Screwdriver

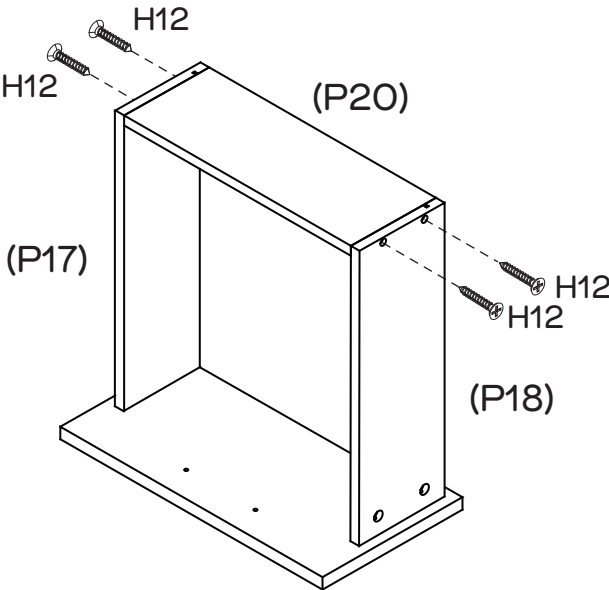

Attach Smaller Drawer Back (P20) to Drawer Sides (P17, P19) with 4 x Long Screws (H12),
make sure that the grooves line up the whole way around the drawer.
Tighten Screws using a Phillips head screwdriver.




Step 22


You will need	
1 x DL Runner (H8)	1 x DR Runner (H9)
4 x Small Screws (H5)	Phillips Head Screwdriver

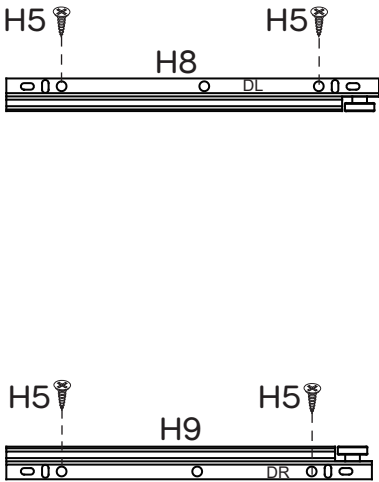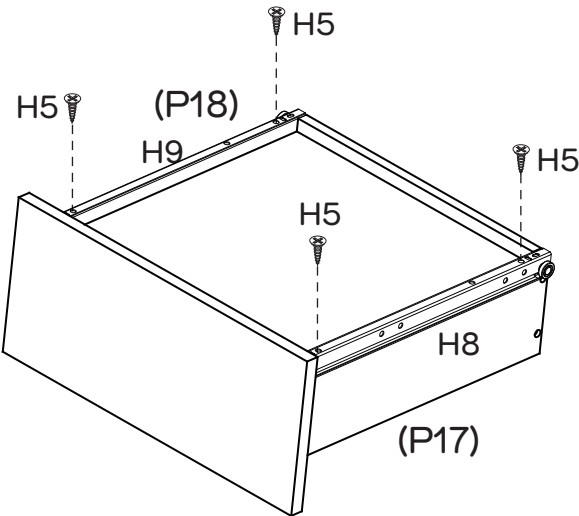

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P17) and
1 x DR Runner (H9) to the bottom of Right Drawer Side (P18) with 4 x Small Screws (H5).
Tighten Screws using a Phillips head screwdriver.


Step 23

You will need	
	
1 x Handle (H13)	2 x Round Head Bolts (H14)
	
Phillips Head Screwdriver	

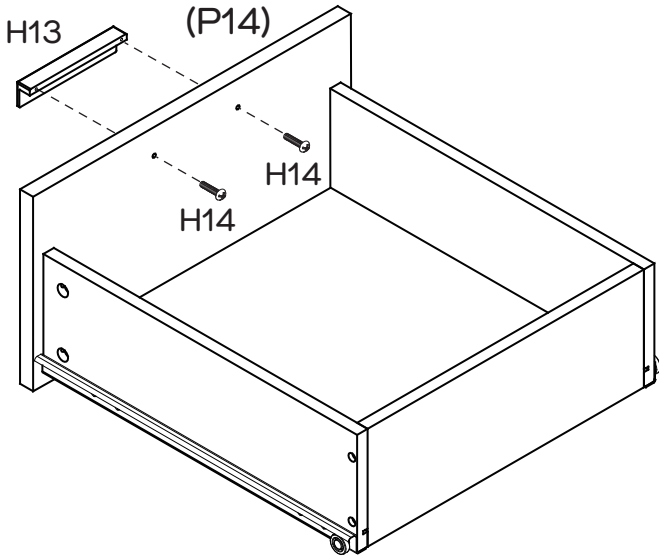



Attach 1 x Handle (H13) to Smaller Drawer Front (P14) with 2 x Round Head Bolts (H14). Tighten Round Head Bolts using a Phillips head screwdriver.

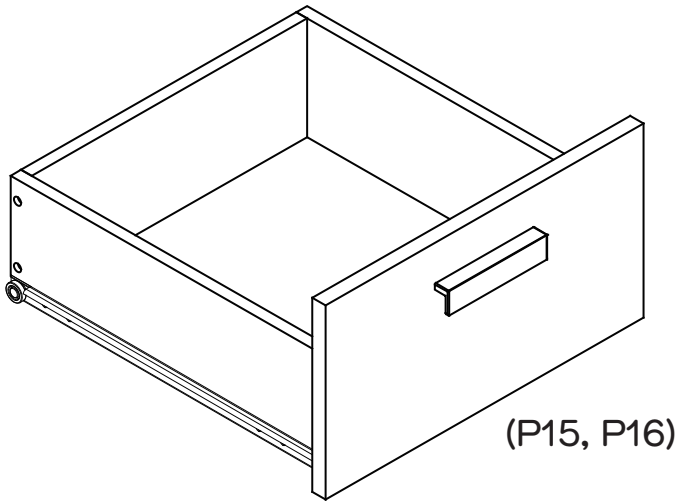
Step 24



Repeat Step 18 to Step 23 with Samller Drawer Fronts (P15, P16) to assemble the other 2 smaller drawers.



Step 25

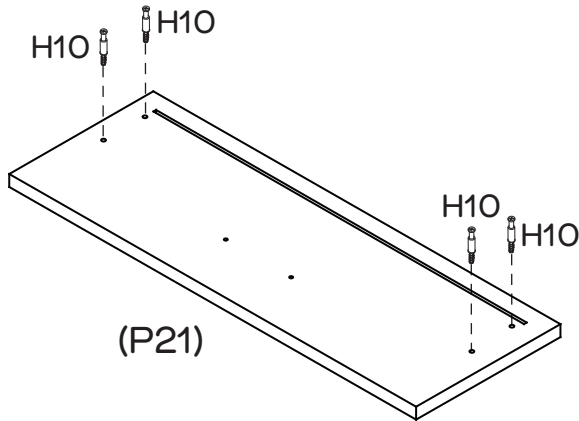
You will need	
	
4 x Small Cam Bolts (H10)	Phillips Head Screwdriver



Insert 4 x Small Cam Bolts (H10) into Larger Drawer Front (P21).


Step 26

You will need	
	
4 x Small Cam Nuts (H11)	Phillips Head Screwdriver

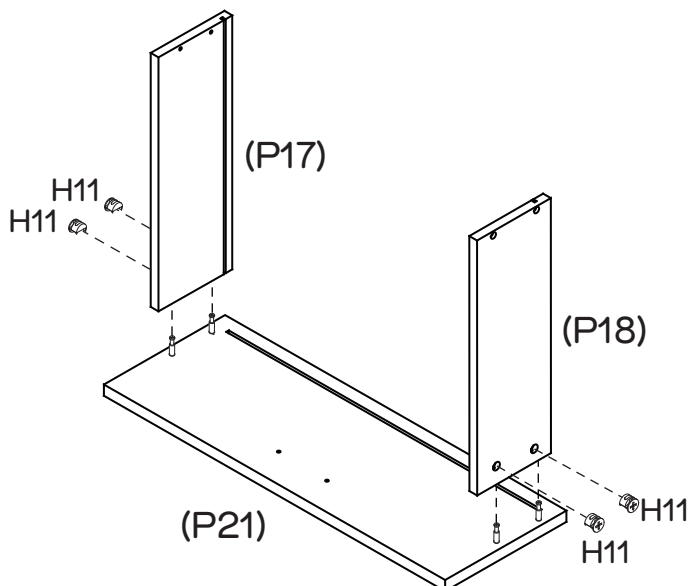



Insert 4 x Small Cam Nuts (H11) into the holes of Drawer Sides (P17, P18). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Sides (P17, P18) with Larger Drawer Front (P21), and then tighten the cam nuts.

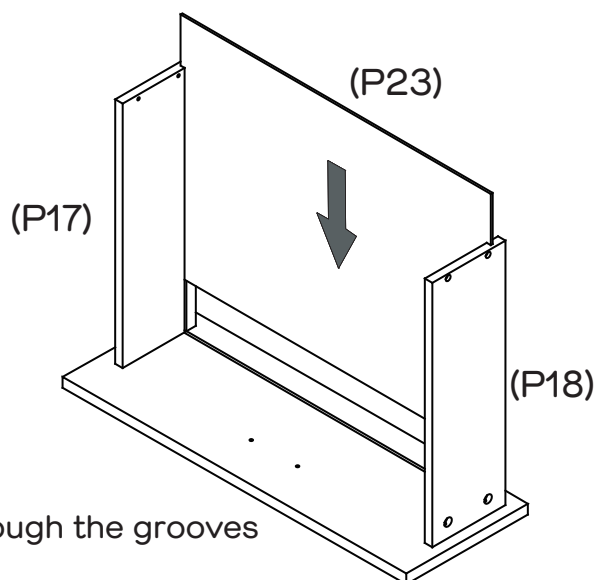
Step 27



Slide Larger Drawer Base (P23) in through the grooves of Drawer Sides (P17, P18).

Step 28


You will need	
	
4 x Long Screws (H12)	Phillips Head Screwdriver

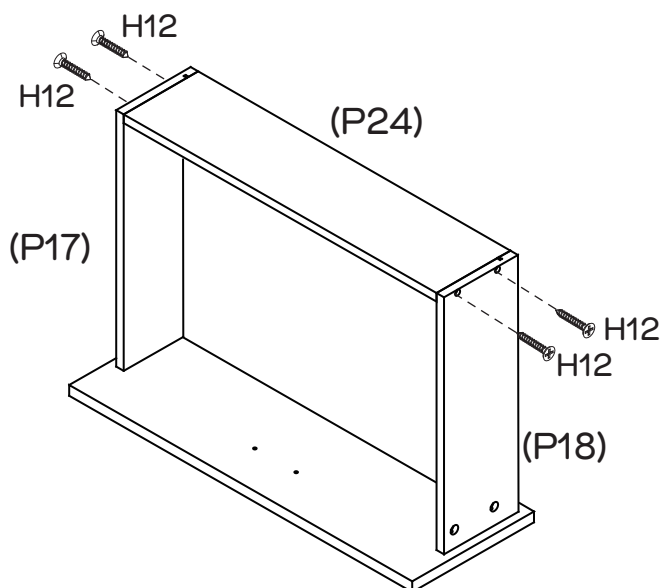

Attach Larger Drawer Back (P24) to Drawer Sides (P17, P18) with 4 x Long Screws (H12) make sure that the grooves line up the whole way around the drawer. Tighten Screws using a Phillips head screwdriver.

Step 29


You will need	
1 x DL Runner (H8)	1 x DR Runner (H9)
4 x Small Screws (H5)	Phillips Head Screwdriver

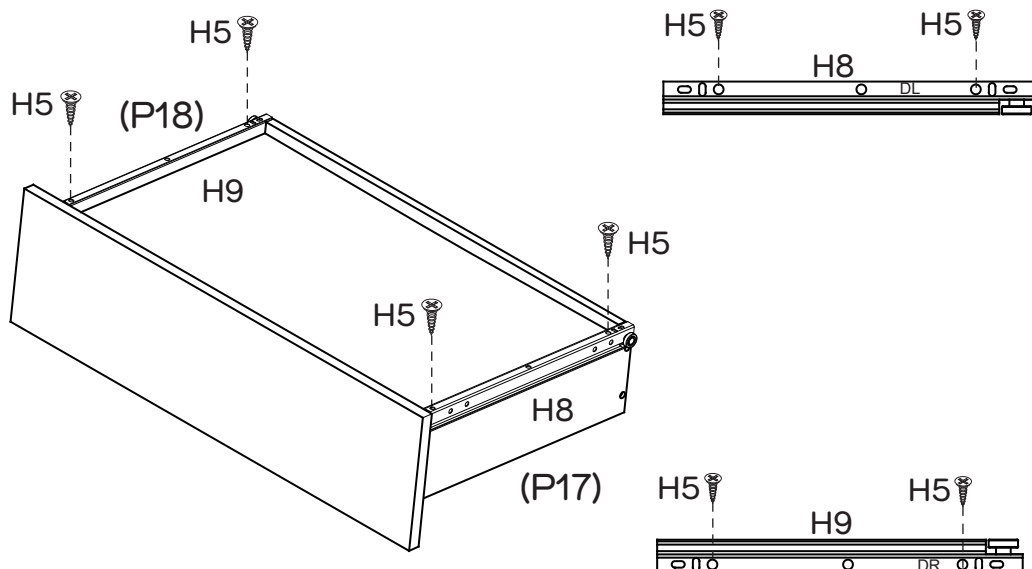

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P17) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P18) with 4 x Small Screws (H5). Tighten Screws using a Phillips head screwdriver.


Step 30

You will need	
1 x Handle (H13)	2 x Round Head Bolts (H14)
Phillips Head Screwdriver	

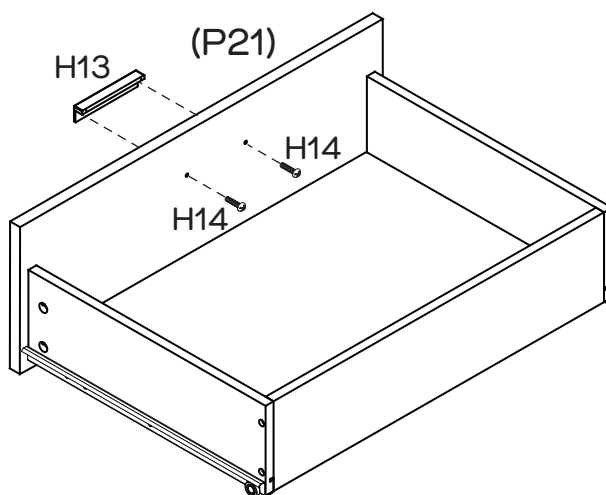


Attach 1 x Handle (H13) to Larger Drawer Front (P21) with 2 x Round Head Bolts (H14). Tighten Round Head Bolts using a Phillips head screwdriver.

Step 31

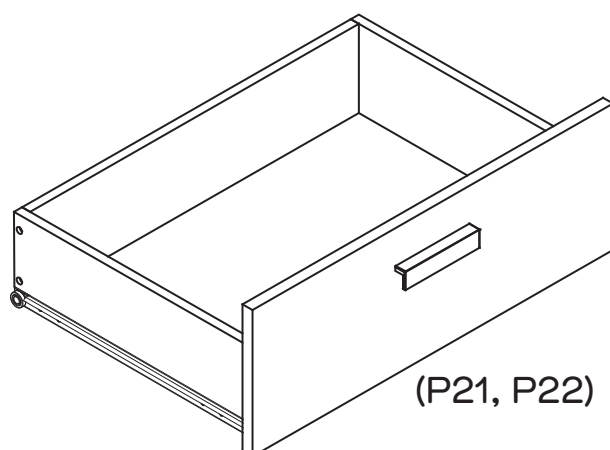

Repeat Step 25 to Step 30 with Larger Drawer Fronts (P21, P22) to assemble the other 3 larger drawers.

Step 32

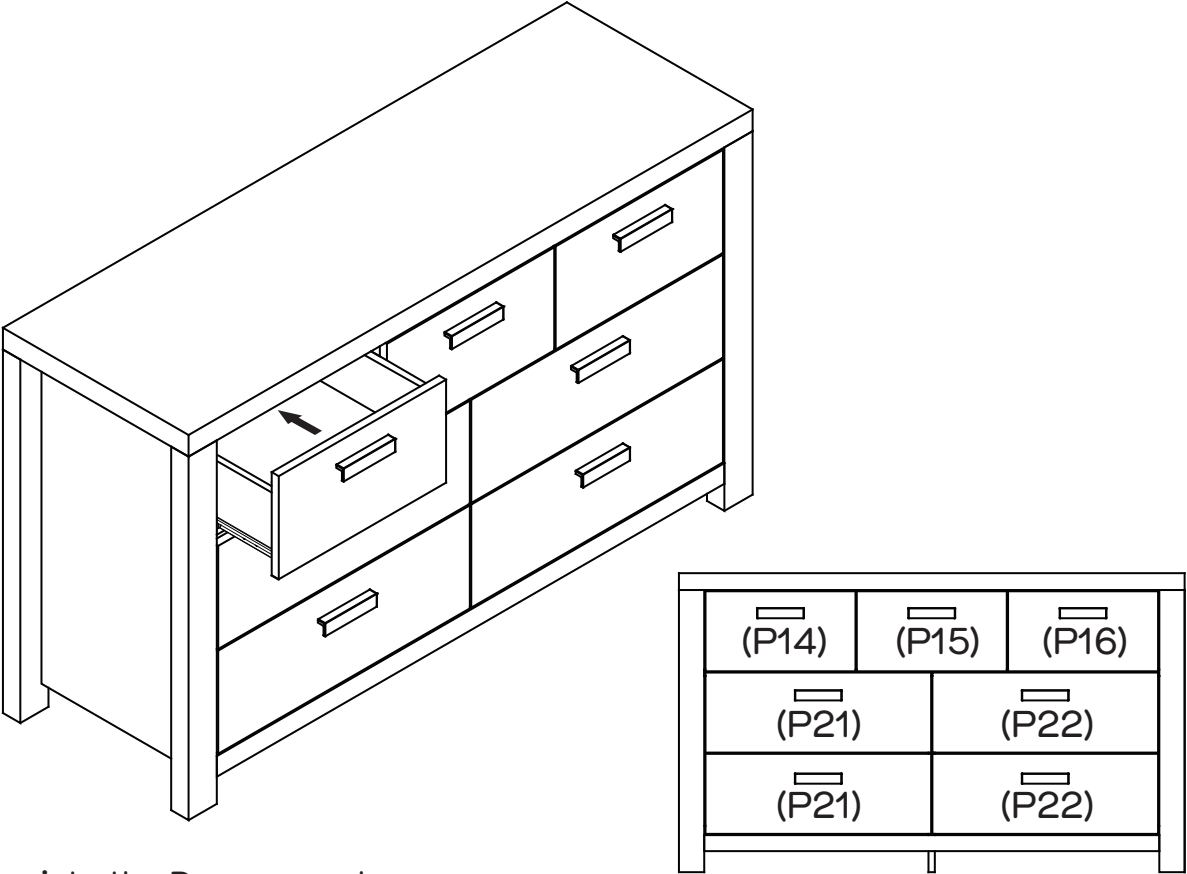


Slide 7 x drawers into the Dresser as shown.

Step 33



We strongly advise that you use the wall safety strap provided to prevent the unit toppling

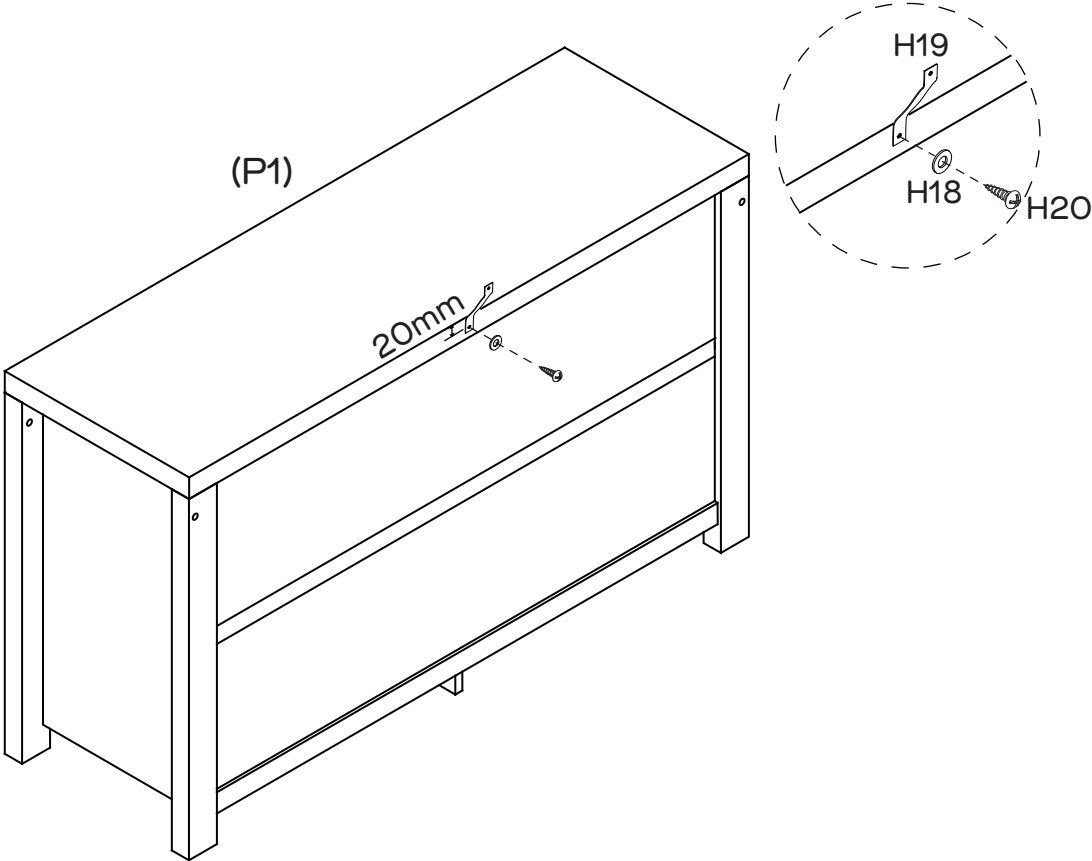You will need	
1 x Safety Strap (H19)	1 x Screw (H20)
1 x Washer (H18)	Phillips Head Screwdriver





Use Screw (H20) and Washer (H18) to attach Safety Strap (H19) securely on Top Panel (P1) as shown.


Step 34

You will need	
	
1 x Washer (H18)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

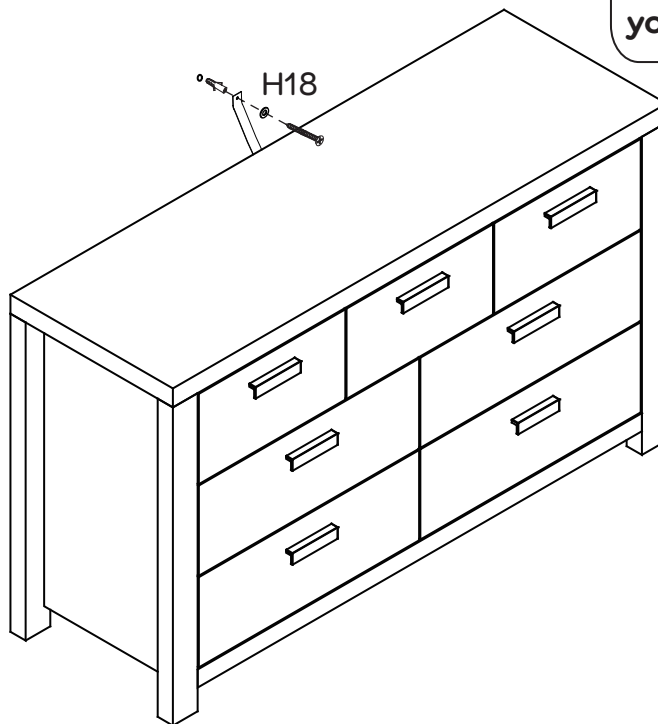

Move the dresser to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

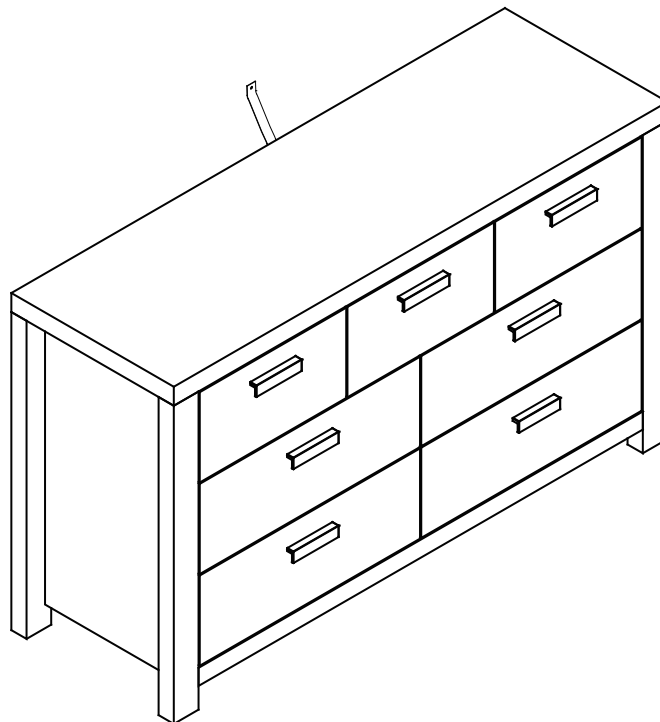

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.