


APPROVED CD 15/12/2022



**Fantastic
Furniture**

Version 1.0

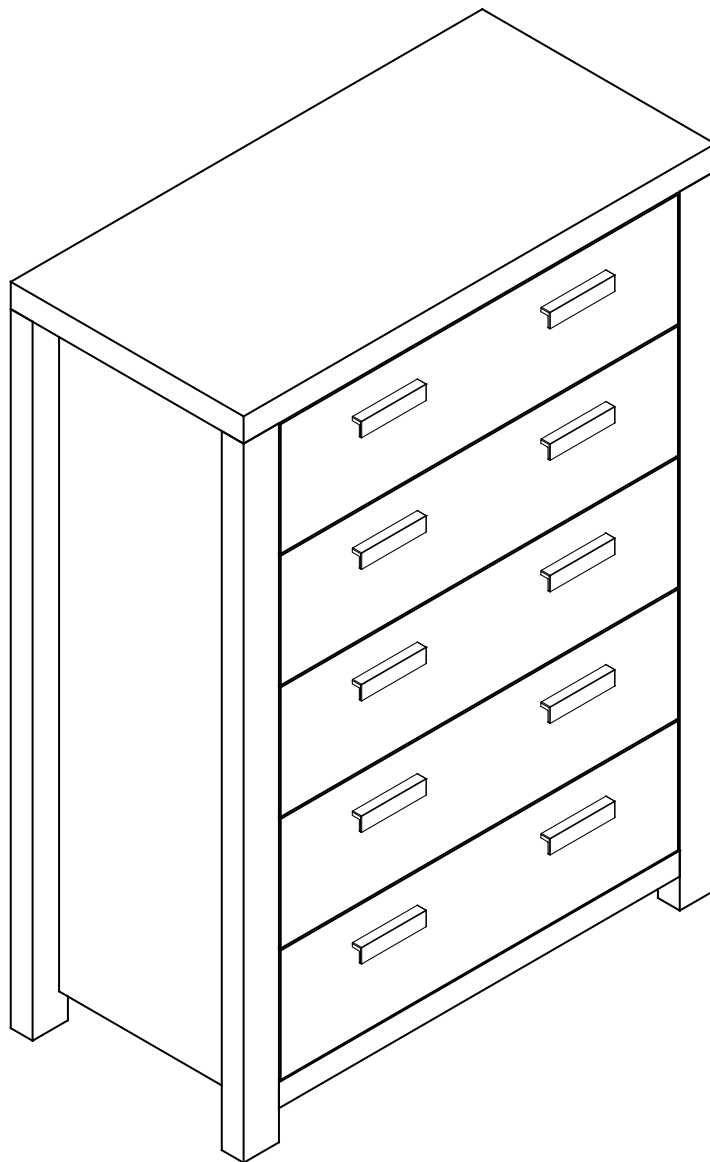

Havana
Tallboy 5 Drawer

fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments.

Please seek professional advice if you are in doubt of what fixing device to use.

Recommended Weight Capacity :80kg

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.



For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

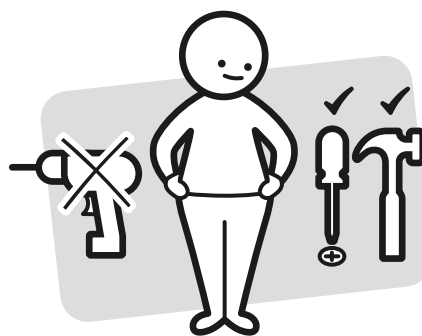

Make sure you have all the required tools. Never use power tools unless instructed.

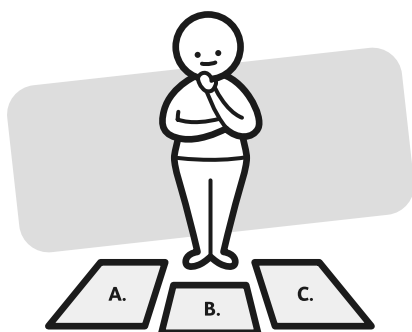

Identify and lay out all of the components before you begin assembly.

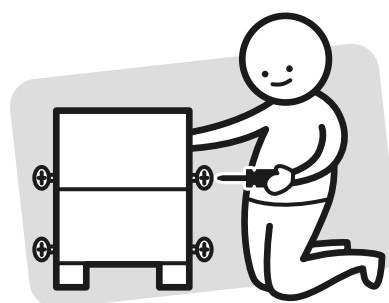

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE





Other tools you need:


Phillips head screwdriver;
Hammer

Parts list

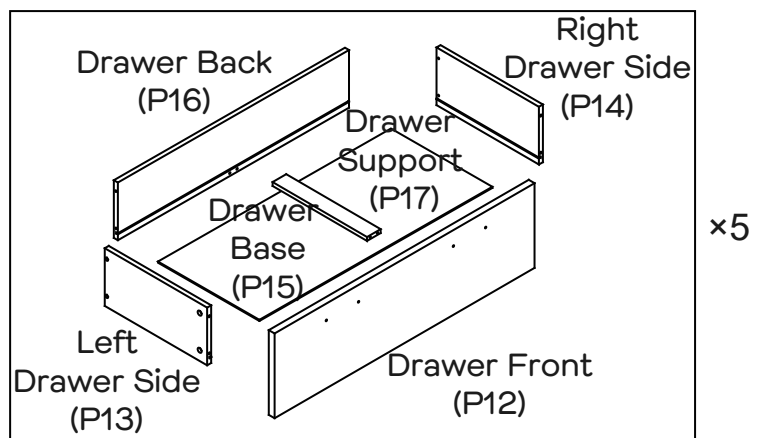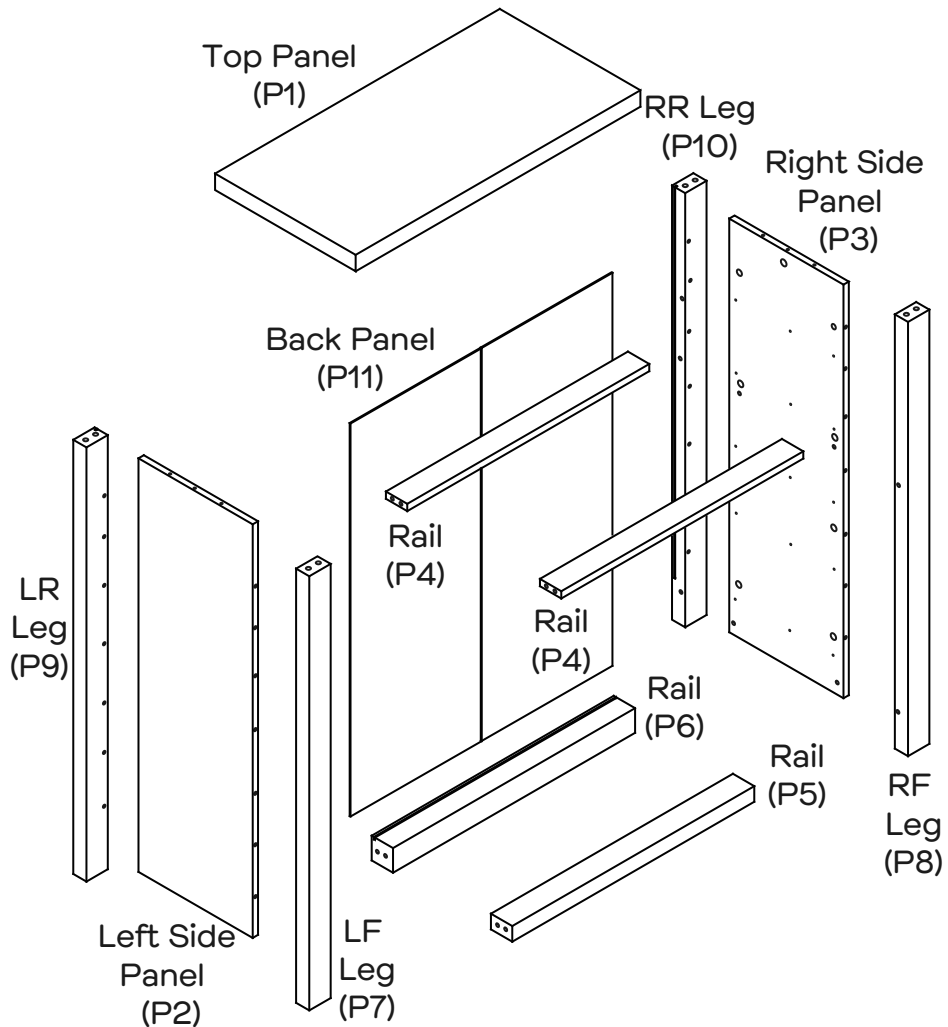

Top Panel (P1);
Rail (P5); Rail (P6);
LF Leg (P7); RF Leg (P8);
LR Leg (P9); RR Leg (P10);
Left Side Panel (P2);
Right Side Panel (P3);
2 x Rails (P4);
Back Panel (P11);
5 x Drawer Fronts (P12);
5 x Left Drawer Sides (P13);
5 x Right Drawer Sides (P14);
5 x Drawer Bases (P15);
5 x Drawer Backs (P16);
5 x Drawer Supports (P17);

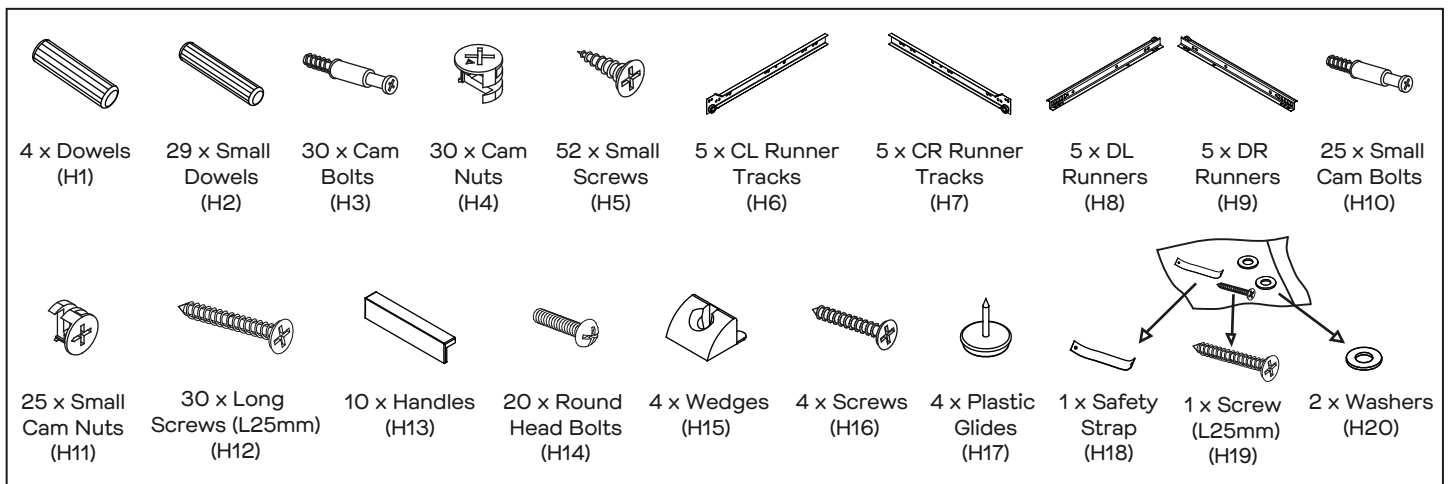


Hardware pack






Step 1

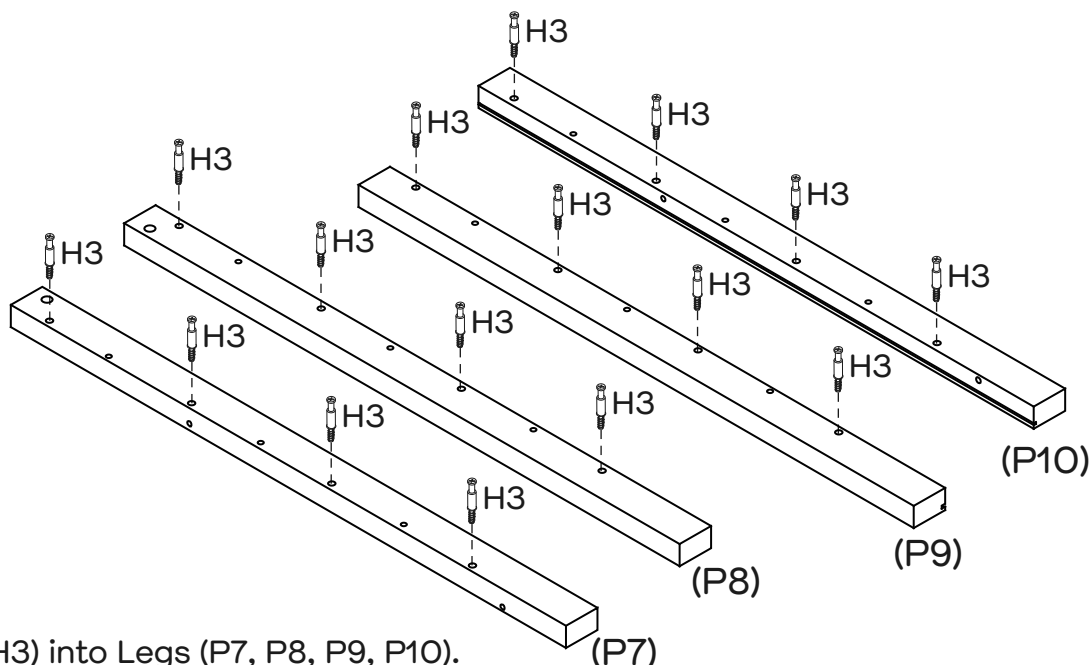
You will need	
	
16 x Cam Bolts (H3)	Phillips head screwdriver



Attach 16 x Cam Bolts (H3) into Legs (P7, P8, P9, P10).


Step 2

You will need	
	
12 x Small Dowels (H2)	16 x Cam Nuts (H4)
	
Phillips head screwdriver	

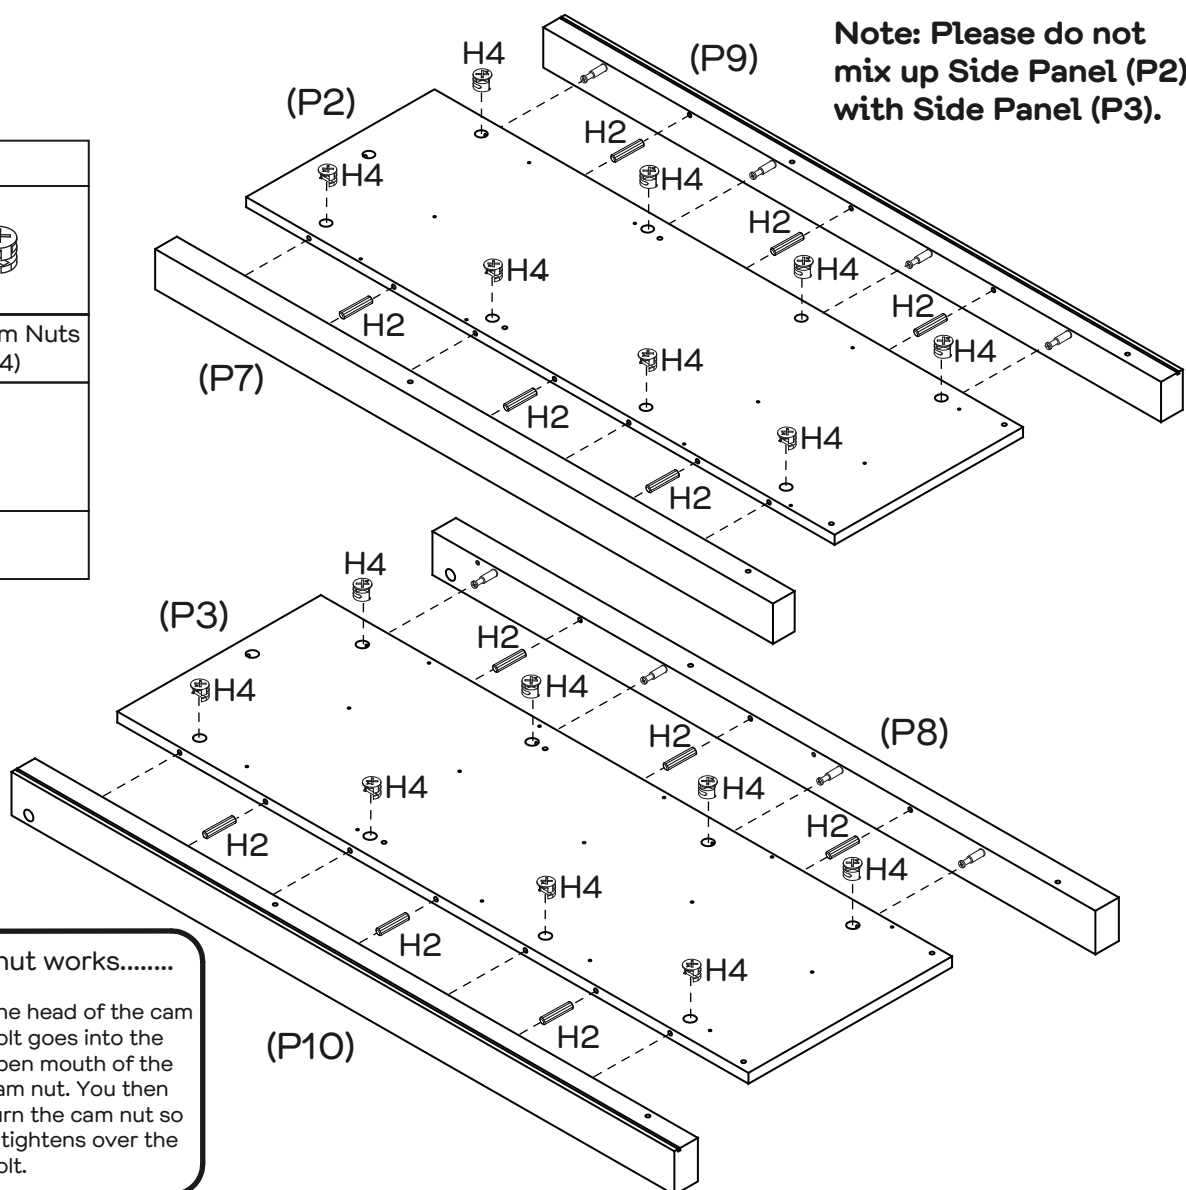

Note: Please do not mix up Side Panel (P2) with Side Panel (P3).




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 12 x Small Dowels (H2) into the holes of Side Panels (P2, P3). Insert 16 x Cam Nuts (H4) into the holes of Side Panels (P2, P3). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Legs (P7, P9) to Left Side Panel (P2) and Legs (P8, P10) to Right Side Panel (P3). Tighten the cam nuts using a Phillips head screwdriver.




Step 3

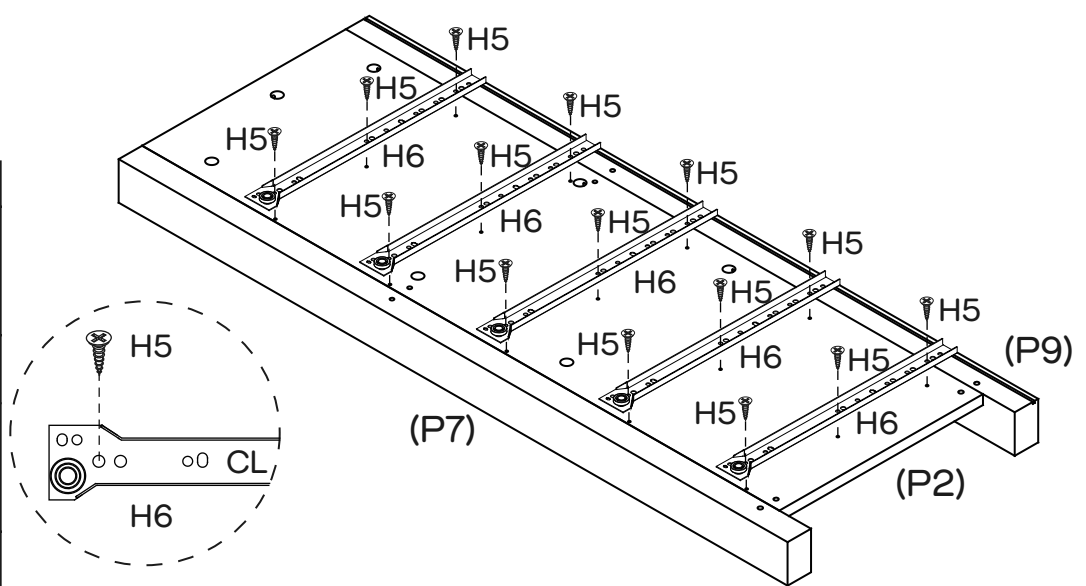
You will need	
	
5 x CL Runner Track (H6)	15 x Small Screws (H5)
	
Phillips head screwdriver	



Attach 5 x CL Runner Tracks (H6) to Left Side Panel (P2) with 15 x Small Screws (H5).



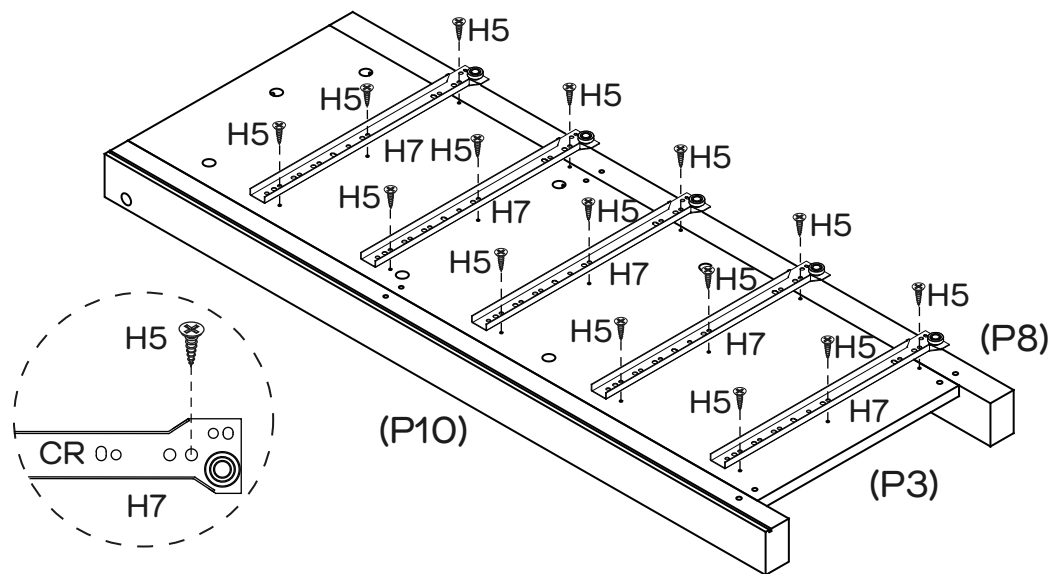

Step 4


You will need	
	
5 x CR Runner Track (H7)	15 x Small Screws (H5)
	
Phillips head screwdriver	



Attach 5 x CR Runner Tracks (H7) to Right Side Panel (P3) with 15 x Small Screws (H5).




Step 5

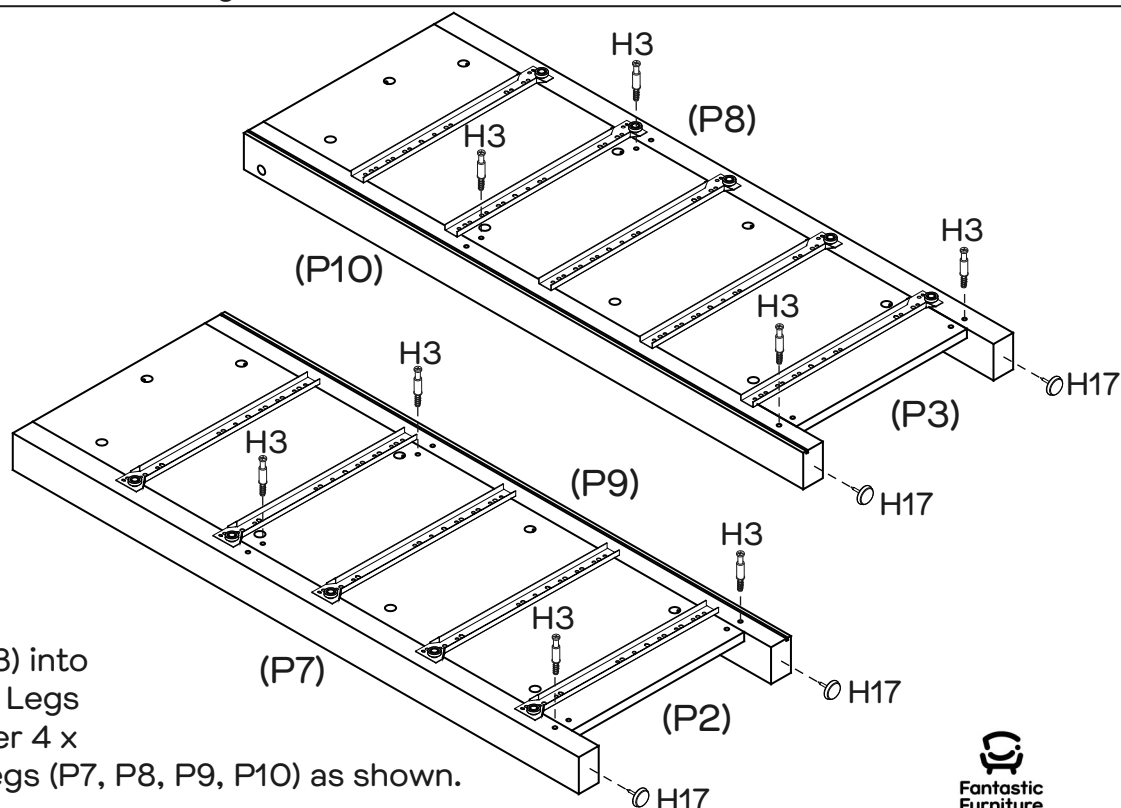You will need	
	
8 x Cam Bolts (H3)	4 x Plastic Glides (H17)
	
Phillips head screwdriver	Hammer




Attach 8 x Cam Bolts (H3) into Side Panels (P2, P3) and Legs (P7, P8, P9, P10). Hammer 4 x Plastic Glides (H17) on Legs (P7, P8, P9, P10) as shown.

Step 6




You will need	
	
4 x Small Dowels (H2)	4 x Cam Nuts (H4)
	
Phillips head screwdriver	

Insert 4 x Small Dowels (H2) into Left Side Panel (P2) and Legs (P7, P9). Insert 4 x Cam Nuts (H4) into the holes of Rails (P4, P5, P6). Rotate the cam nuts so the arrows point towards the incoming cam bolts.

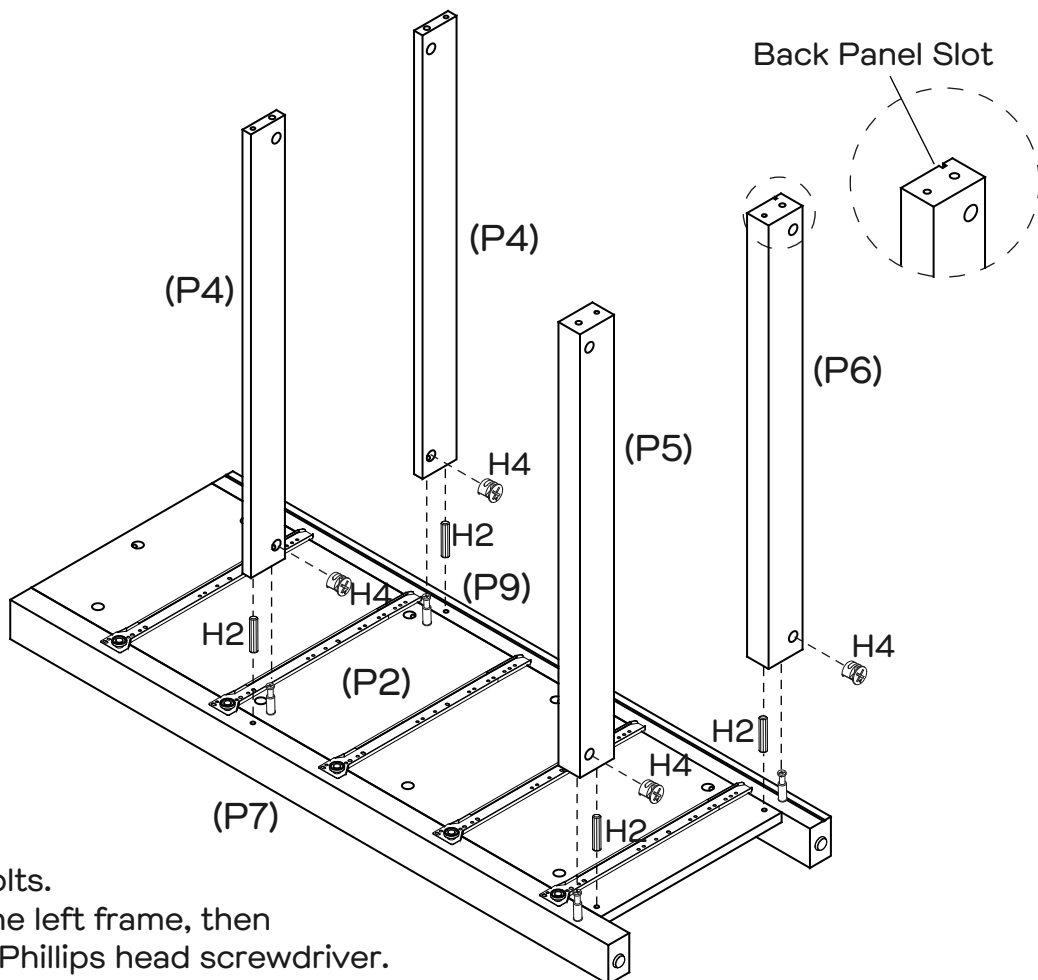
Attach Rails (P4, P5, P6) to the left frame, then tighten the cam nuts using a Phillips head screwdriver.




Step 7

You will need	
	
4 x Small Dowels (H2)	4 x Cam Nuts (H4)
	
Phillips head screwdriver	

Insert 4 x Small Dowels (H2) into Right Side Panel (P3) and Legs (P8, P10). Insert 4 x Cam Nuts (H4) into the holes of Rails (P4, P5, P6). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push the right frame into place, then tighten the cam nuts using a Phillips head screwdriver.

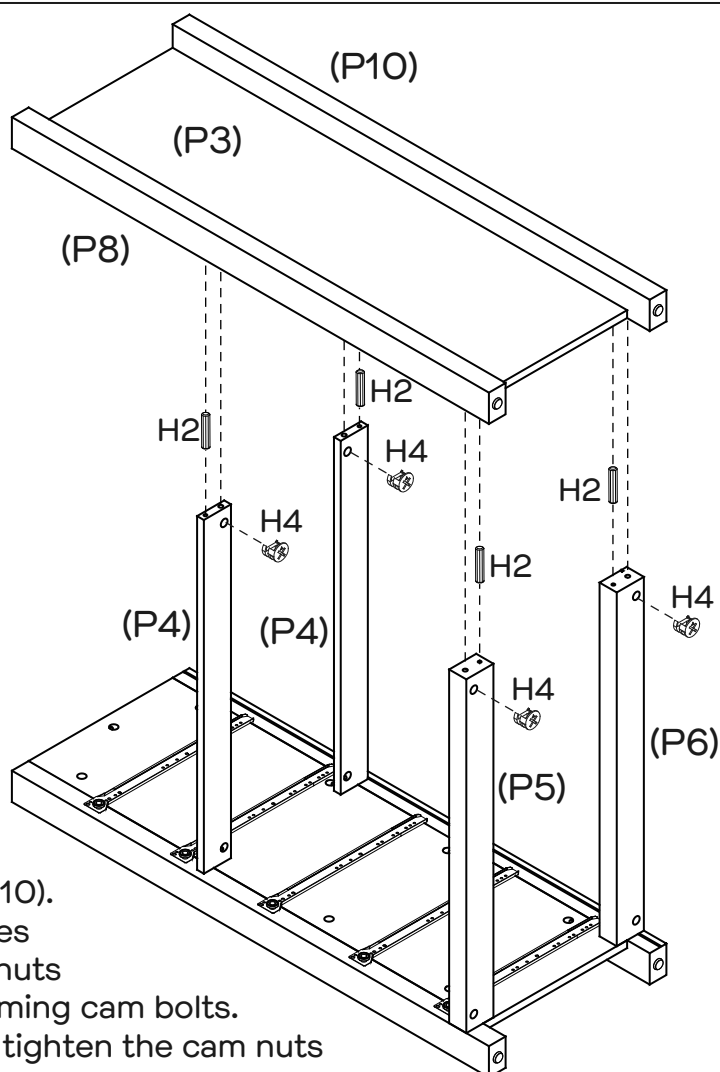

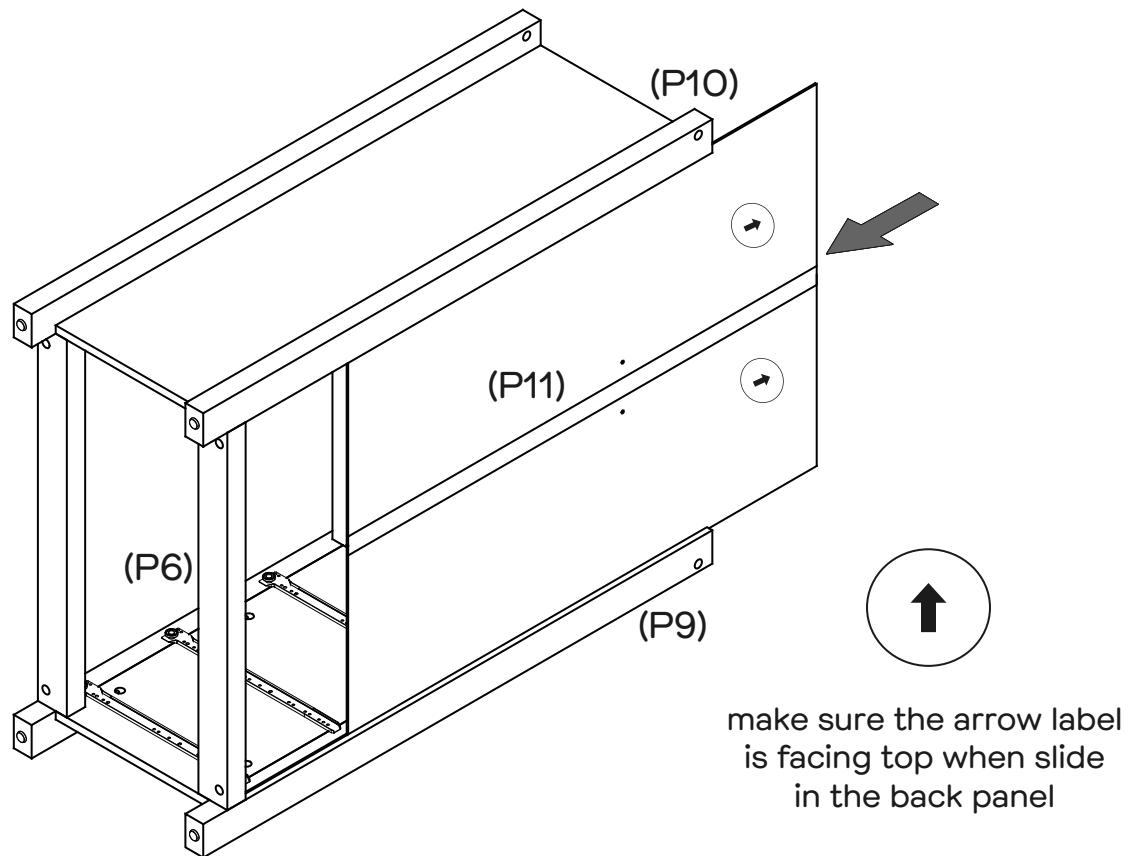


Step 8



Slide Back Panel (P11) into the grooves of Legs (P9, P10) and Rail (P6).


Step 9


You will need	
	
2 x Small Screws (H5)	Phillips head screwdriver

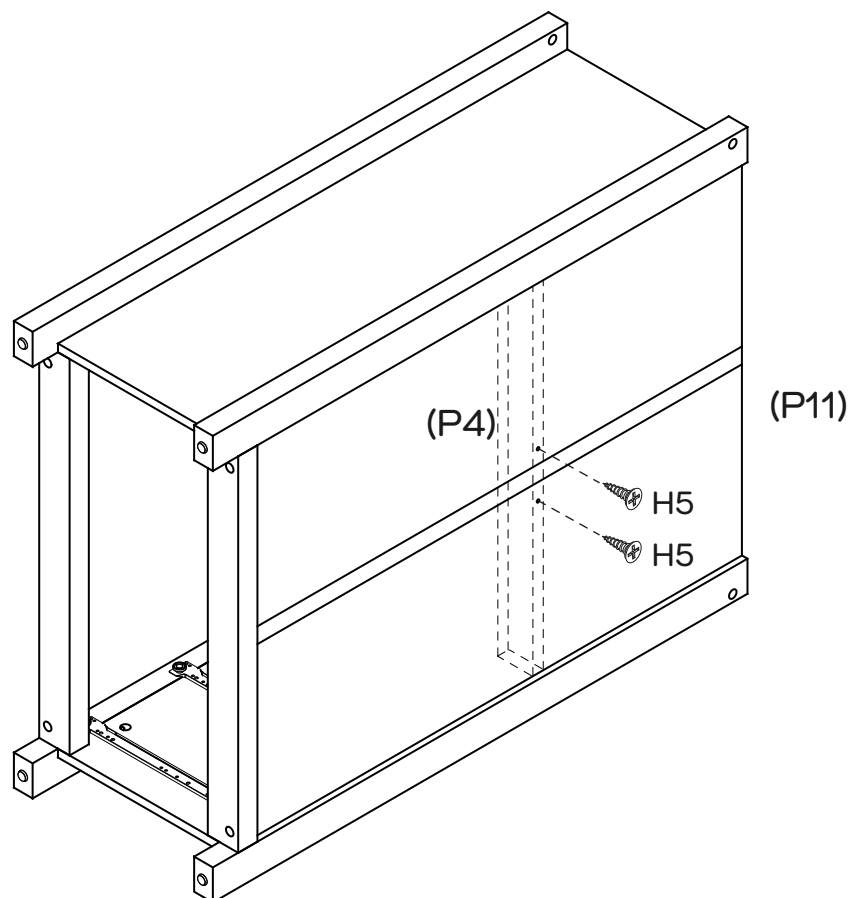

Use 2 x Small Screws (H5) to fix Back Panel (P11) onto Rail (P4).
Tighten the screws with a Phillips head screwdriver.


Step 10


You will need	
	
4 x Dowels (H1)	

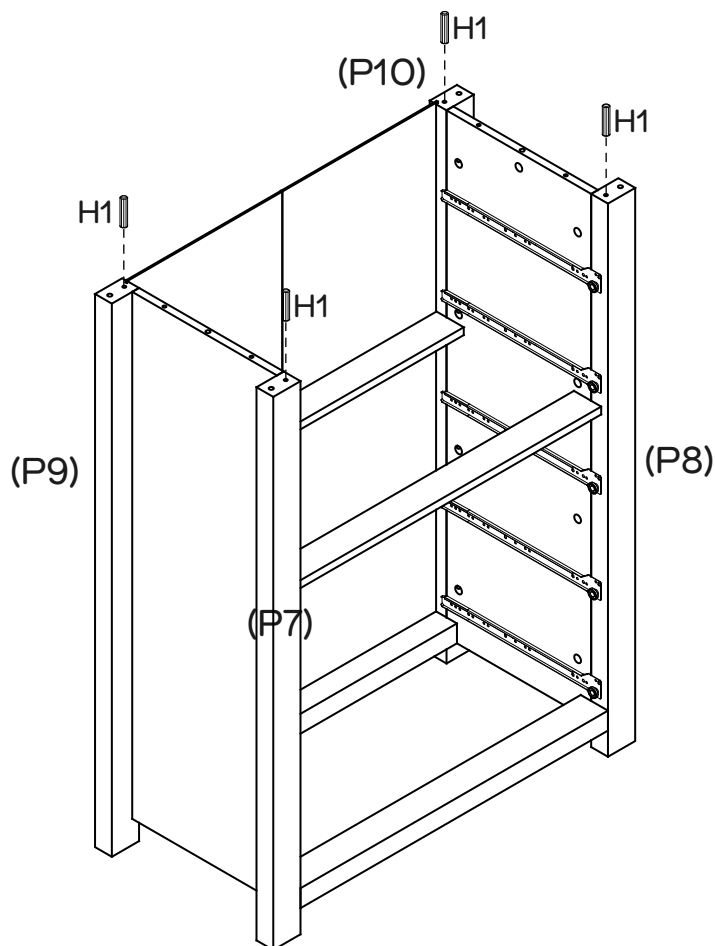

Carefully turn the tallboy over to an upright position.
Insert 4 x Dowels (H1) into Legs (P7, P8, P9, P10) as shown.



Step 11

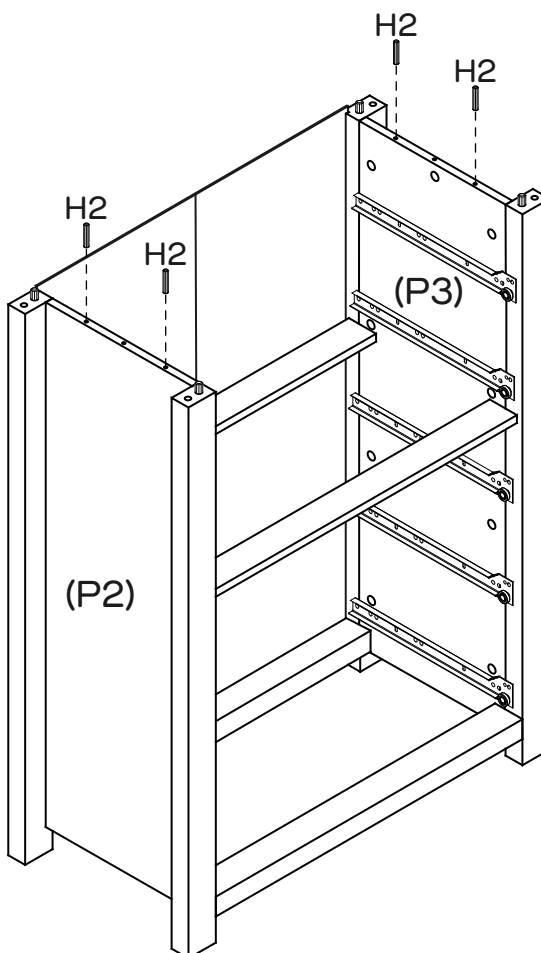
You will need	
	
4 x Small Dowels (H2)	



Insert 4 x Small Dowels (H2) into Side Panels (P2, P3) as shown.



Step 12

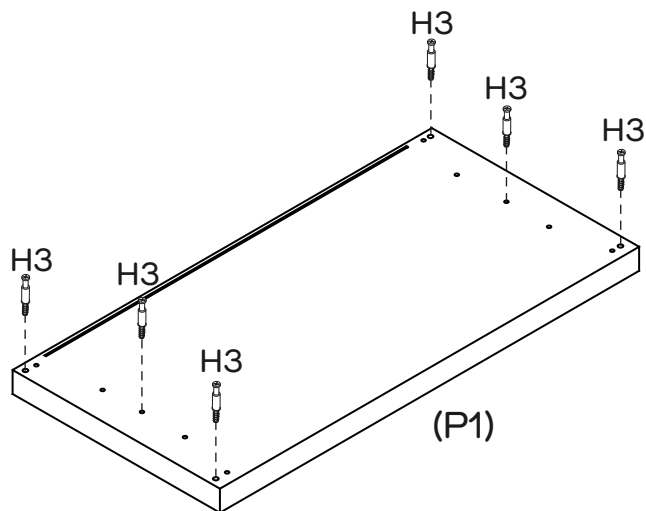
You will need	
	
6 x Cam Bolts (H3)	Phillips head screwdriver



Attach 6 x Cam Bolts (H3) into Top Panel (P1) as shown.




Step 13

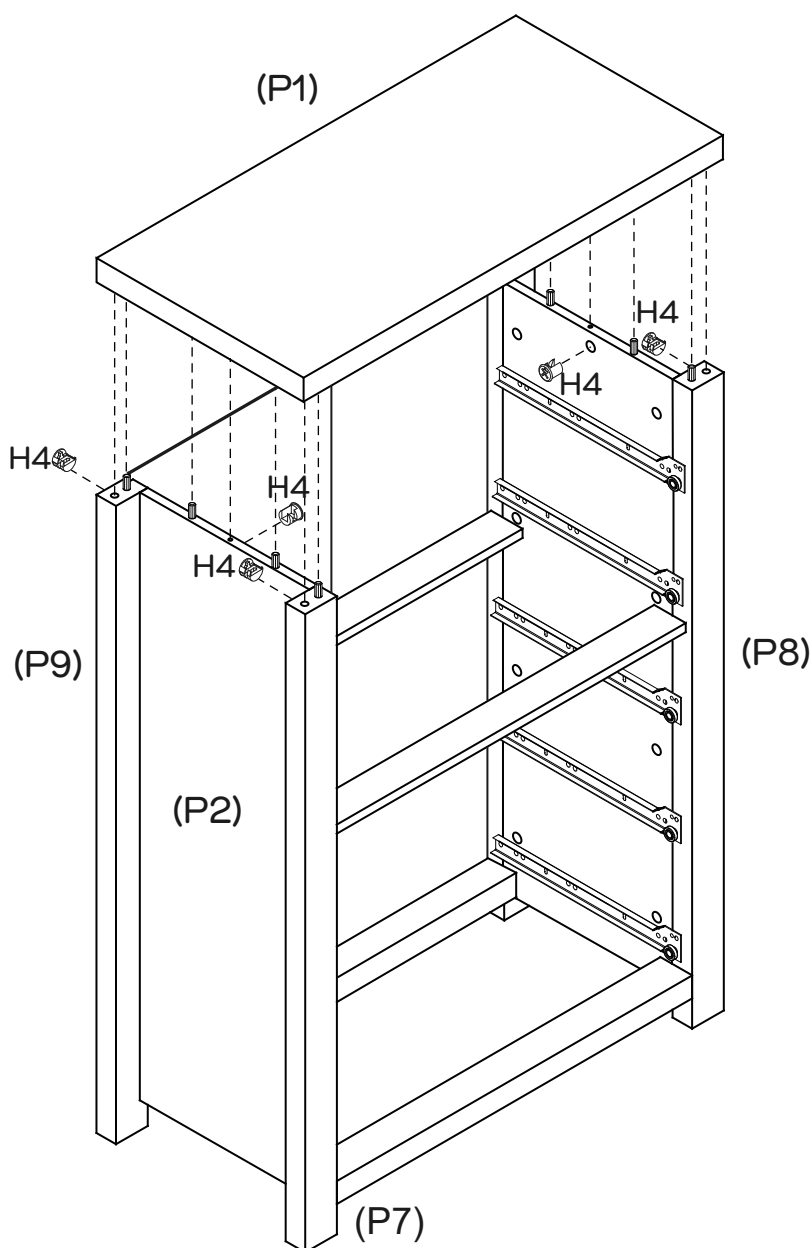
You will need	
	
6 x Cam Nuts (H4)	Phillips head screwdriver




Insert 6 x Cam Nuts (H4) into the holes of Side Panels (P2, P3) and Legs (P7, P8, P9, P10). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) into place, and then tighten the cam nuts.

Step 14

You will need	
	
4 x Wedges (H15)	4 x Screws (H16)
	
Phillips head screwdriver	




Make sure Wedge (H15) is facing to the bottom of Top Panel (P1).

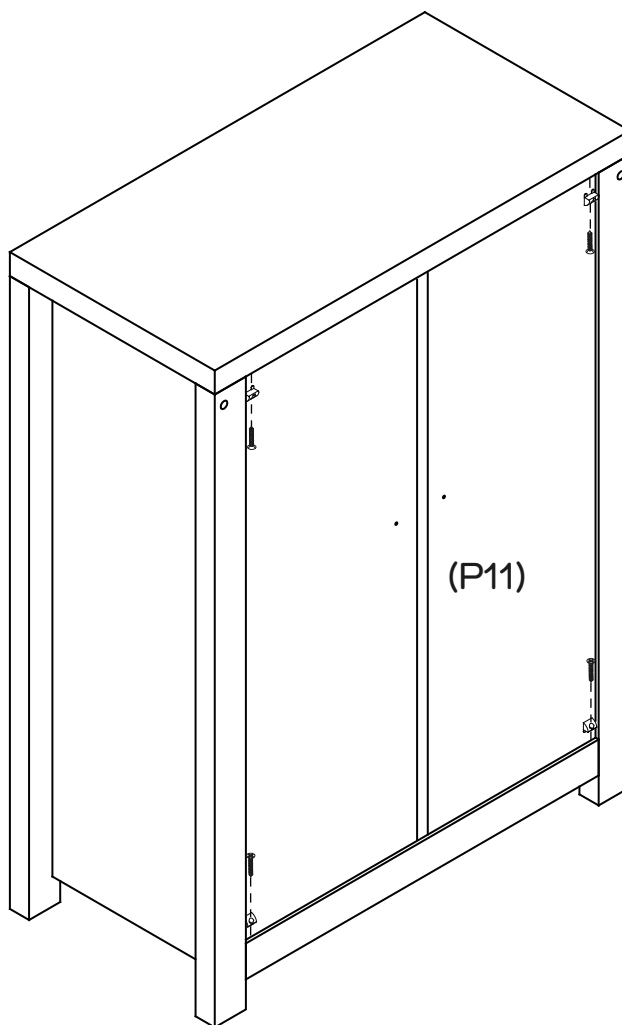

Secure Back Panel (P11) in place with 4 x Wedges (H15) using 4 x Screws (H16). Tighten the screws with a Phillips head screwdriver.




Step 15

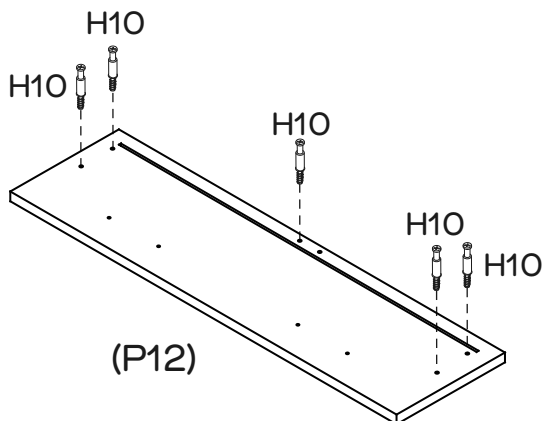
You will need	
	
5 x Small Cam Bolts (H10)	Phillips head screwdriver



Screw 5 x Small Cam Bolts (H10) into Drawer Front (P12) with a Phillips head screwdriver.

Step 16


You will need	
	
1 x Small Dowel (H2)	5 x Small Cam Nuts (H11)
	
Phillips head screwdriver	

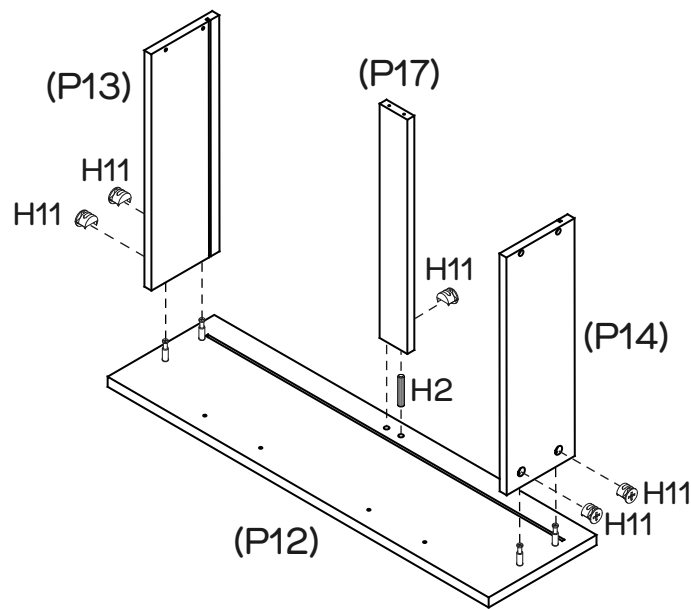

Insert 1 x Small Dowel (H2) into Drawer Front (P12) as shown.



Insert 5 x Small Cam Nuts (H11) into the holes of Drawer Sides (P13, P14) and Drawer Support (P17). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Align the holes together, secure Drawer Sides (P13, P14) and Drawer Support (P17) into place, tighten the cam nuts using a Phillips head screwdriver.

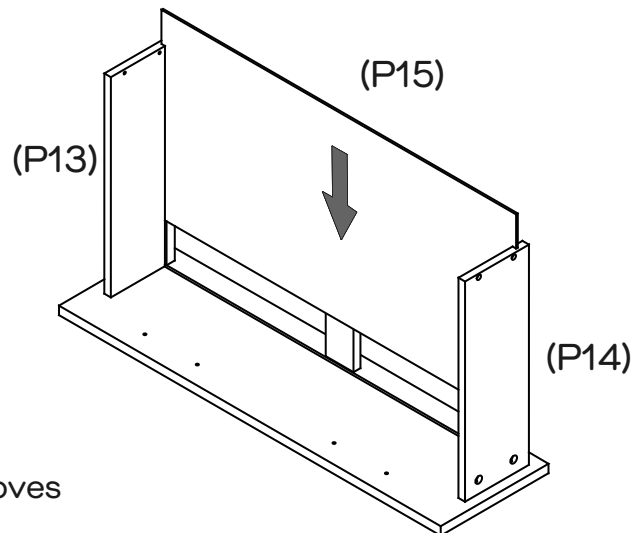
Step 17



Slide Drawer Base (P15) into the grooves in Drawer Sides (P13, P14).

Step 18


You will need	
	
6 x Long Screws (H12)	Phillips head screwdriver

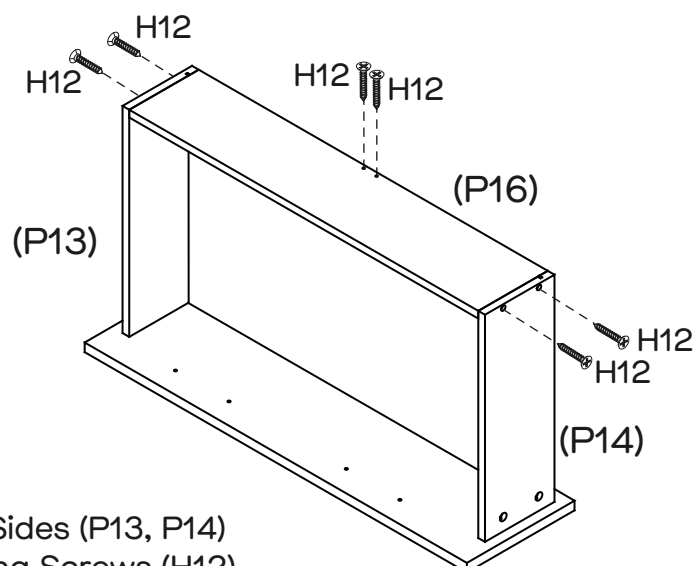

Attach Drawer Back (P16) to Drawer Sides (P13, P14) and Drawer Support (P17) with 6 x Long Screws (H12), make sure that the groove lines up the whole way around the drawer. Tighten Screws using a Phillips head screwdriver.

Step 19


You will need	
1 x DL Runner (H8)	1 x DR Runner (H9)
4 x Small Screws (H5)	Phillips head screwdriver

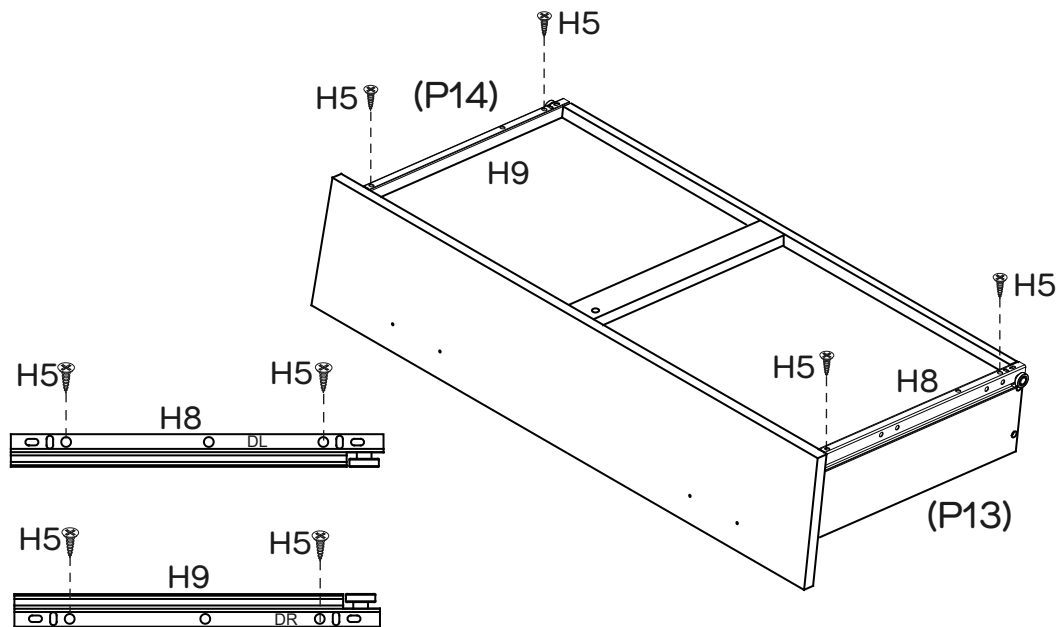

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P13) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P14) with 4 x Small Screws (H5). Tighten Screws using a Phillips head screwdriver.


Step 20

You will need	
2 x Handles (H13)	4 x Round Head Bolts (H14)
Phillips head screwdriver	

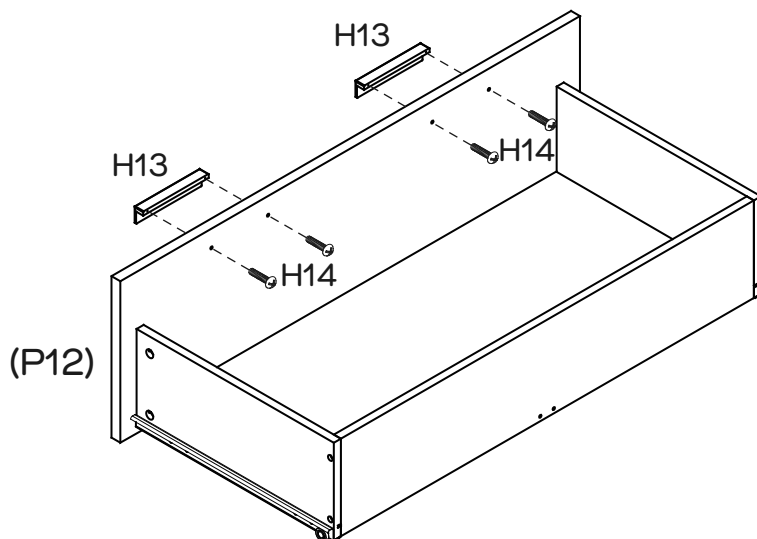


Attach 2 x Handles (H13) to Drawer Front (P12) with 4 x Round Head Bolts (H14). Tighten Round Head Bolts using a Phillips head screwdriver.

Step 21

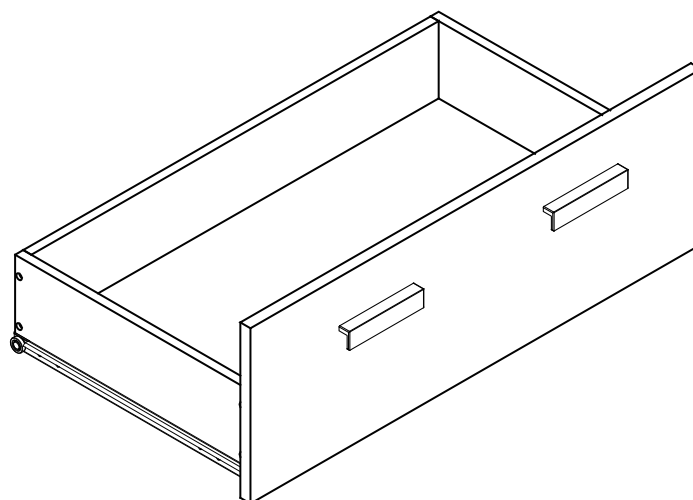

Repeat Step 15 to Step 20 to assemble the other 4 drawers.

Step 22


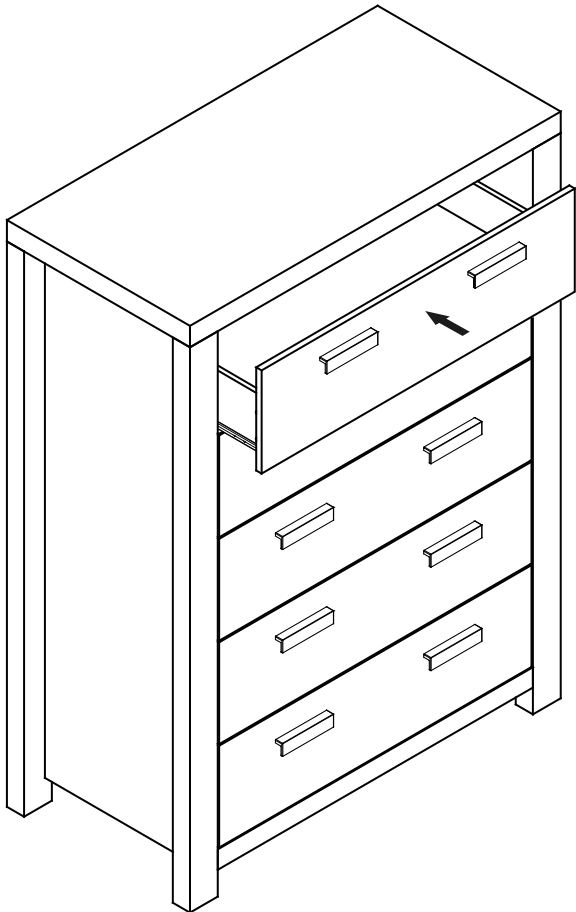


Put the drawers into the tallboy.

Step 23



We strongly advise that you use the wall safety strap provided to prevent the unit toppling

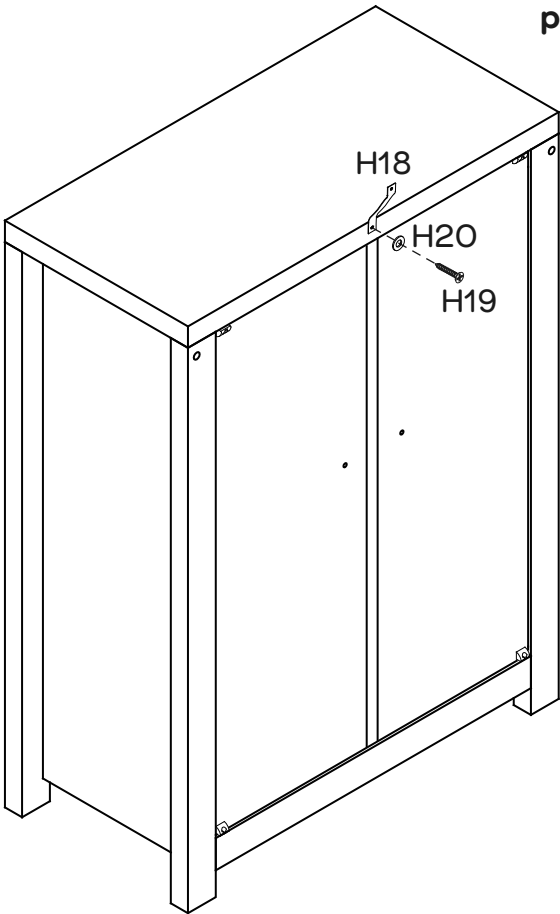
You will need	
1 x Safety Strap (H18)	1 x Screw (H19)
1 x Washer (H20)	Phillips head screwdriver




Use Screw (H19) and Washer (H20) to attach Safety Strap (H18) securely on Top Panel (P1) as shown.

Step 24


You will need	
	
1 x Washer (H20)	Phillips head screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

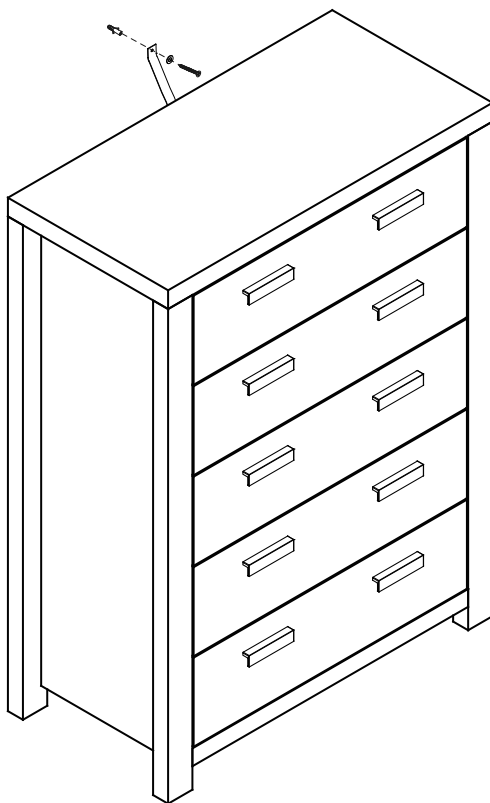

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

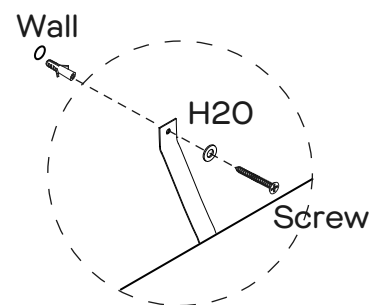

Move the tallboy to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

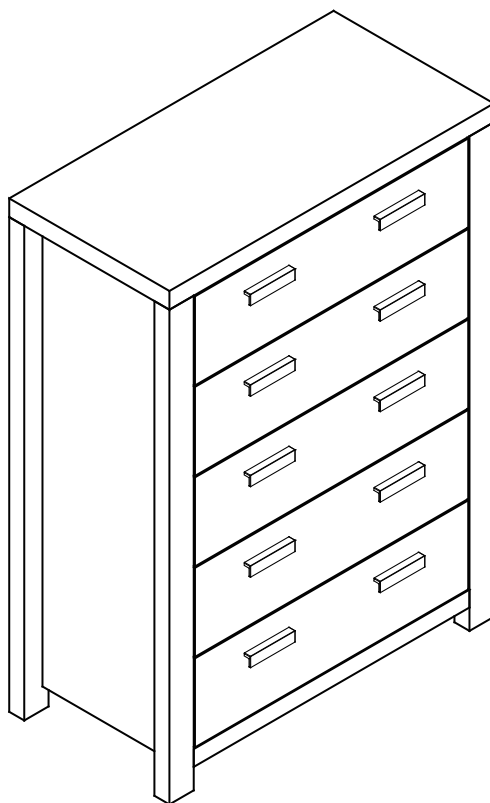

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.