




**Fantastic
Furniture**

Version 1.0

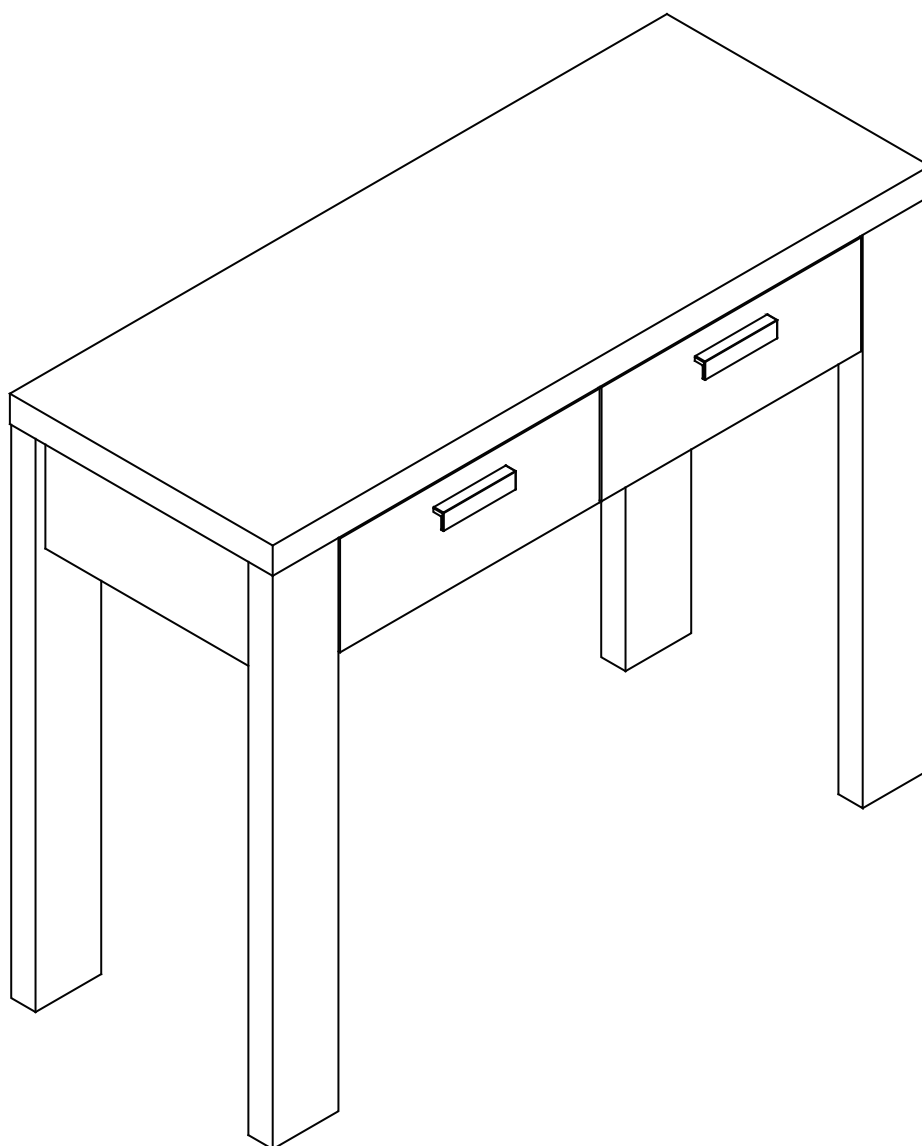

Havana
Hall Table 2 Drawer

fantasticfurniture.com.au

Recommended weight capacity : 50kg.



**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Connecting attachments for your wall are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what wall connections to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

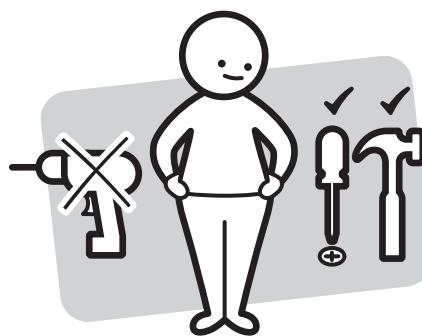

Make sure you have all the required tools. Never use power tools unless instructed.

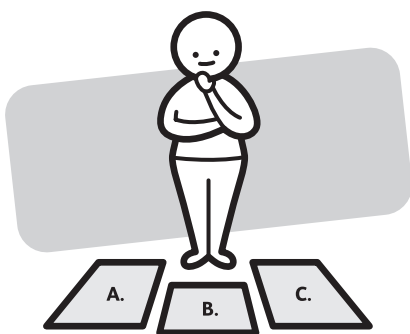

Identify and lay out all of the components before you begin assembly.

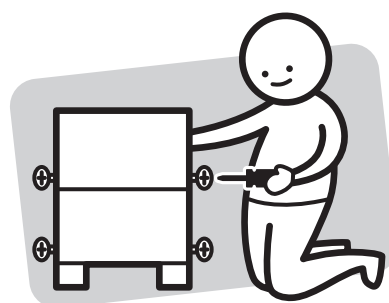

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE





Other tools you need:


Phillips Head Screwdriver;
Hammer

Parts list

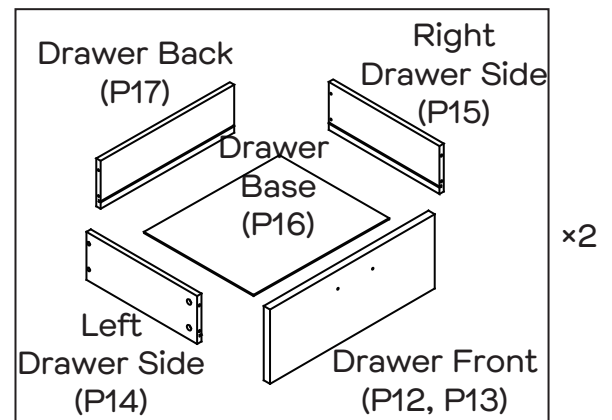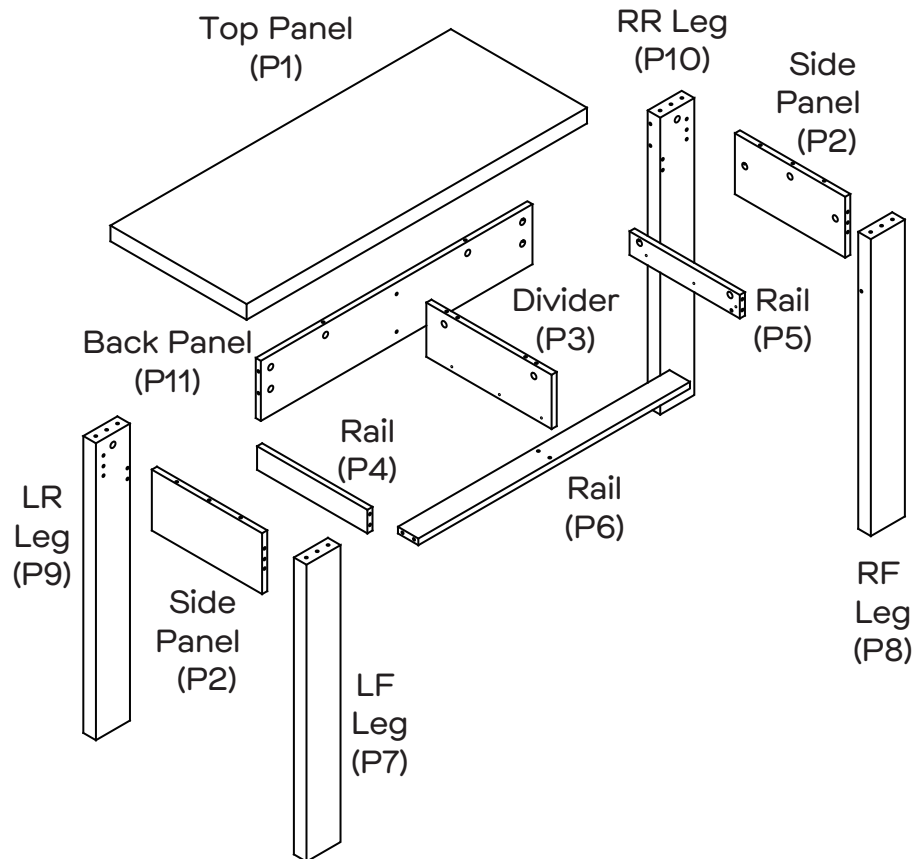

Top Panel (P1);
2 x Side Panels (P2);
Divider (P3);
Rail (P4); Rail (P5); Rail (P6);
LF Leg (P7); RF Leg (P8);
LR Leg (P9); RR Leg (P10);
Back Panel (P11);
Drawer Front (P12);
Drawer Front (P13);
2 x Left Drawer Sides (P14);
2 x Right Drawer Sides (P15);
2 x Drawer Bases (P16);
2 x Drawer Backs (P17);

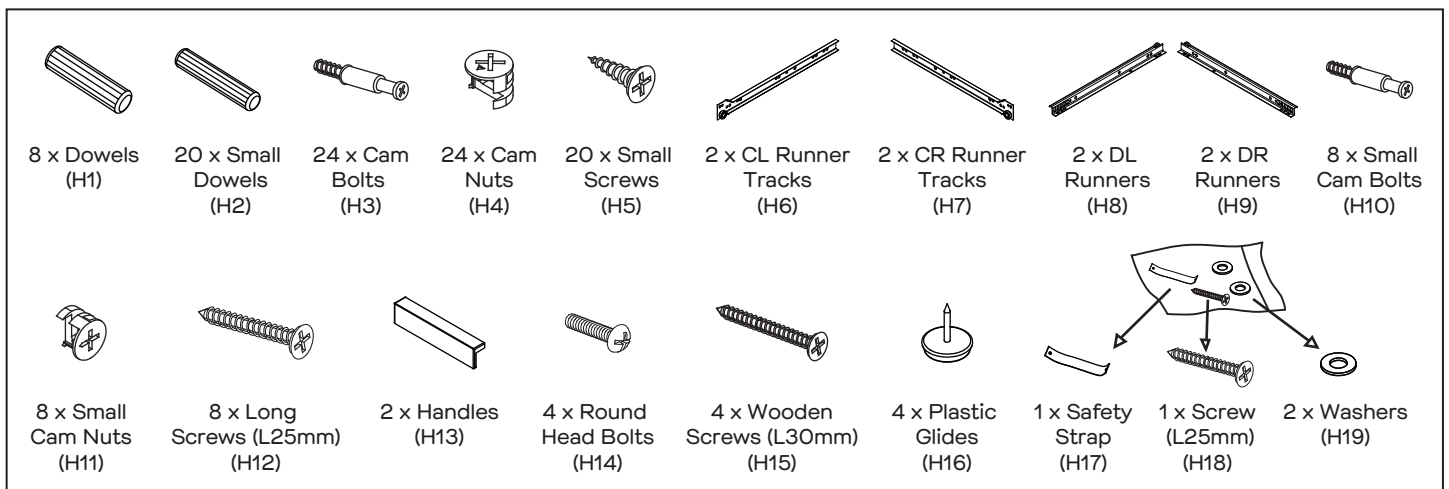


Hardware pack






Step 1

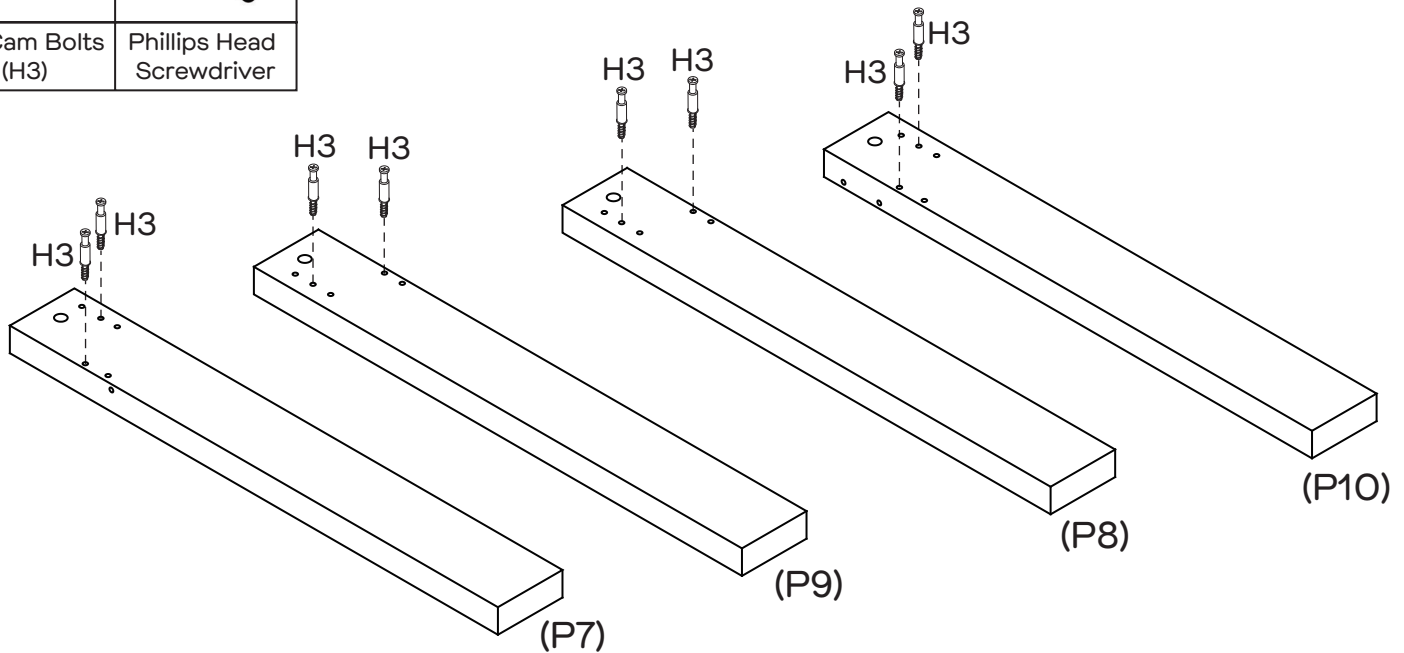
You will need	
	
8 x Cam Bolts (H3)	Phillips Head Screwdriver




Insert 8 x Cam Bolts (H3) into the hole of Legs (P7, P8, P9, P10) as shown.

Step 2

You will need	
	
3 x Small Dowels (H2)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

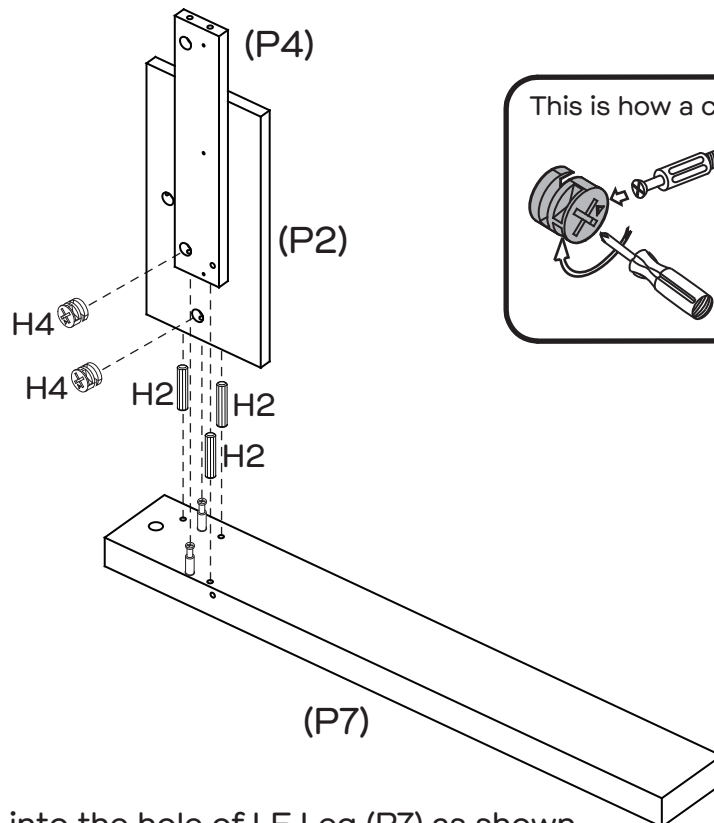




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 3 x Small Dowels (H2) into the hole of LF Leg (P7) as shown.
 Insert 2 x Cam Nuts (H4) into the holes of Rail (P4) and Side Panel (P2).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Attach Rail (P4) and Side Panel (P2) to LF Leg (P7), then tighten the cam nut.




Step 3

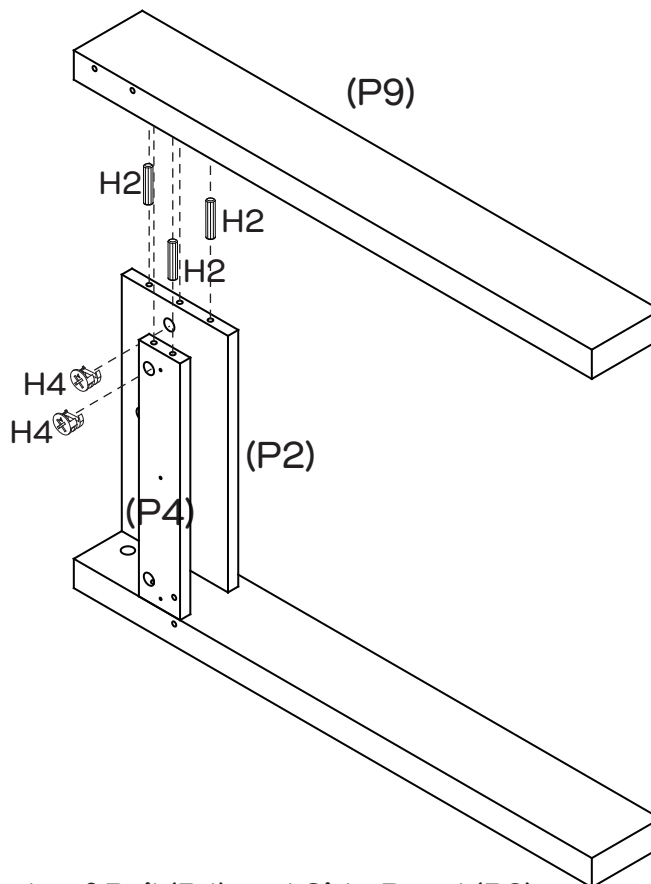
You will need	
	
3 x Small Dowels (H2)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 3 x Small Dowels (H2) into the hole of Rail (P4) and Side Panel (P2).
 Insert 2 x Cam Nuts (H4) into the holes of Rail (P4) and Side Panel (P2).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Attach LR Leg (P9) to Side Panel (P2) and Rail (P4),
 then tighten the cam nut using a Phillips head screwdriver.




Step 4

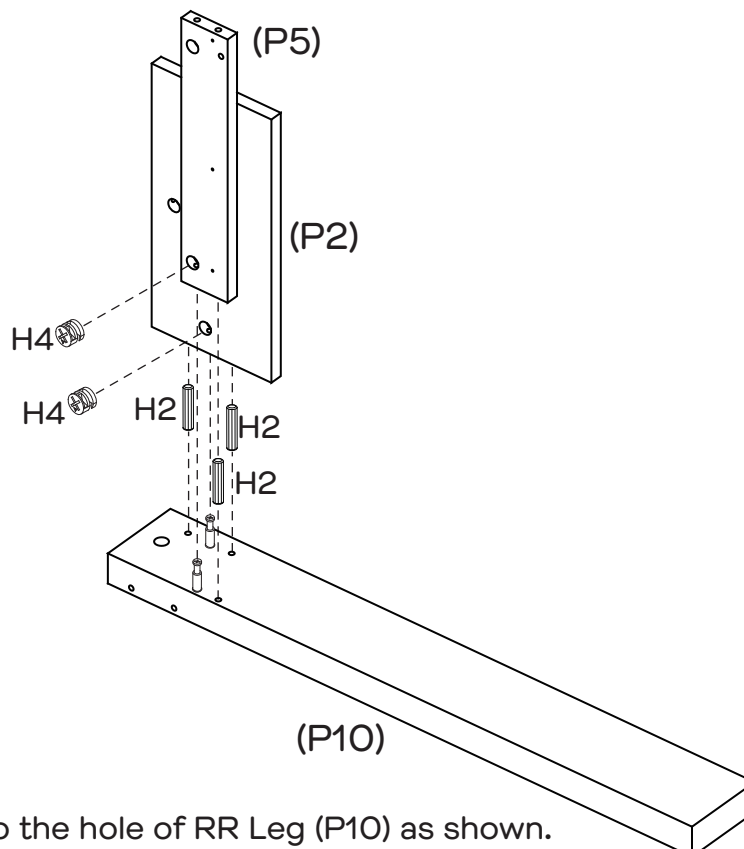
You will need	
	
3 x Small Dowels (H2)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 3 x Small Dowels (H2) into the hole of RR Leg (P10) as shown.
 Insert 2 x Cam Nuts (H4) into the holes of Rail (P5) and Side Panel (P2).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Attach Rail (P5) and Side Panel (P2) to RR Leg (P10), then tighten the cam nut.





Step 5


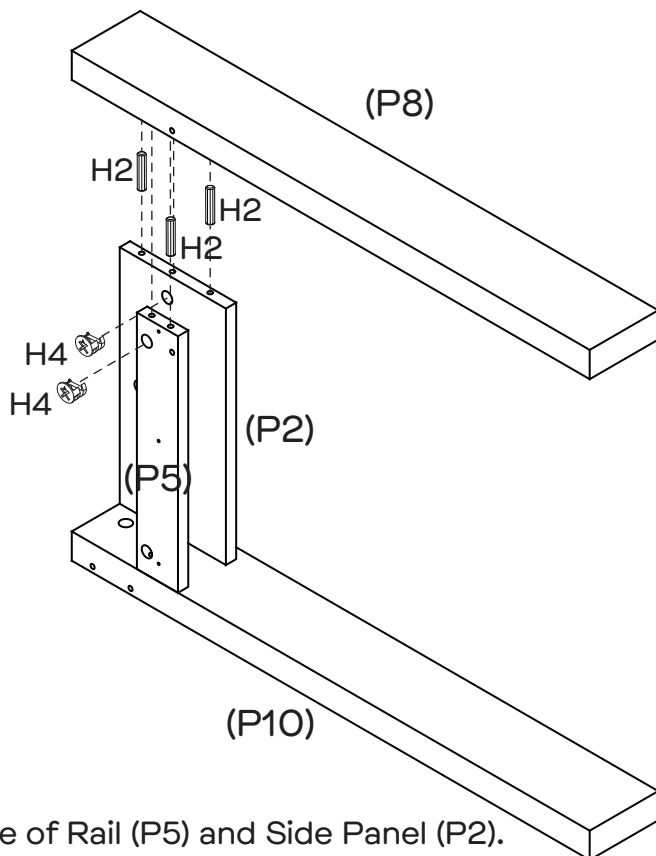
You will need	
	
3 x Small Dowels (H2)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 3 x Small Dowels (H2) into the hole of Rail (P5) and Side Panel (P2).
 Insert 2 x Cam Nuts (H4) into the holes of Rail (P5) and Side Panel (P2).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Attach RF Leg (P8) to Side Panel (P2) and Rail (P5),
 then tighten the cam nuts using a Phillips head screwdriver.



Step 6

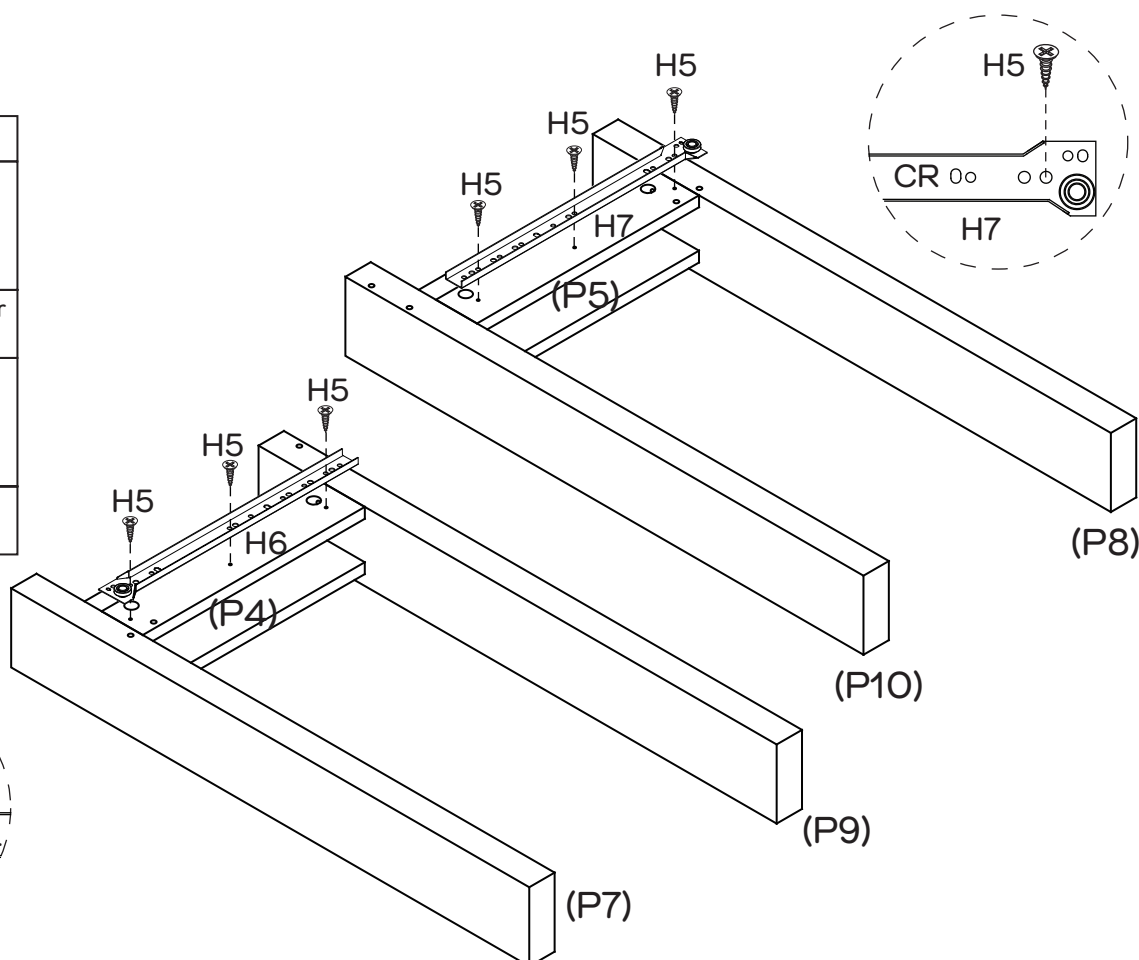
You will need	
	
1 x CL Runner Track (H6)	1 x CR Runner Track (H7)
	
6 x Small Screws (H5)	Phillips Head Screwdriver



Attach 1 x CL Runner Track (H6) to Rail (P4) with 3 x Small Screws (H5).
 Attach 1 x CR Runner Track (H7) to Rail (P5) with 3 x Small Screws (H5).




Step 7

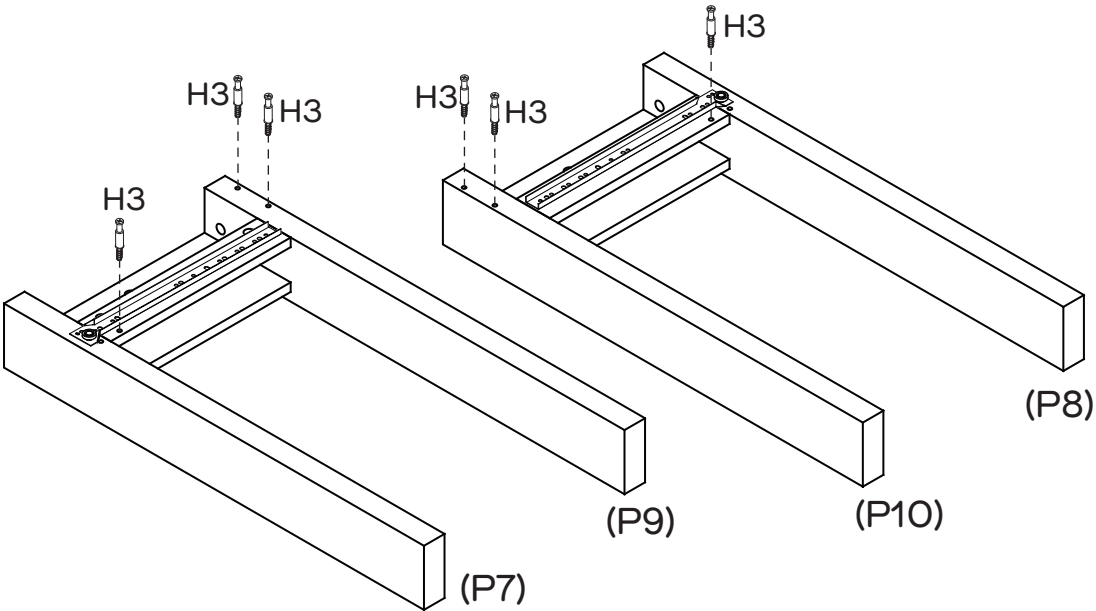
You will need	
	
6 x Cam Bolts (H3)	Phillips Head Screwdriver



Insert 6 x Cam Bolts (H3) into the holes of Legs (P9, P10) and Rails (P4, P5) as shown.




Step 8

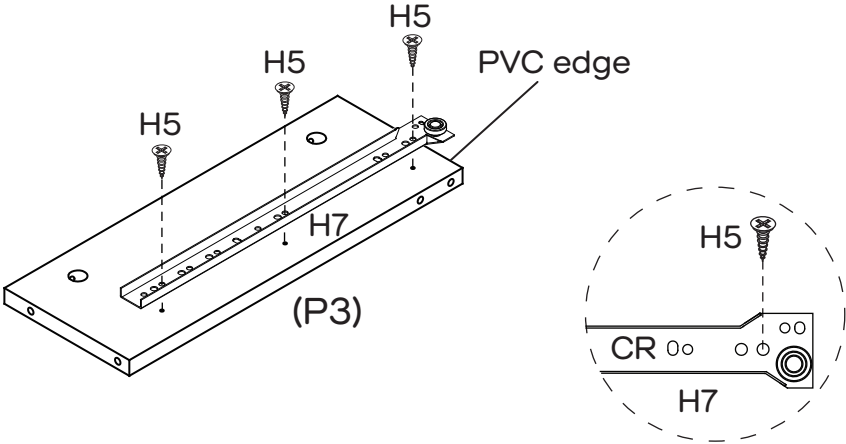
You will need	
	
1 x CR Runner Track (H7)	3 x Small Screws (H5)
	
Phillips Head Screwdriver	



Attach 1 x CR Runner Track (H7) to Divider (P3) with 3 x Small Screws (H5).



Step 9

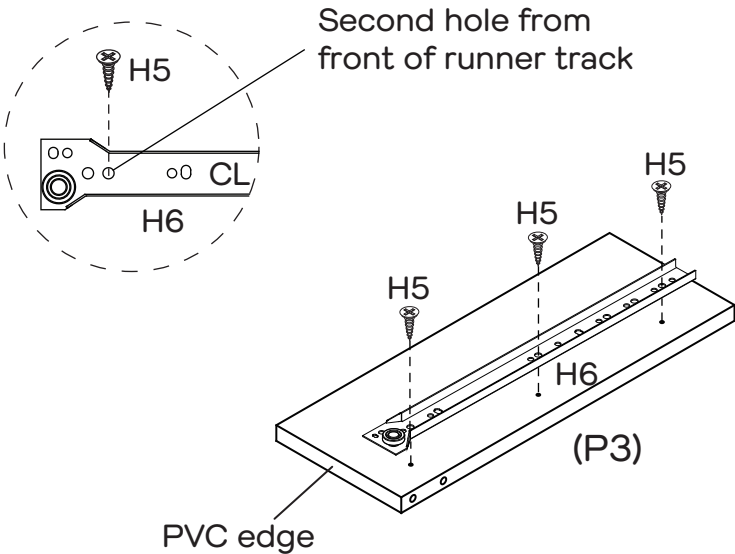
You will need	
	
1 x CL Runner Track (H6)	3 x Small Screws (H5)
	
Phillips Head Screwdriver	



Turn Divider (P3) over to the other side.
Attach 1 x CL Runner Track (H6) to Divider (P3) with 3 x Small Screws (H5).



Step 10

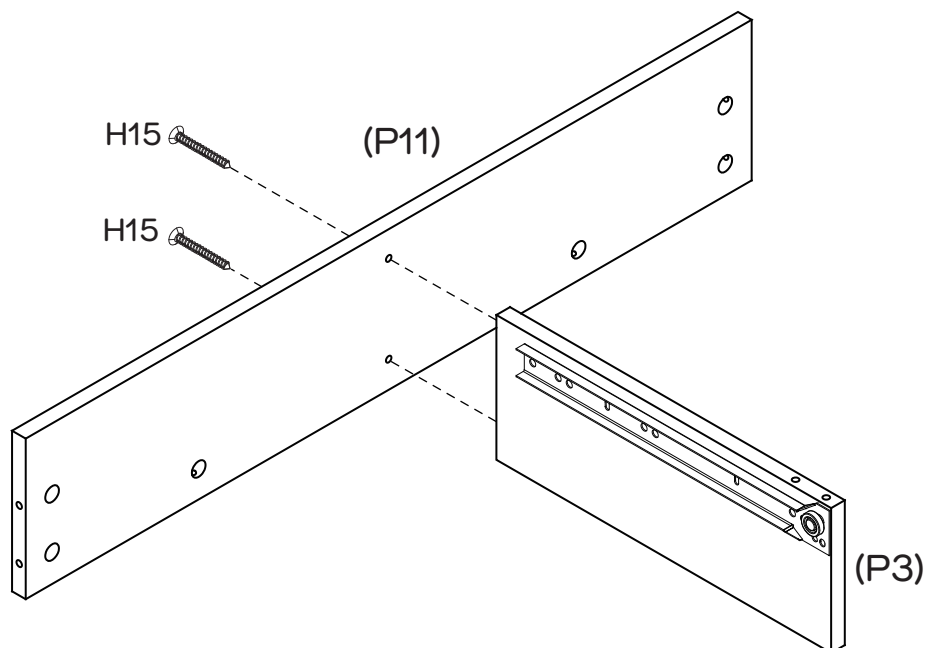
You will need	
	
2 x Wooden Screws (H15)	Phillips Head Screwdriver



Attach Divider (P3) to Back Panel (P11) with 2 x Wooden Screws (H15) using a Phillips head screwdriver.




Step 11

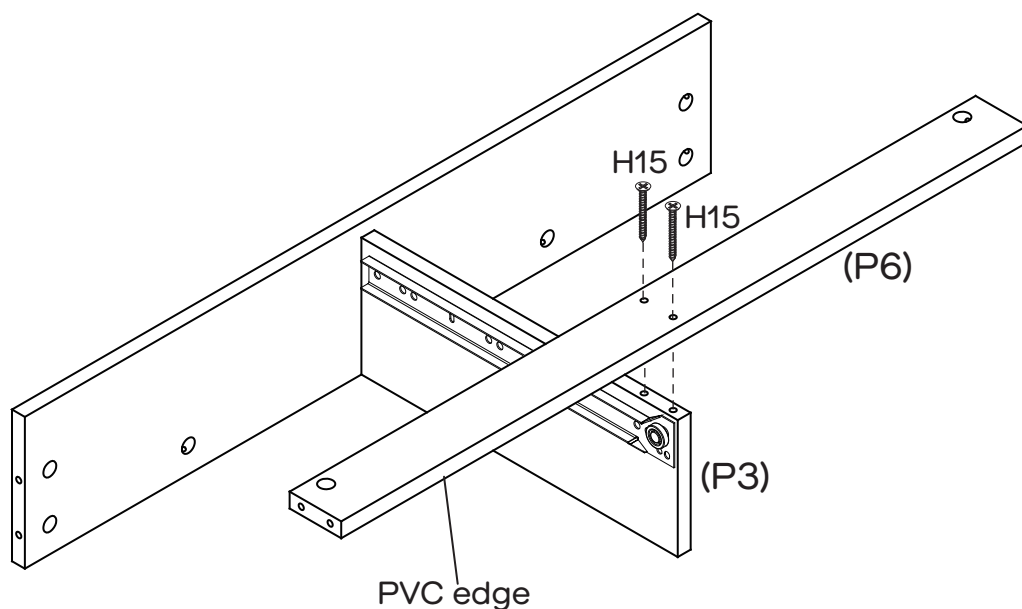
You will need	
	
2 x Wooden Screws (H15)	Phillips Head Screwdriver



Attach Rail (P6) to Divider (P3) with 2 x Wooden Screws (H15) using a Phillips head screwdriver.

Step 12

You will need	
	
1 x Small Dowel (H2)	3 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

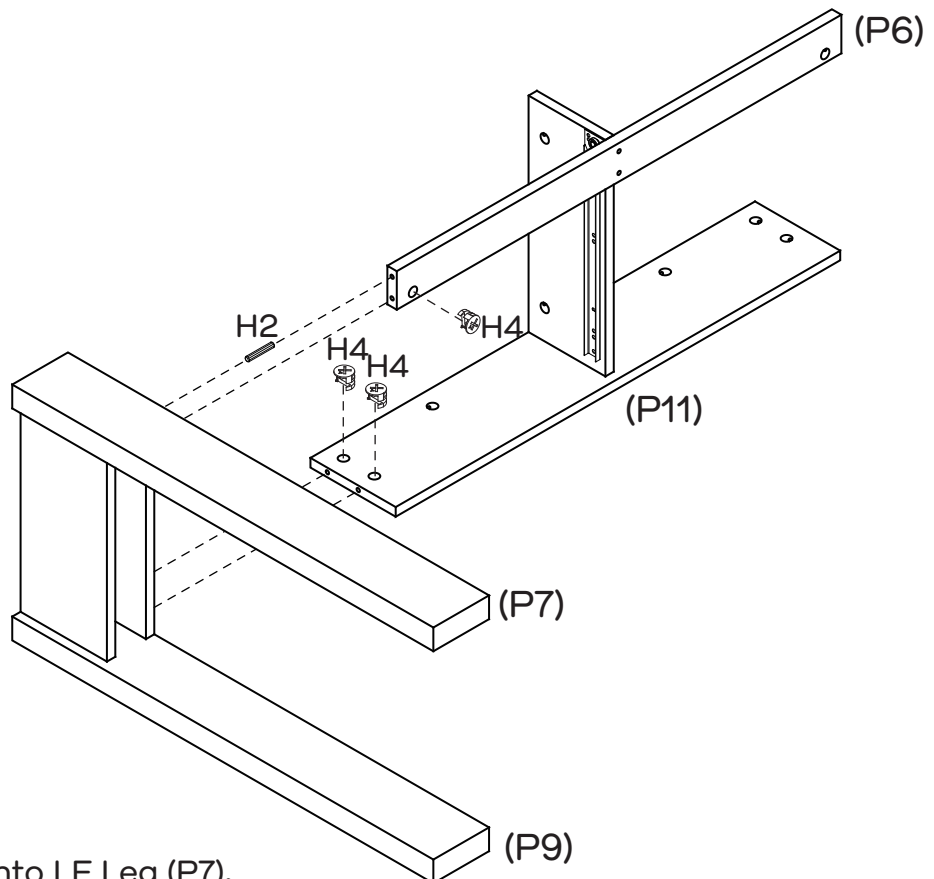

Insert 1 x Small Dowel (H2) into LF Leg (P7).




Insert 3 x Cam Nuts (H4) into the holes of Rail (P6) and Back Panel (P11).


Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Rail (P6) and Back Panel (P11) into place.

Tighten the cam nuts using a Phillips head screwdriver.

Step 13

You will need	
	
1 x Small Dowel (H2)	3 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

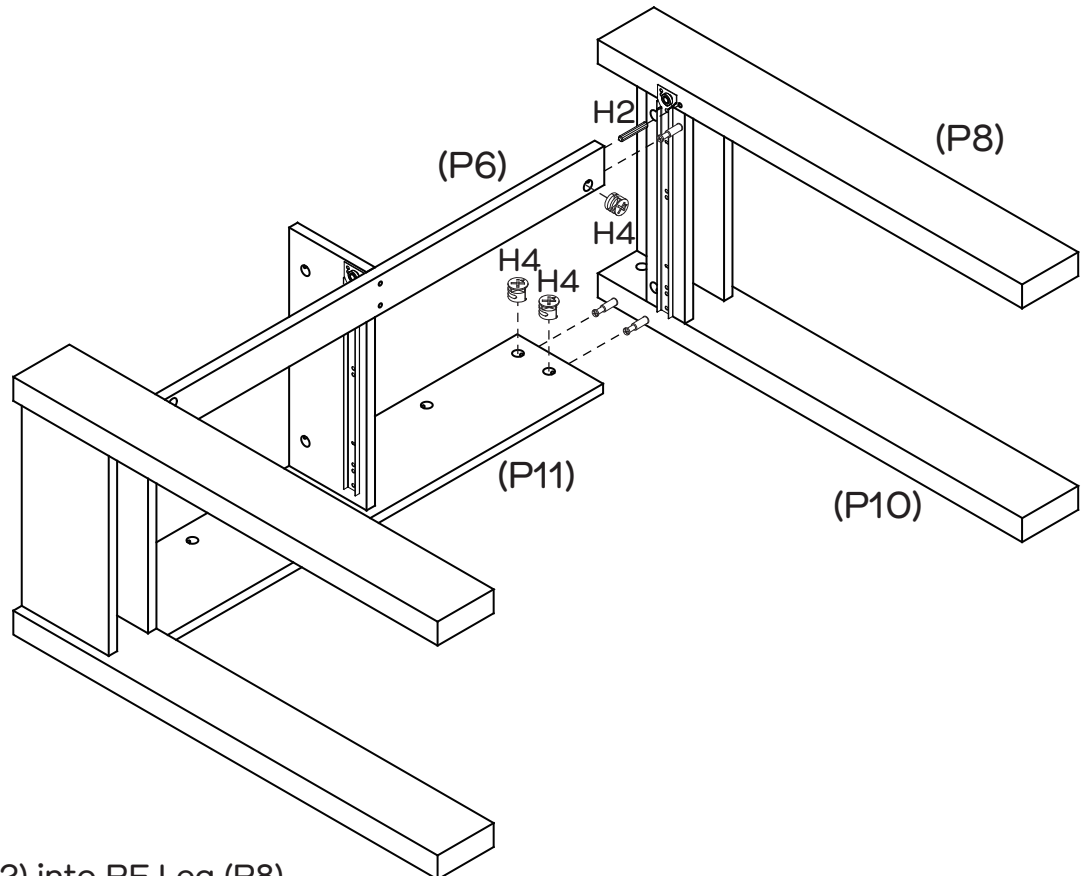



Insert 1 x Small Dowel (H2) into RF Leg (P8).


Insert 3 x Cam Nuts (H4) into the holes of Rail (P6) and Back Panel (P11).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach the right frame into place, and then tighten the cam nuts.



Step 14


You will need	
	
4 x Plastic Glides (H16)	Hammer

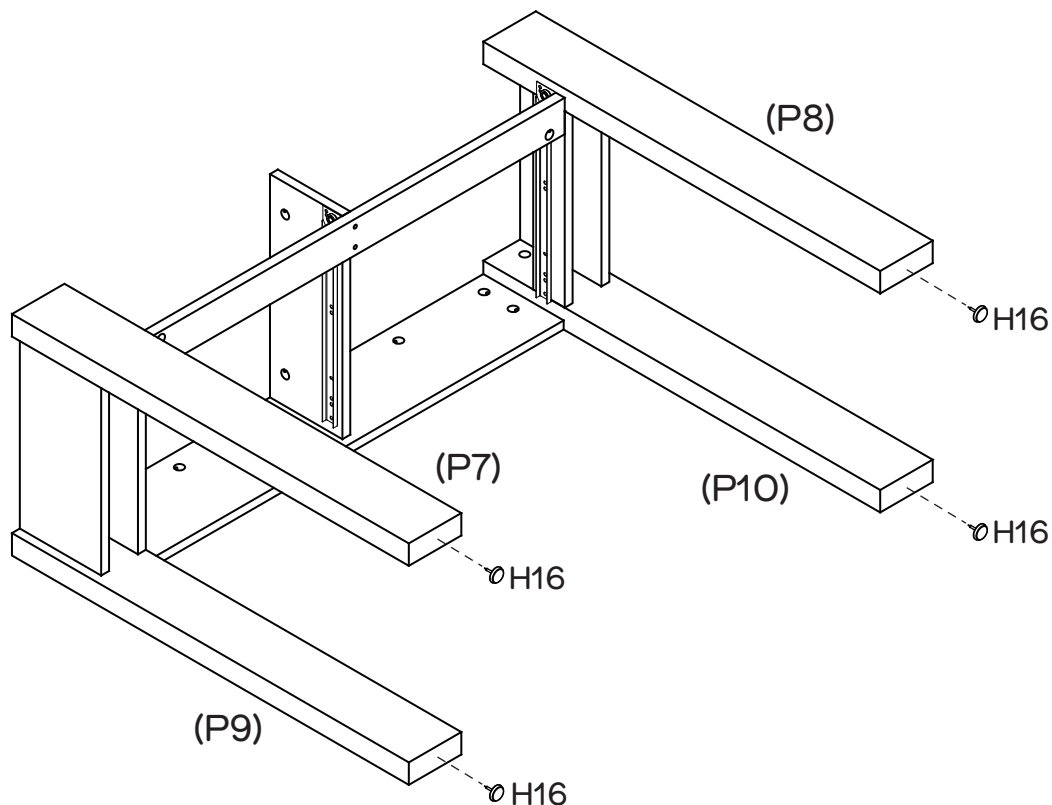

Hammer 4 x Plastic Glides (H16) on Legs (P7, P8, P9, P10) as shown.

Step 15

You will need	
	
8 x Dowels (H1)	6 x Small Dowels (H2)

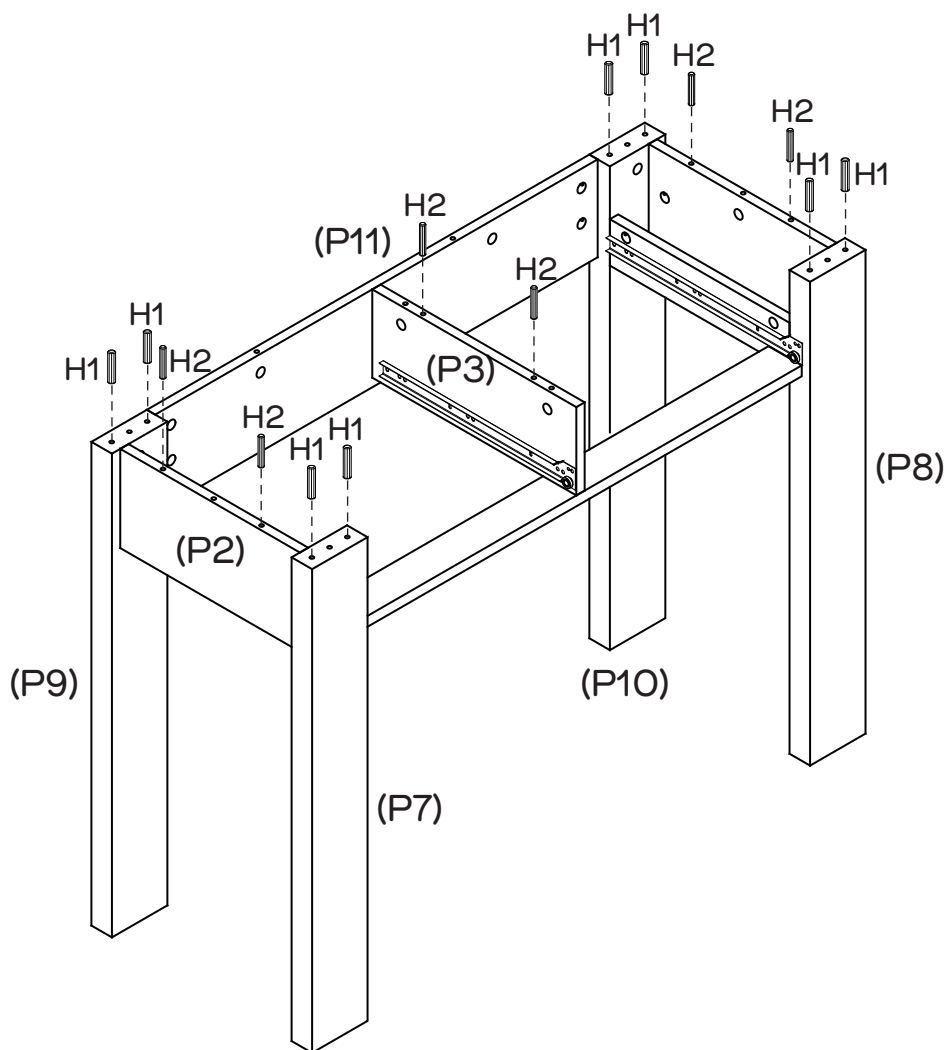




Carefully turn the frame over to an upright position.

Insert 8 x Dowels (H1) into Legs (P7, P8, P9, P10).

Insert 6 x Small Dowels (H2) into Side Panels (P2) and Divider (P3) as shown.



Step 16

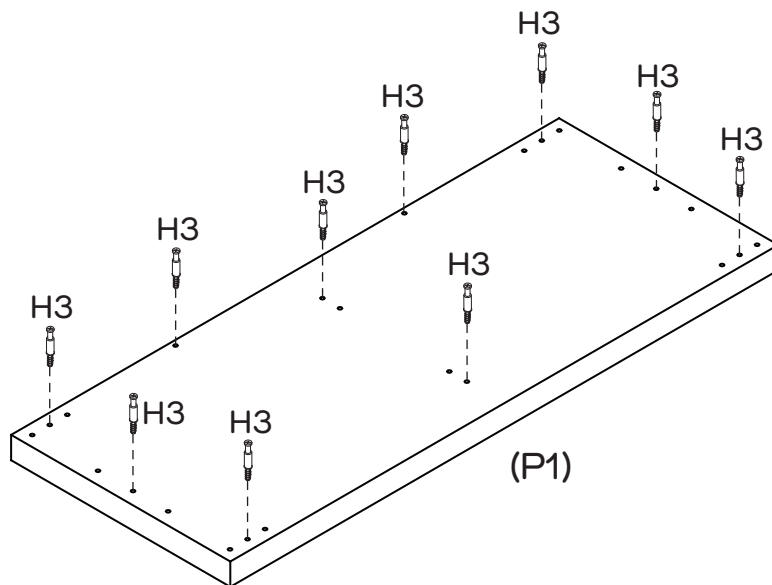
You will need	
	
10 x Cam Bolts (H3)	Phillips Head Screwdriver



Insert 10 x Cam Bolts (H3) into the holes of Top Panel (P1) as shown.



Step 17


You will need	
	
10 x Cam Nuts (H4)	Phillips Head Screwdriver

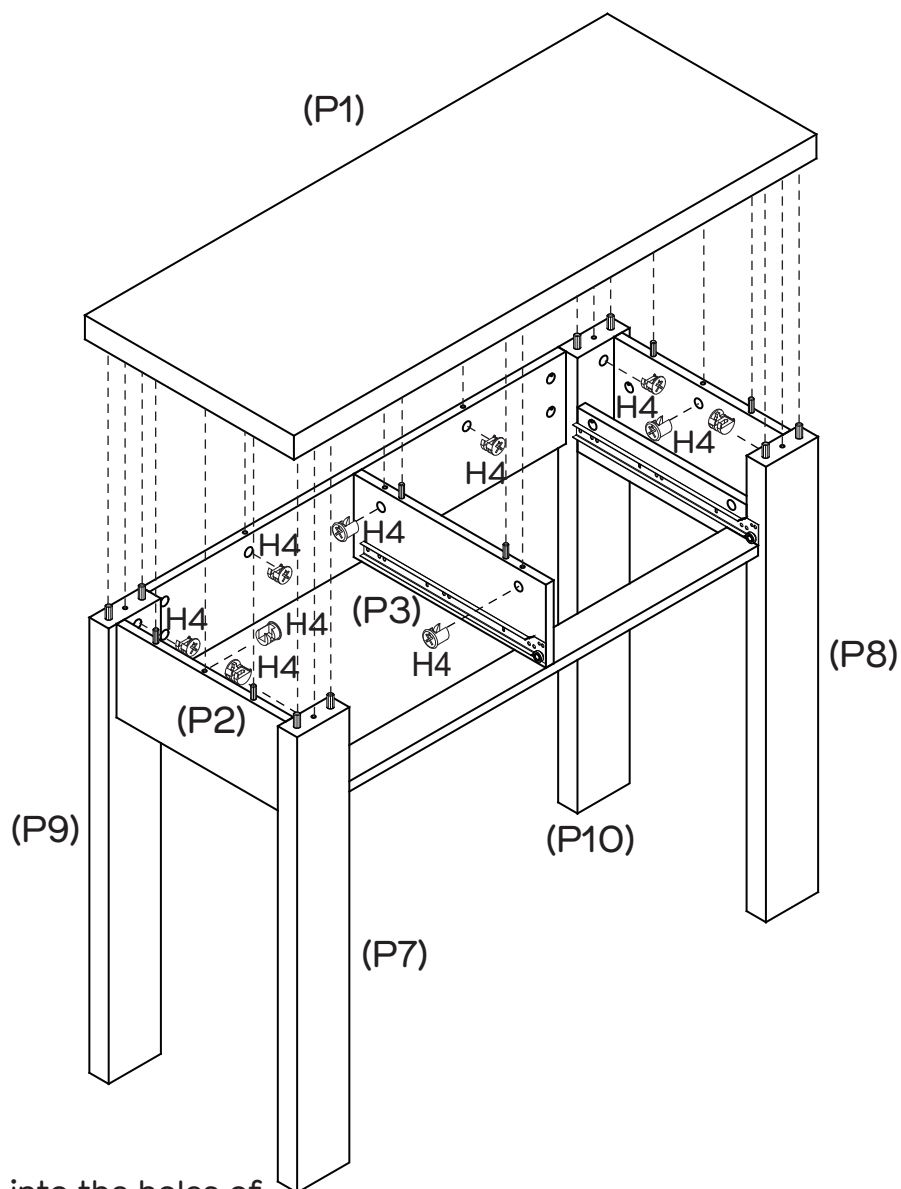

Insert 10 x Cam Nuts (H4) into the holes of Side Panels (P2), Divider (P3), Back Panel (P11) and Legs (P7, P8, P9, P10). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to the frame and then tighten the cam nuts using a Phillips head screwdriver.

Step 18


You will need	
	
4 x Small Cam Bolts (H10)	Phillips Head Screwdriver

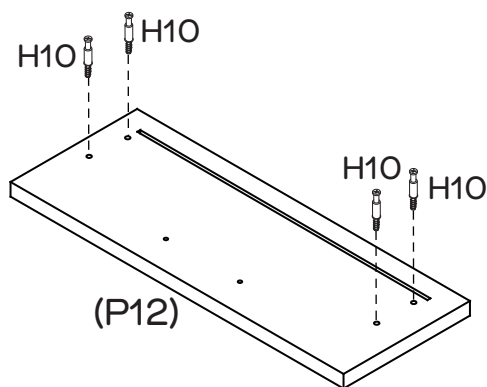

Screw 4 x Small Cam Bolts (H10) into Drawer Front (P12) with a Phillips head screwdriver.

Step 19


You will need	
	
4 x Small Cam Nuts (H11)	Phillips Head Screwdriver

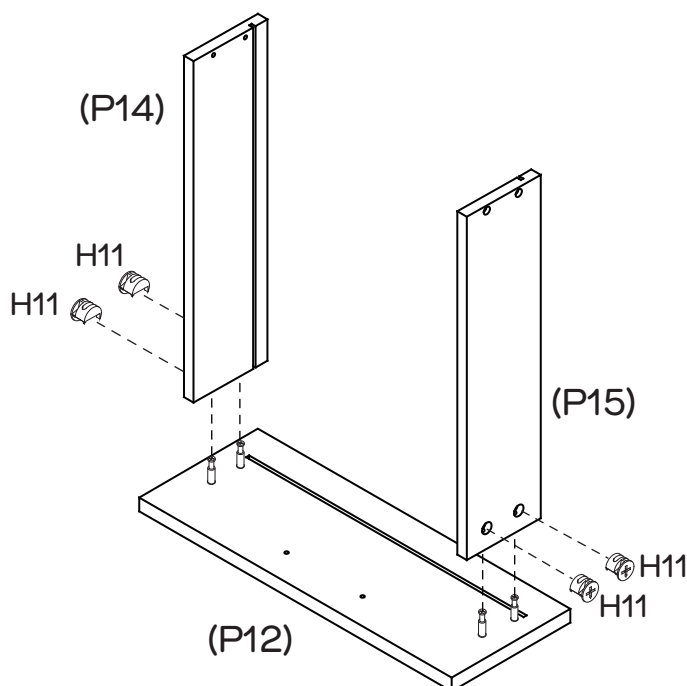

Insert 4 x Small Cam Nuts (H11) into the holes of Drawer Sides (P14, P15). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Align the holes together, secure Drawer Sides (P14, P15) into place and tighten the cam nuts using a Phillips head screwdriver.



Step 20

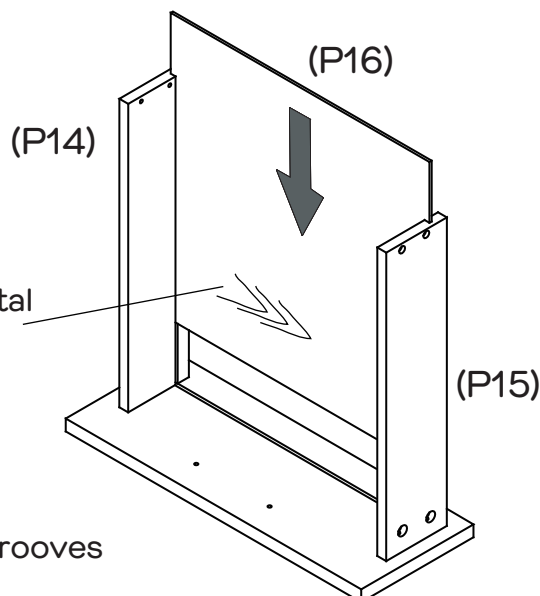Make sure the grain on drawer bottom is horizontal before sliding into groove.




Slide Drawer Base (P16) in through the grooves on Drawer Sides (P14, P15).





Step 21



You will need	
	
4 x Long Screws(H12)	Phillips Head Screwdriver

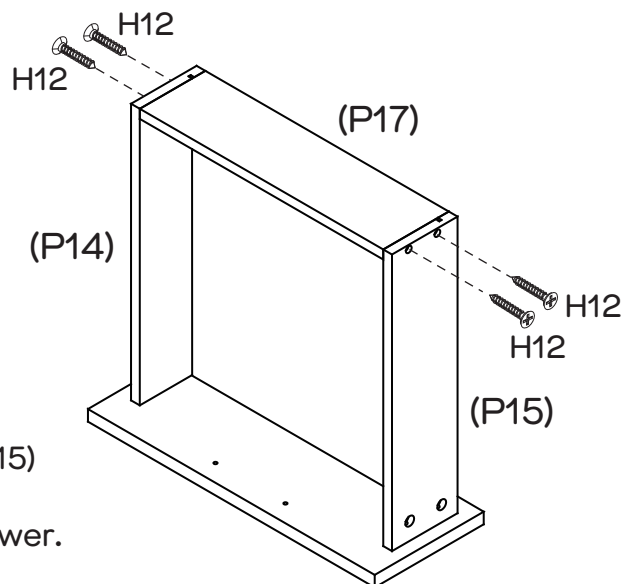Attach Drawer Back (P17) to Drawer Sides (P14, P15) with 4 x Long Screws (H12), make sure that the groove lines up the whole way around the drawer. Tighten Screws using a Phillips head screwdriver.






Step 22



You will need	
	
1 x DL Runner (H8)	1 x DR Runner (H9)
	
4 x Small Screws (H5)	Phillips Head Screwdriver

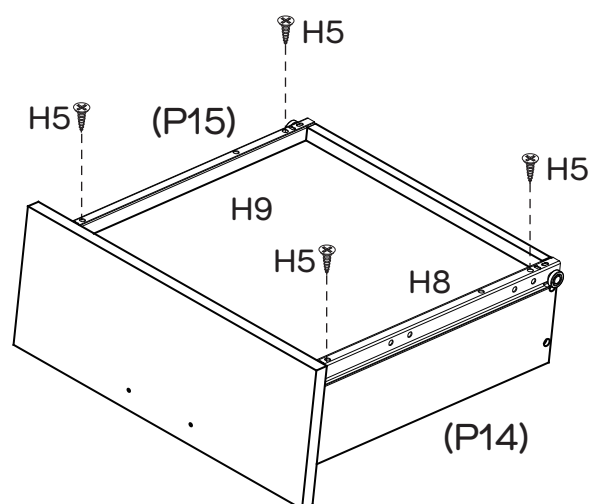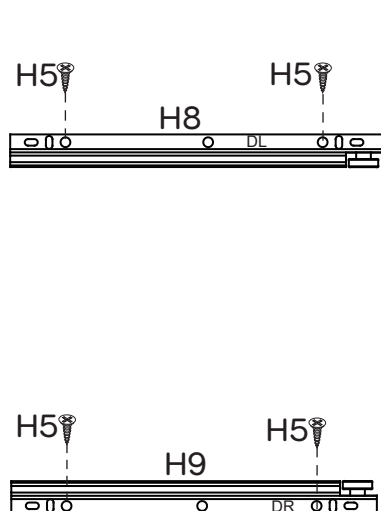

Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P14) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P15) with 4 x Small Screws (H5). Tighten Screws using a Phillips head screwdriver.


Step 23

You will need	
	
1 x Handle (H13)	2 x Round Head Bolts (H14)
	
Phillips Head Screwdriver	

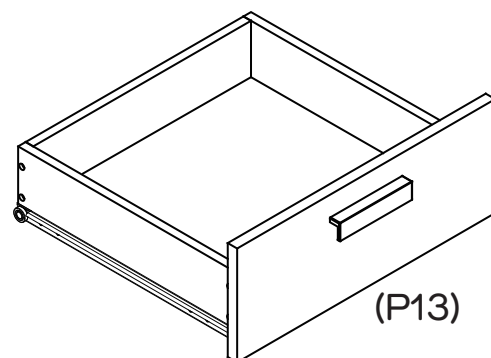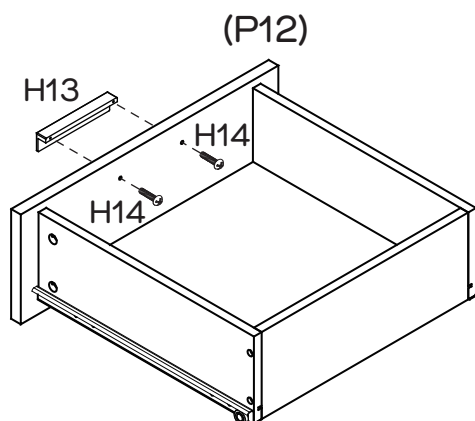

Attach 1 x Handle (H13) to Drawer Front (P12) with 2 x Round Head Bolts (H14). Tighten round head bolts using a Phillips head screwdriver. Repeat Step 18 to Step 23 with Drawer Front (P13) to assemble the other drawer.

Step 24


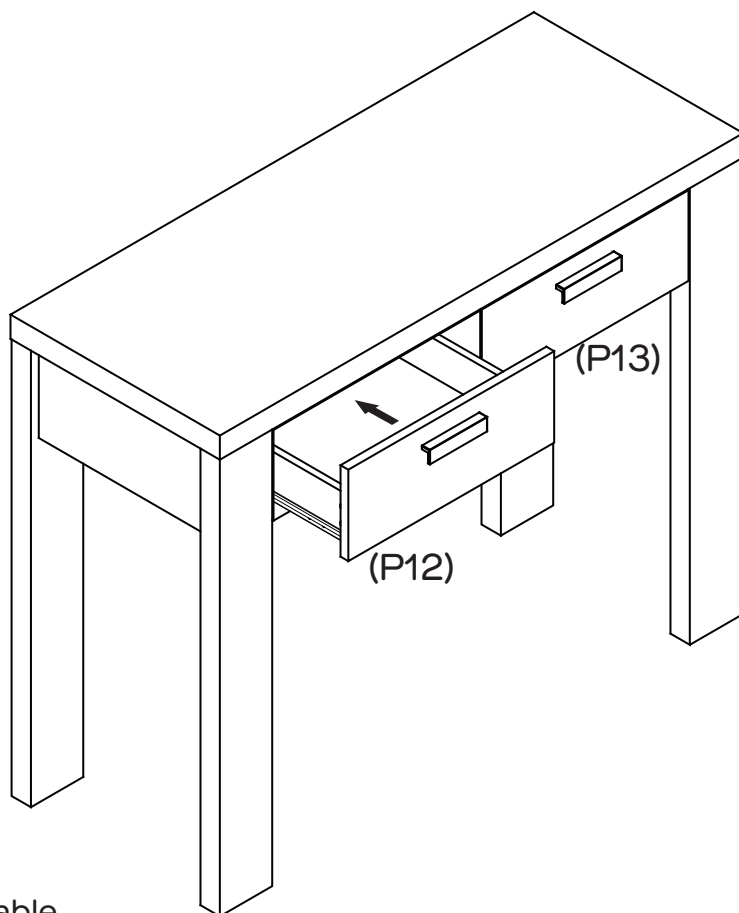


Put the drawers into the table.

Step 25

We strongly advise that you use the wall safety strap provided to prevent the unit toppling

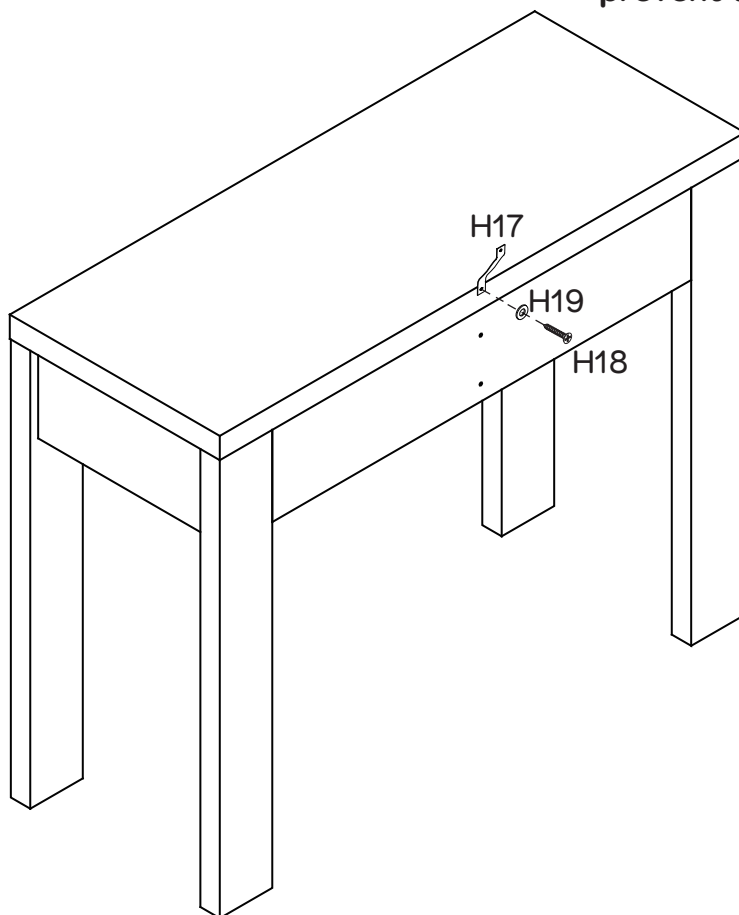

You will need	
1 x Safety Strap (H17)	1 x Screw (H18)
1 x Washer (H19)	Phillips Head Screwdriver





Use Screw (H18) and Washer (H19) to attach Safety Strap (H17) securely on Top Panel (P1) as shown.

fantasticfurniture.com.au


Step 26

You will need	
	
1 x Washer (H19)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

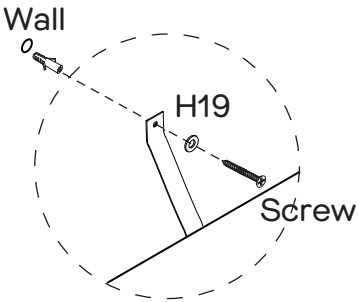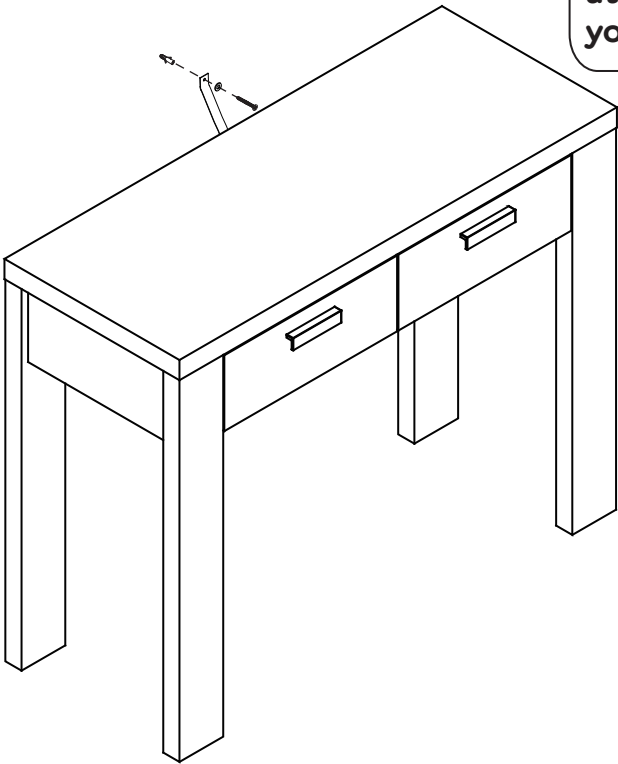

Move the table to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

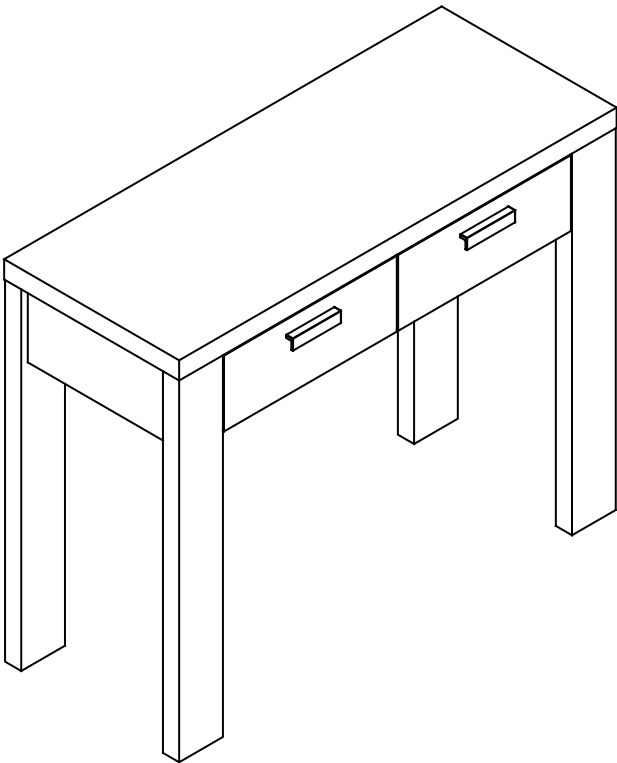

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.