




**Fantastic  
Furniture**

Version 1.2

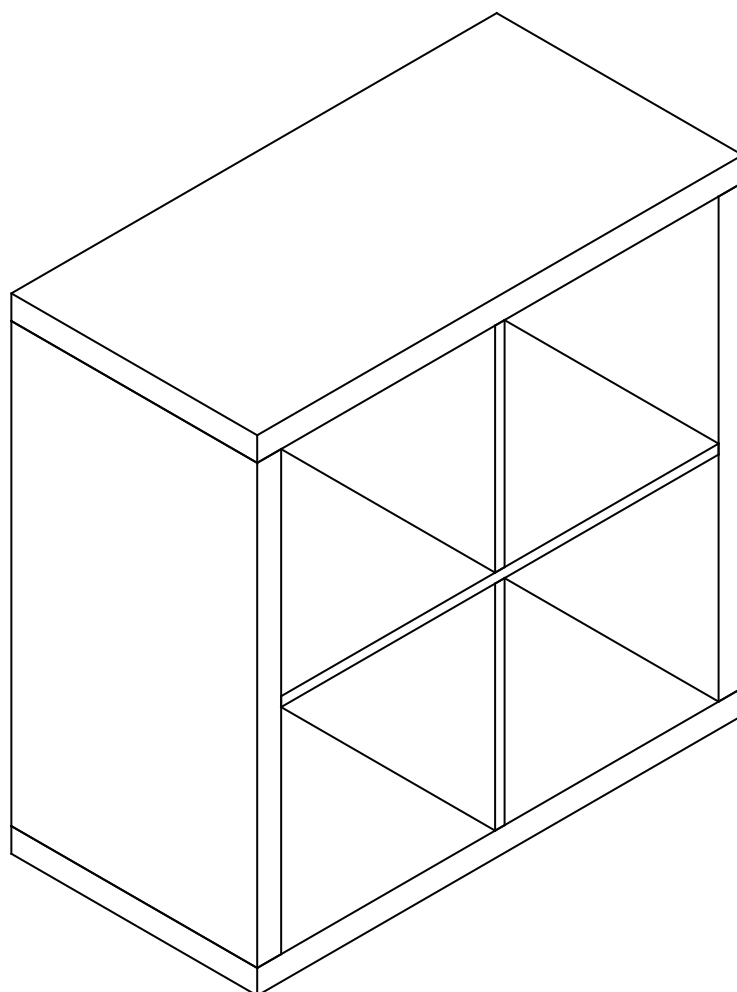

**Coda**  
Bookcase 4 Shelf

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

# Secure it!

Preventing furniture tip-over accidents



## WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY.

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Connecting attachments for your wall are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what wall connections to use.


**Recommended weight capacity: 10kg/Shelf**

## ⚠ WARNING

### Children have died from furniture tipover.

- ALWAYS secure this furniture with an anchor device.
- NEVER allow children to stand, climb or hang on drawers, doors, or shelves.
- NEVER open more than one drawer at a time.
- Place heavy items down low.

**NEVER put a TV on this furniture**




### Wall anchoring guide




**For plasterboard**  
(with available wood stud)

**Securing method:**  
Self drilling plasterboard anchor.



**For plasterboard**  
(with available wood stud)

**Securing method:**  
Screw inserted directly into stud.



**For masonry wall**

**Securing method:**  
Solid wall: Plug with screw  
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



# Fantastic Furniture

## Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.

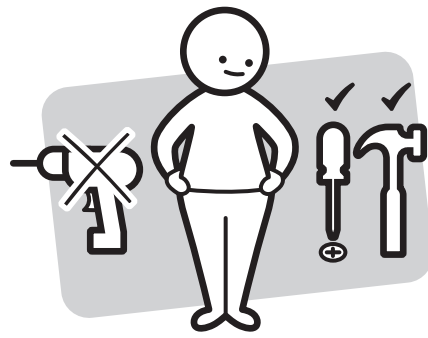

Make sure you have all the required tools. Never use power tools unless instructed.

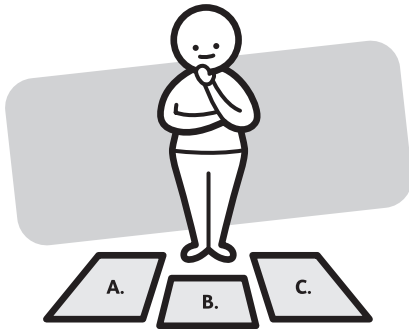

Identify and lay out all of the components before you begin assembly.

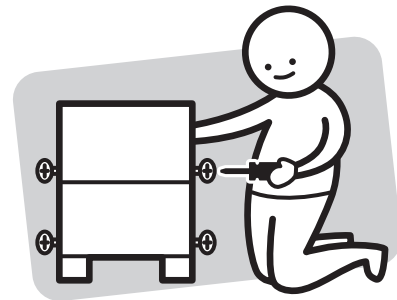

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need


to assemble the product



DO NOT USE




**Other tools you need:**  
Phillips Head Screwdriver;  
Hammer

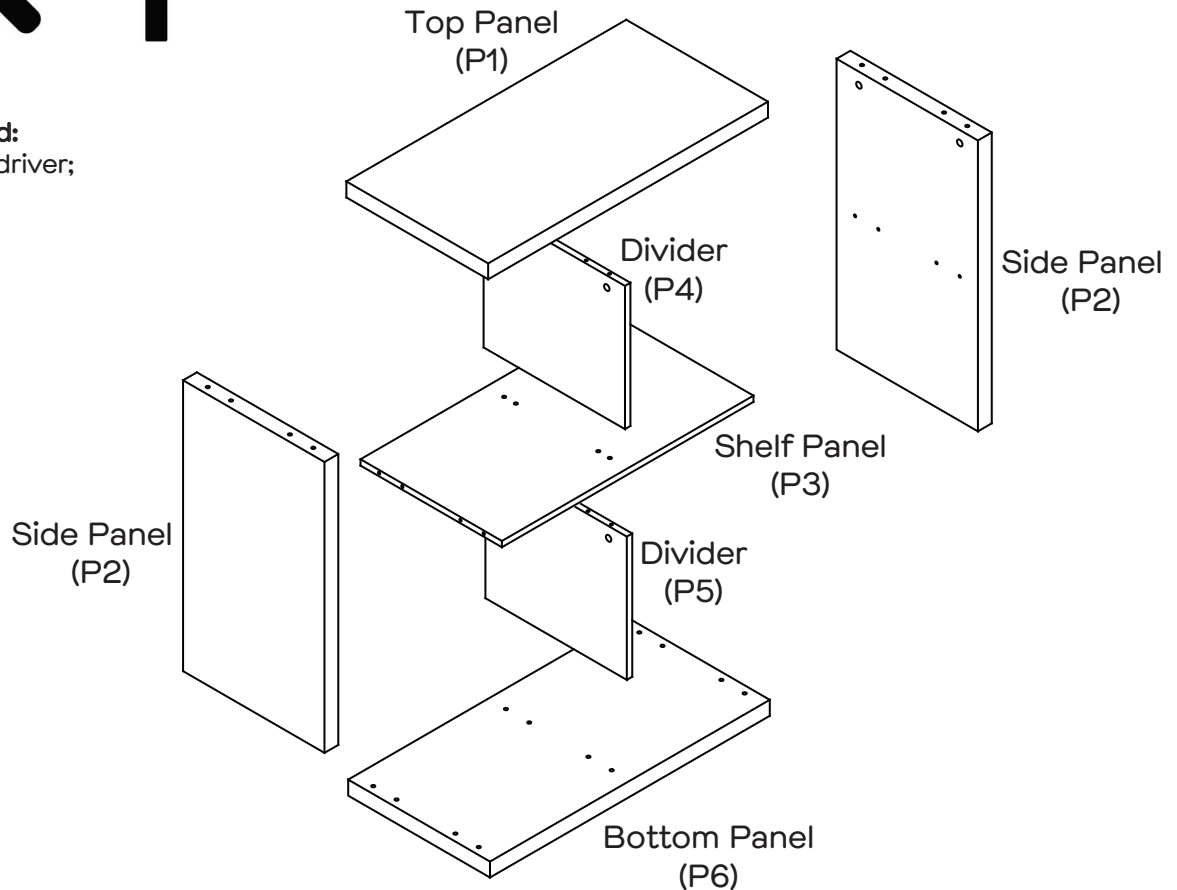



## Parts list


Top Panel (P1);  
2 x Side Panels (P2);  
Shelf Panel (P3);  
Divider (P4);  
Divider (P5);  
Bottom Panel (P6);
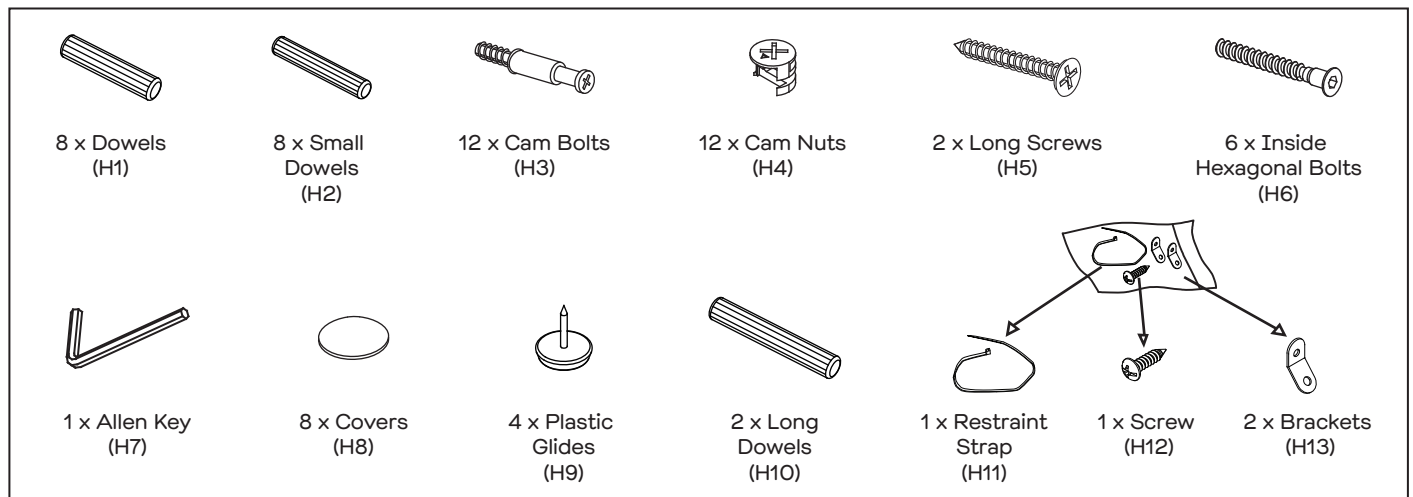
## Hardware pack





# Step 1

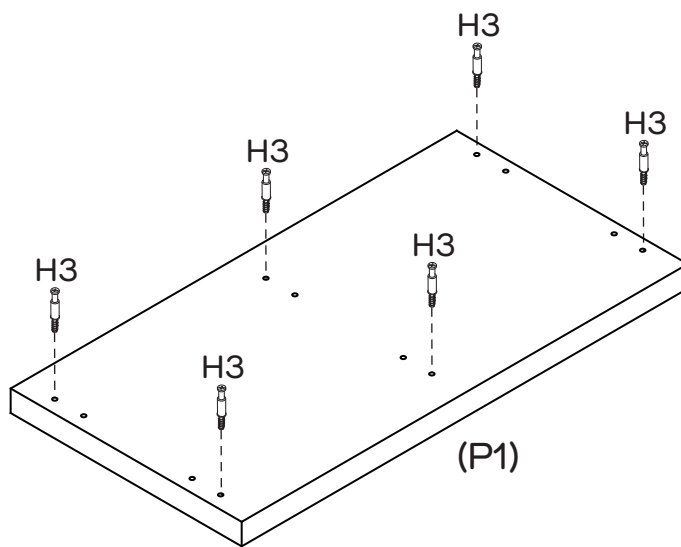
You will need	
	
6 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 6 x Cam Bolts (H3) into Top Panel (P1) as shown.



# Step 2

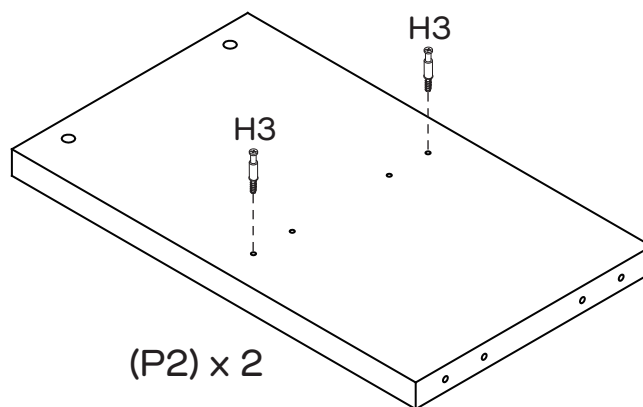
You will need	
	
4 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 2 x Cam Bolts (H3) into each Side Panel (P2) as shown.




# Step 3

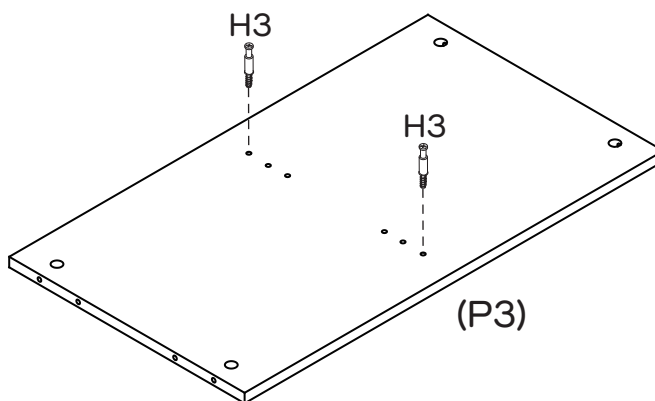
You will need	
	
2 x Cam Bolts (H3)	Phillips head screwdriver



Attach 2 x Cam Bolts (H3) into Shelf Panel (P3) as shown.




## Step 4

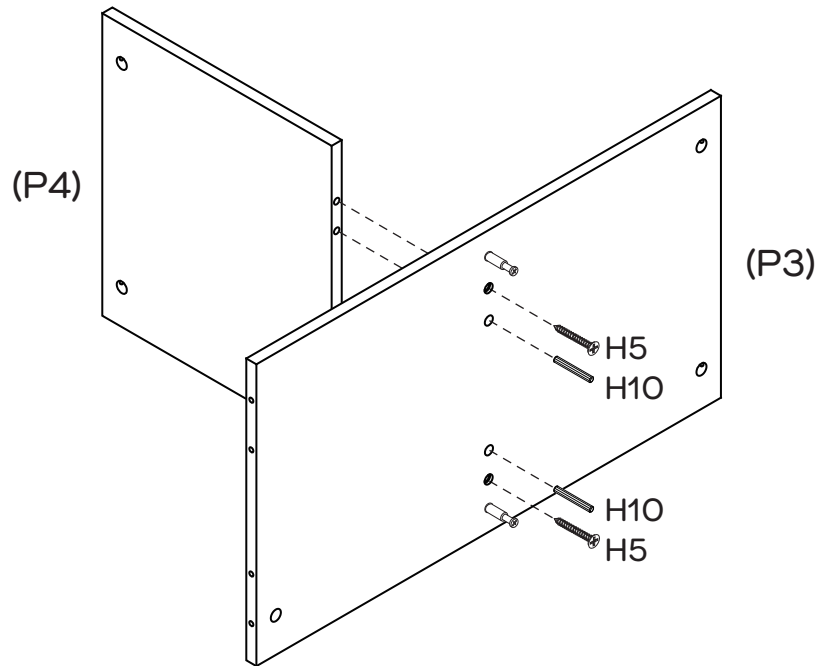You will need	
	
2 x Long Dowels (H10)	2 x Long Screws (H5)
	
Phillips Head Screwdriver	




Insert 2 x Long Dowels (H10) into the holes of Divider (P4) through Shelf Panel (P3) as shown. Attach Divider (P4) to Shelf Panel (P3) with 2 x Long Screws (H5) using a Phillips Head Screwdriver.


## Step 5

You will need	
	
2 x Cam Nuts (H4)	2 x Covers (H8)
	
Phillips Head Screwdriver	

This is how a cam nut works.....



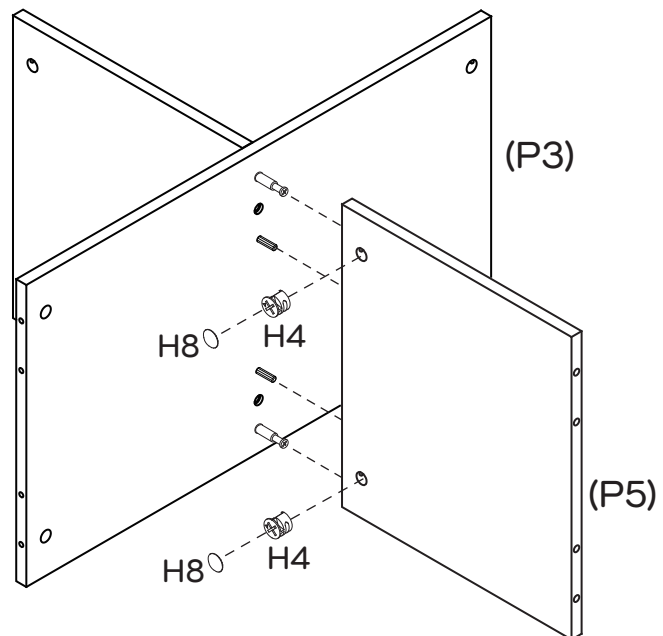


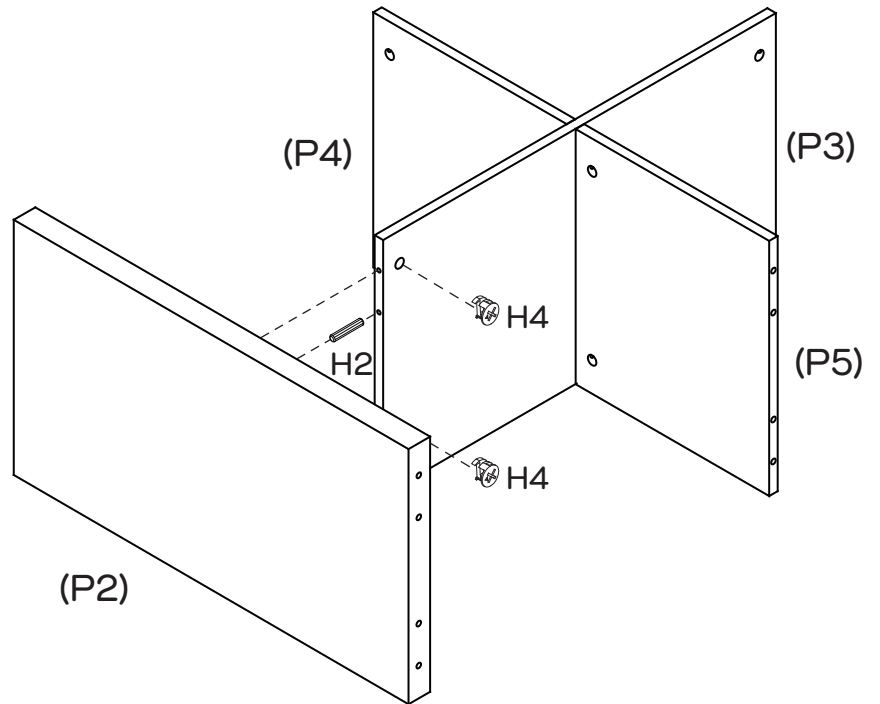
The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Insert 2 x Cam Nuts (H4) into the holes of Divider (P5). Rotate the Cam Nuts so the arrows point towards the incoming Cam Bolts. Push Divider (P5) into place and then tighten the Cam Nuts using a Phillips Head Screwdriver. Seal the holes with 2 x Covers (H8).




## Step 6


You will need	
	
2 x Small Dowels (H2)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 2 x Small Dowels (H2) into the holes of Shelf Panel (P3).  
 Insert 2 x Cam Nuts (H4) into the holes of Shelf Panel (P3).  
 Rotate the Cam Nuts so the arrows point towards the incoming Cam Bolts.  
 Push Side Panel (P2) into place and then tighten the Cam Nuts using a Phillips Head Screwdriver.

## Step 7


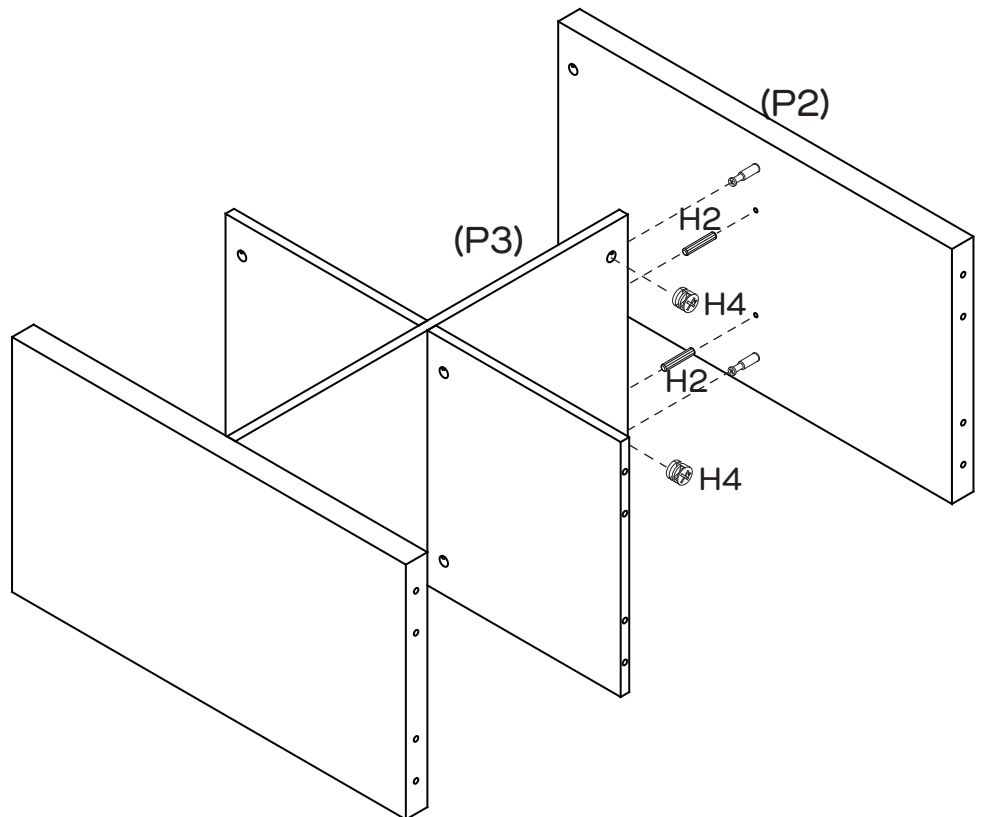



You will need	
	
2 x Small Dowels (H2)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	




Insert 2 x Small Dowels (H2) into the holes of Shelf Panel (P3).  
 Insert 2 x Cam Nuts (H4) into the holes of Shelf Panel (P3).  
 Rotate the Cam Nuts so the arrows point towards the incoming Cam Bolts.  
 Push Side Panel (P2) into place.  
 Tighten the Cam Nuts using a Phillips Head Screwdriver.







# Step 8

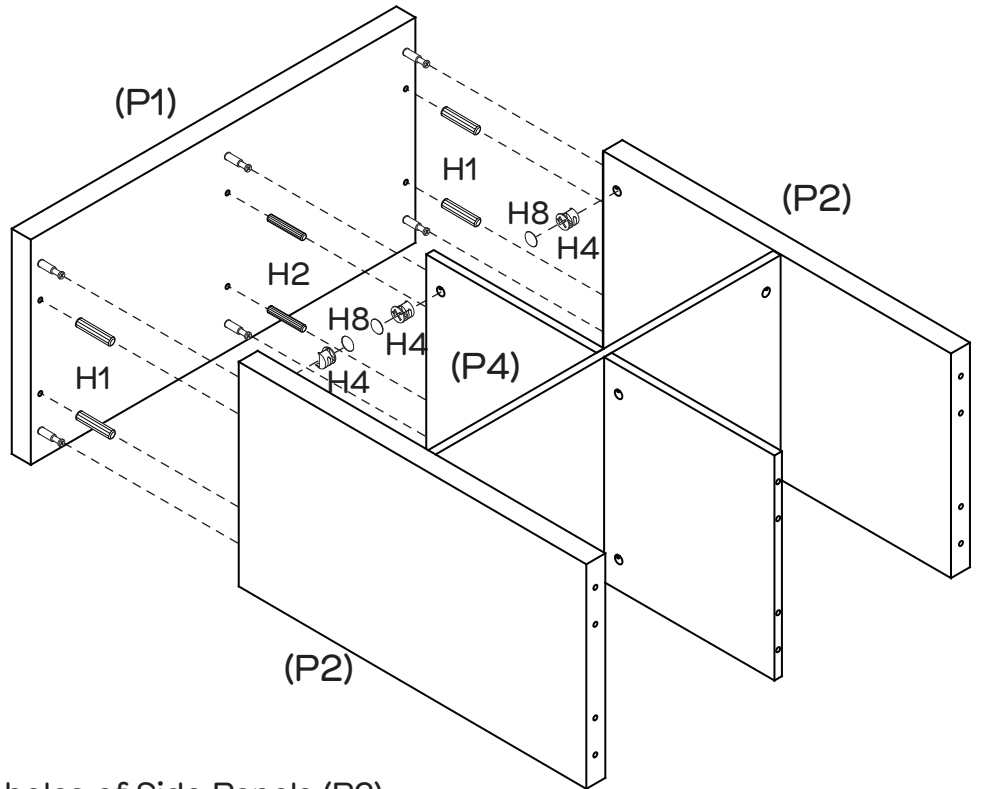
You will need	
	
4 x Dowels (H1)	2 x Small Dowels (H2)
	
6 x Cam Nuts (H4)	6 x Covers (H8)
	
Phillips Head Screwdriver	



Insert 4 x Dowels (H1) into the holes of Side Panels (P2).  
 Insert 2 x Small Dowels (H2) into the holes of Divider (P4).  
 Insert 6 x Cam Nuts (H4) into the holes of Side Panels (P2) and Divider (P4),  
 Rotate the Cam Nuts so the arrows point towards the incoming Cam Bolts.  
 Attach Top Panel (P1) into place and then tighten the Cam Nuts using a Phillips Head Screwdriver. Seal the holes with 6 x Covers (H8) as shown.



# Step 9

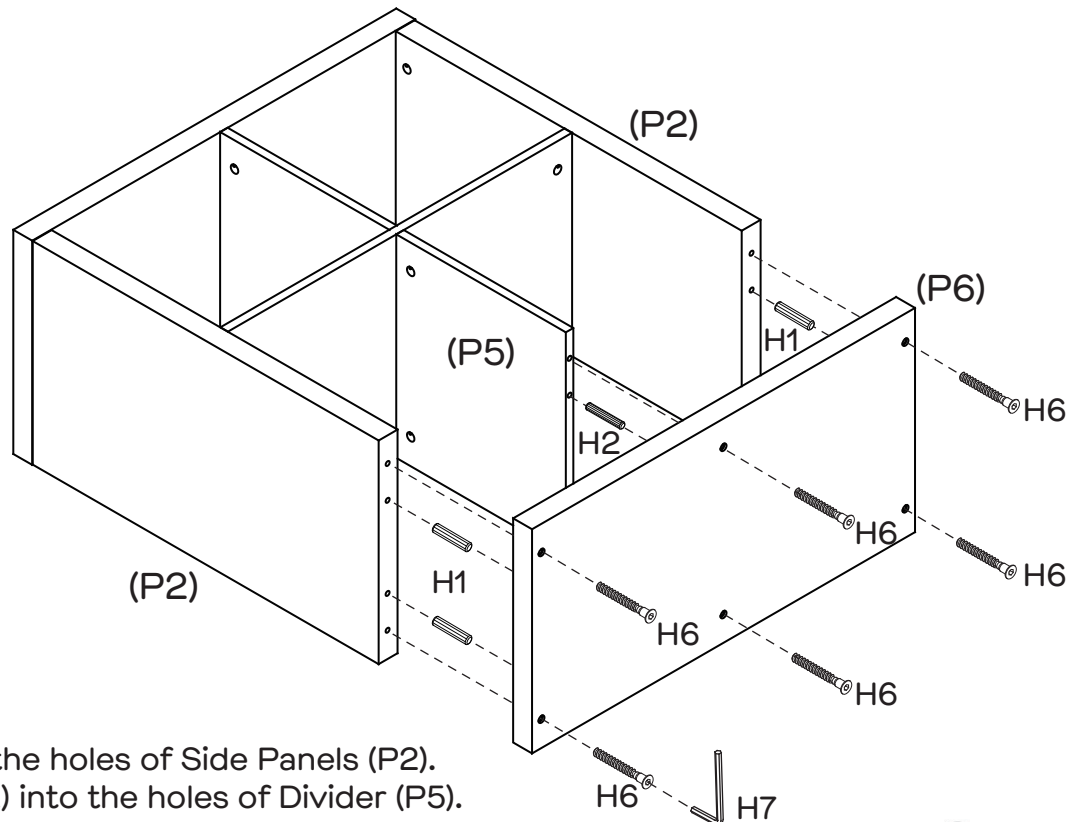
You will need	
	
4 x Dowels (H1)	2 x Small Dowels (H2)
	
6 x Inside Hexagonal Bolts (H6)	1 x Allen Key (H7)



Insert 4 x Dowels (H1) into the holes of Side Panels (P2).  
 Insert 2 x Small Dowels (H2) into the holes of Divider (P5).  
 Attach Bottom Panel (P6) to Side Panels (P2) and Divider (P5) with  
 6 x Inside Hexagonal Bolts (H6) using an Allen Key (H7).





## Step 10

You will need	
	
4 x Plastic Glides (H9)	Hammer

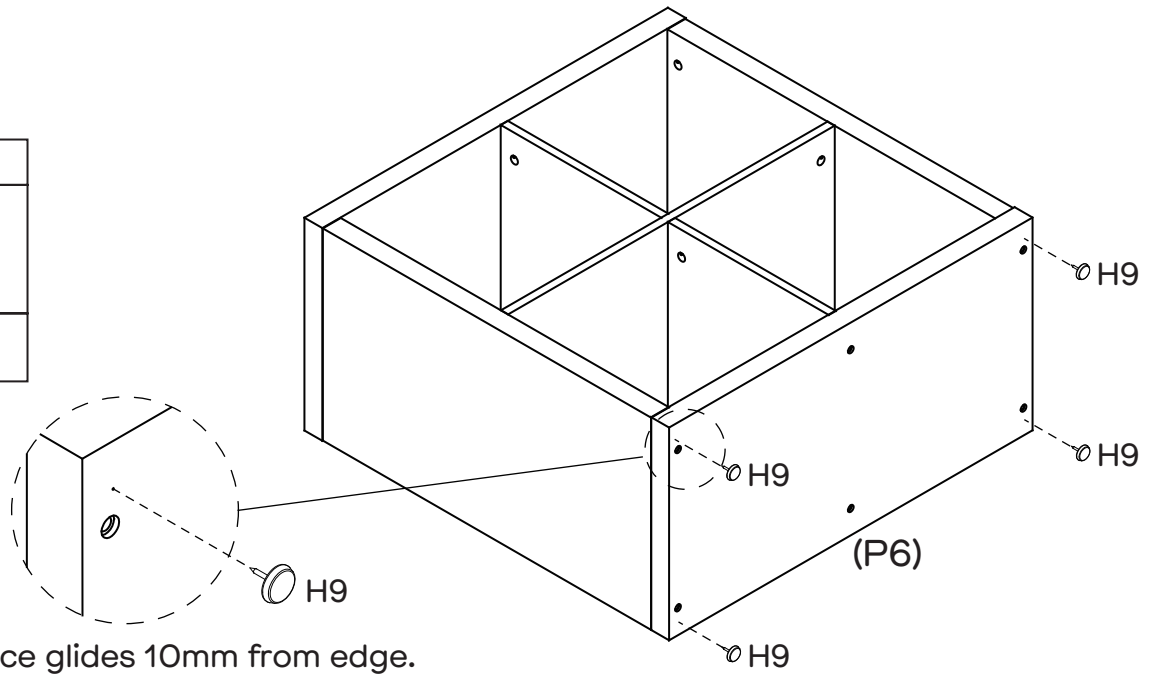


Attach 4 x Plastic Glides (H9) to the bottom of Bottom Panel (P6) with a Hammer.

## Step 11

You will need	
	
1 x Restraint Strap (H11)	1 x Screw (H12)
	
2 x Brackets (H13)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

We strongly advise that you use the wall safety strap provided to prevent the unit toppling

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

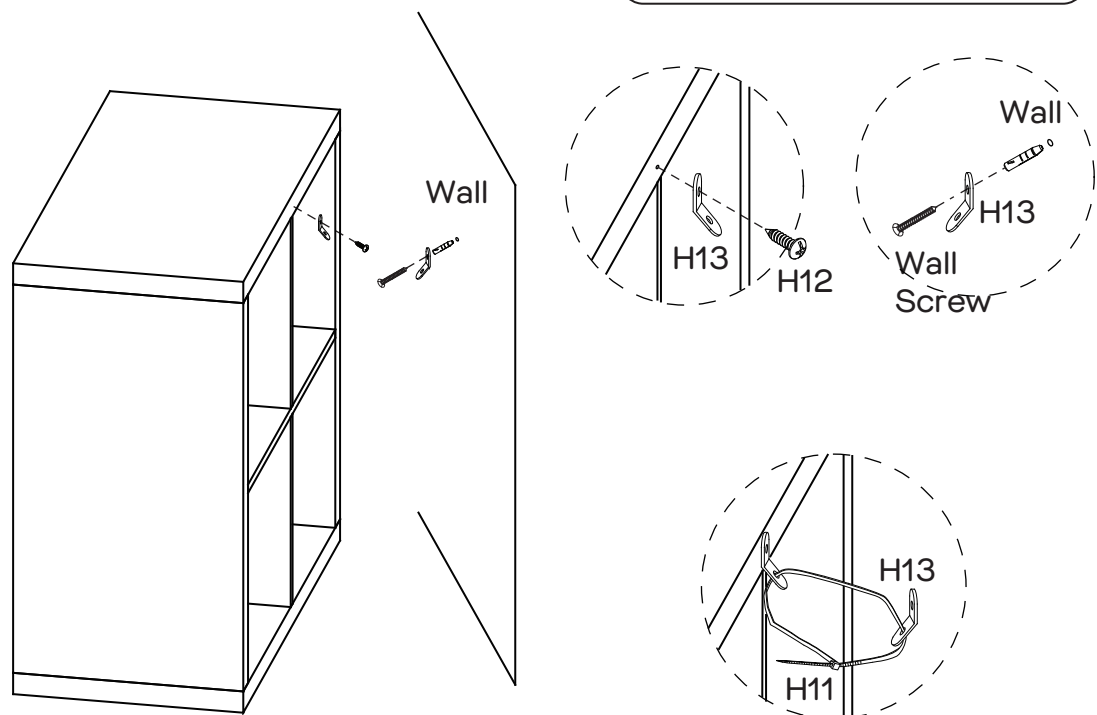


Carefully turn the bookcase over to an upright position.

Attach 1 x Bracket (H13) securely to back of Top Panel (P1) with 1 x Screw (H12) through the smaller hole.

Align the opposite wall Bracket about 20mm lower than the one attached to the bookcase so the Bracket can't be seen.

Using appropriate wall connection fixtures, secure the bracket to the wall and thread the Restraint Strap through it.

Be careful not to over tighten the strap which would cause the unit to lean.

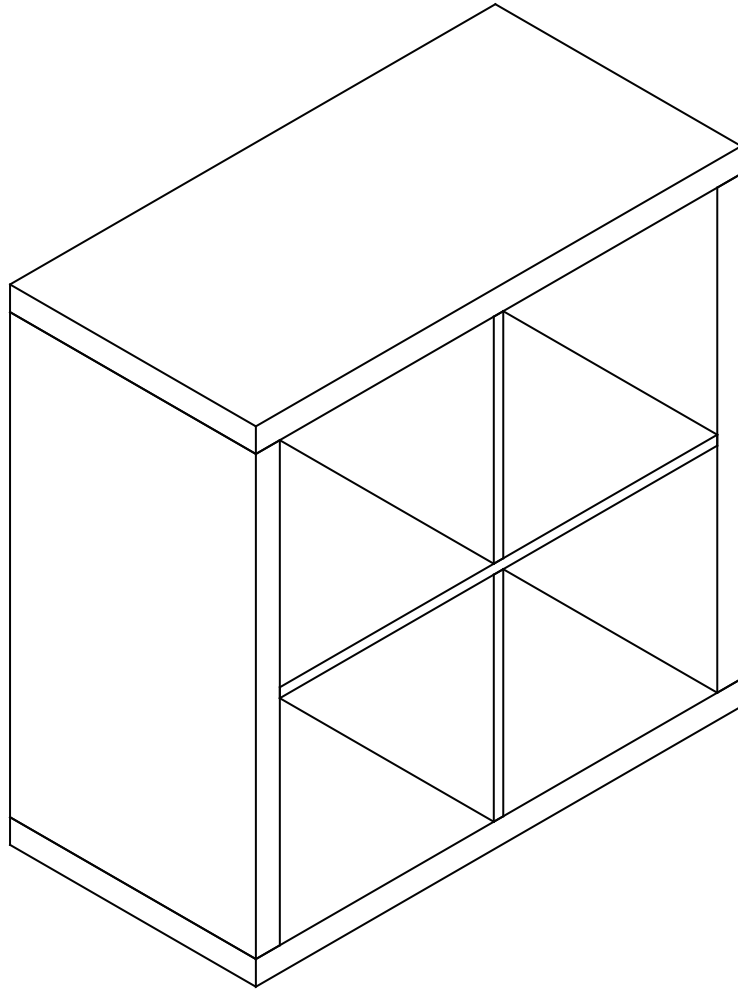

## **Job Complete!**

In the interest of our environment please dispose of all packaging thoughtfully.