




**Fantastic  
Furniture**

Version 1.0

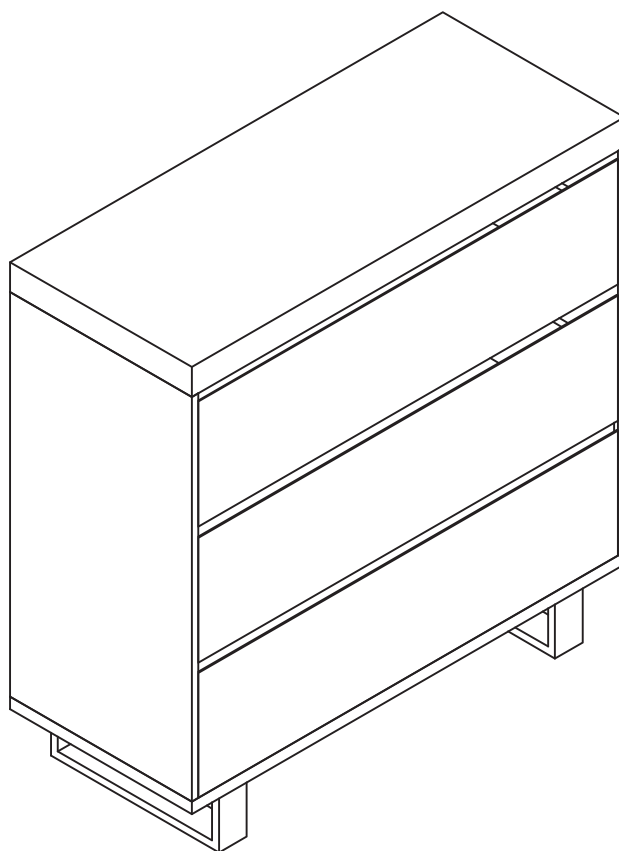

# Bridge

## Tallboy 3 Drawer Oak

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)



**Warning: Ensure the wall strap is attached to avoid serious injury.**

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

## **Looks like you've found your Fantastic!**

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



# **Fantastic Furniture**

### **Love it? Share it!**


Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.

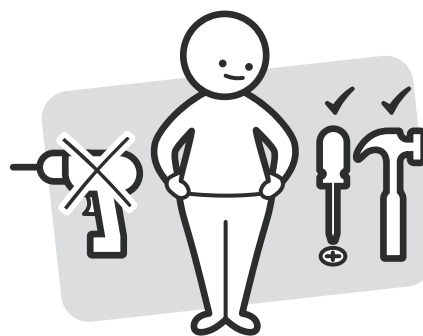

Make sure you have all the required tools. Never use power tools unless instructed.

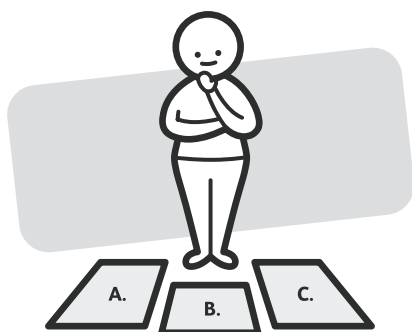

Identify and lay out all of the components before you begin assembly.

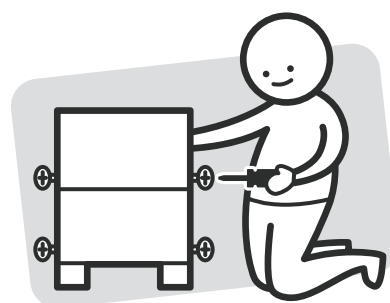

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need

## to assemble the product



DO NOT USE




### Other tools you need:

Phillips head screwdriver;  
Hammer

### Parts list

Top Panel (P1)  
Bottom Panel (P2)  
Right Panel (P3)  
Left Panel (P4)  
2 x Back Panels (P5)  
3 x Support Panels (P6)  
Back Support Panel (P7)  
3 x Drawer Doors (P8)  
3 x Drawer Backs (P9)  
3 x Drawer Left Panels (P10)  
3 x Drawer Right Panels (P11)  
3 x Drawer Bottoms (P12)  
3 x Drawer Supports (P13)  
2 x Legs (P14)

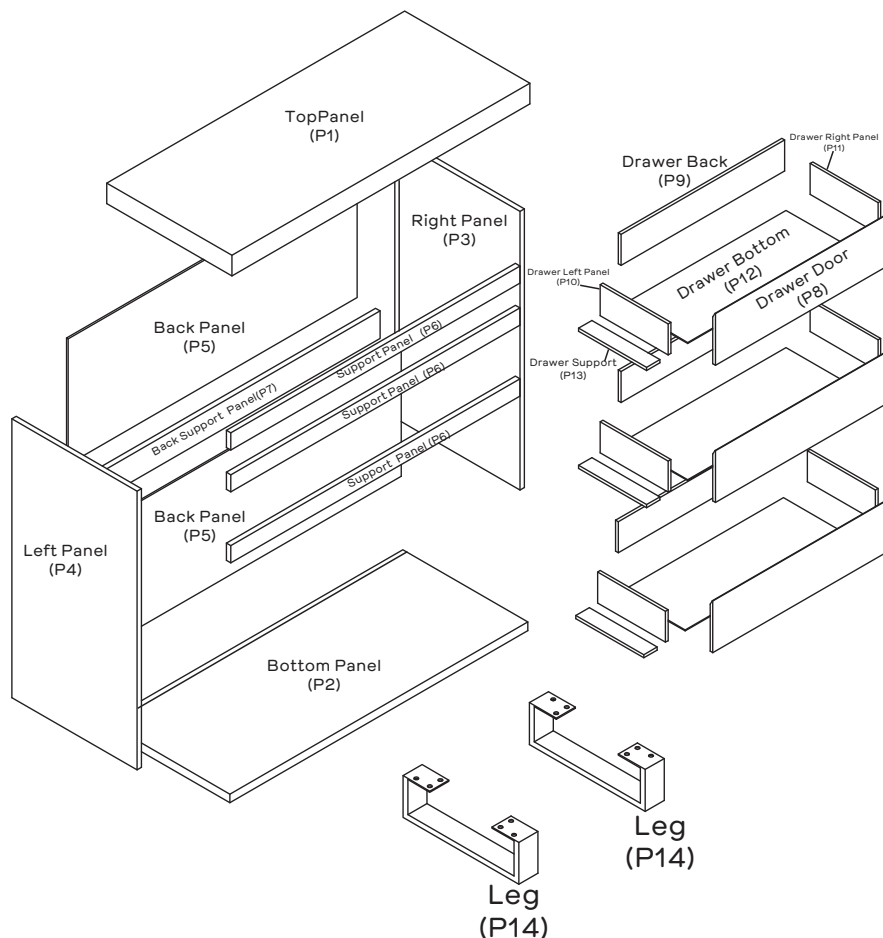






## Hardware Pack

36 x Cam Bolts (H1)	36 x Cam Nuts (H2)	18 x Dowels (H3)	12 x Small Washers (H4)	12 x Bolts (H5)	36 x Short Screws (H6)
1 x Allen Key (H7)	4 x Levelling Feet (H8)	3 x Left Runner Track (H9-1)	3 x Right Runner Track (H9-2)	3 x Left Runner (H9-3)	3 x Right Runner (H9-4)
12 x Long Screws (H10)	12 x Wedges (H11)	4 x Washers (H12)	2 x Wall Straps (H13)	2 x Medium Screws (H14)	

# Step 1

You will need:

	
12 x Small Washers (H4)	12 x Bolts (H5)
	
1 x Allen Key (H7)	4 x Levelling Feet (H8)

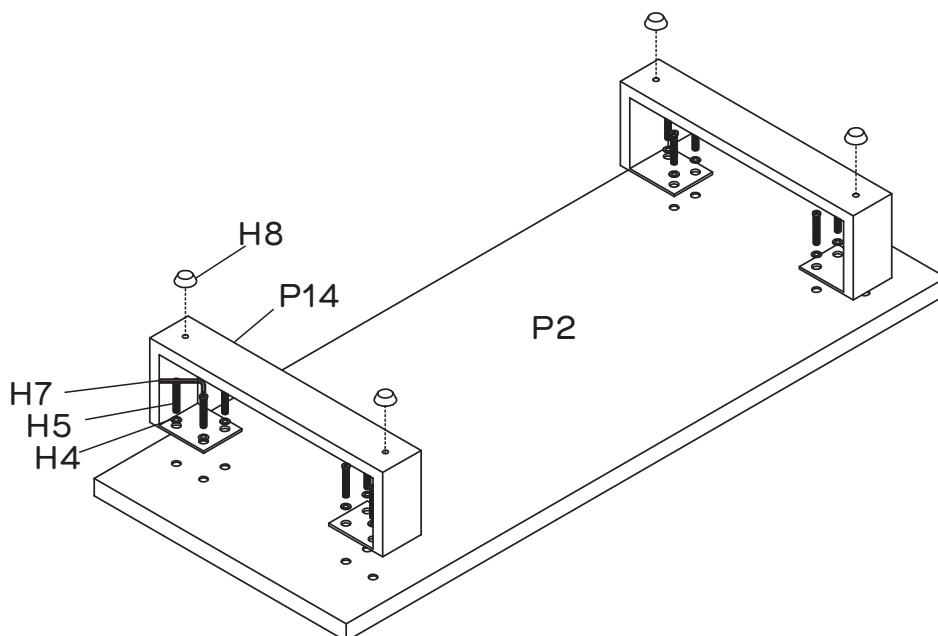




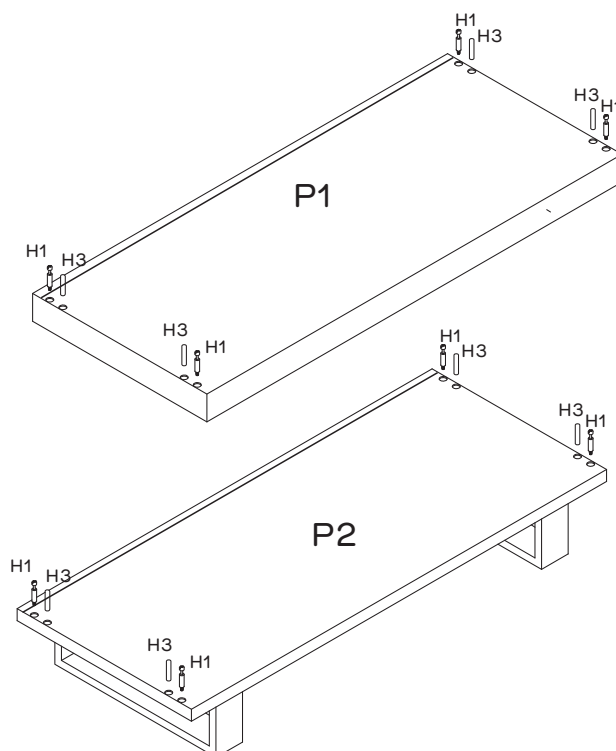
Using 12 x bolts (H5) and 12 x small washers (H4), secure the 2 x legs (P14) to the bottom panel (P2), tightening completely with allen key (H7).

Screw in 4 x levelling feet (H8) into the bottom of the 2 x legs (P14) as shown. Ensure they are secure.

# Step 2

You will need:

	
8 x Cam Bolts (H1)	8 x Dowels (H3)
	
Phillips Head Screwdriver	



TWO PEOPLE



REQUIRED


With assistance, carefully turn the bottom panel upright.

Insert 4 x dowels (H3) into the bottom panel (P2). Secure 4 x cam bolts (H1) into the bottom panel, tightening with a phillips head screwdriver.

Repeat this step for the top panel (P1).


## Step 3

You will need:	
	
10 x Cam Bolts (H1)	6 x Dowels (H3)
	
Phillips Head Screwdriver	

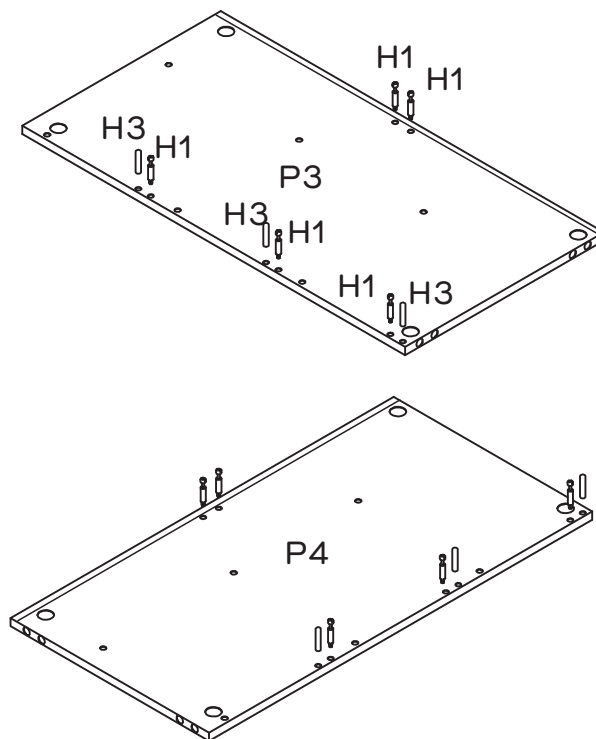

Insert 3 x dowels (H3) into the right panel (P3). Secure 5 x cam bolts (H1) to the right panel (P3), tightening using a phillips head screwdriver. Repeat this step for the left panel (P4).

## Step 4

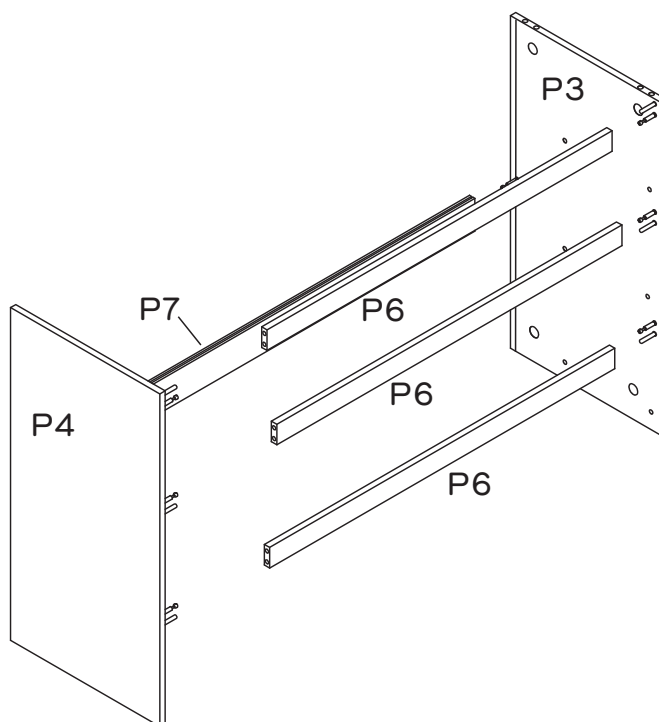

Align and attach the 3 x support panels (P6) and the back support panel (P7) to the right panel (P3). With assistance, align and attach the left side panel (P4) to the 3 x support panels (P6) and back support panel (P7) as shown.

## Step 5

You will need:



10 x Cam Nuts  
(H2)




Phillips Head  
Screwdriver

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

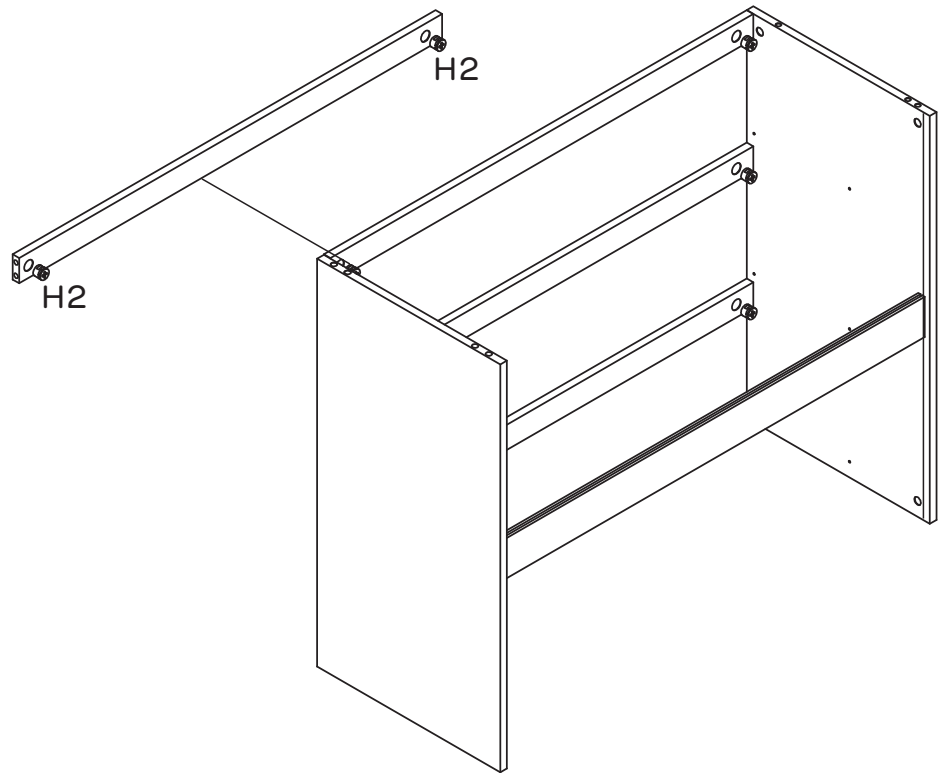

Insert 10 x cam nuts (H2) into the 4 x support panels (P6, P7), rotating the cam nuts so the arrow points towards the incoming cam bolt. Secure the panels together by tightening the cam nuts (H2) using a phillips head screwdriver.

## Step 6

You will need:



4 x Cam Nuts  
(H2)




Phillips Head  
Screwdriver

This is how a cam nut works.....




The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

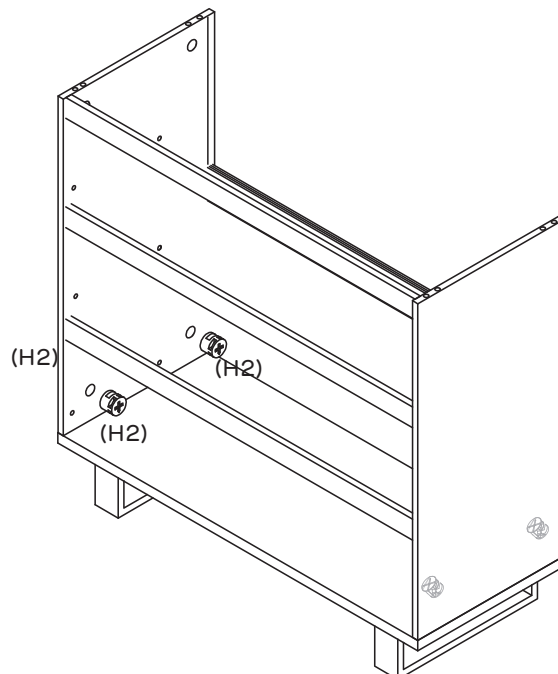

With assistance, attach the assembled frame onto the bottom panel (P2) as shown. Ensure the grooves on the bottom, left and right panels (P2, P3, P4) align. Insert 4 x cam nuts (H2) into the bottom of the left and right panels (P3, P4), rotating the cam nuts so the arrow points towards the incoming cam bolts. Secure the panels together by tightening the cam nuts (H2) using a phillips head screwdriver.

## Step 7

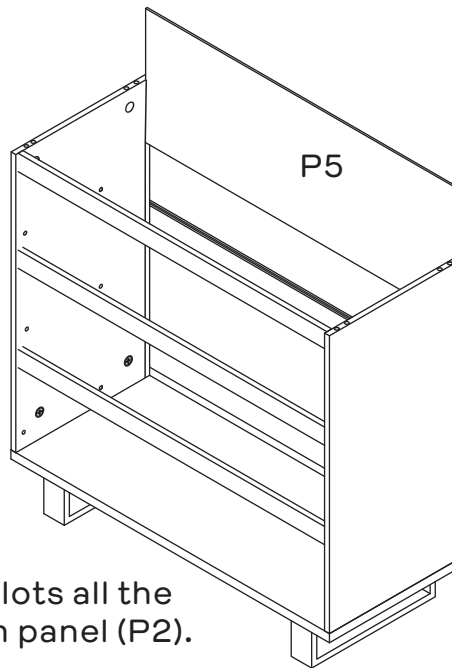

Note: ensure the back panel (P5) slots all the way into the groove on the bottom panel (P2).

Slide the 2 x back panels (P5) into the grooves of the bottom, left and right panels (P2, P3, P4) as shown.

## Step 8

You will need:



4 x Cam Nuts  
(H2)




Phillips Head  
Screwdriver

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

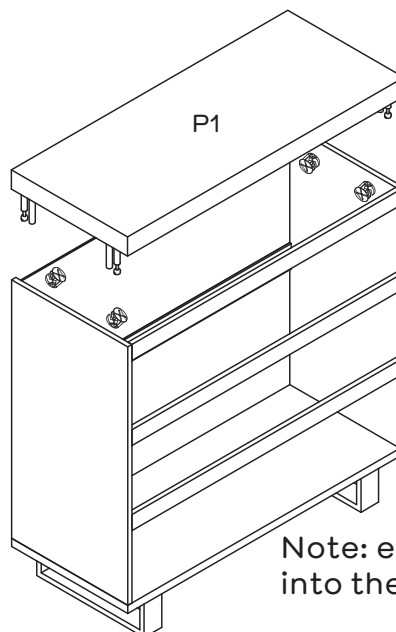

Note: ensure the back panel (P5) slots into the groove on the top panel (P1).



Insert 4 x cam nuts (H2) into the top of the left and right panels (P3, P4), rotating the cam nuts so the arrows point towards the incoming cam bolts.


With assistance, carefully align and lower the top panel (P1) onto the assembled unit as shown.

Secure the panels together by tightening the cam bolts (H2) on the left and right panels (P3, P4) using a phillips head screwdriver.





## Step 9

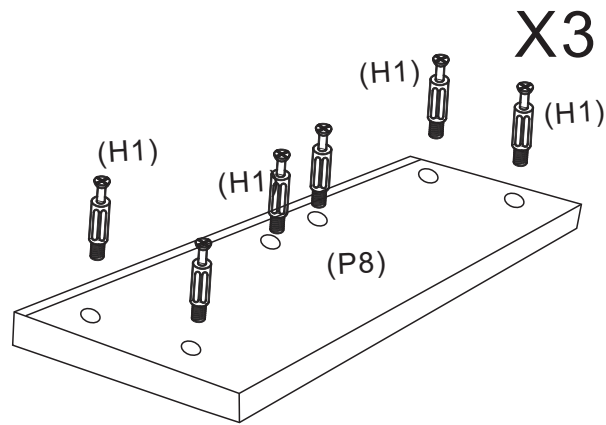You will need:	
	
18 x Cam Bolts (H1)	Phillips Head Screwdriver



Secure 6 x cam bolts (H1) to 1 x drawer door (P8), tightening using a phillips head screwdriver.  
Repeat this step for the other 2 x drawer doors (P8).


## Step 10

You will need:	
	
18 x Cam Nuts (H2)	Phillips Head Screwdriver

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

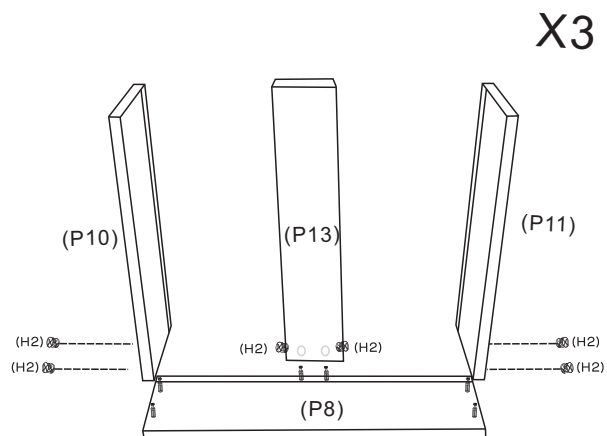


Align and attach 1 x drawer support (P13), 1 x drawer left panel (P10) and 1 x drawer right panel (P11) to 1 x drawer door (P8). Ensure the grooves on the drawer panels (P8, P10, P11) align as shown.

Insert 6 x cam nuts (H2) into the panels (P10, P11, P13), rotating the cam nuts so the arrow points towards incoming cam bolts. Secure the panels by tightening the cam nuts (H2) using a phillips head screwdriver.



Repeat this step for the other 2 x drawers.

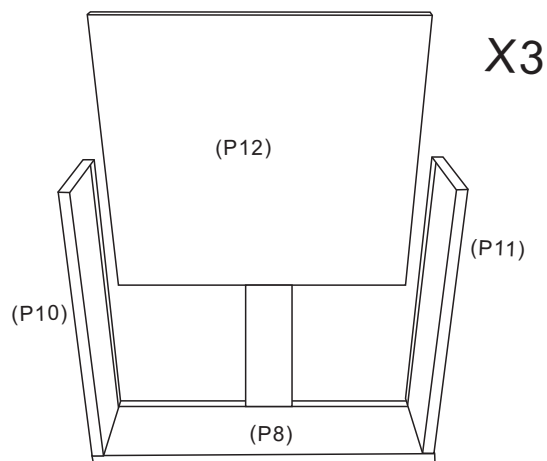
## Step 11



Slide 1 x drawer bottom (P12) into the grooves on the panels (P8, P10, P11) as shown. Repeat this step for the other 2 x drawers.

## Step 12

You will need:	
	
18 x Long Screw (H10)	Phillips Head Screwdriver

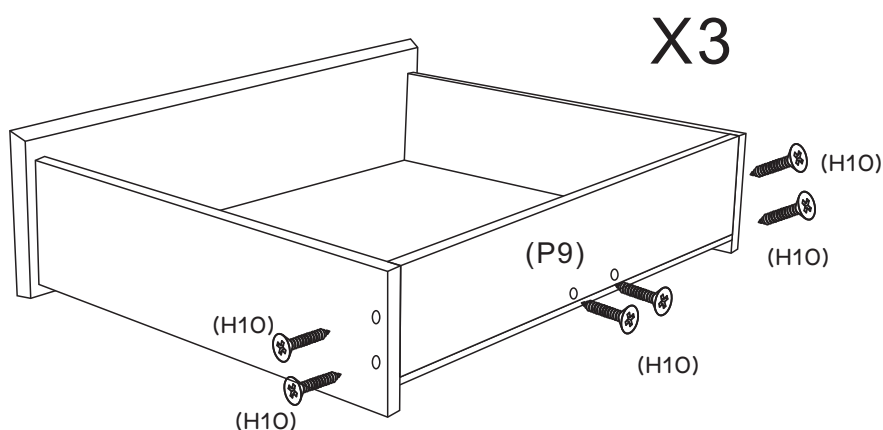


Align 1 x drawer back (P9) to the assembled drawer. Ensure the pre-drilled holes on the left and right drawer panels (P10, P11) and drawer support (P13) align with the pre-drilled holes on the drawer back (P9). Secure together using 6 x long screws (H10), completely tightening with a phillips head screwdriver.

Repeat this step for the other 2 x drawers.

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

## Step 13

You will need:	
Left Runner (H9-3)	Right Runner (H9-4)
12 x Short Screws (H6)	Phillips Head Screwdriver

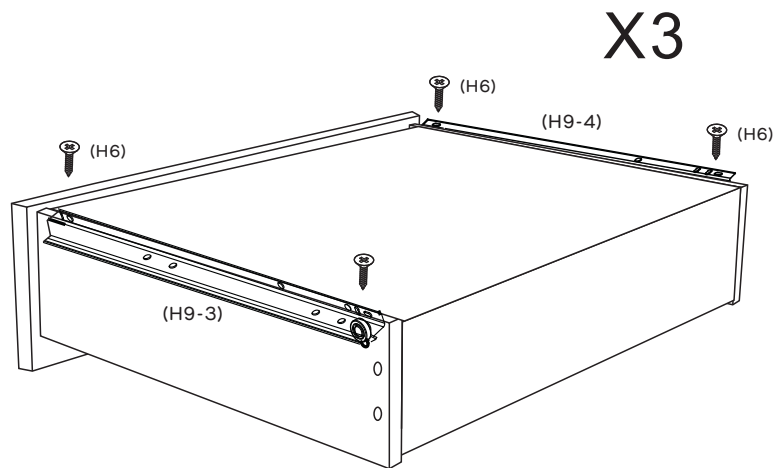


Note: Ensure the wheels on the runners are at the back of the drawer as shown.

Secure 1 x left runner (H9-3) and 1 x right runner (H9-4) to the assembled drawer using 4 x short screws (H6), tightening with the phillips head screwdriver.  
Repeat this step for the other 2 x drawers.

## Step 14


Note: ensure the wheels on the tracks are on the front of the assembled unit as shown.

You will need:	
12 x Short Screws (H6)	
Left Runner Track (H9-1)	Right Runner Track (H9-2)

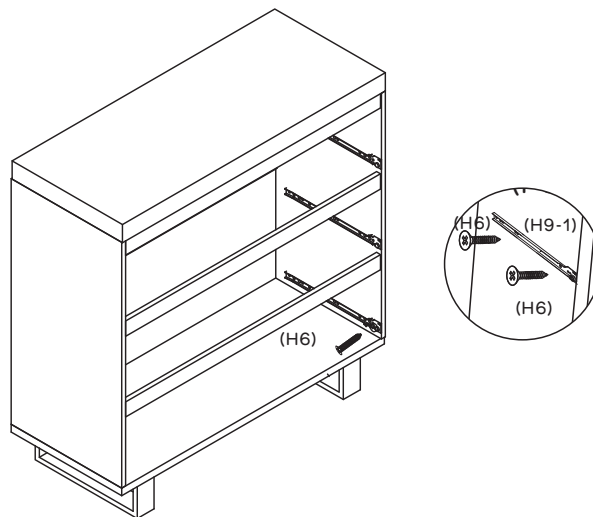

Secure 3 x right runner tracks (H9-2) to the right panel (P3) using 2 x short screws (H6), tightening with the phillips head screwdriver.  
Repeat this step for the 3 x left runner tracks (H9-1) and left panel (P4).


## Step 15

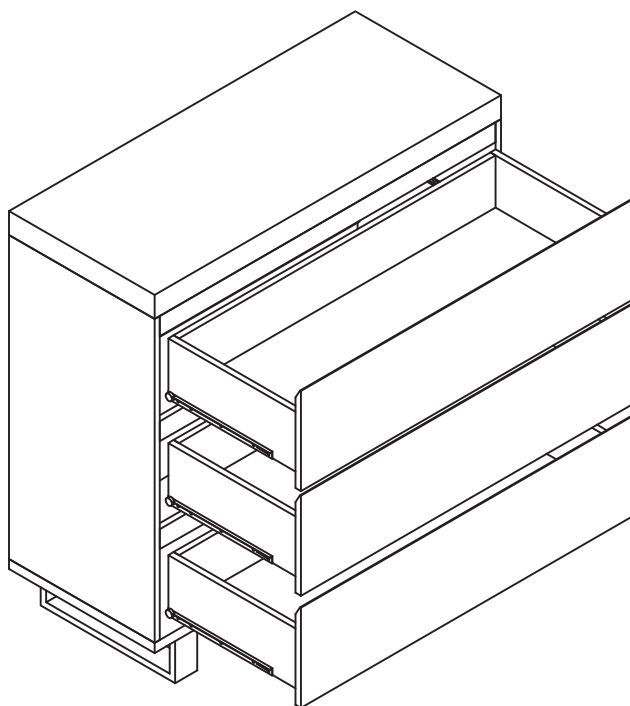

Slide the 3 x assembled drawers into tallboy

## Step 16

You will need:	
12 x Wedges (H11)	12 x Short Screws (H6)
Phillips Head Screwdriver	

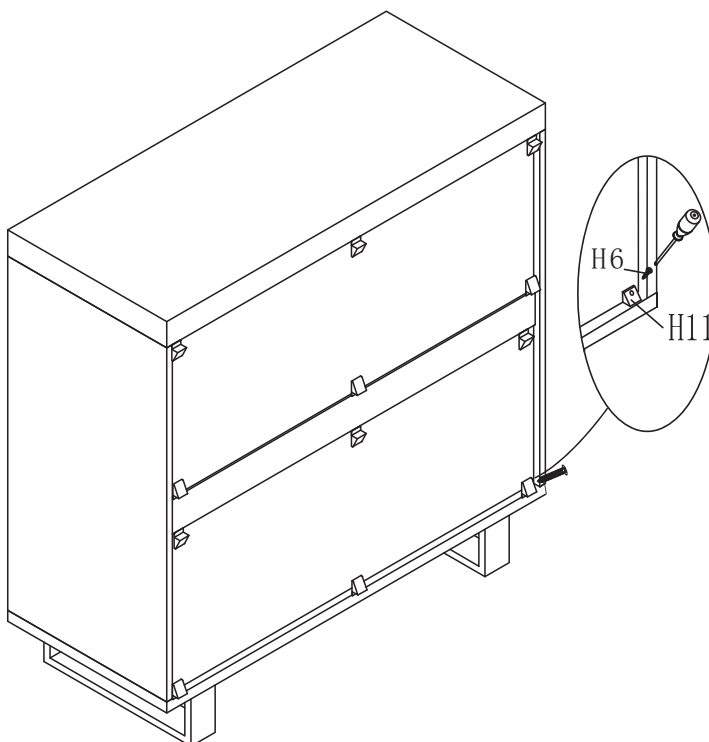


Insert 12 x wedges (H11) into the back of the unit as shown. Secure using 12 x short screws (H6), tightening with the phillips head screwdriver.

## Step 17


We strongly recommend this product is permanently fixed to the wall or other suitable surface.



You will need:	
	
2 x Medium Screws (H14)	2 x Washers (H12)
	
2 x Wall Straps (H13)	Phillips Head Screwdriver

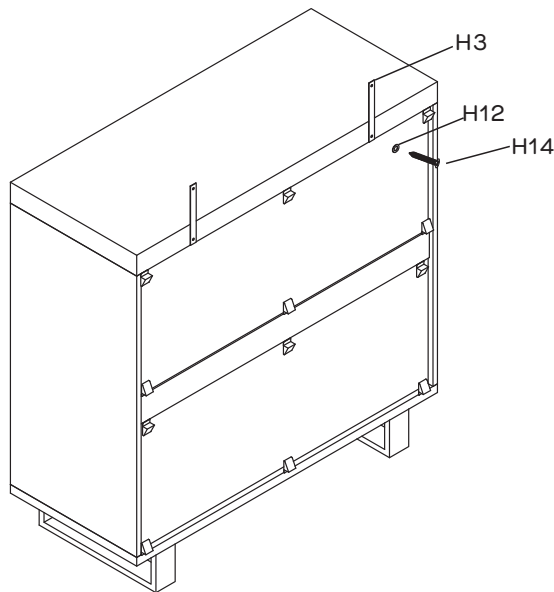

Attach 2 x wall straps (H13) to the top panel (P1) using 2 x washers (H12) and 2 x medium screws (H14). Tighten using the phillips head screwdriver.

## Step 18

You will need:	
	
2 x Washers (H12)	

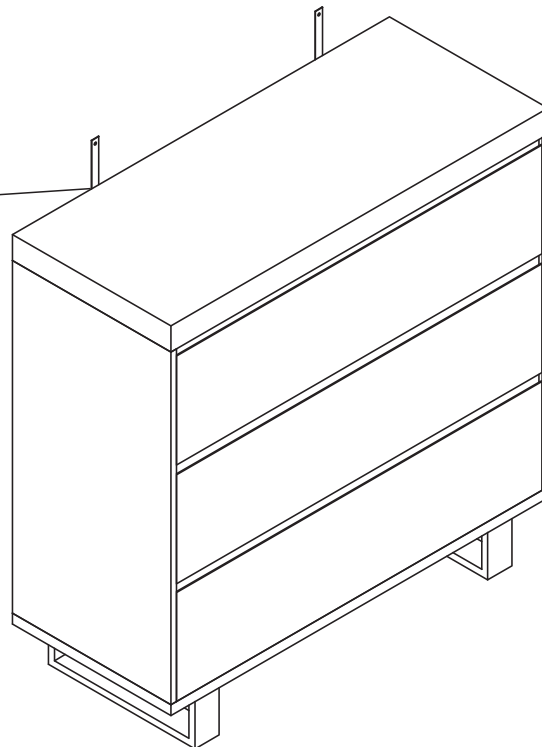


Screws and wall plugs are not provided please use appropriate fixtures for your wall.

Seek advice from a qualified trades person on how to attach this to your specific wall.

With assistance, carefully move the tallboy to its final position. Attach the wall straps (H13) to the wall, ensuring it is firmly attached and secure. If required, the levelling feet on the 2 x legs (P14) can be adjusted so the unit is level.

## Step 19

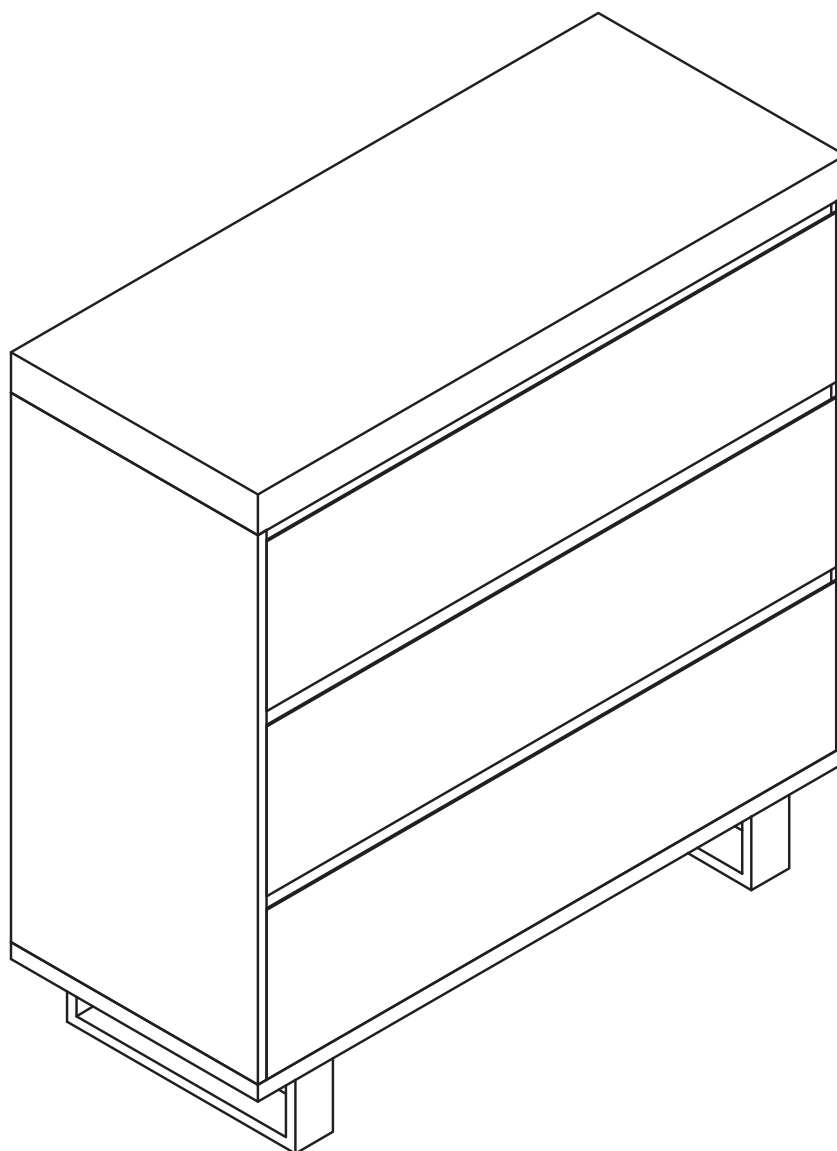

**Job Complete!**

In the interest of our environment please dispose of all packaging thoughtfully.