




**Fantastic  
Furniture**

Version 1.0

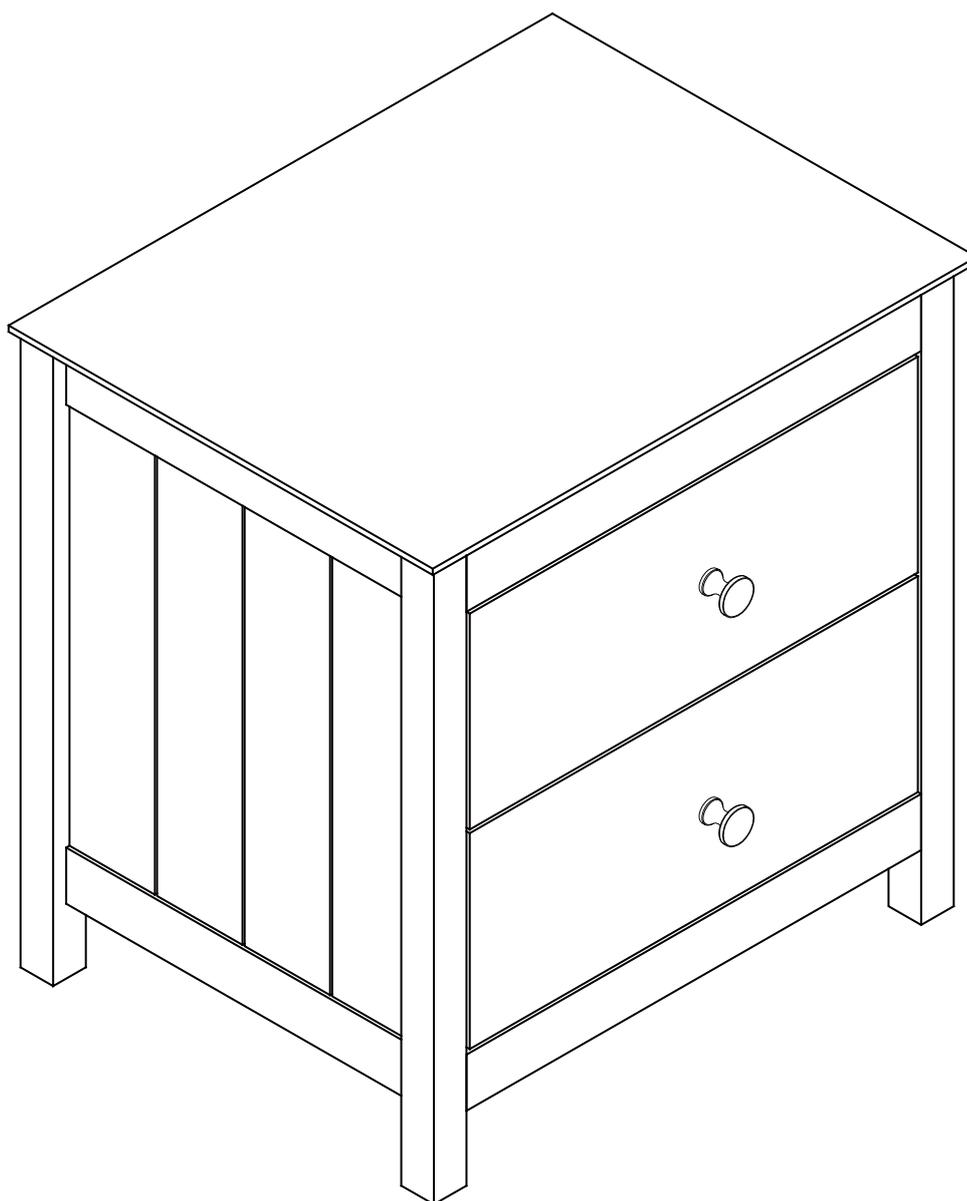

# Hamilton

Bedside 2 Drawer

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

Recommended weight capacity : 50kgs on top.

## Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



# Fantastic Furniture

### Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

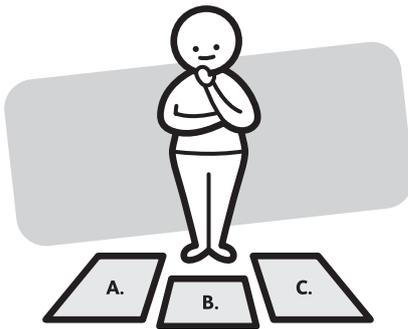

Identify and lay out all of the components before you begin assembly.

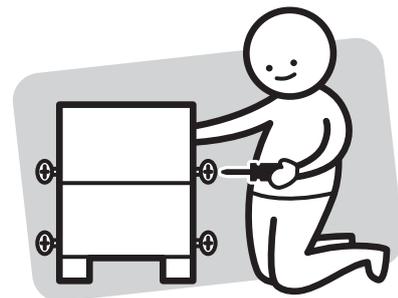

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need


to assemble the product



DO NOT USE





**Other tools you need:**  
Phillips head screwdriver;

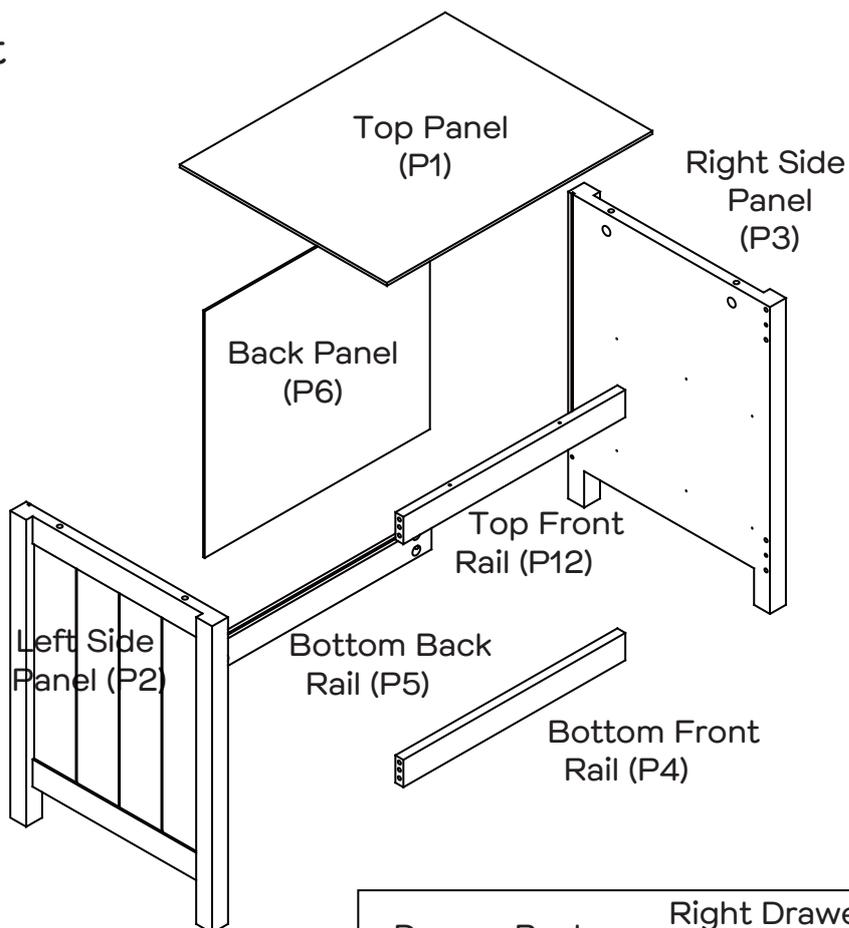



## Parts list


- Top Panel (P1);
- Left Side Panel (P2);
- Right Side Panel (P3);
- Bottom Front Rail (P4);
- Bottom Back Rail (P5);
- Back Panel (P6);
- 2 x Drawer Fronts (P7);
- 2 x Left Drawer Sides (P8);
- 2 x Right Drawer Sides (P9);
- 2 x Drawer Bases (P10);
- 2 x Drawer Backs (P11);
- Top Front Rail (P12)

## Hardware pack

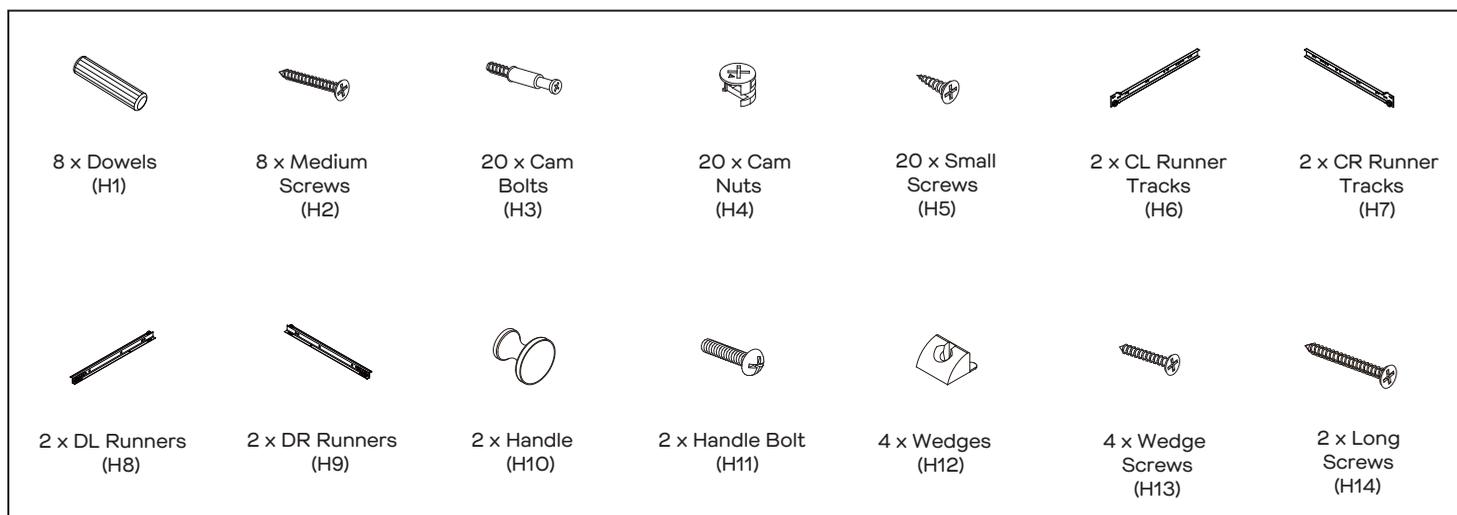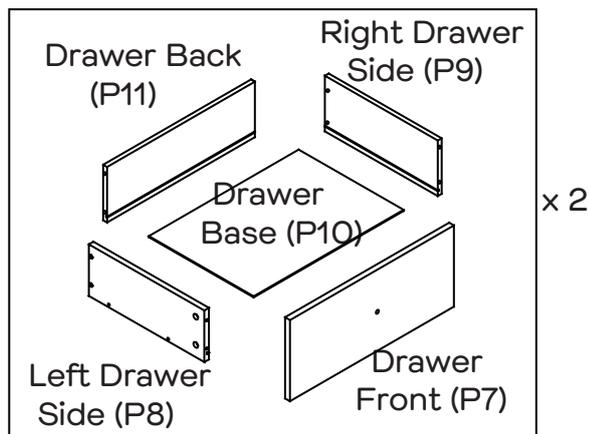


# Step 1


You will need	
	
12 x Small Screws (H5)	2 x CL Runner Tracks (H6)
	
2 x CR Runner Tracks (H7)	Phillips Head Screwdriver

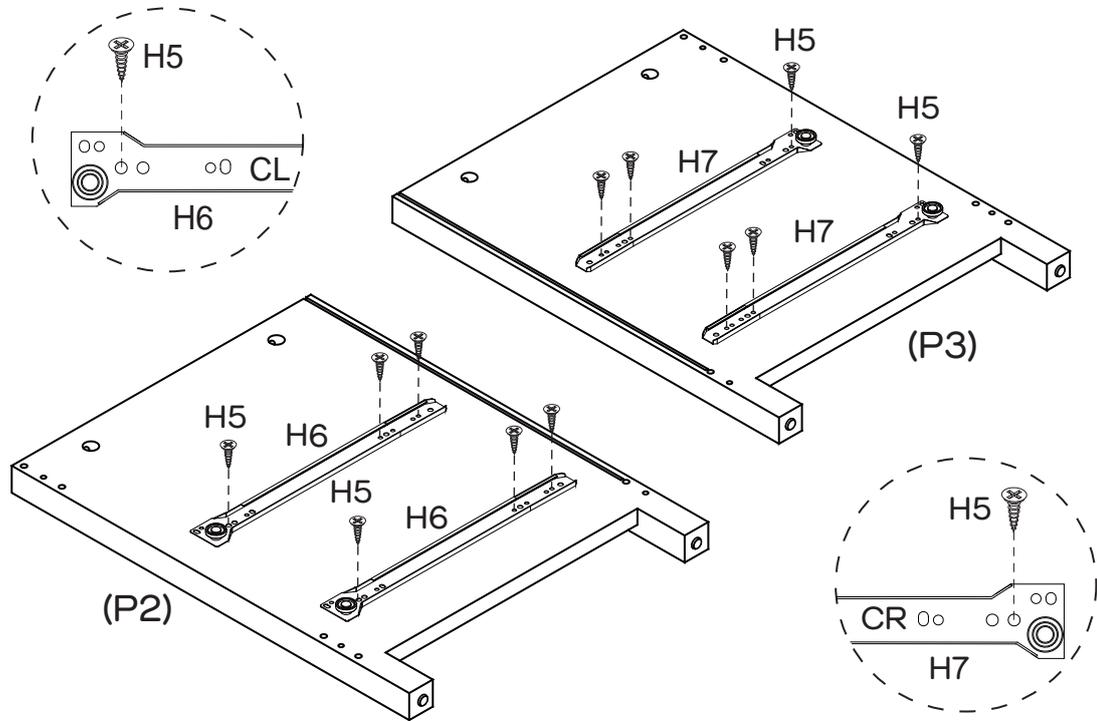

Attach 2 x CL RunnerTracks (H6) and 2 x CR Runner Tracks (H7) to Left&Right Side Panels (P2&P3) with 12 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.


# Step 2

You will need	
	
8 x Cam Bolts (H3)	Phillips Head Screwdriver

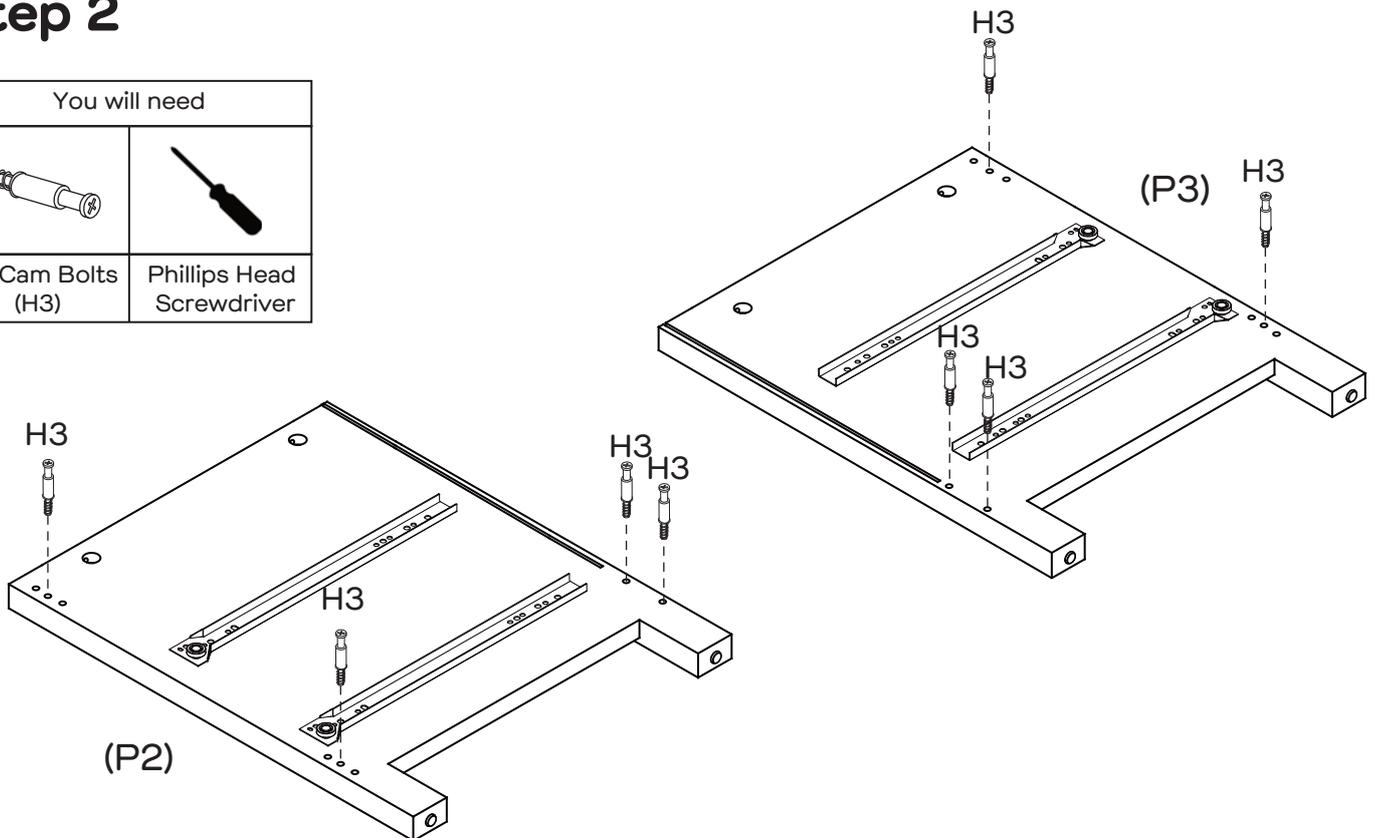


Attach 8 x Cam Bolts (H3) to Left&Right Side Panels (P2&P3) by tightening with the Phillips Head Screwdriver.


## Step 3

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

This is how a cam nut works.....





The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

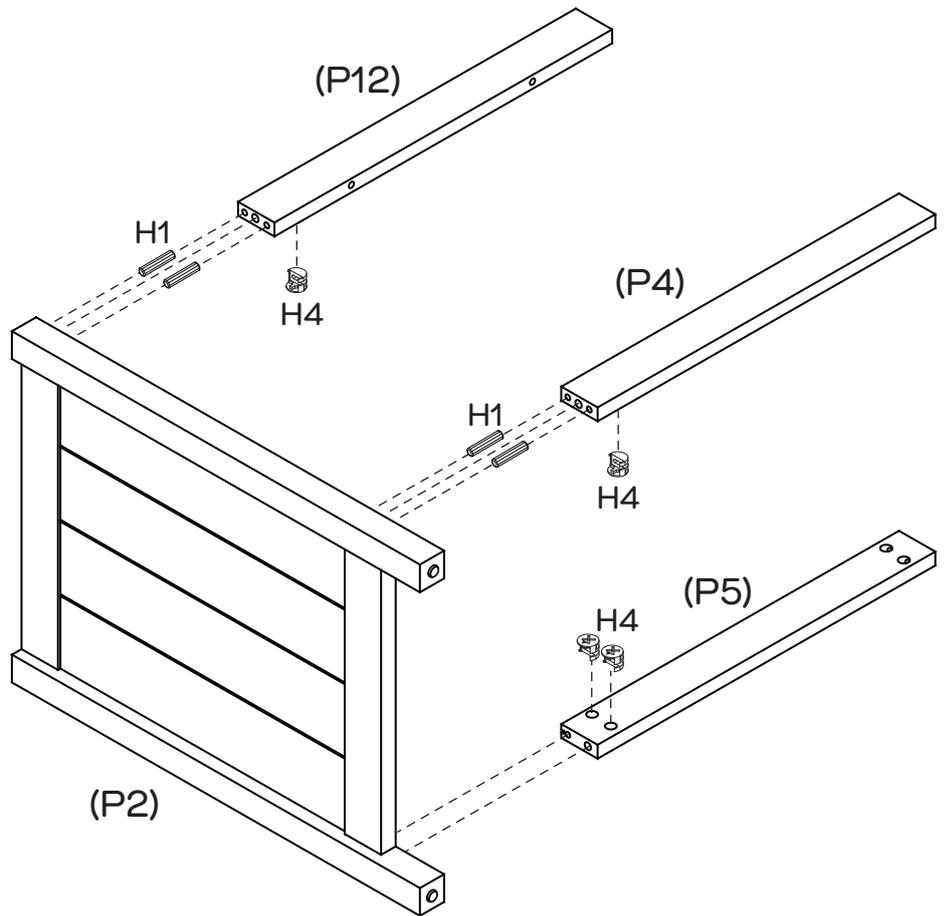

Insert 4x Dowels (H1) into Left Side Panel (P2). Insert 4 x Cam Nuts (H4) into Rails (P4&P5&P12) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Rails (P4&P5&P12) to Left Side Panel (P2) by tightening all cam nuts with the Phillips Head Screwdriver.


## Step 4

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

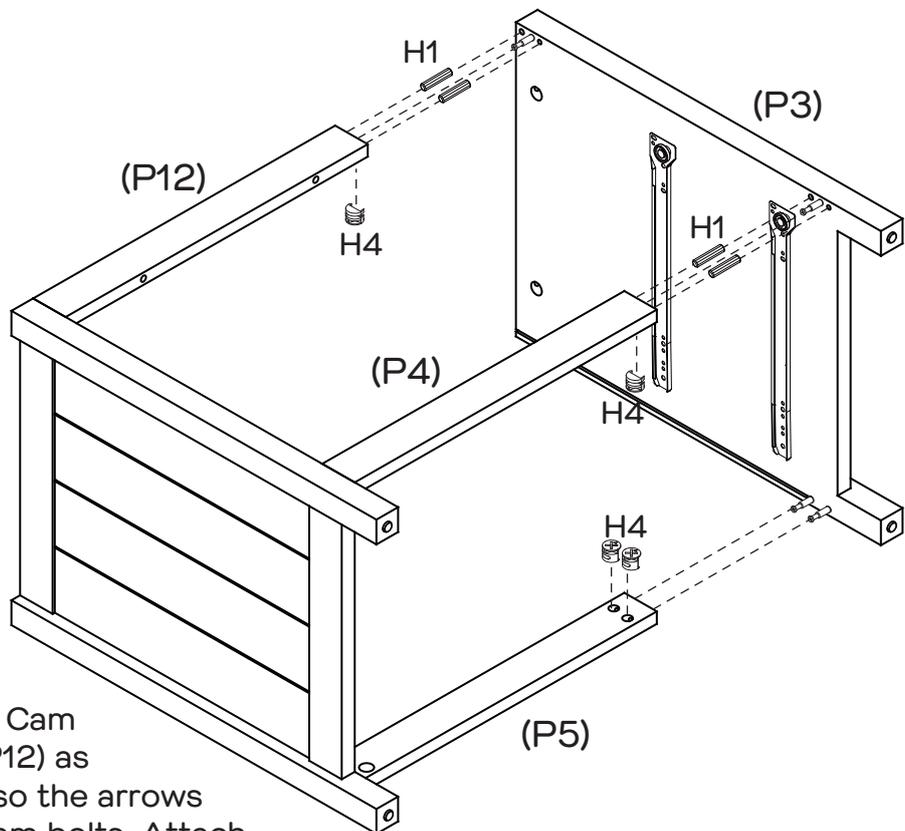

Insert 4 x Dowels (H1) and 4 x Cam Nuts (H4) into Rails (P4&P5&P12) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Right Side Panel (P3) to Rails (P4&P5&P12) by tightening all cam nuts with the Phillips Head Screwdriver.


## Step 5

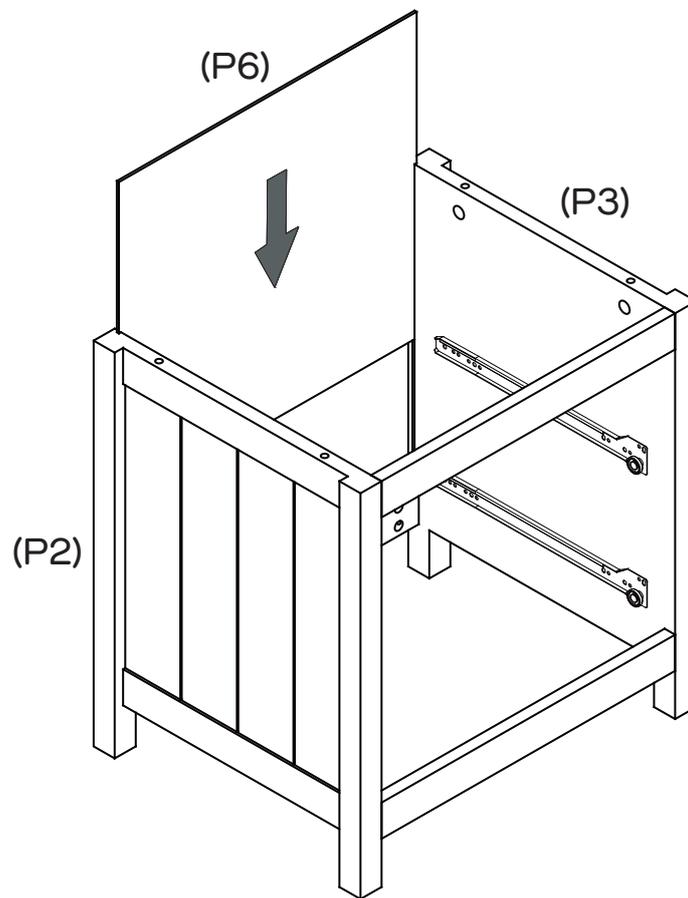

Slide Back Panel (P6) into the grooves of Left&Right Side Panels (P2&P3).

## Step 6



You will need	
4 x Cam Bolts (H3)	4 x Cam Nuts (H4)
2 x Long Screws (H14)	Phillips Head Screwdriver

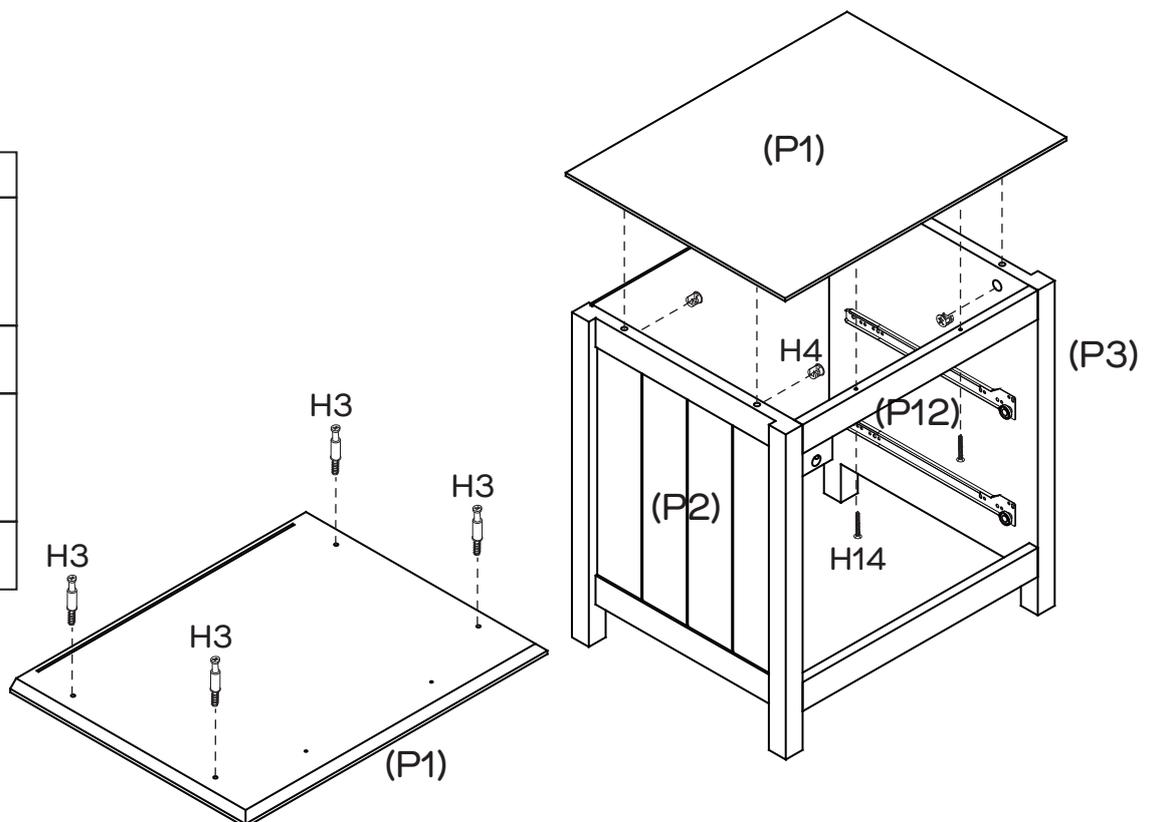

Attach 4 x Cam Bolts (H3) to Top Panel (P1) by tightening with the Phillips Head Screwdriver. Insert 4 x Cam Nuts (H4) into Left & Right Side Panel (P2&P3) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Front Rail (P12) to Top Panel (P1) with 2x Long Screws (H14). Attach Top Panel (P1) to Left & Right Side Panel (P2&P3) by tightening all cam nuts with the Phillips Head Screwdriver.

## Step 7


You will need	
	
4 x Wedges (H12)	4 x Wedge Screws (H13)
	
Phillips Head Screwdriver	

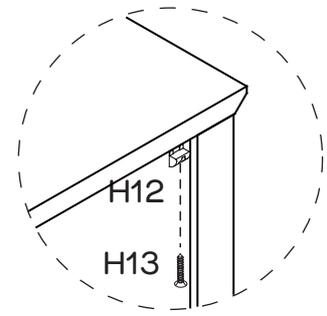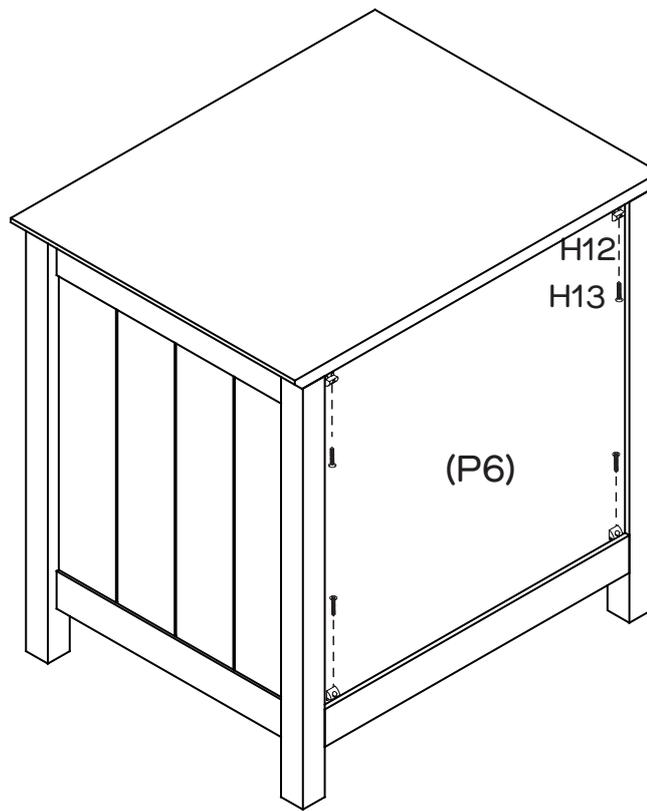

Secure Back Panel (P6) in place with 4 x Wedges (H12) using 4 x Wedge Screws (H13). Tighten with a Phillips Head Screwdriver.

## Step 8


You will need	
	
8 x Cam Bolts (H3)	Phillips Head Screwdriver

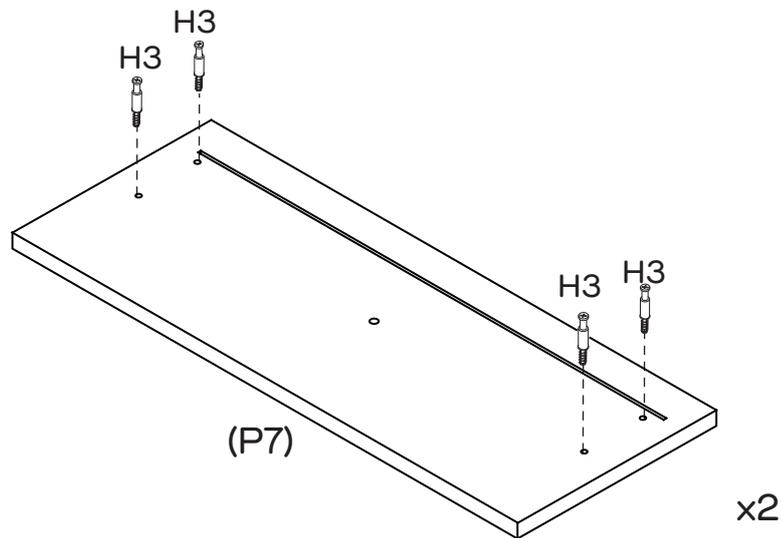

Attach 8 x Cam Bolts (H3) to Drawer Fronts (P7x2). Tighten with a Phillips Head Screwdriver.


## Step 9

You will need	
	
8 x Cam Nuts (H4)	Phillips Head Screwdriver

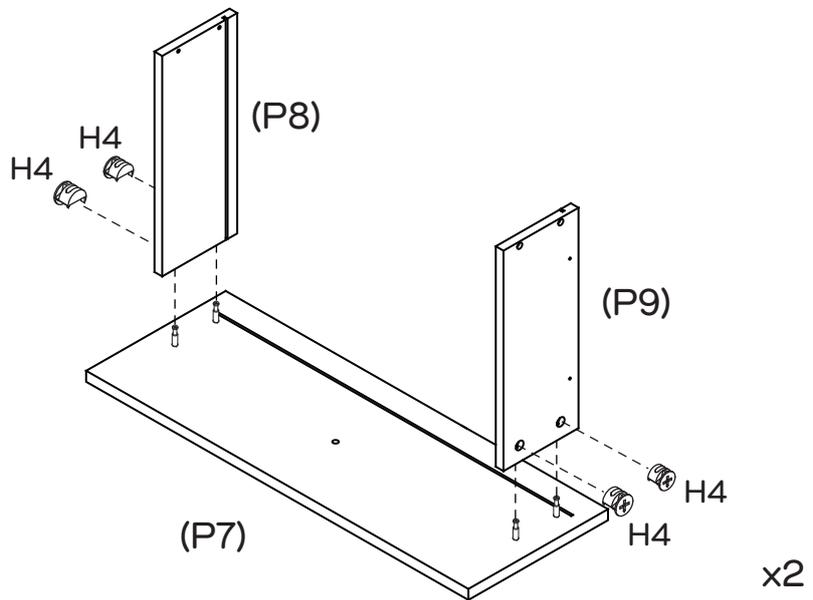

Attach Drawer Sides (P8x2&P9x2) to Drawer Front (P7x2). Insert 8 x Cam Nuts (H4) into the holes of Drawer Sides (P8x2, P9x2). Make sure the opening on cam nuts point towards the incoming cam bolts. Tighten with a Phillips Head Screwdriver.


## Step 10

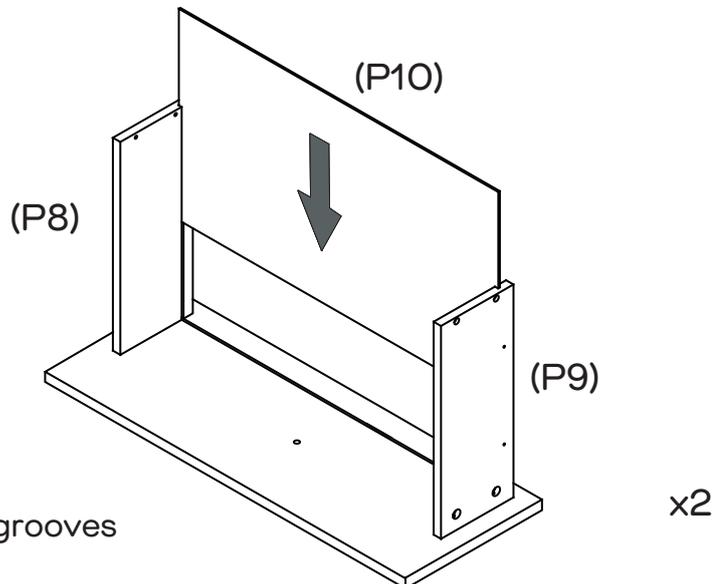

Slide the Drawer Base (P10x2) into the grooves between drawer sides as shown.

## Step 11


You will need	
	
8 x Medium Screws (H2)	Phillips Head Screwdriver

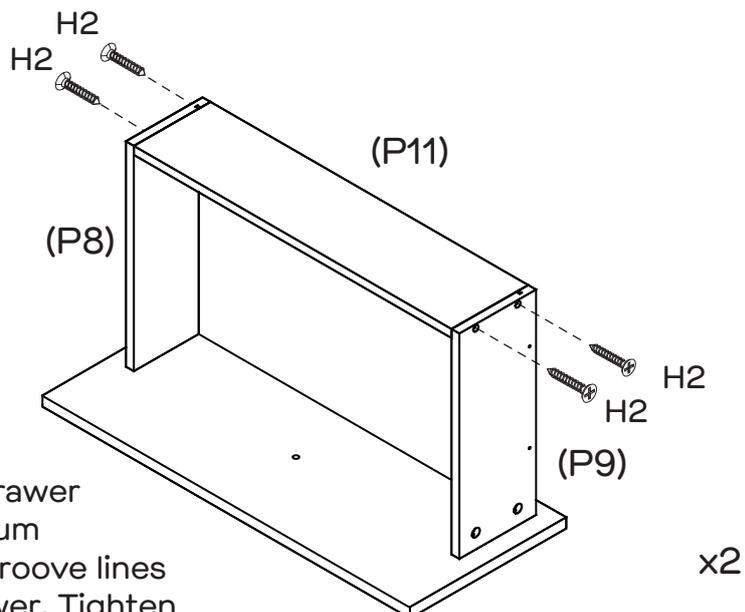

Attach Drawer Backs (P11x2) to Drawer Sides (P8x2&P9x2) with 8 x Medium Screws (H2), make sure that the groove lines up the whole way around the drawer. Tighten with a Phillips Head Screwdriver.

# Step 12


You will need	
2 x DL Runners (H8)	2 x DR Runners (H9)
8 x Small Screws (H5)	Phillips Head Screwdriver

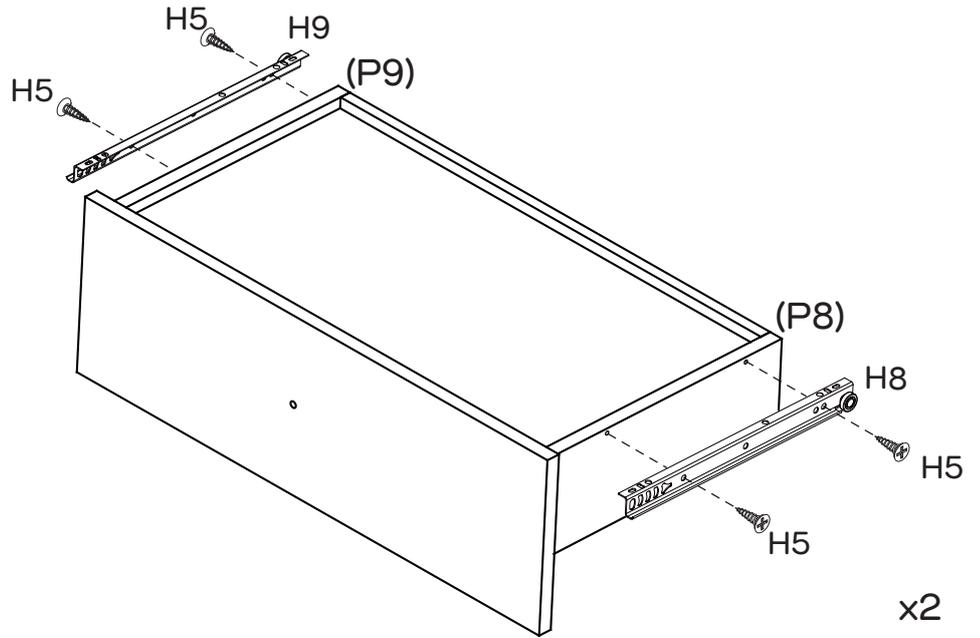

Attach 2 x DL Runners (H8) to Left Drawer Sides (P8x2) and 2 x DR Runners (H9) to Right Drawer Side (P9x2) with 8 x Small Screws (H5) using a Phillips Head Screwdriver.


# Step 13

You will need	
3 x Handle Bolts (H11)	3 x Handles (H10)
Phillips Head Screwdriver	

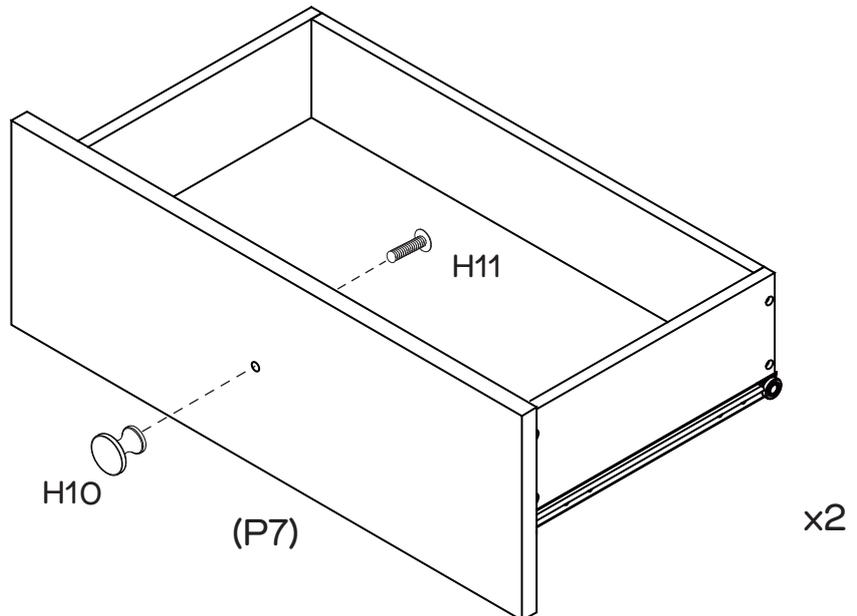


Attach 2 x Handles (H10) to Drawer Fronts (P7x2) with 2 x Handle Bolts (H11) by tightening with the Phillips Head Screwdriver.

## Step 14

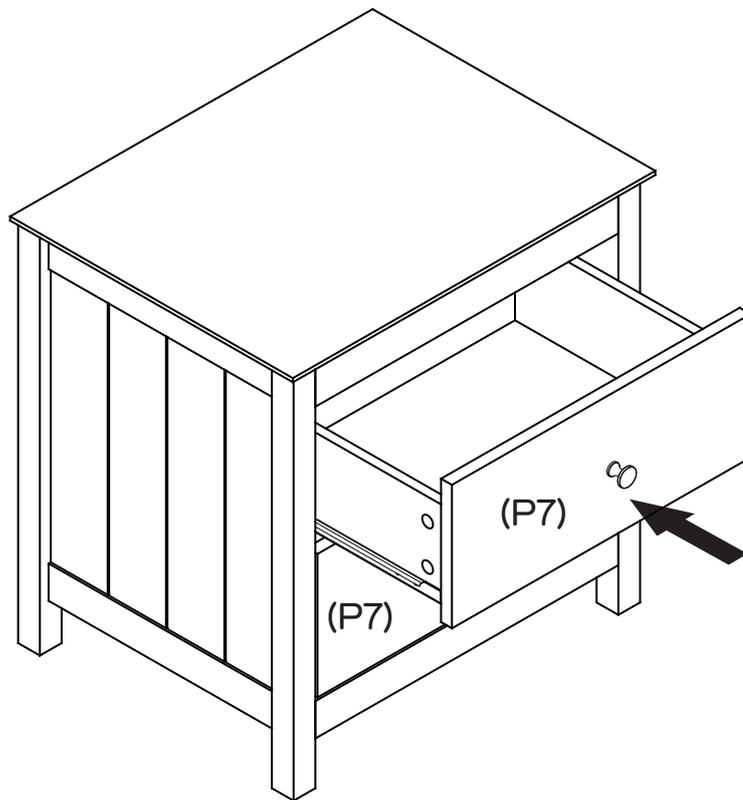

Insert the assembled drawers into the corresponding compartments as shown. Ensure the drawers slide easily along the rails.

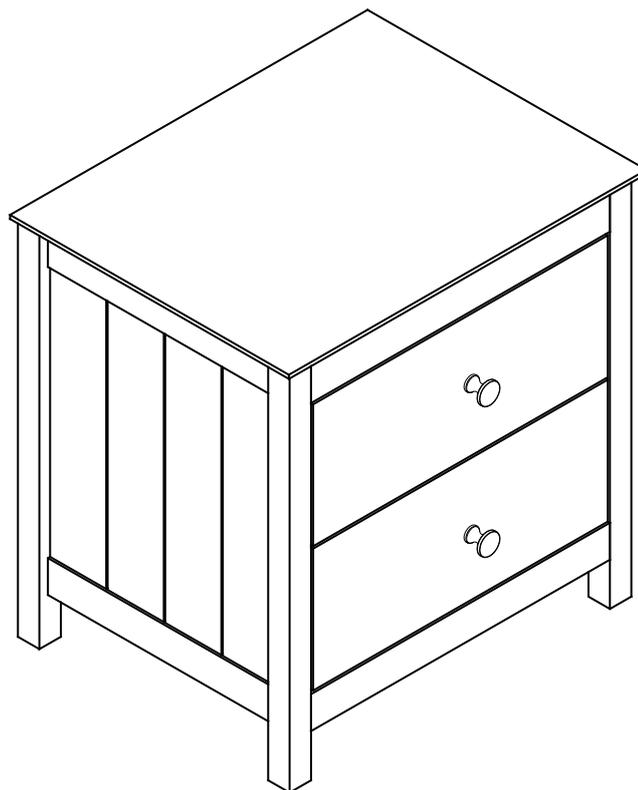

## Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.