




**Fantastic
Furniture**

Version 1.0

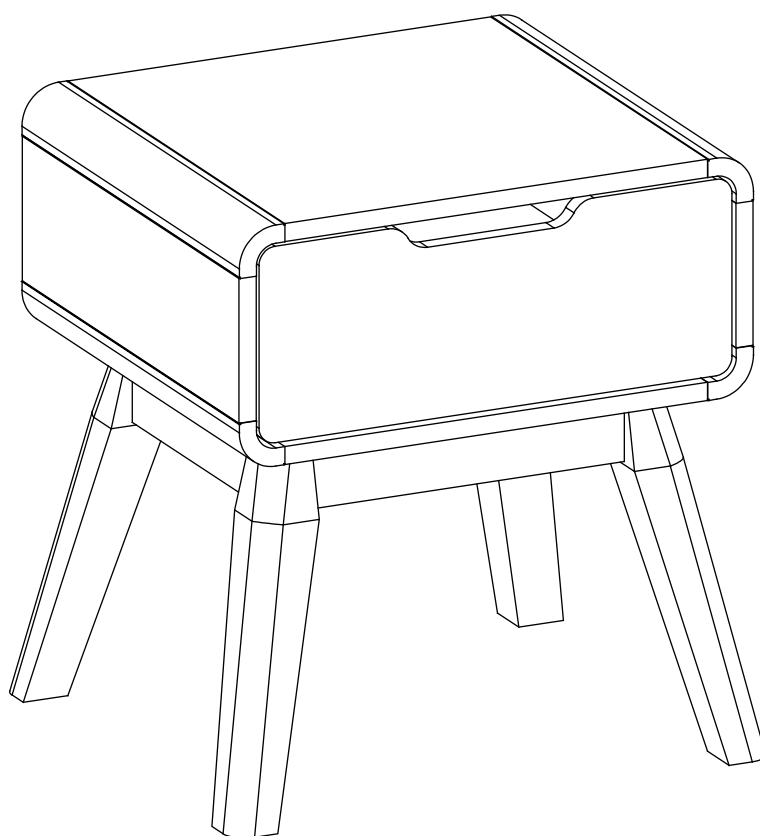

Two People



Required

Niva
Bedside 1 Drawer
fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.
- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.




- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.

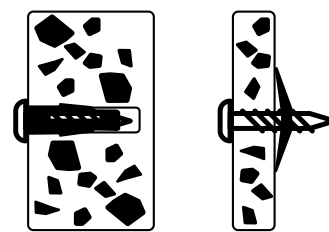

For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
for your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

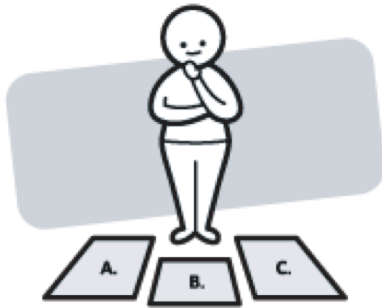

Identify and lay out all of the components before you begin assembly.

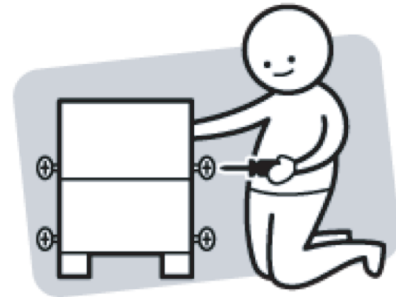

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information


- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE

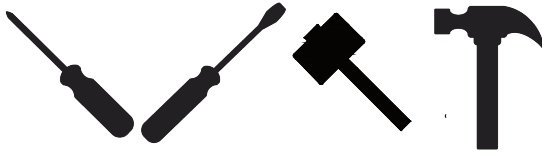


Othe tools you need

Flat head screwdriver; Phillips head screwdriver; Mallet; Hammer

Parts list

- 1 x Top Panel (P1)
- 1 x Bottom Panel (P2)
- 1 x Left Side Panel (P3)
- 1 x Right Side Panel (P4)
- 1 x Back Panel (P5)
- 2 x Long Rails (P6)
- 2 x Short Rails (P7)
- 4 x Legs (P8)
- 1 x Drawer Front (P9)
- 1 x Drawer Left Side (P10)
- 1 x Drawer Right Side (P11)
- 1 x Drawer Base (P12)
- 1 x Drawer Back (P13)

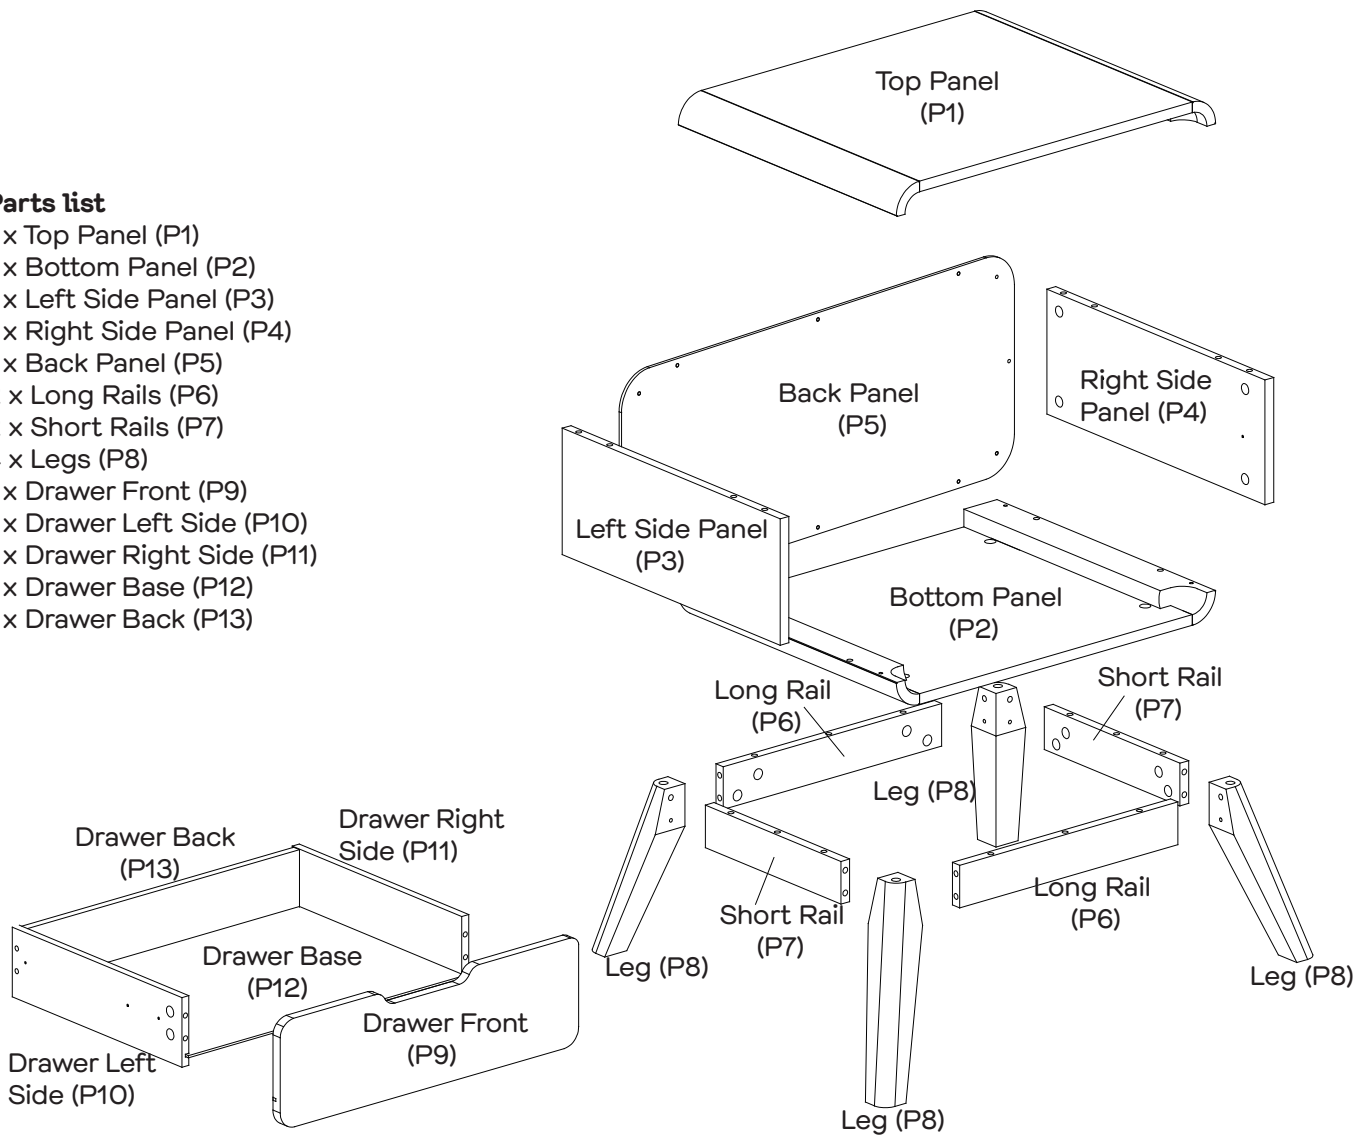


Hardware Pack



28 x Cam Bolts
(H1)



24 x Big Cam
Nuts (H2)



20 x Dowels
(H3)




4 x Felt
Pads (H4)



4 x Small
Cam Nuts (H5)




12 x Screws
12mm (H6)



4 x Screws
38mm (H7)




4 x Screws
38mm (H8)



1 x Left Runner
Track (H11)



1 x Left Runner
(H12)




1 x Right Runner
Track (H13)



1 x Right Runner
(H14)




11 x Nails
(H15)



1 x Wall Strap
(H16)





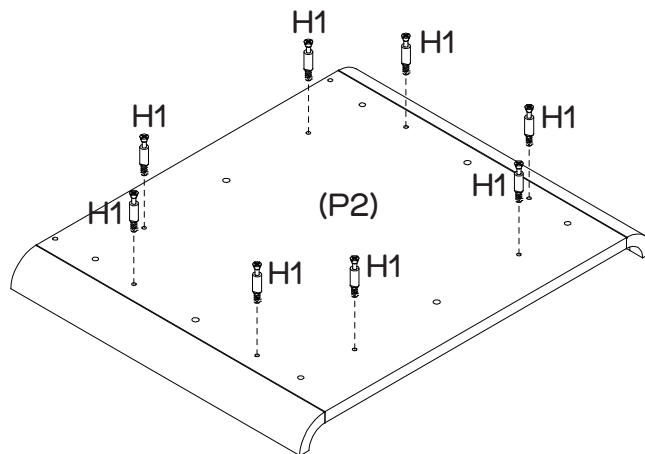
2 x Flat Washers
(H17)



1 x Screw 25mm
(H18)



Step 1


You will need	
	
8 x Cam Bolts (H1)	Phillips Head Screwdriver



Screw 8 x cam bolts (H1) into bottom panel (P2) using a Phillips head screwdriver.




Step 2

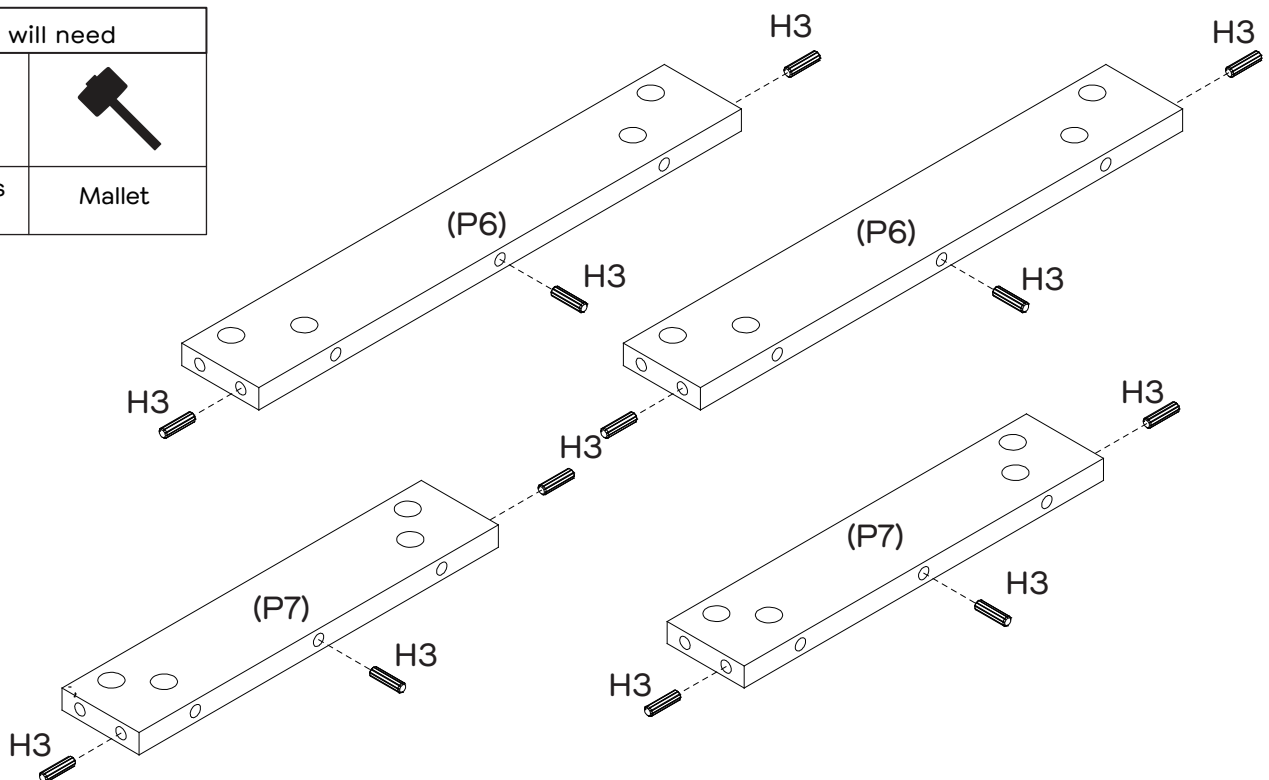
You will need	
	
12 x Dowels (H3)	Mallet



Insert 3 x dowels (H3) into each short rail (P7) as shown.
 Insert 3 x dowels (H3) into each long rail (P6) as shown.
 Use a mallet to gently tap the dowels into place if needed.

Step 3


You will need	
	
8 x Cam Bolts (H1)	Phillips Head Screwdriver
	
4 x Felt Pads (H4)	

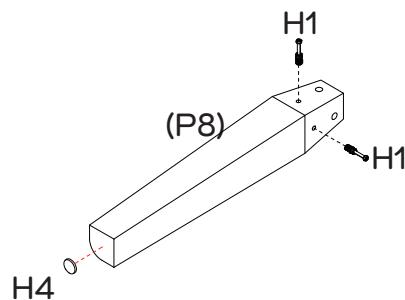


x4

Screw 2 x cam bolts (H1) into each leg (P8) using a Phillips head screwdriver.
Attach 1 x felt pad (H4) onto each leg (P8) as shown.


Step 4

You will need	
	
4 x Big Cam Nuts (H2)	Flat Head Screwdriver

This is how a cam nut works.....



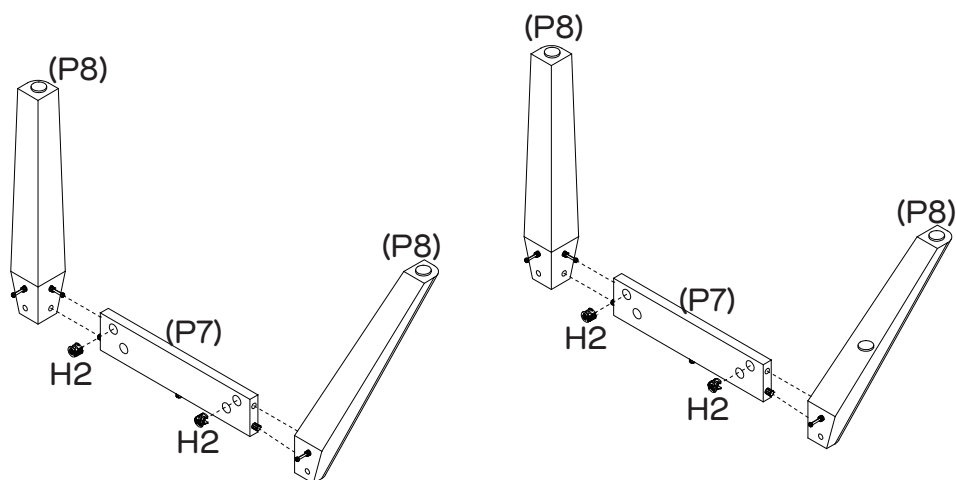


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Fit each short rail (P7) between 2 x legs (P8).
Insert 2 x big cam nuts (H2) each into short rail (P7).
Turn the big cam nuts (H2) clockwise to lock using a flat head screwdriver.



Step 5

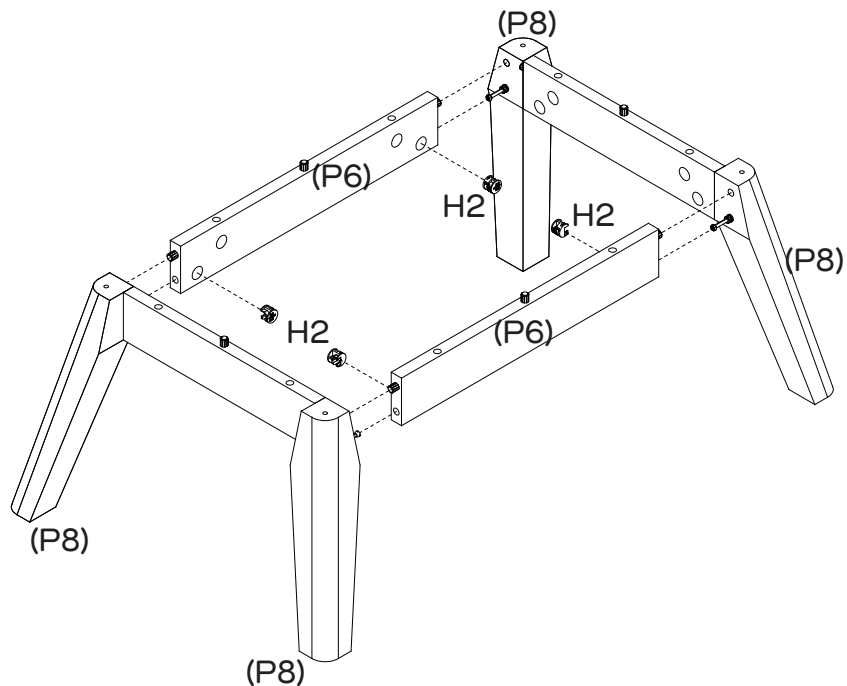
You will need	
	
4 x Big Cam Nuts (H2)	Flat Head Screwdriver



Position 2 x long rails (P6) between the assembled units as shown.
 Insert 4 x big cam nuts (H2) into long rails (P6).
 Turn the big cam nuts (H2) clockwise to lock using a flat head screwdriver.




Step 6


You will need	
	
8 x Big Cam Nuts (H2)	Flat Head Screwdriver

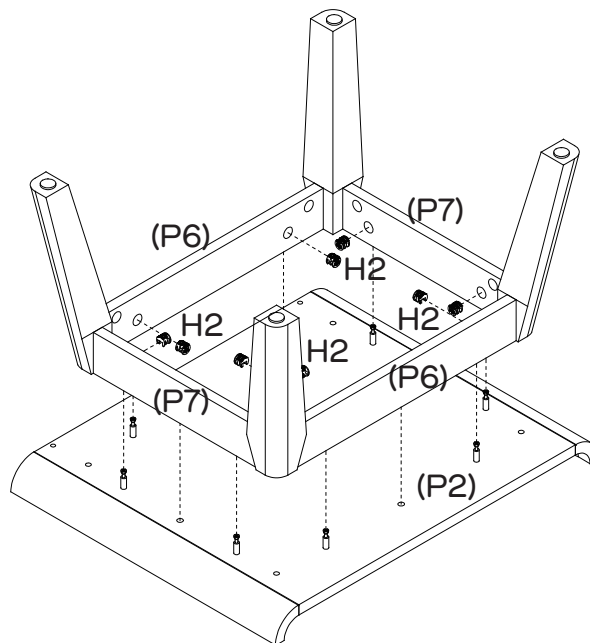

Position the leg assembly onto bottom panel (P2), making sure the cam bolts on the bottom panel (P2) are inserted into the holes on the leg assembly.
 Insert 8 x big cam nuts (H2) into short rails (P7) and long rails (P6).
 Turn the big cam nuts (H2) clockwise to lock using a flat head screwdriver.
 Carefully turn the unit over.



Step 7

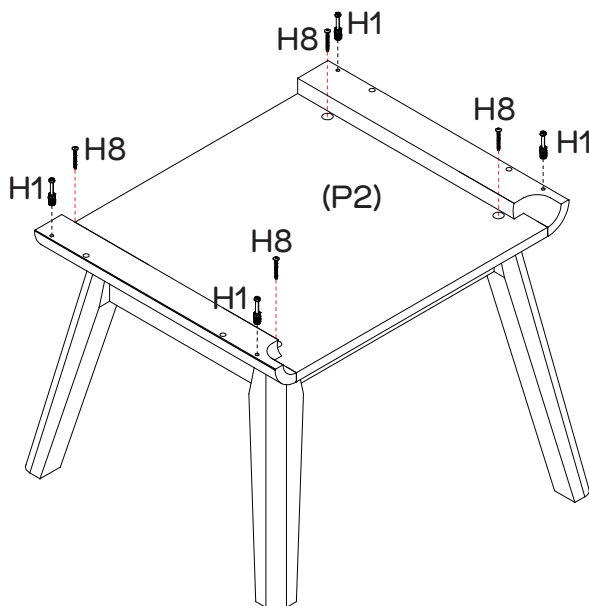
You will need	
	
4 x Cam Bolts (H1)	4 x Screws 38mm (H8)
	
Phillips Head Screwdriver	



Screw 4 x cam bolts (H1) into bottom panel (P2) as shown, tighten with a Phillips head screwdriver.
Fasten the legs (P8) through bottom panel (P2) with 4 x screws (H8) , using a Phillips head screwdriver as shown.




Step 8


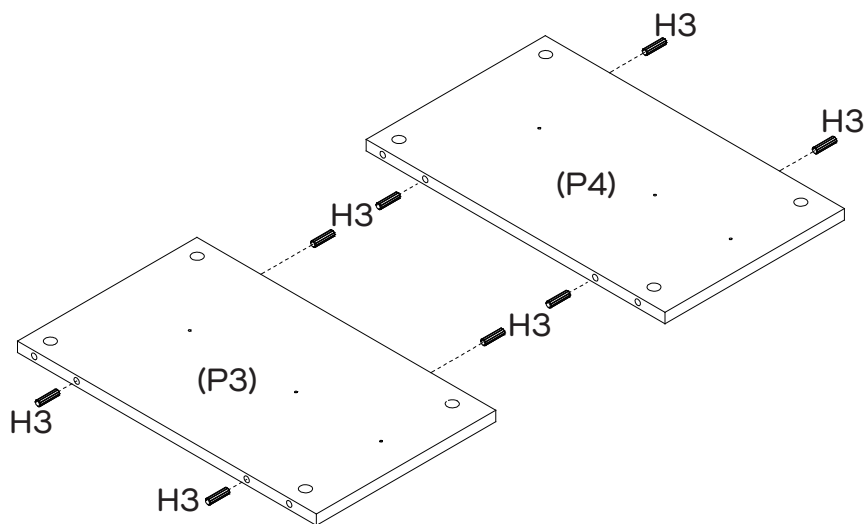
You will need	
	
8 x Dowels (H3)	Mallet



Insert 4 x dowels (H3) each into side panels (P3) and (P4).
Use a mallet to gently tap the dowels into place if needed.

Step 9

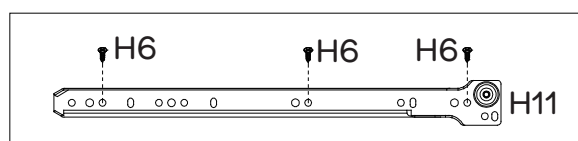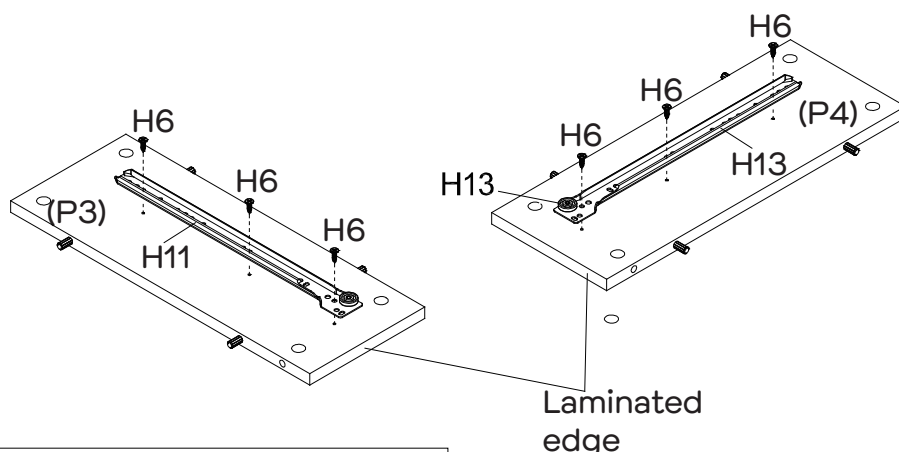

You will need	
	
1 x Left Runner Track (H11)	1 x Right Runner Track (H13)
	
6 x Screws 12mm (H6)	Phillips Head Screwdriver




Attach 1 x left runner track (H11) to left side panel (P3) with 3 x screws (H6), using a Phillips head screwdriver as shown.

Attach 1 x right runner track (H13) to right side panel (P4) with 3 x screws (H6), using a Phillips head screwdriver as shown.

Step 10

You will need	
	
4 x Big Cam Nuts (H2)	Flat Head Screwdriver

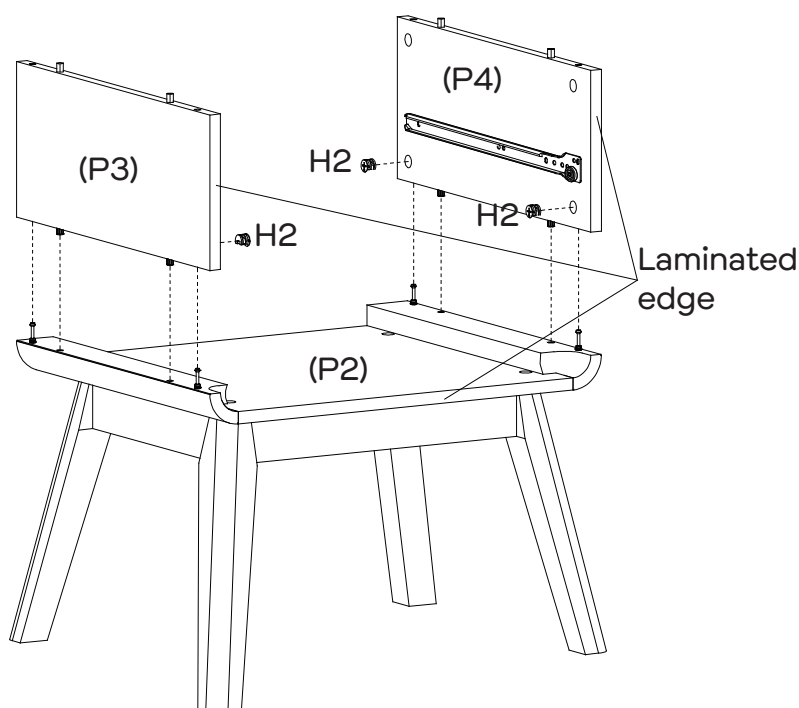



Make sure the laminated edges of panels (P2), (P3) and (P4) are facing the same direction.


Position side panels (P3) & (P4) onto bottom panel (P2) as shown.

Insert 4 x big cam nuts (H2) into side panels (P3) & (P4).

Turn the big cam nuts (H2) clockwise to lock using a flat head screwdriver.



Step 11

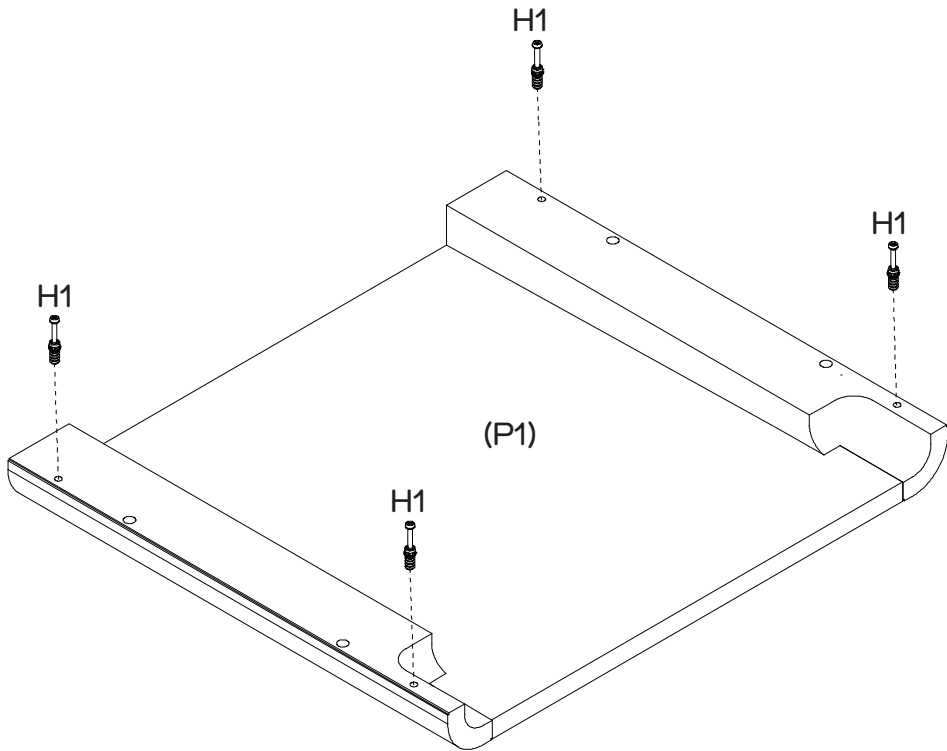
You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver



Screw 4 x cam bolts (H1) into top panel (P1) using a Phillips head screwdriver.



Step 12

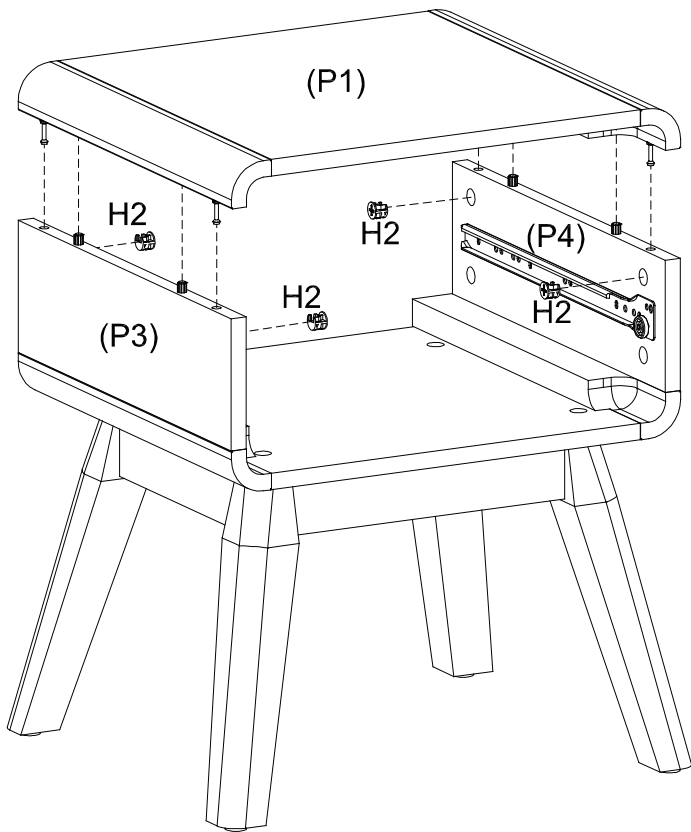
You will need	
	
4 x Big Cam Nuts (H2)	Flat Head Screwdriver



Position top panel (P1) onto side panels (P3) & (P4) as shown. Insert 4 x big cam nuts (H2) into side panels (P3) & (P4). Turn the big cam nuts (H2) clockwise to lock using a flat head screwdriver.

Step 13



You will need	
	
11 x Nails (H15)	Hammer

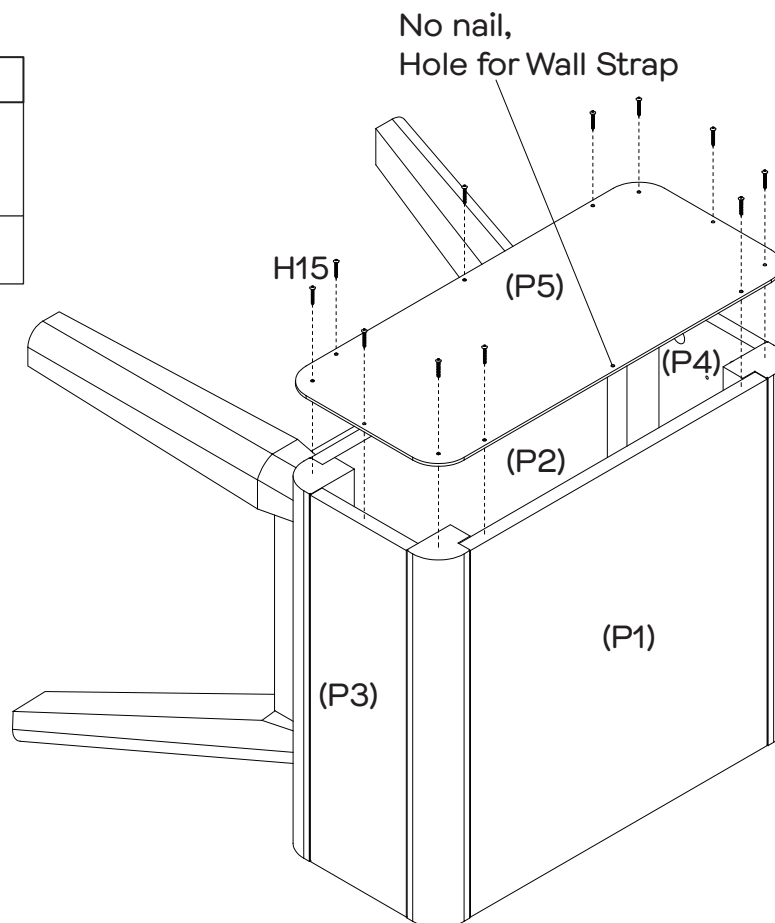


Position back panel (P5) onto assembled unit as shown.

Nail the back panel (P5) to the assembled unit with 11 x nails (H15) using a hammer.



Step 14

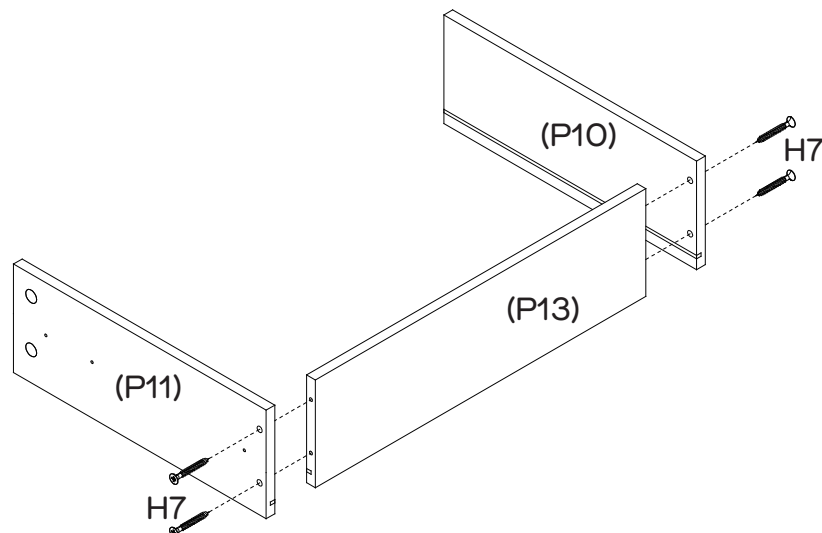
You will need	
	
4 x Screws 38mm (H7)	Phillips Head Screwdriver



Attach drawer sides (P10) & (P11) to drawe back (P13) with 4 x screws (H7), using a Phillips head screwdriver as shown.


Step 15

You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver

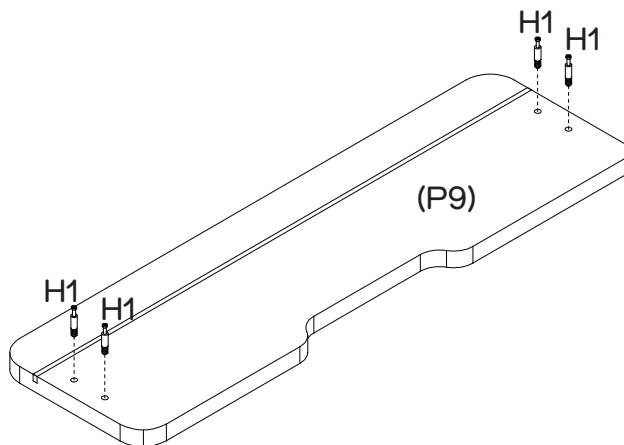



Screw 4 x cam bolts (H1) into drawer front (P9), using a Phillips head screwdriver as shown.

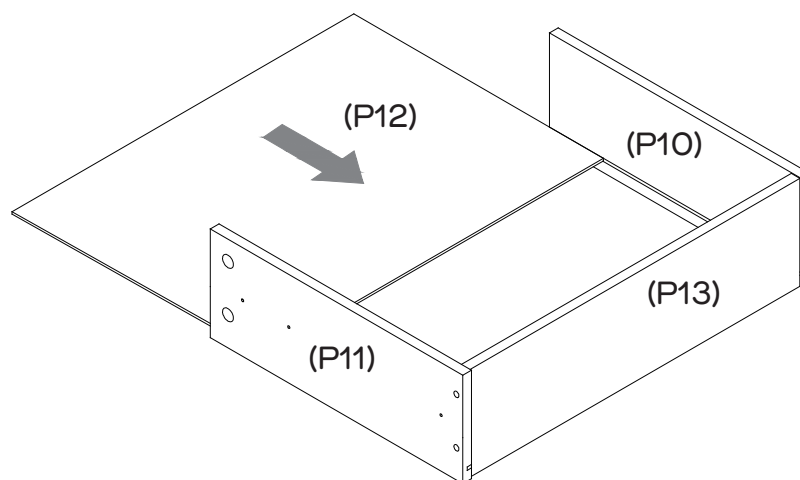
Step 16



Slide drawer base (P12) into the grooves of drawer panels (P10), (P11) and (P13) as shown.



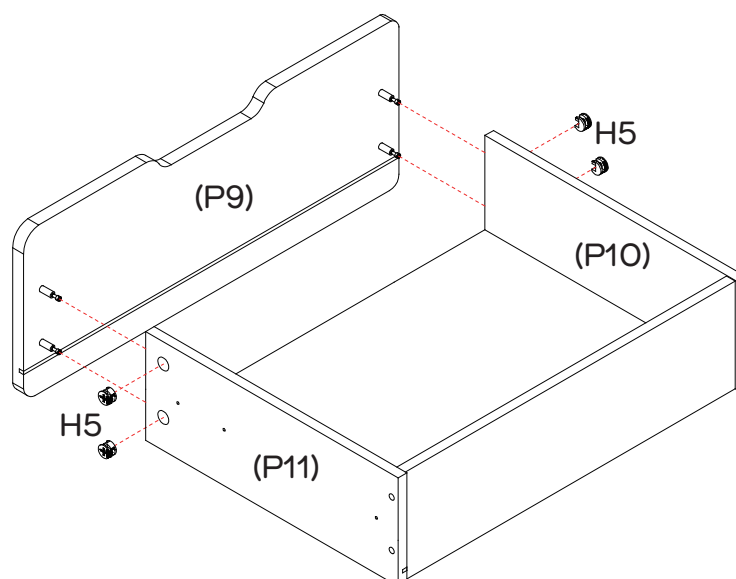

Step 17


You will need	
	
4 x Small Cam Nuts (H5)	Flat Head Screwdriver



Position drawer front (P9) to drawer sides (P10) & (P11).
Insert 4 x small cam nuts (H5).
Turn cam nuts clockwise to lock using a flat head screwdriver.

Step 18


You will need	
	
1 x Left Runner (H12)	1 x Right Runner (H14)
	
6 x Screws 12mm (H6)	Phillips Head Screwdriver

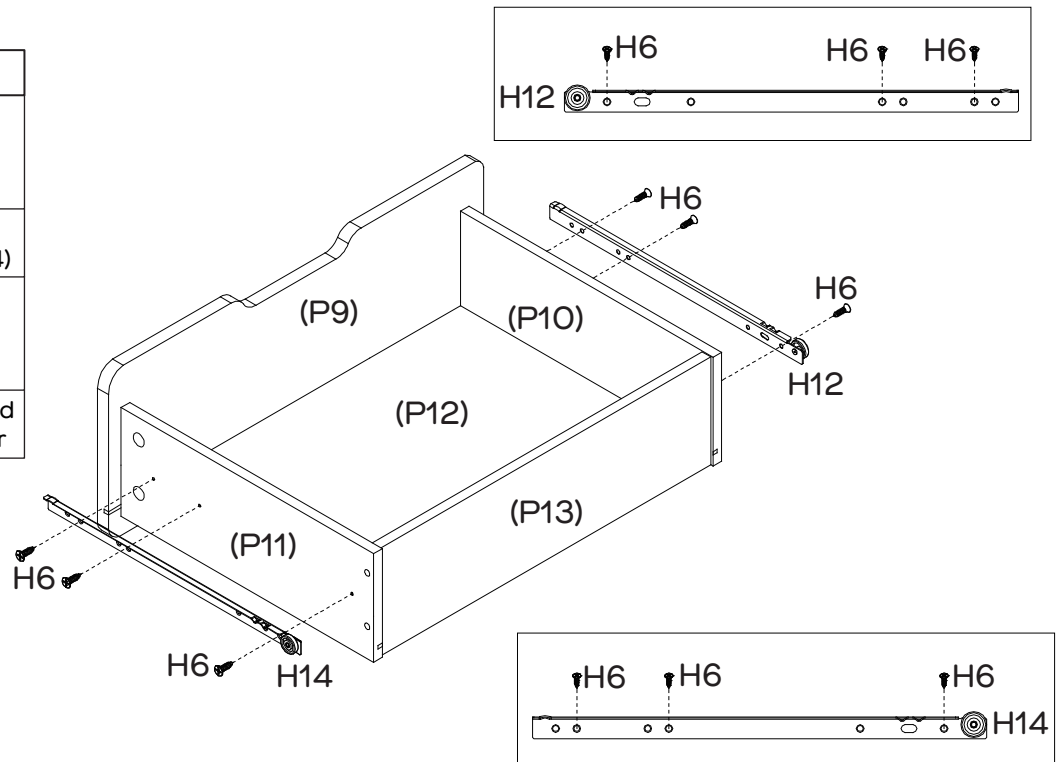

Fasten 1 x left runner (H12) to drawer left side (P10) with 3 x screws (H6) using a Phillips head screwdriver as shown.

Fasten 1 x right runner (H14) to drawer right side (P11) with 3 x screws (H6) using a Phillips head screwdriver as shown.

Step 19

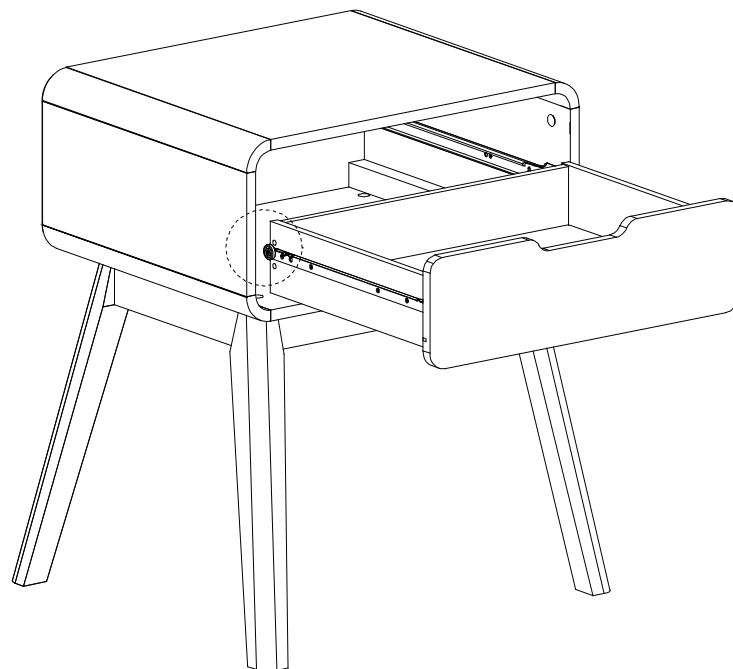





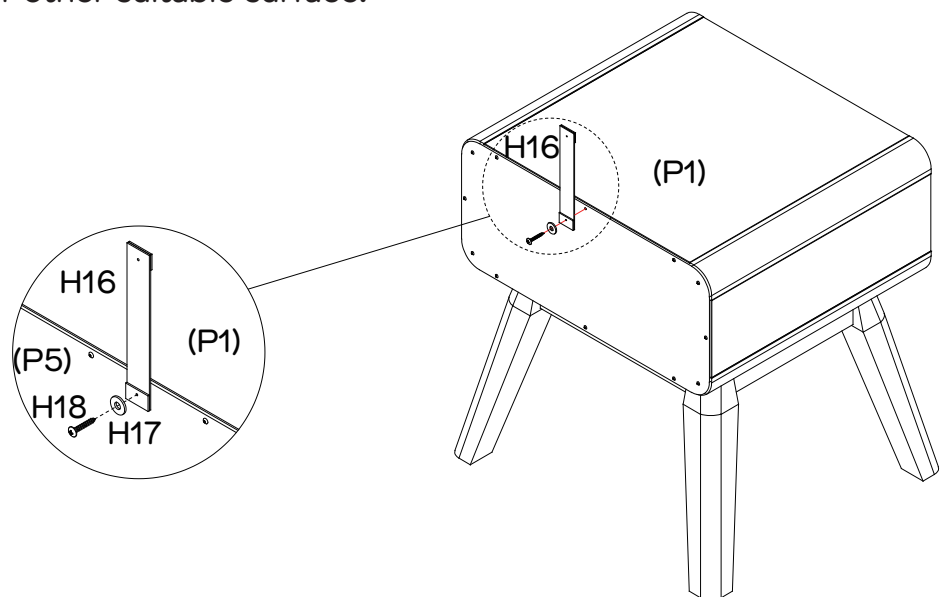
Insert drawer into bedside carefully as shown.

Slide drawer runners into position gently to avoid damaging runner.

Step 20



We strongly recommend that this product is permanently fixed to the wall or other suitable surface.


You will need	
	
1 x Flat Washer (H17)	1 x Screw 25mm (H18)
	
1 x Wall Strap (H16)	Phillips Head Screwdriver



Fix 1 x wall strap (H16) to top panel (P1) with 1 x screw (H18) and 1 x flat washer (H17) as shown, using a phillips head screwdriver.

Step 21


You will need	
	
1 x Flat Washer (H17)	Phillips Head Screwdriver

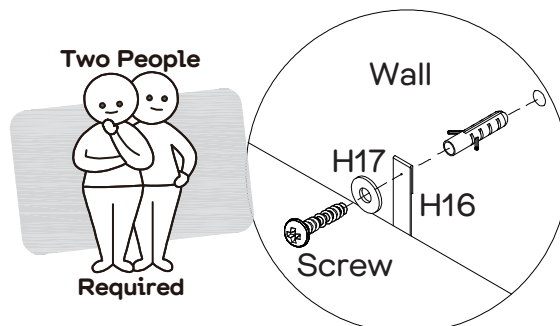


Seek advice from a qualified trades person on how to attach this wall strap to your specific wall.

Screw and wall plug are not included. Please use appropriate fixtures for your wall.

With assistance, move the bedside to its final position. Attach the wall strap to the wall with the appropriate fixtures using a phillips head screwdriver. Make sure they are firmly attached and secure.

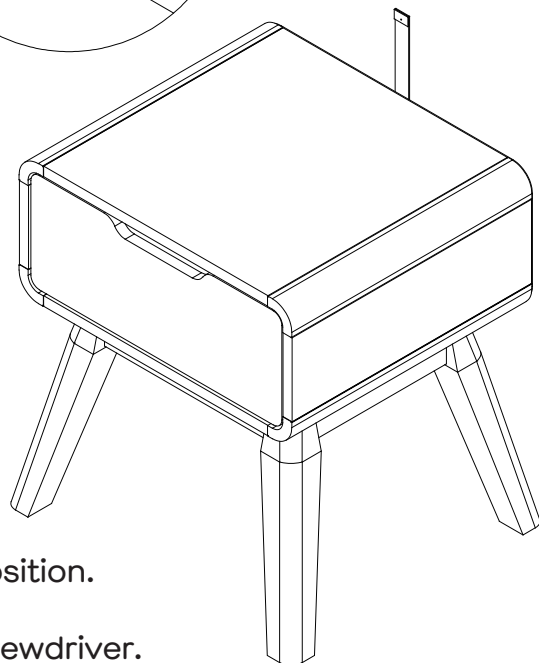

Step 22

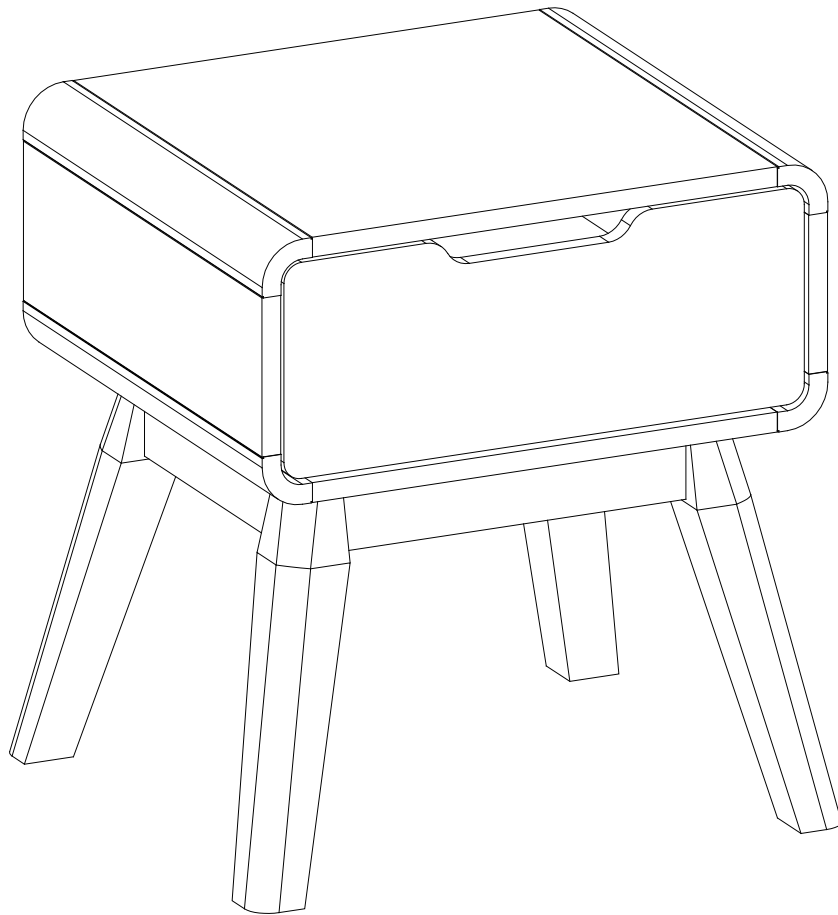

Job complete!

In the interest of our environment please dispose of all packaging thoughtfully.