





**Fantastic
Furniture**

Version 1.0

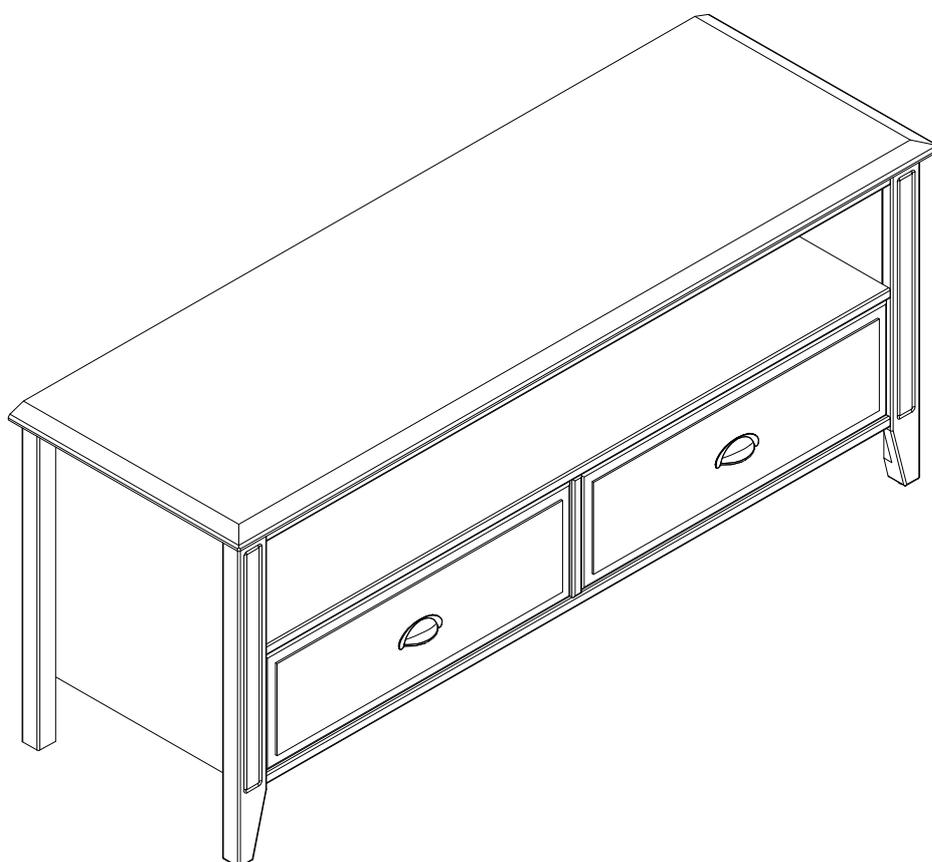

Two People

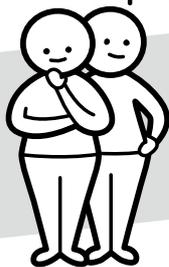

Required

Torkay

Lowline 1400mm White Walnut

fantasticfurniture.com.au

**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**



To avoid any serious or fatal injury, this product has been provided with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture

Assembly checklist




Read through the instructions carefully before you begin.

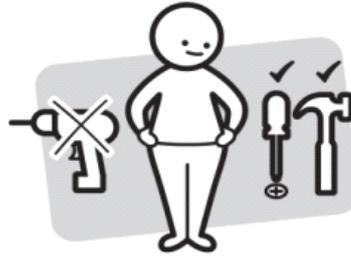

Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

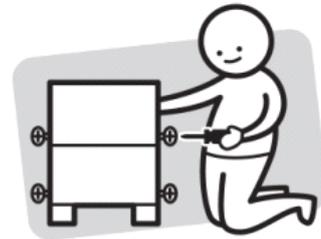

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you Need

To assemble the product



(Other Tools You Need)
Phillips Head Screwdriver
Mallet (soft headed)


Part List

Carton 1:


- 1 x Top Panel (P1);
- 1 x Top Panel Rail (P4);
- 1 x Shelf (P5);
- 1 x Centre Board (P6);
- 1 x Bottom Frame (P7);
- 1 x Middle Foot (P8);
- 1 x Back Panel (P9);
- 2 x Drawer Fronts (P10);
- 2 x Left Drawer Sides (P11);
- 2 x Right Drawer Sides (P12)
- 2 x Drawer Backs (P13);
- 2 x Drawer Bases (P14);
- 2 x Drawer Support Rails (P15)

Carton 2:

- 1 x Left Side (P2);
- 1 x Right Side (P3);

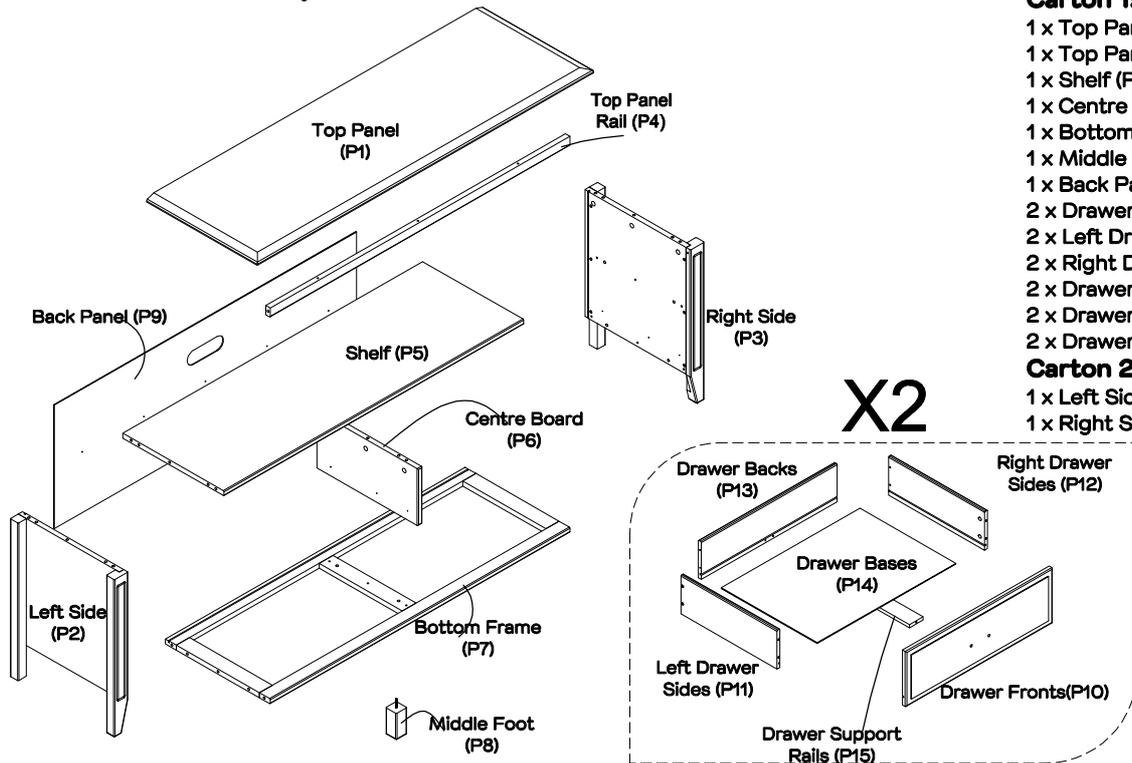

Hardware Pack

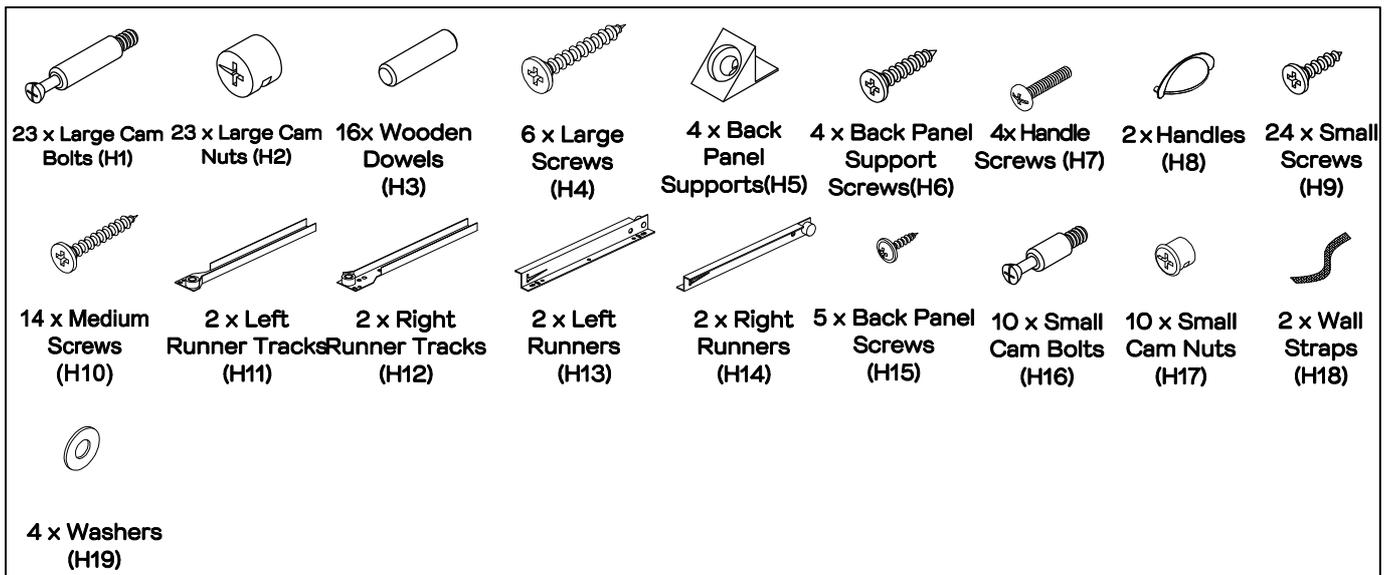


Please make sure you have all these parts before you start.




Step 1


You will need:	
	
6 x Large Cam Bolts (H1)	Phillips Head Screwdriver

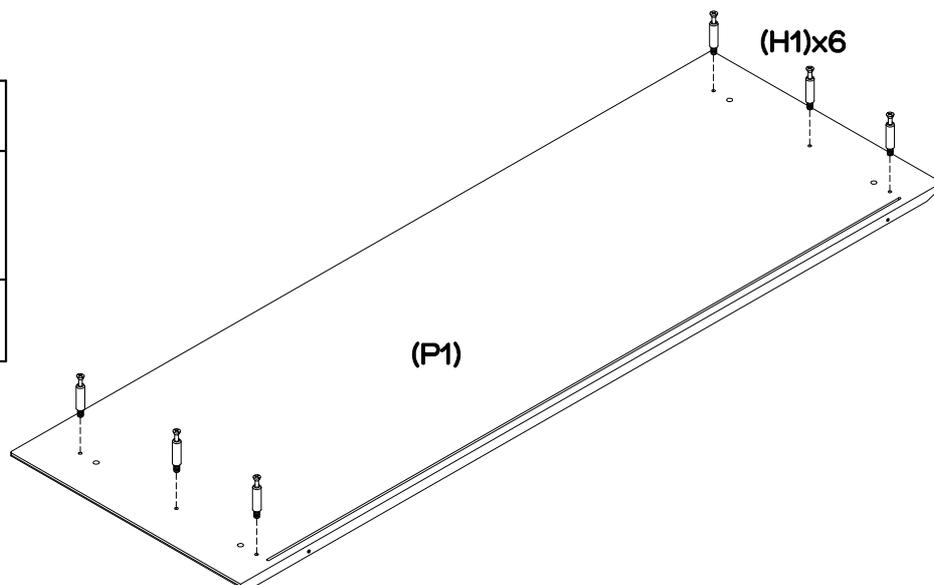

Attach 6 x large cam bolts (H1) to top panel (P1) using a phillips head screwdriver.


Step 2


You will need:			
	8 x Wooden Dowels (H3)		Mallet (soft headed)
	3 x Large Cam Bolts (H1)		Phillips Head Screwdriver

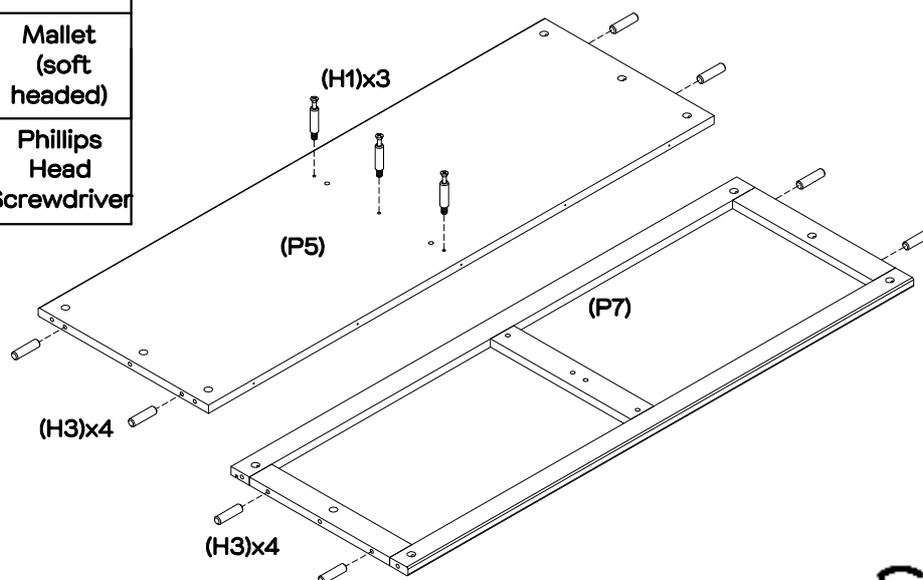

Insert 8 x wooden dowels (H3) into shelf (P5) and bottom frame (P7). Attach 3 x large cam bolts (H1) to shelf (P5), using a phillips head screwdriver.

Step 3

You will need:			
	Mallet (soft headed)		3 x Small Screws (H9)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver
	1 x Left Runner Tracks (H11)		

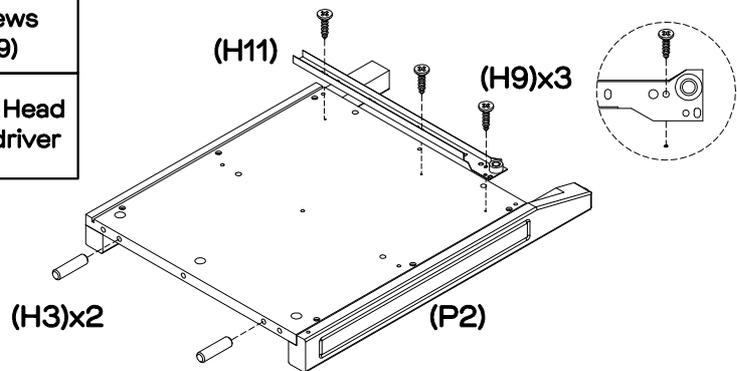


Insert 2 x wooden dowels (H3) into left side (P2).

Attach 1 x left runner track (H11) to left side (P2) using 3 x small screws, tightening with a phillips head screwdriver. Ensure you insert the the screws (H9) into the holes on the track (H11) as shown.

Step 4

You will need:			
	Mallet (soft headed)		3 x Small Screws (H9)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver
	1 x Right Runner Tracks (H12)		

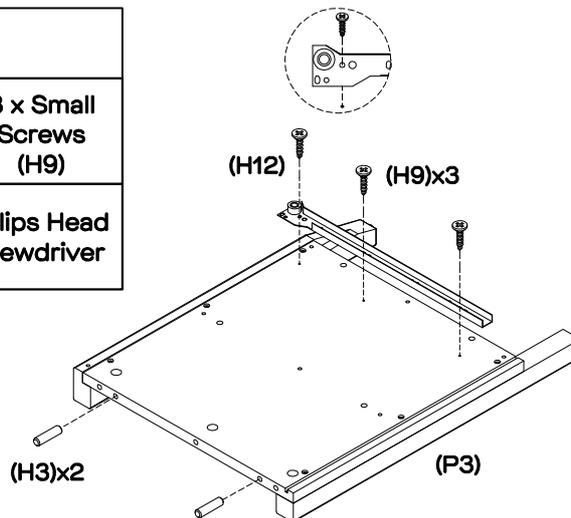


Insert 2 x wooden dowels (H3) into right side (P3).

Attach 1 x right runner track (H12) to right side (P3) using 3 x small screws (H9), tightening with a phillips head screwdriver. Ensure you insert the screws (H9) into the holes on the track (H12) as shown.

Step 5


You will need:	
	
Phillips Head Screwdriver	7 x Large Cam Bolts (H1)

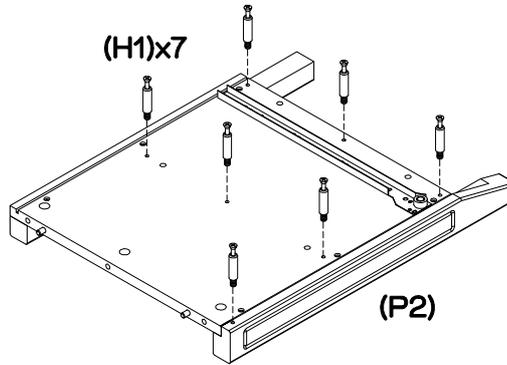

Attach 7 x large cam bolts (H1) to left side (P2) using a phillips head screwdriver.

Step 6

You will need:	
	
Phillips Head Screwdriver	7 x Large Cam Bolts (H1)

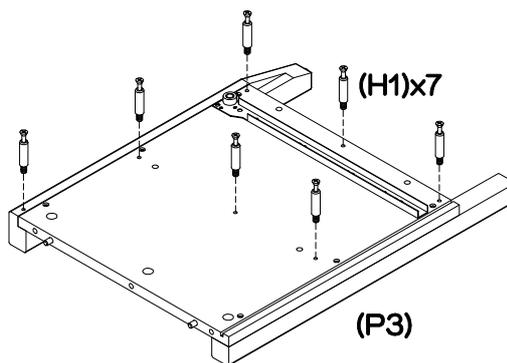


Attach 7 x large cam bolts (H1) to right side (P3) using a phillips head screwdriver.

Step 7

You will need:			
	Mallet (soft headed)		3 x Small Screws (H9)
	4 x Wooden Dowels (H3)		Phillips Head Screwdriver
	1 x Right Runner Tracks (H12)		


Note: the left side of the centre board (P6) has 3 x cam nut holes.

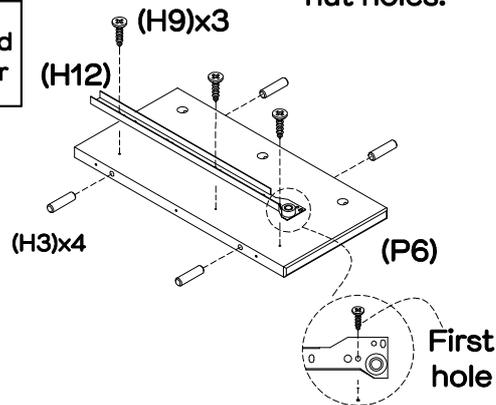

Insert 4 x wooden dowels (H3) into centre board (P6). Attach 1 x right runner (H12) to the left side of centre board (P6) using 3 x small screws (H9), tightening with a phillips head screwdriver. Ensure the screws are inserted into the holes shown in the image above.

Step 8

You will need:			
	1 x Left Runner Tracks (H11)		3 x Small Screws (H9)
	Phillips Head Screwdriver		

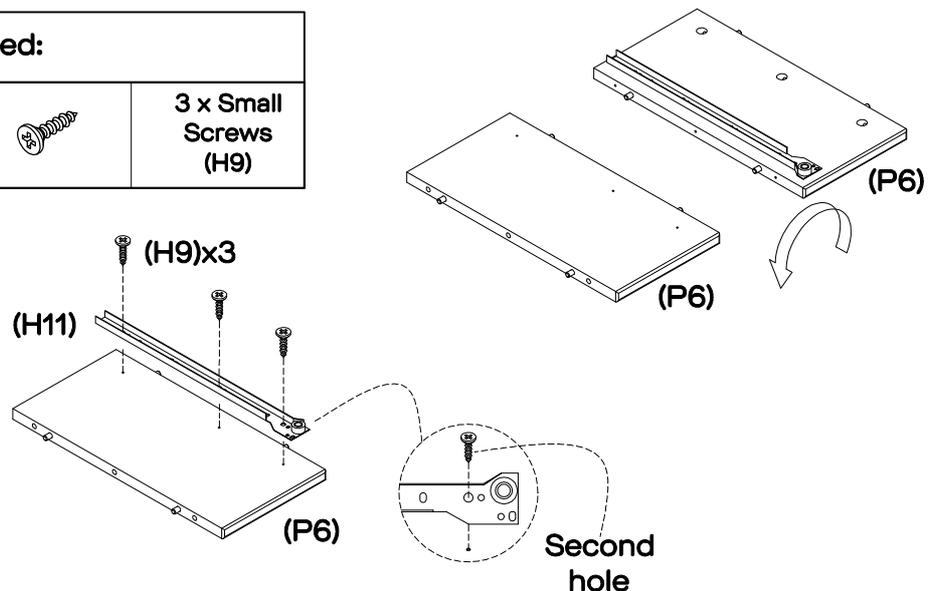

Turn over the centre board (P6) and attach 1 x left runner track (H11) using 3 x small screws (H9), tightening with a phillips head screwdriver. Ensure the screws are inserted into the holes shown in the image above.


Step 9

You will need:	
	
3 x Large Cam Nut (H2)	Phillips Head Screwdriver

This is how a cam nut works.....





The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

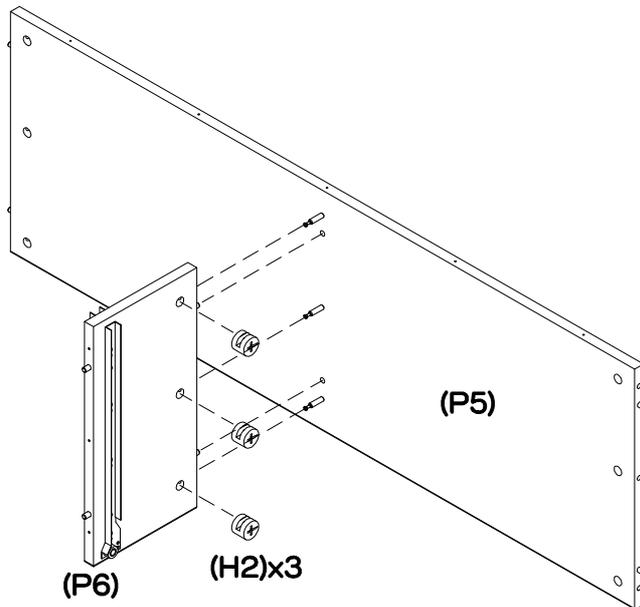

Attach the centre board (P6) to the shelf (P5) as shown. Insert 3 x large cam nuts (H2) into centre board (P6). Using a phillips head screwdriver, rotate the cam nuts so the arrow points towards the incoming cam bolt. Turn clockwise to lock.


Step 10

You will need:	
	
Phillips Head Screwdriver	3 x Large Screws (H4)

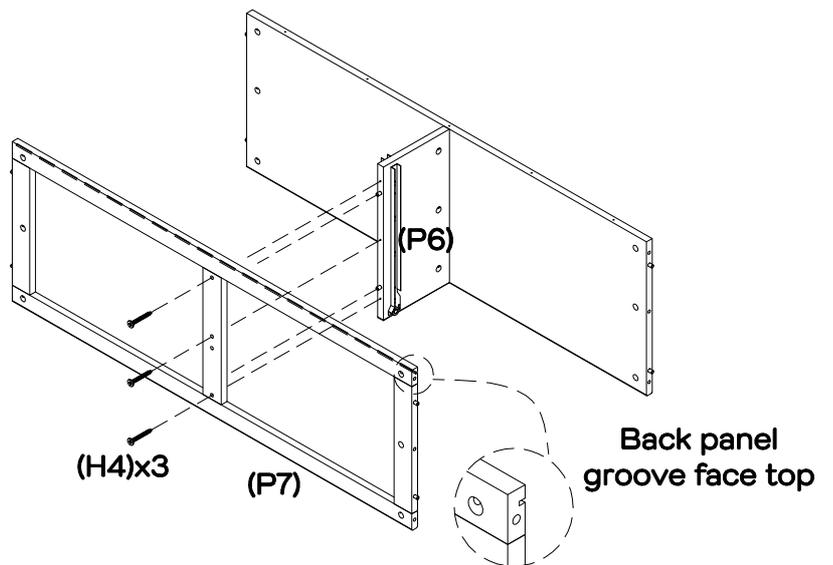

Attach the bottom frame (P7) to the centre board (P6) using 3 x large screws (H4), tightening with a phillips head screwdriver.



Step 11

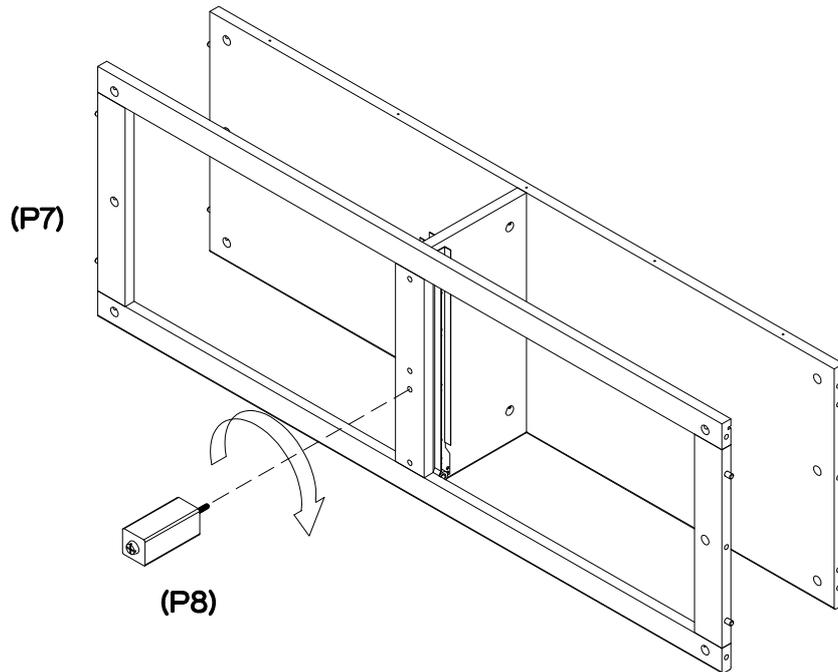

Attach middle foot (P8) to the bottom frame (P7) by turning clockwise to lock.

Step 12

You will need:	
6 x Large Cam Nut (H2)	Phillips Head Screwdriver

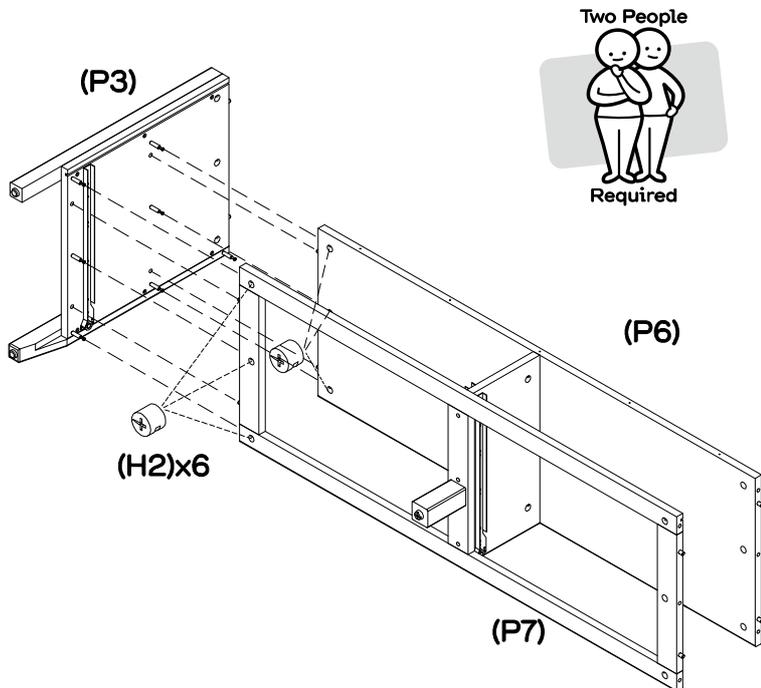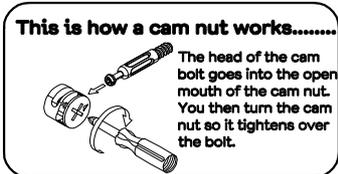

With assistance, attach right side (P3) to centre board (P6) and bottom frame (P7). Insert 6 x large cam nuts (H2) into centre board (P6) and bottom frame (P7). Using a phillips head screwdriver, rotate the cam nuts (H2) so the arrows point towards incoming cam bolts. Turn clockwise to lock.




Step 13

You will need:	
1 x Large Cam Nut (H2)	Phillips Head Screwdriver

This is how a cam nut works.....

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

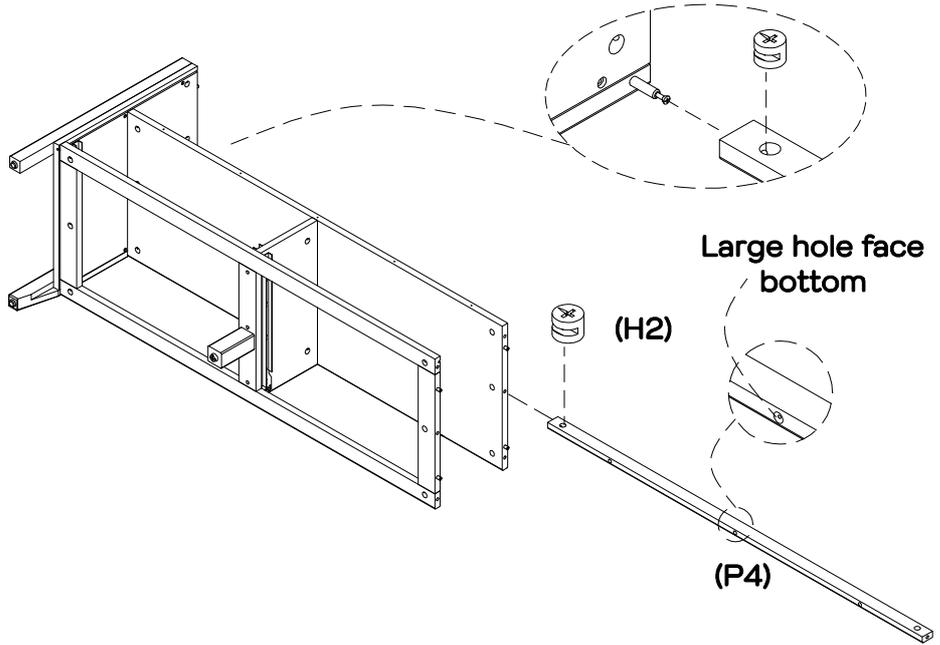


Attach top panel rail (P4) to the assembled frame as shown. Insert 1 x large cam nut (H2) into top panel rail (P4). Using a phillips head screwdriver, rotate the cam nut so the arrow points towards incoming cam bolt. Turn clockwise to lock.

Step 14

You will need:	
7 x Large Cam Nut (H2)	Phillips Head Screwdriver


This is how a cam nut works.....

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

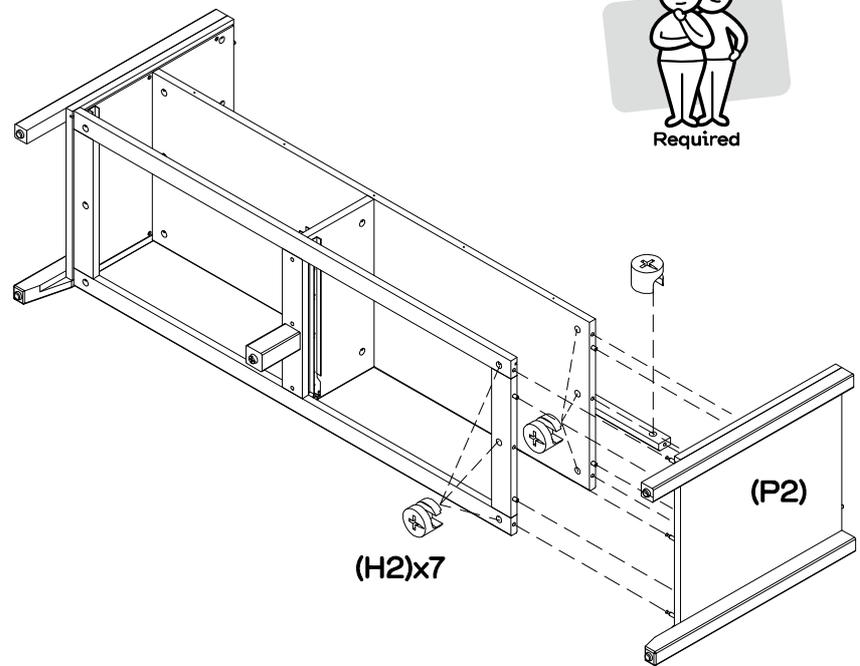

With assistance, attach left side (P2) to centre board (P6) and bottom frame (P7). Insert 7 x large cam nuts (H2) into centre board (P6), bottom frame (P7) and top panel rail (P4). Using a phillips head screwdriver, rotate the cam nuts (H2) so the arrow points towards incoming cam bolt. Turn clockwise to lock.

Step 15

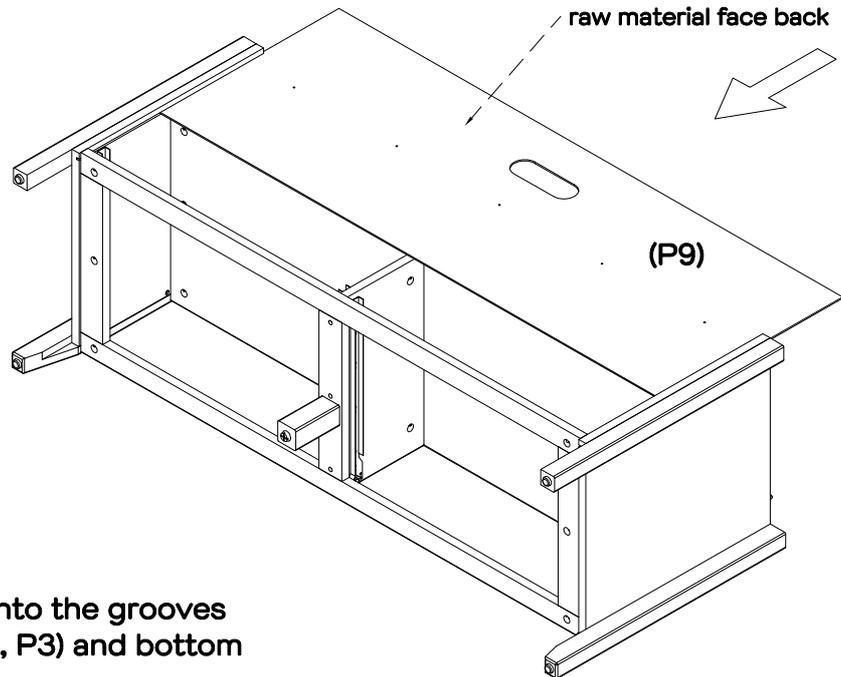

Slide back panel (P9) into the grooves on the side panels (P2, P3) and bottom frame (P7).

Step 16

Two People




Required

You will need:	
6 x Large Cam Nut (H2)	Phillips Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

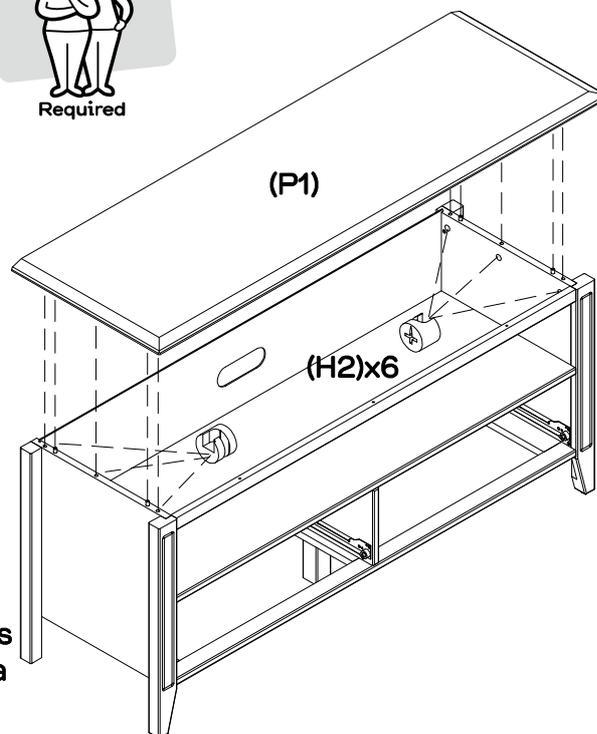

With assistance, carefully turn the unit upright. Attach top panel (P1) to the assembled unit. Insert 6 x large cam nuts (H2) into the side panels (P2, P3). Using a phillips head screwdriver, turn the cam nuts (H2) so the arrow points towards incoming cam bolts. Turn clockwise to lock.
fantasticfurniture.com.au

Step 17


You will need:	
	
3 x Large Screws (H4)	Phillips Head Screwdriver

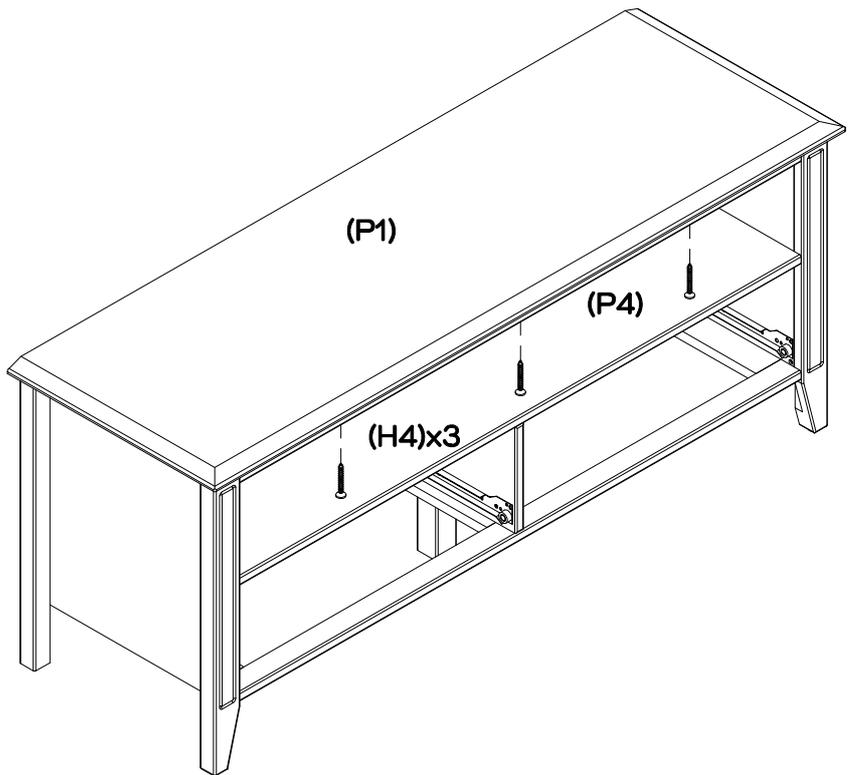

Attach top panel rail (P4) to top panel using 3 x large screws (H4), tightening with a phillips head screwdriver.

Step 18

You will need:	
	
4 x Back Panel Supports(H5)	Phillips Head Screwdriver
	
4 x Back Panel Support Screws(H6)	5 x Back Panel Screws (H15)

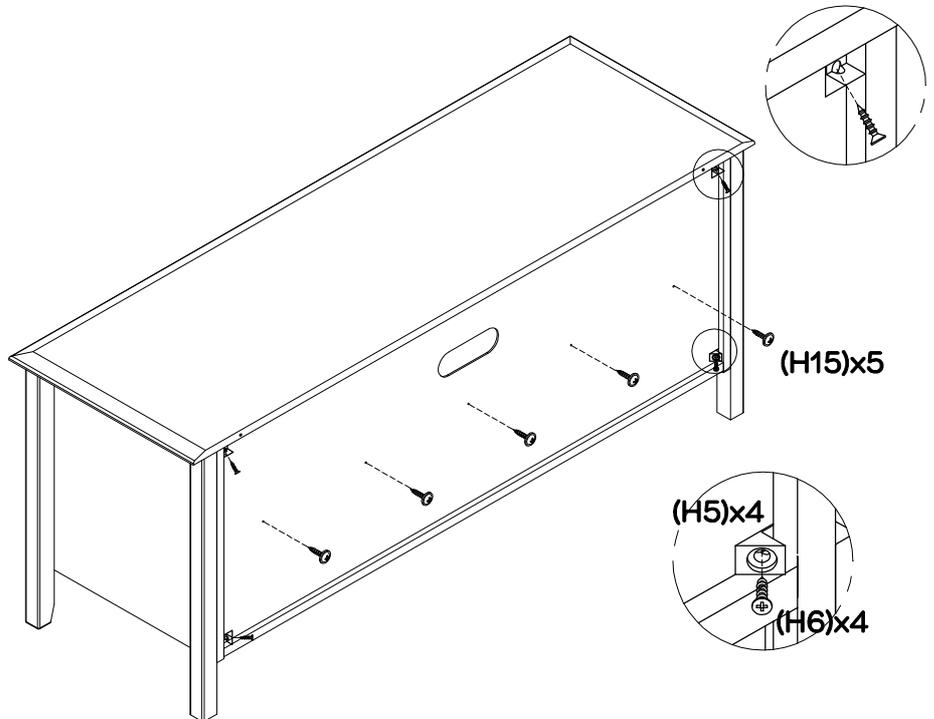


Attach back panel (P9) to shelf (P5) using 5 x back panel screws (H15), tightening with a phillips head screwdriver. Attach 4 x back panel supports (H5) to each corner of the unit. Secure using 4 x back panel support screws (H6), tightening with a phillips head screwdriver.

Step 19

You will need:	
	
10 x Small Cam Bolts (H16)	Phillips Head Screwdriver

Attach 5 x small cam bolts (H16) to 1 x drawer front (P10) using a phillips head screwdriver. Repeat this step for the other drawer front (P10).

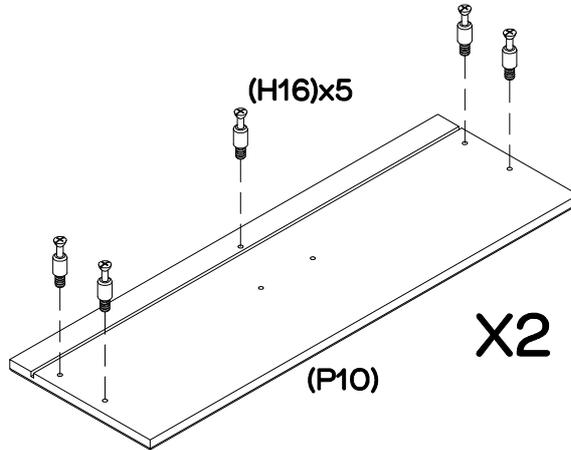


Step 20

You will need:	
	
8 x Small Cam Nuts (H17)	Phillips Head Screwdriver

This is how a cam nut works.....





The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

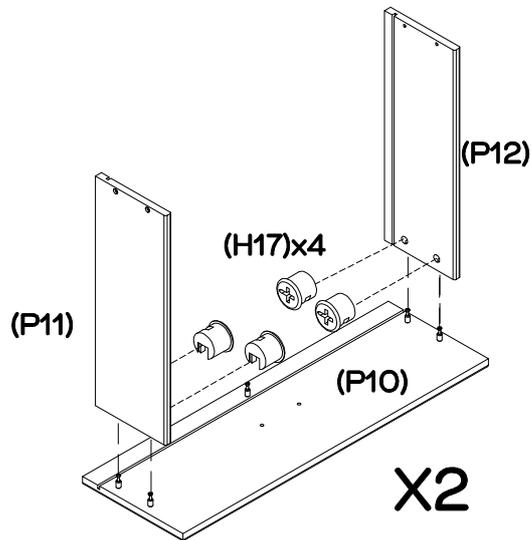

Attach 1 x left drawer side (P11) and 1 x right drawer side (P12) to 1 x drawer front (P10), ensuring the grooves on each panel align. Insert 4 x small cam nuts (H17) into the drawer sides (P11, P12). Using a phillips head screwdriver, rotate so the arrow on the cam nut 9 (H17) points towards incoming cam bolts. Turn clockwise to lock. Repeat this step for the other drawer.


Step 21

You will need:	
	
2 x Small Cam Nuts (H17)	Phillips Head Screwdriver

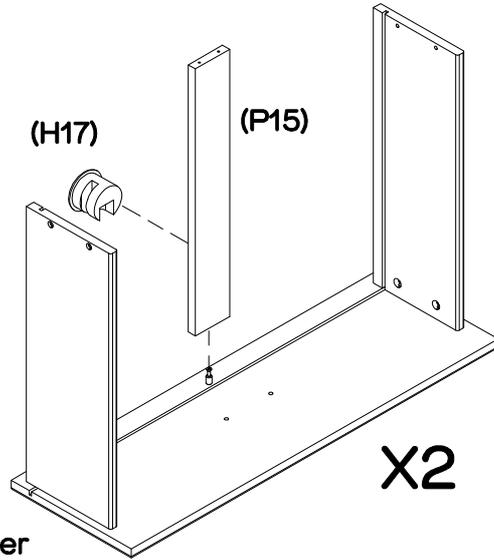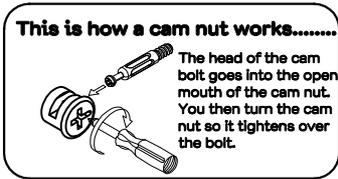

Attach 1 x drawer support rail (P15) to the drawer front (P10). Insert 1 x small cam nut (H17) into the support rail (P15). Using a phillips head screwdriver, rotate the cam nut so the arrow points towards incoming cam bolt. Turn clockwise to lock. Repeat this step for the other drawer.


Step 22

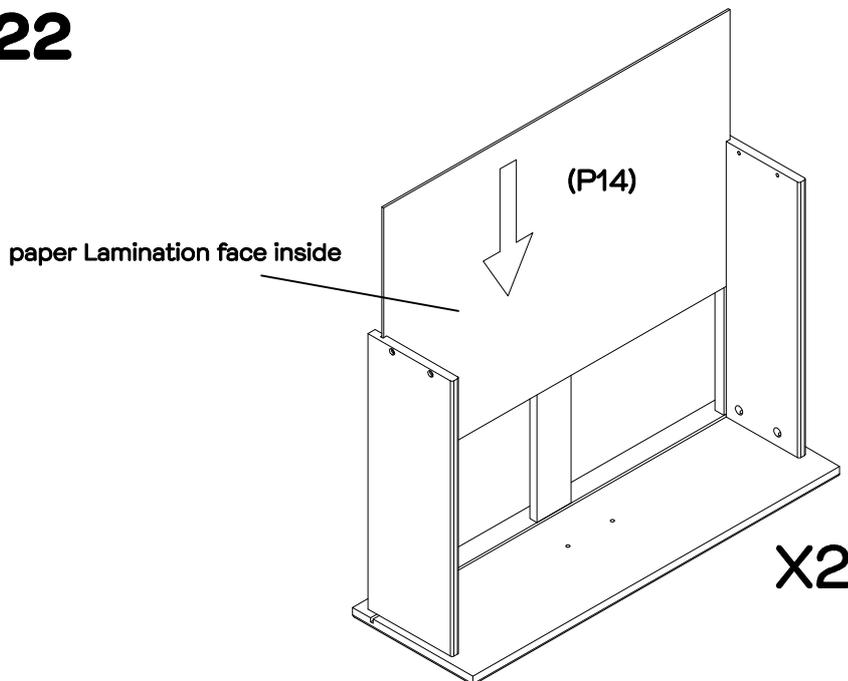

Slide 1 x drawer base (P14) into the grooves on the drawer sides (P11, P12) and drawer front (P10). Repeat this process for the other drawer.


Step 23


You will need:	
	
12 x Medium Screws (H10)	Phillips Head Screwdriver

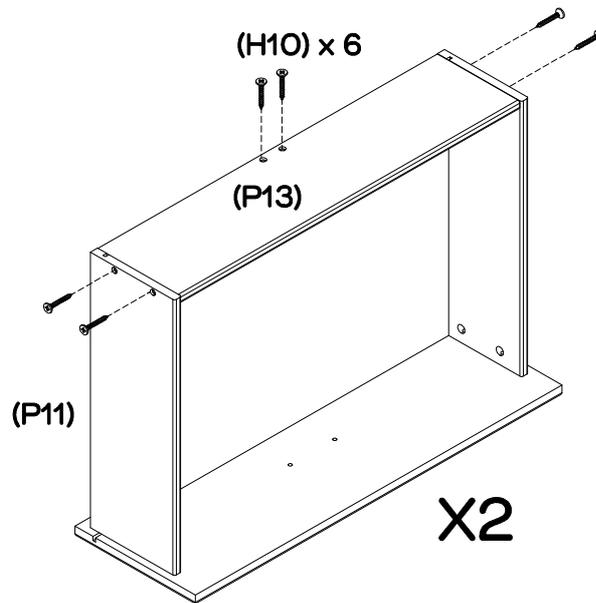

Attach 1 x drawer back panel (P13) to drawer sides (P11, P12) and drawer support rail (P15) using 6 x medium screws (H10). Repeat this process for the other drawer.

Step 24

You will need:	
	
12 x Small Screws (H9)	Phillips Head Screwdriver
	
2 x Left Runners (H13)	2 x Right Runners (H14)

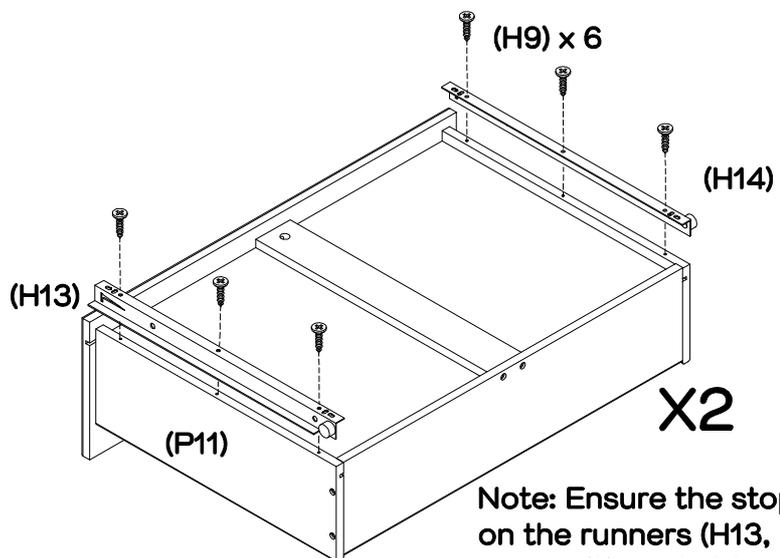


Note: Ensure the stoppers on the runners (H13, H14) are positioned at the back of the drawer.

Attach 1 x left runner (H13) to left drawer side (P11), and 1 x right runner (H14) to right drawer side (P12) using 6 x small screws. Tighten using a phillips head screwdriver. Repeat this step for the other drawer.

Step 25


You will need:

		
4x Handle Screws (H7)	2 x Handles (H8)	Phillips Head Screwdriver

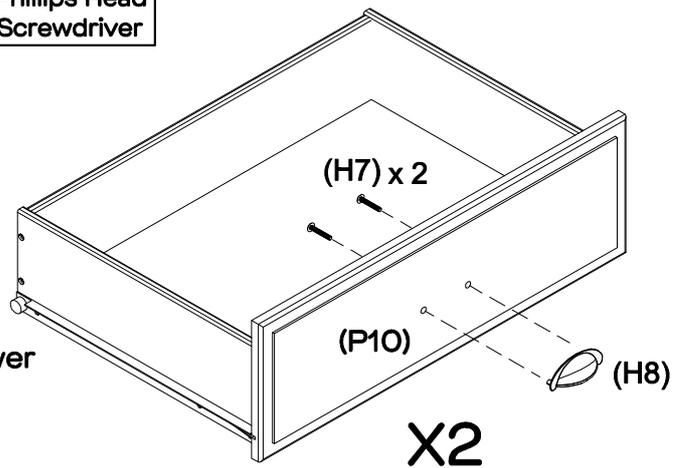

Attach 1 x handle (H8) to drawer front (P10) using 2 x handle screws (H7). Tighten using a phillips head screwdriver. Repeat this step for the other drawer.


Step 26

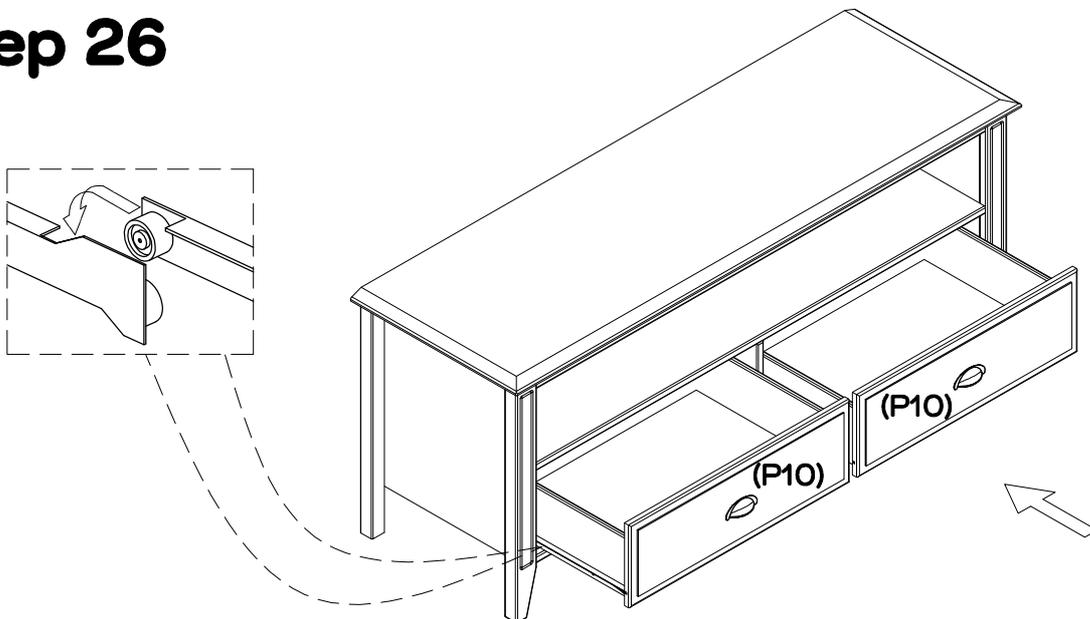

Slide the 2 x drawers into the lowline as shown.

Step 27


You will need:	
2 x Wall Straps (H18)	Phillips Head Screwdriver
2 x Washers (H19)	2 x Medium Screws (H10)

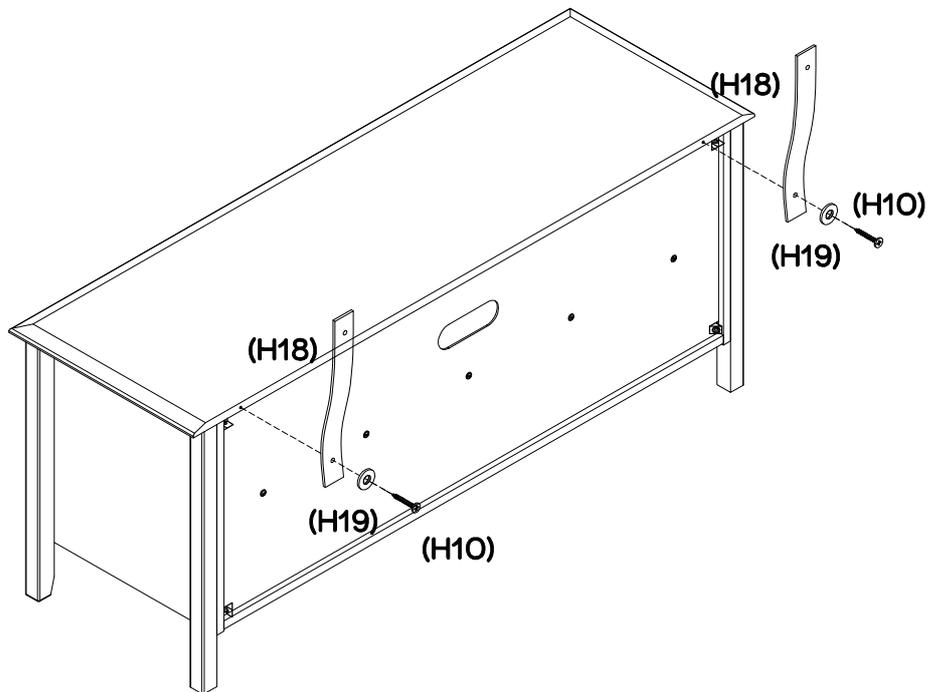

Attach 2 x wall straps (H18) to the back of the top panel (P1) using 2 x large screws (H10) and 2 x washers (H19).

Step 28


You will need:	
2 x Washer (H19)	Phillips Head Screwdriver

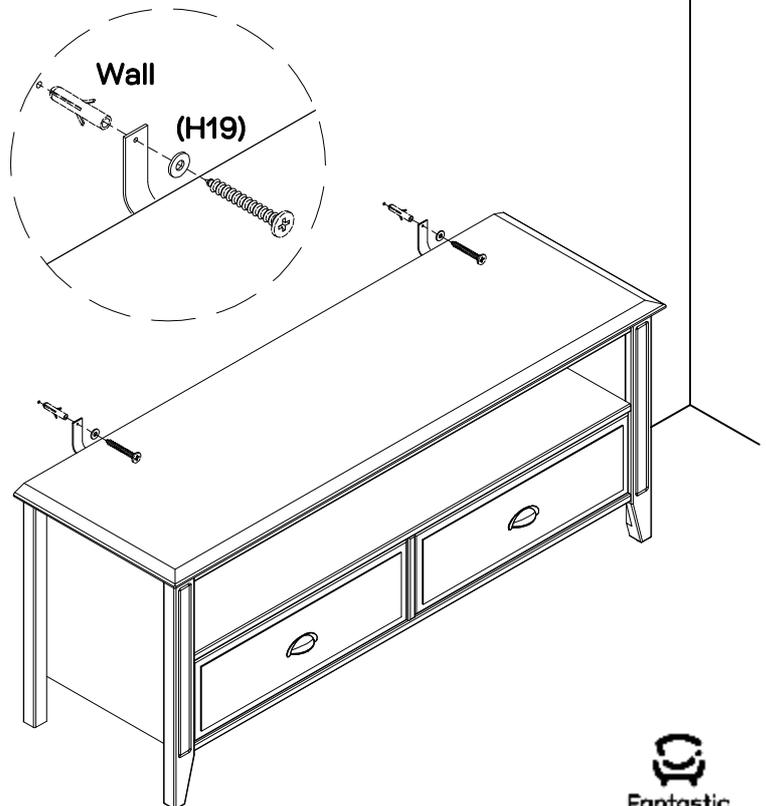

Screw and Wall Plug are not provided.
Please use appropriate fixtures for your wall.

Seek advice from a qualified trades person on how to attach safety strap to the wall .

If drawer fronts gaps are not even please adjust the adjustable leveler on center leg accordingly

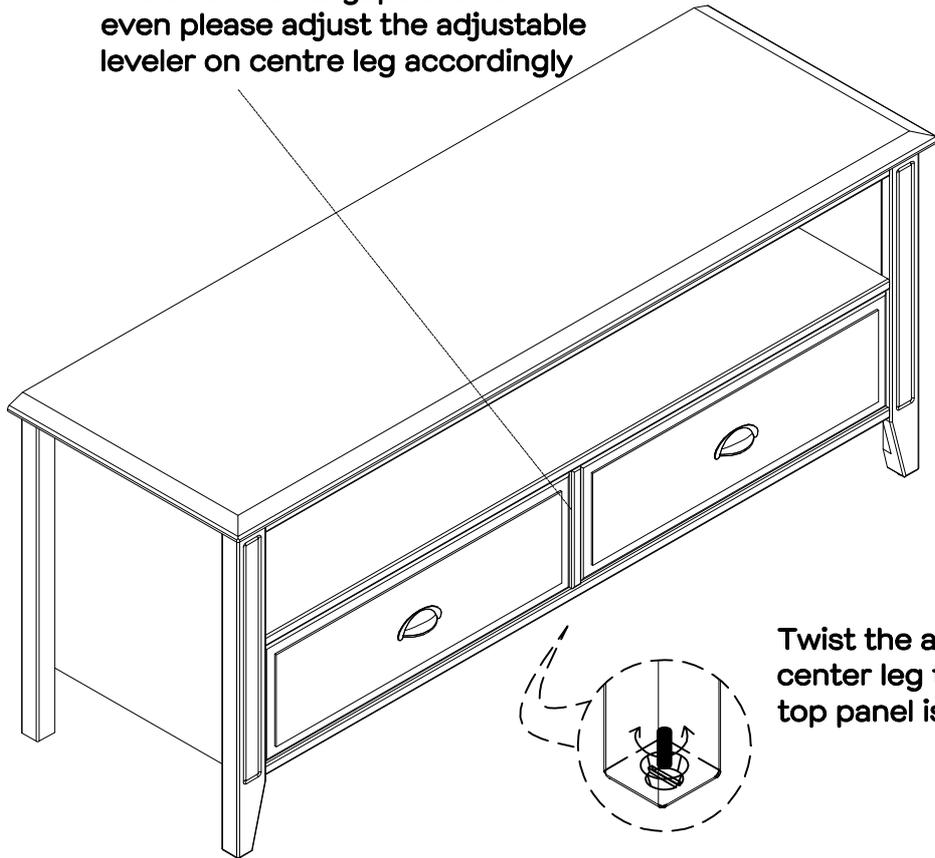

Twist the adjuster on center leg to make the top panel is flush

Job Complete!

In the interest of our environment please dispose of all packing thoughtfully.