





**Fantastic
Furniture**

Version 1.0

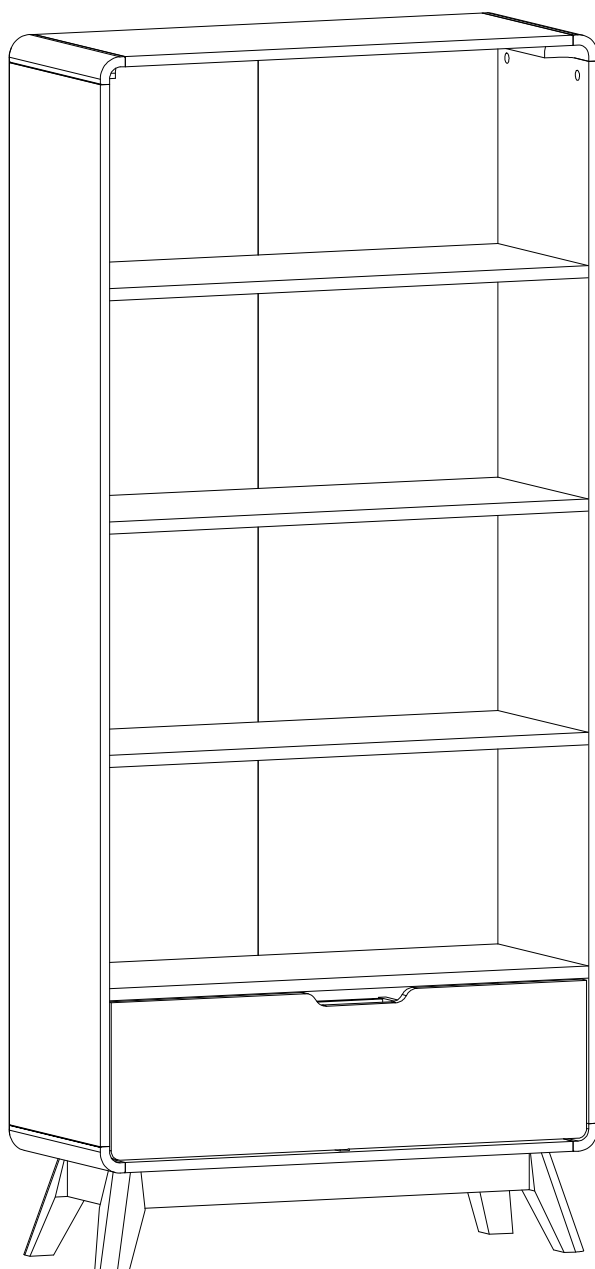

Two People



Required

Niva
Bookcase 1 Drawer
fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

RECOMMENDED WEIGHT CAPACITY: 30kgs/shelf

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.
- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.




- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.

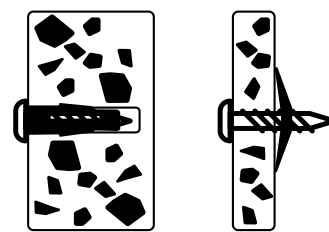

For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

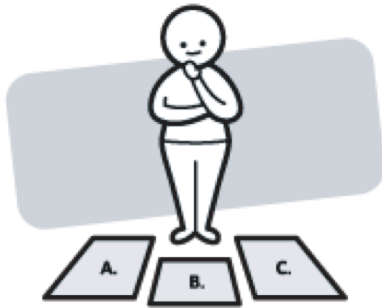

Identify and lay out all of the components before you begin assembly.

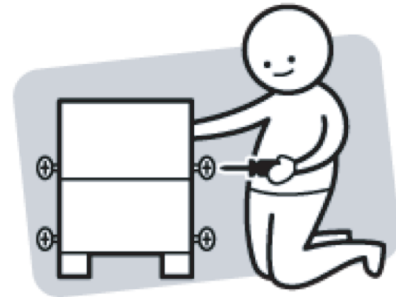

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE



Other tools you need

Phillips head screwdriver; Hammer

Part list

Box 1: Top Panel (P1);

Bottom Panel (P4);

4 x Legs (P5);

2 x Short Rails (P6);

2 x Shelves (P8);

Drawer Left Side (P9);

Drawer Right Side (P10);

Drawer Base (P12);

Drawer Rail (P14);

Hardware pack.

Box 2: Left Side Panel (P2);

Right Side Panel (P3);

2 x Long Rails (P7); Shelf (P8);


Bottom Shelf (P16);

Drawer Front (P13);


Drawer Back (P11)

Back Panel (P15);

Metal Rail (P17).

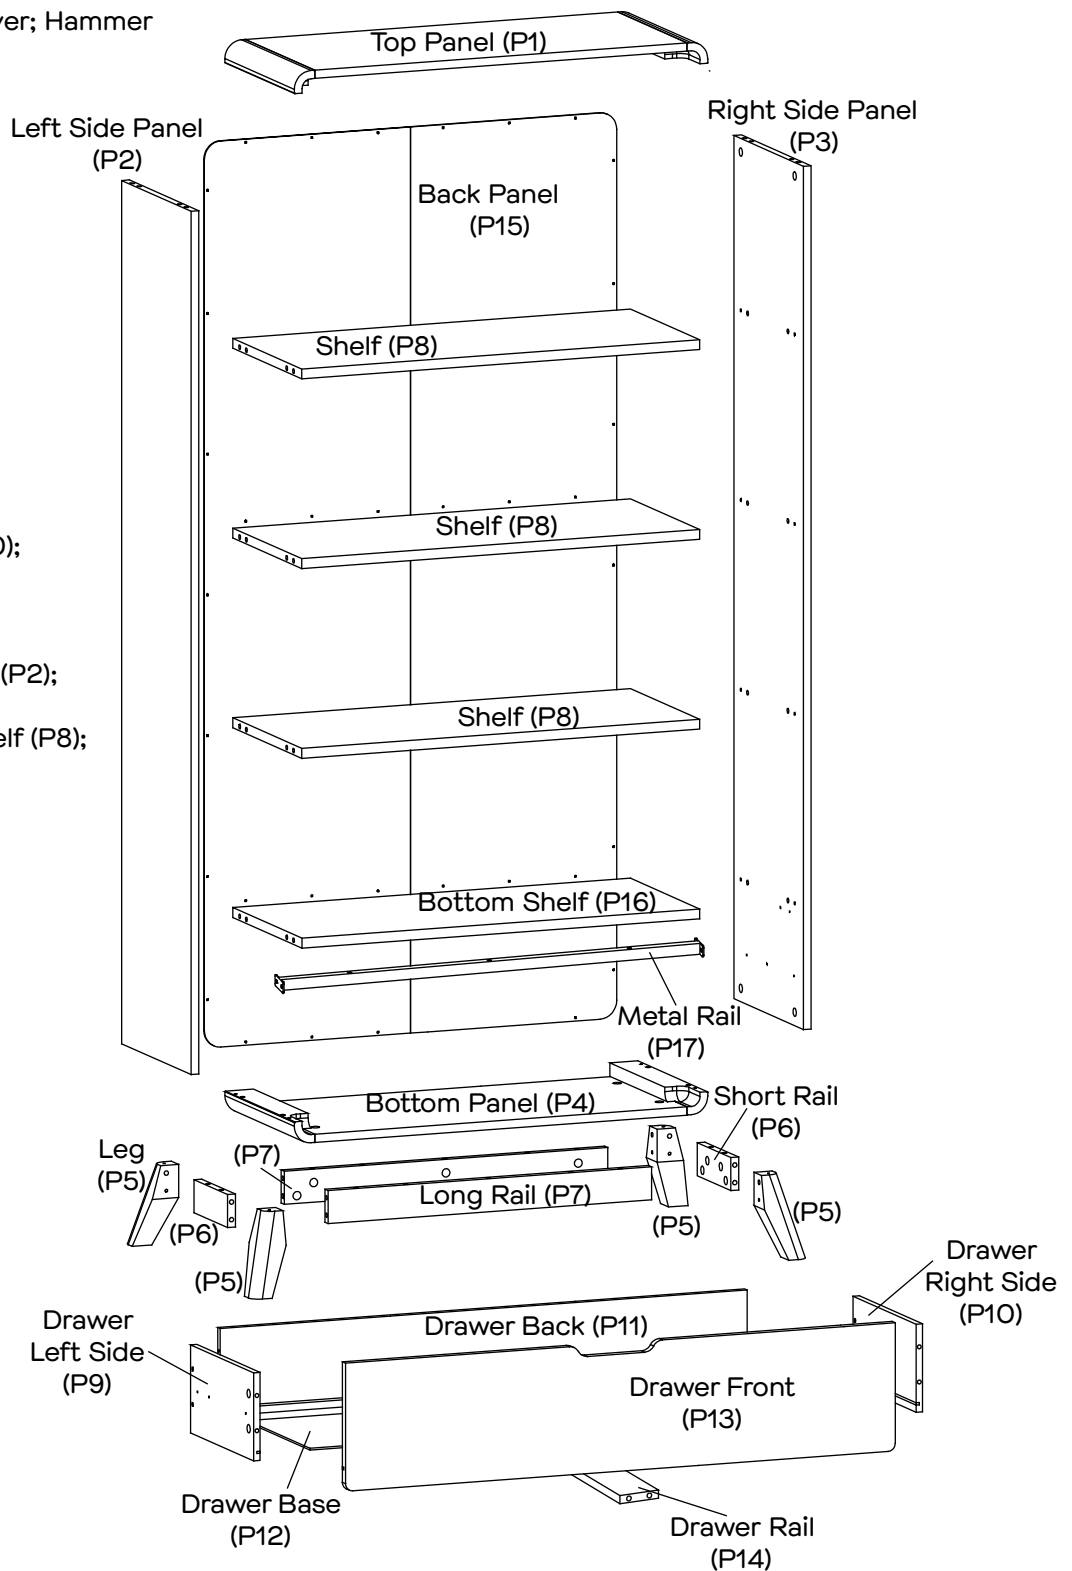

Hardware Pack



48 x Cam Bolts
(H1)




42 x Large Cam
Nuts (H2)




36 x Dowels
(H3)



6 x Small Cam
Nuts (H4)



4 x Screws
(H5)



36 x Nails
(H6)



4 x Felt Pads
(H7)



12 x Screws
(H8)



1 x Left Runner
Tracks (H9)




1 x Left Runner
(H10)




1 x Right Runner
Tracks (H11)




1 x Right Runner
(H12)



2 x Screws
(H13)




2 x Wall Straps
(H14)




4 x Flat Washers
(H15)




4 x Screw Caps
(H16)



6 x Screws
(H17)





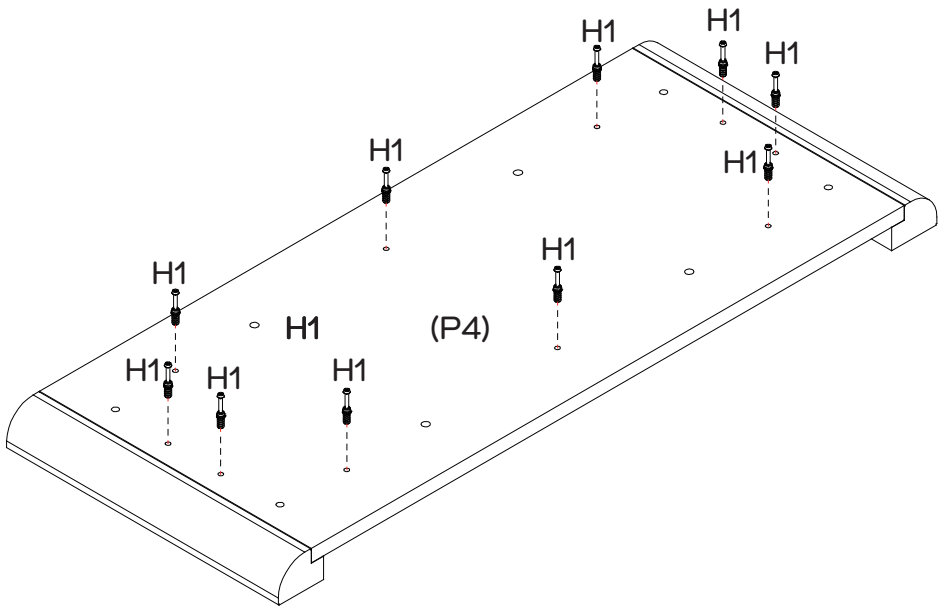
3 x Screws
(H18)



4 x Screws
(H19)


Step 1


You will need	
	
10 x Cam Bolts (H1)	Phillips head screwdriver



Secure 10 x Cam Bolts (H1) to Bottom Panel (P4) as shown by tightening with the Phillips Head Screwdriver.




Step 2

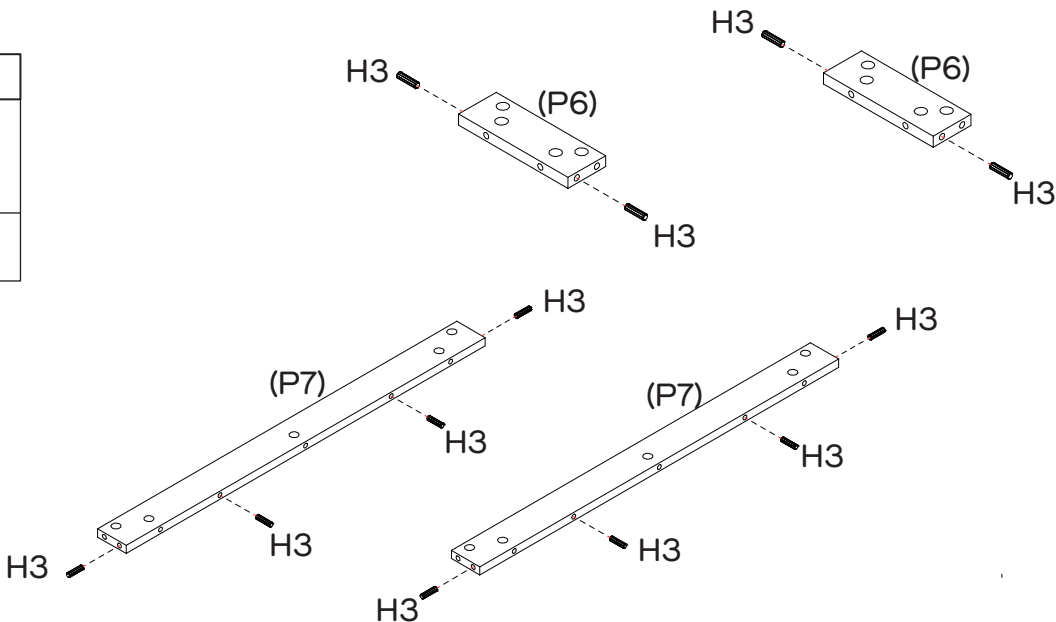
You will need	
	
12 x Dowels (H3)	



Insert 4 x Dowels (H3) into Short Rails (P6x2) and 8 x Dowels (H3) into Long Rails (P7x2) as shown.



Step 3

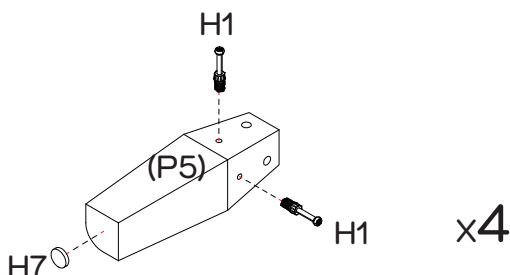You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver
	
4 x Felt Pads (H7)	




Secure 2 x Cam Bolts (H1) to Leg (P5) as shown by tightening with the Phillips Head Screwdriver. Peel off the backing to expose the adhesive side and then apply 1 x Felt Pad (H6) to the bottom of Leg (P5). Repeat steps for the remaining Legs (P5x3).


Step 4

You will need	
	
4 x Large Cam Nuts (H2)	Phillips head screwdriver

This is how a cam nut works.....



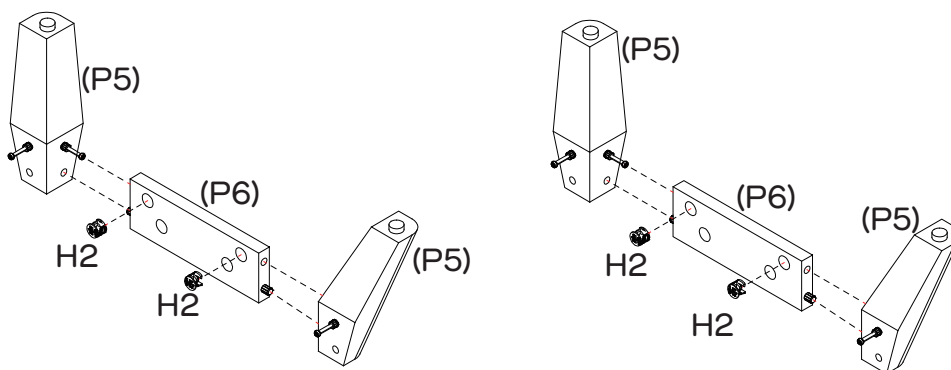


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.



Insert 2 x Large Cam Nuts (H2) into Short Rail (P6) and rotate so that the arrows point towards the incoming Cam Bolts. Secure Legs (P5x2) to each end of the Short Rail (P6) by tightening the Cam Nuts with the Phillips Head Screwdriver. Repeat steps for the second set of Legs (P5x2) and Short Rail (P6).



Step 5

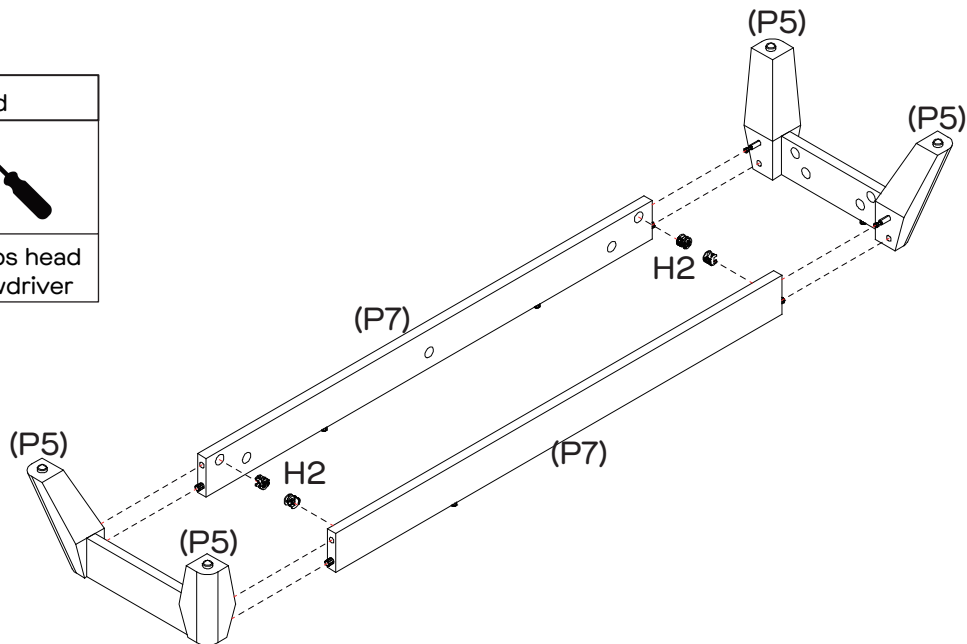
You will need	
	
4 x Large Cam Nuts (H2)	Phillips head screwdriver



Insert 4 x Large Cam Nuts (H2) into Long Rails (P7x2) and rotate so that the arrows point towards the incoming Cam Bolts.
Attach Legs (P5x4) to Long Rails (P7x2) by tightening the Cam Nuts with the Phillips Head Screwdriver.




Step 6


You will need	
	
10 x Large Cam Nuts (H2)	Phillips head screwdriver

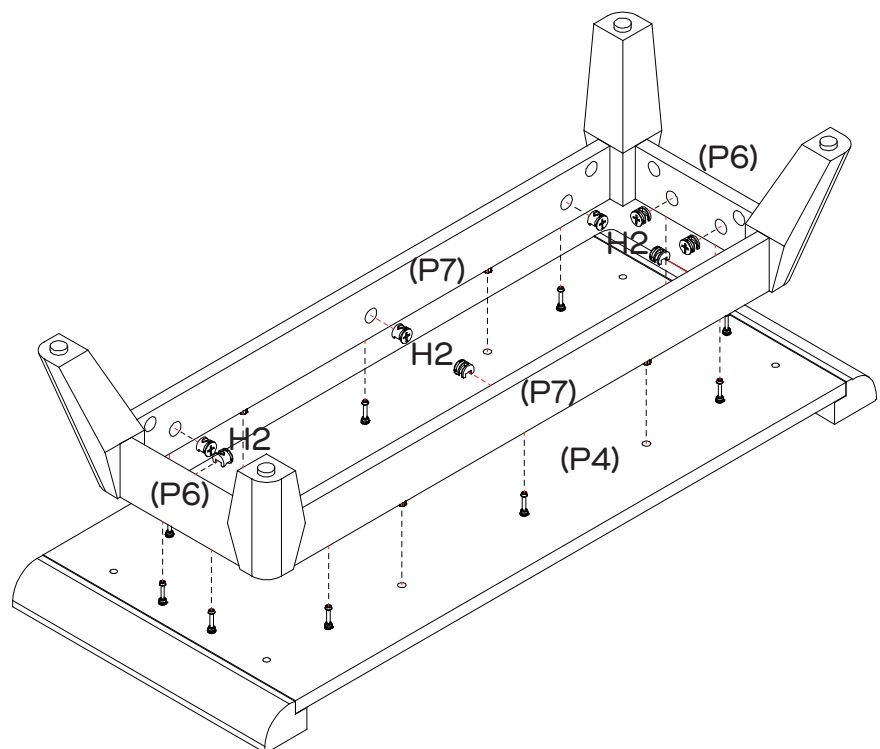

Insert 10 x Large Cam Nuts (H2) into Short & Long Rails (P6x2,P7x2) as shown and rotate so that the arrows point towards the incoming Cam Bolts.
Attach Short & Long Rails (P6x2,P7x2) to Bottom Panel (P4) by tightening the Cam Nuts with the Phillips Head Screwdriver.




Step 7

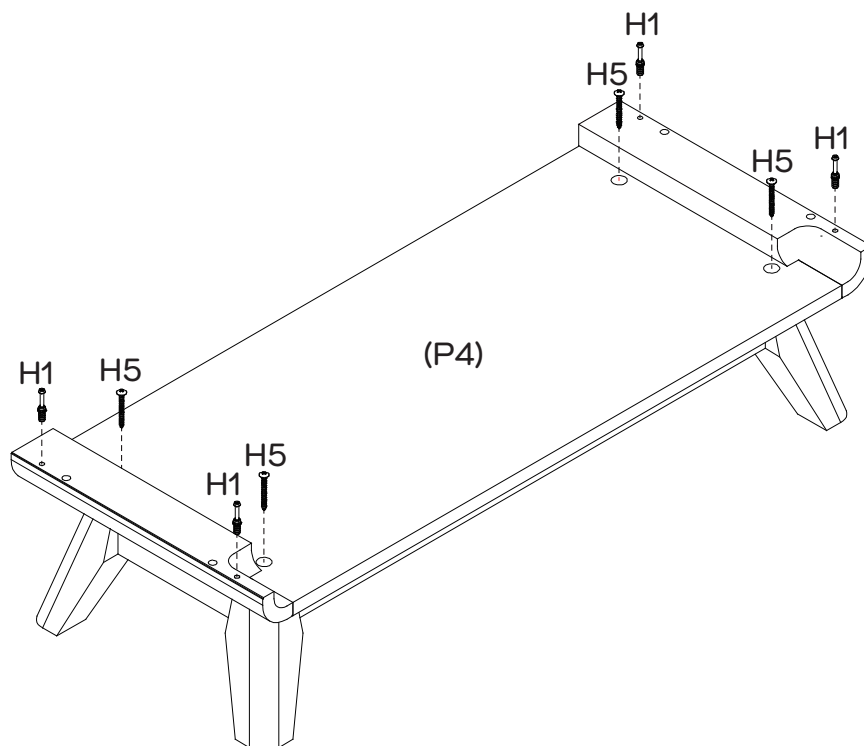
You will need	
	
4 x Cam Bolts (H1)	4 x Screws (H5)
	
Phillips head screwdriver	



Secure 4 x Cam Bolts (H1) and 4 x Screws (H5) to Bottom Panel (P4) as shown by tightening with the Phillips Head Screwdriver.




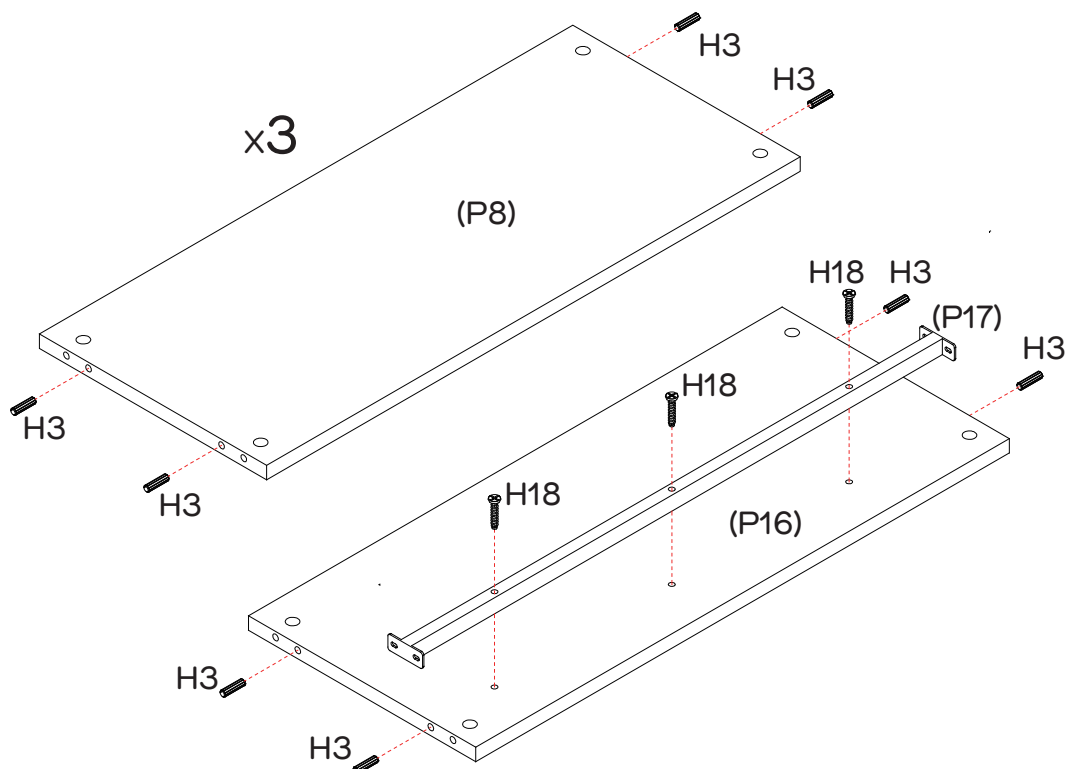

Step 8


You will need	
	
16 x Dowels (H3)	3 x Screws (H18)
	
Phillips head screwdriver	



Insert 4 x Dowels (H3) into each Shelf (P8x3) and Bottom Shelf (P16) as shown. Attach Metal Rail (P17) to Bottom Shelf (P16) with 3 x Screws (H18) by tightening with the Phillips Head Screwdriver.

Step 9

You will need	
	
8 x Cam Bolts (H1)	4 x Dowels (H3)
	
3 x Screws (H8)	1 x Left Runner Track (H9)
	
Phillips head screwdriver	

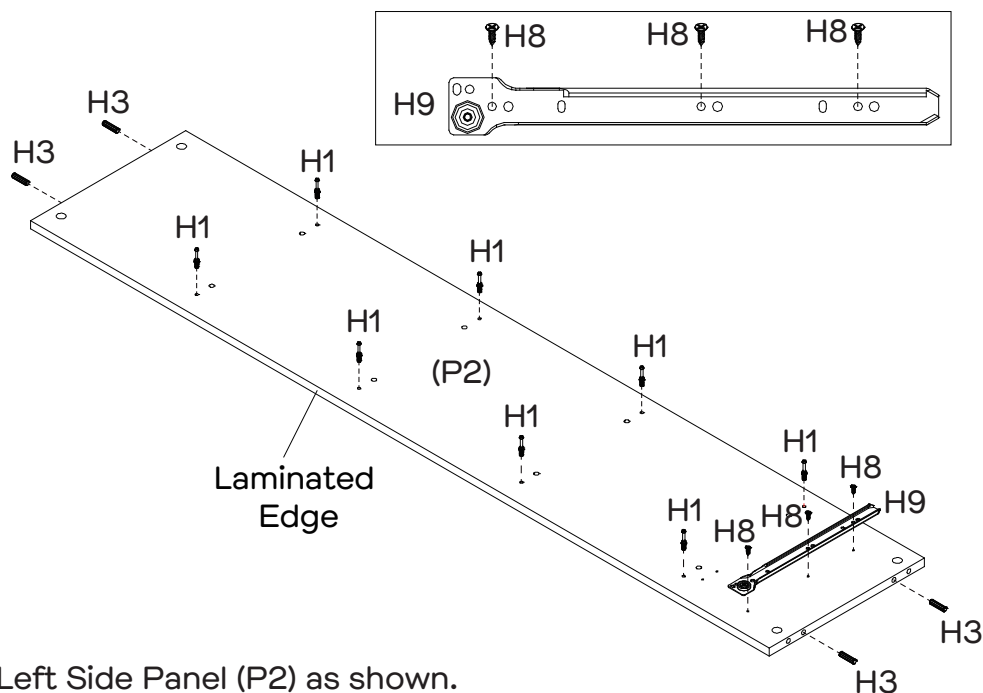







Insert 4 x Dowels (H3) into Left Side Panel (P2) as shown.

Secure 8 x Cam Bolts (H1) to Left Side Panel (P2) by tightening with the Phillips Head Screwdriver.

Attach Left Runner Track (H9) to Left Side Panel (P2) with 3 x Screws (H8) by tightening with the Phillips Head Screwdriver.

Step 10




You will need	
	
8 x Cam Bolts (H1)	4 x Dowels (H3)
	
3 x Screws (H8)	1 x Right Runner Track (H11)
	
Phillips head screwdriver	

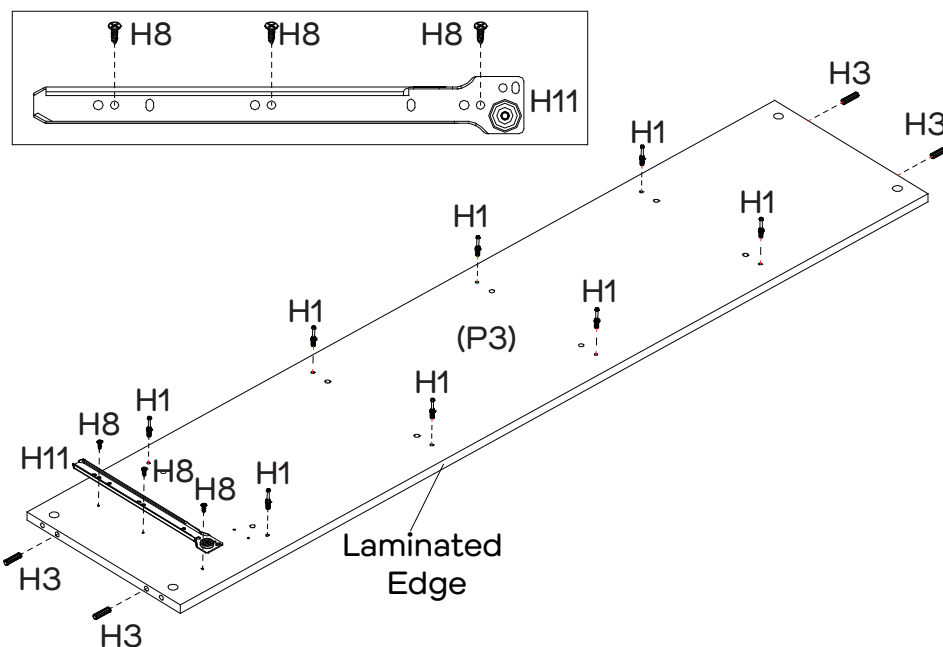


Insert 4 x Dowels (H3) into Right Side Panel (P3) as shown. Secure 8 x Cam Bolts (H1) to Right Side Panel (P3) by tightening with the Phillips Head Screwdriver.

Attach Right Runner Track (H11) to Right Side Panel (P3) with 3 x Screws (H8) by tightening with the Phillips Head Screwdriver.




Step 11


You will need	
	
8 x Large Cam Nuts (H2)	2 x Screws (H19)
	
Phillips head screwdriver	

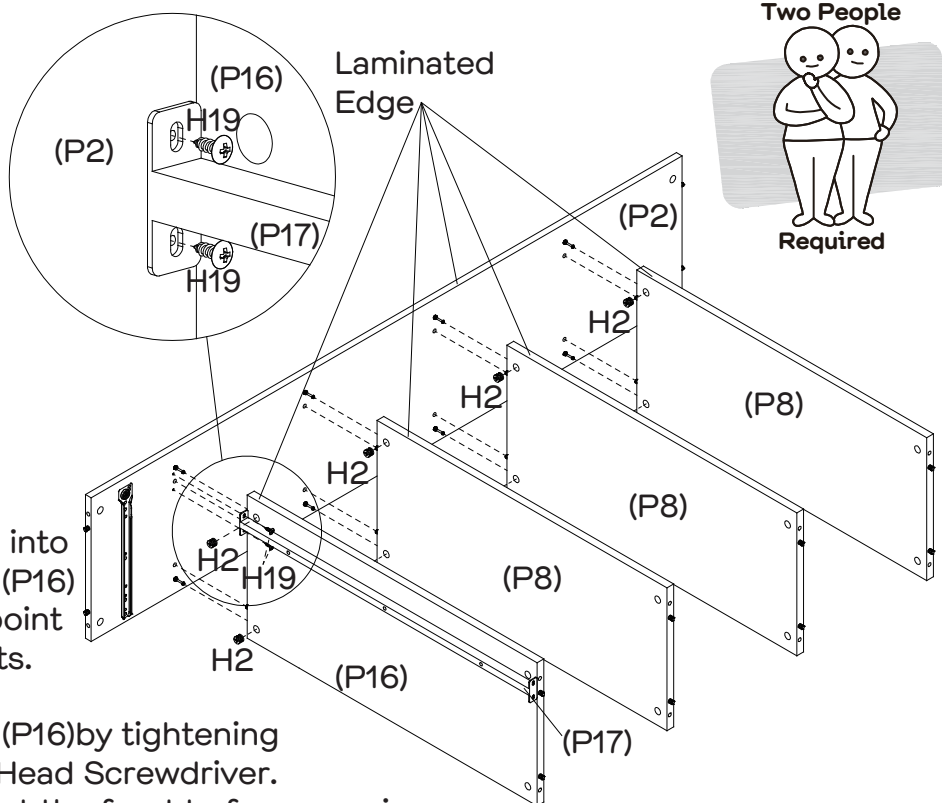

Insert 8 x Large Cam Nuts (H2) into Shelves (P8x3) & Bottom Shelf (P16) and rotate so that the arrows point towards the incoming Cam Bolts. Attach Left Side Panel (P2) to Shelves (P8x3) & Bottom Shelf (P16) by tightening the Cam Nuts with the Phillips Head Screwdriver. Ensure all laminated edges are at the front before securing. Secure Metal Rail (P17) to Left Side Panel (P2) with 2 x Screws (H19) by tightening with the Phillips Head Screwdriver.



Step 12


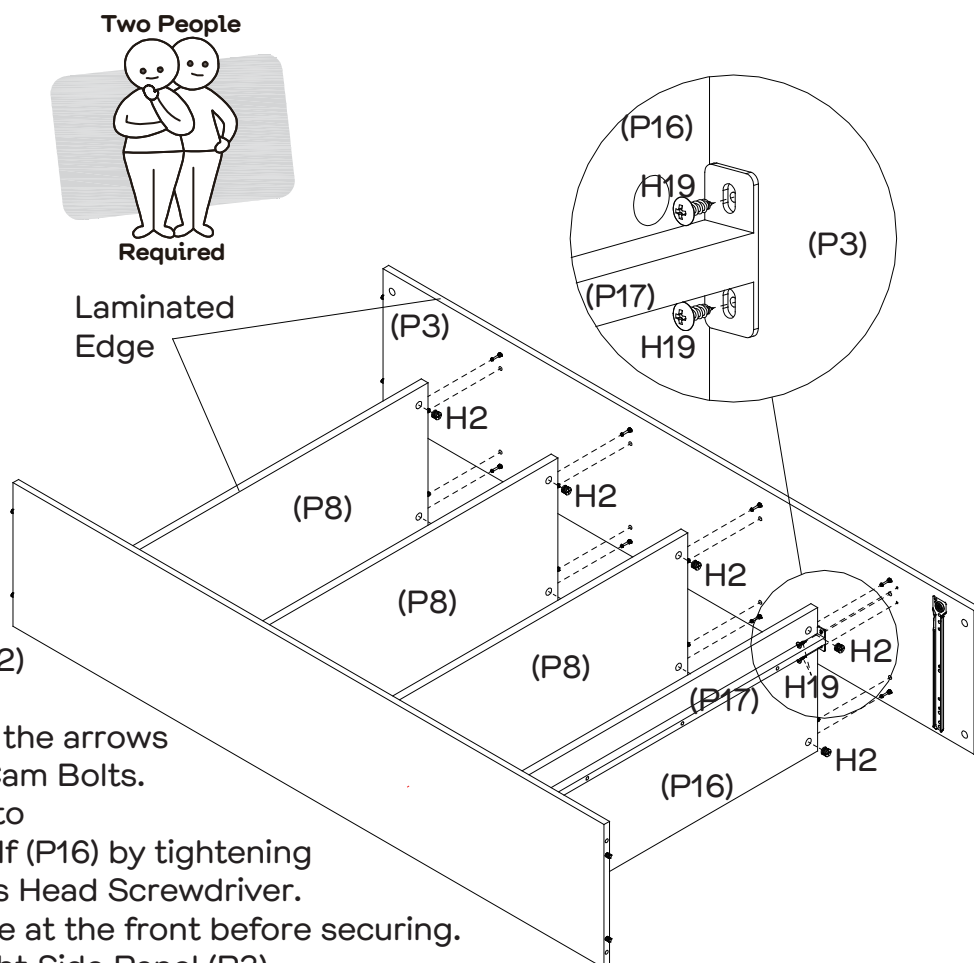
You will need	
	
8 x Large Cam Nuts (H2)	2 x Screws (H19)
	
Phillips head screwdriver	



Insert 8 x Large Cam Nuts (H2) into Shelves (P8x3) & Bottom Shelf (P16) and rotate so that the arrows point towards the incoming Cam Bolts. Attach Right Side Panel (P3) to Shelves (P8x3) & Bottom Shelf (P16) by tightening the Cam Nuts with the Phillips Head Screwdriver. Ensure all laminated edges are at the front before securing. Secure Metal Rail (P17) to Right Side Panel (P3) with 2 x Screws (H19) by tightening with the Phillips Head Screwdriver.



Step 13


You will need	
	
4 x Large Cam Nuts (H2)	Phillips head screwdriver

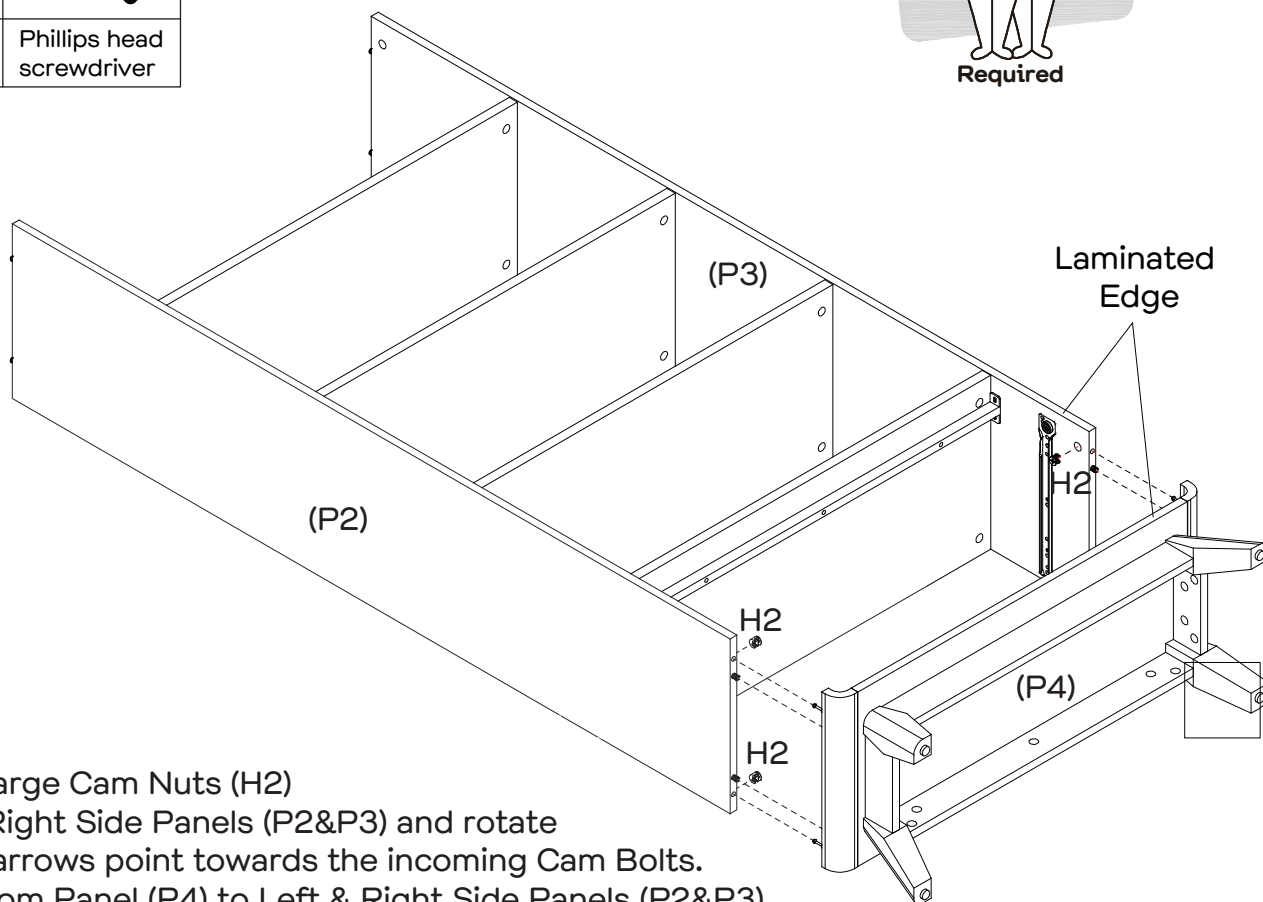

Insert 4 x Large Cam Nuts (H2) into Left & Right Side Panels (P2&P3) and rotate so that the arrows point towards the incoming Cam Bolts. Attach Bottom Panel (P4) to Left & Right Side Panels (P2&P3) by tightening Cam Nuts with the Phillips Head Screwdriver.




Step 14

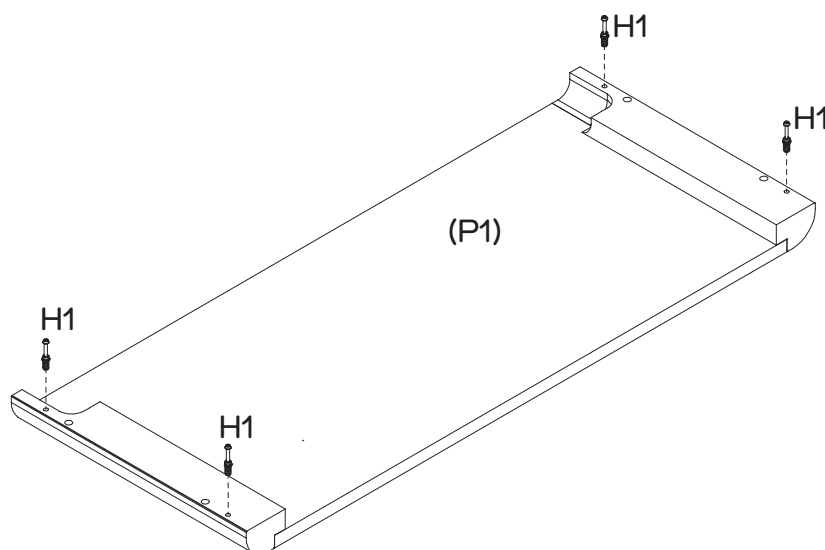
You will need	
	
4 x Cam Bolts (H1)	Phillips head screwdriver



Secure 4 x Cam Bolts (H1) to Top Panel (P1) as shown by tightening with the Phillips Head Screwdriver.



Step 15

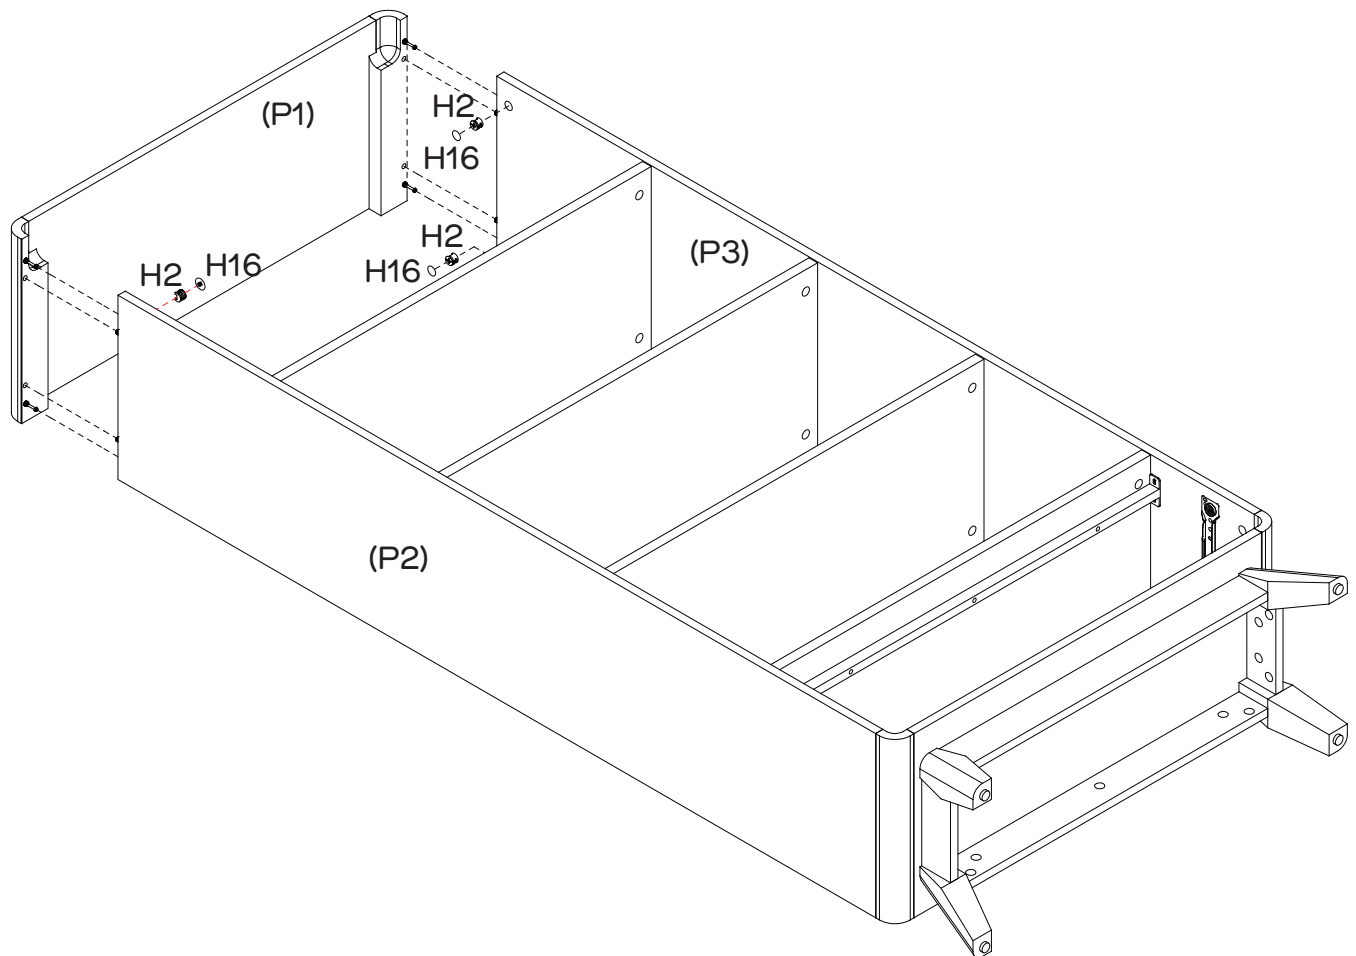
You will need	
	
4 x Large Cam Nuts (H2)	4 x Screw Caps (H16)
	
Phillips head screwdriver	




Insert 4 x Large Cam Nuts (H2) into Left & Right Side Panels (P2&P3) and rotate so that the arrows point towards the incoming Cam Bolts.
 Attach Top Panel (P4) to Left & Right Side Panels (P2&P3) by tightening Cam Nuts with the Phillips Head Screwdriver.
 Place 4 x Screw Caps (H16) over the 4 x Large Cam Nuts (H2).
 With two people, carefully turn the bookcase over.

Step 16

You will need	
	
36 x Nails (H6)	Hammer




Do not nail these holes.
These are for attaching wall straps.

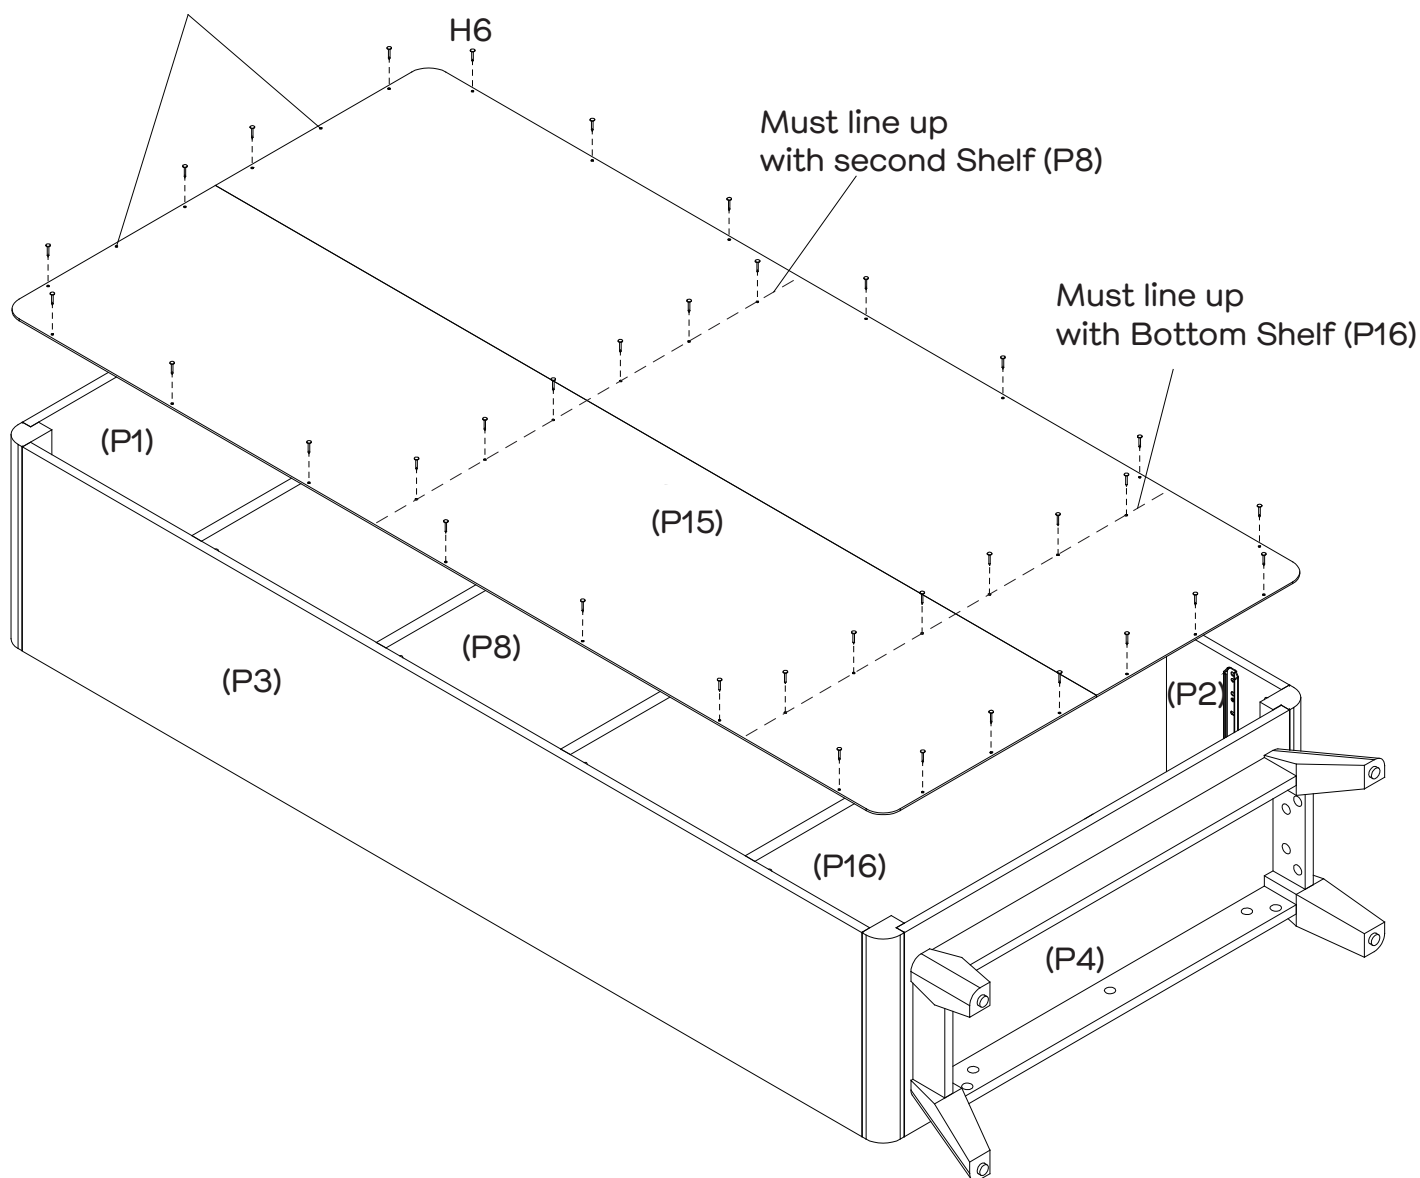

Align the Back Panel (P15) with the bookcase frame.
Ensure that the holes for the nails line up with the second Shelf (P8)
and the Bottom Shelf (P16).
Attach Back Panel (P15) to the unit with 36 x Nails (H6) using the Hammer.


Step 17

You will need	
1 x Left Runner (H10)	1 x Right Runner (H12)
6 x Screws (H8)	Phillips head screwdriver

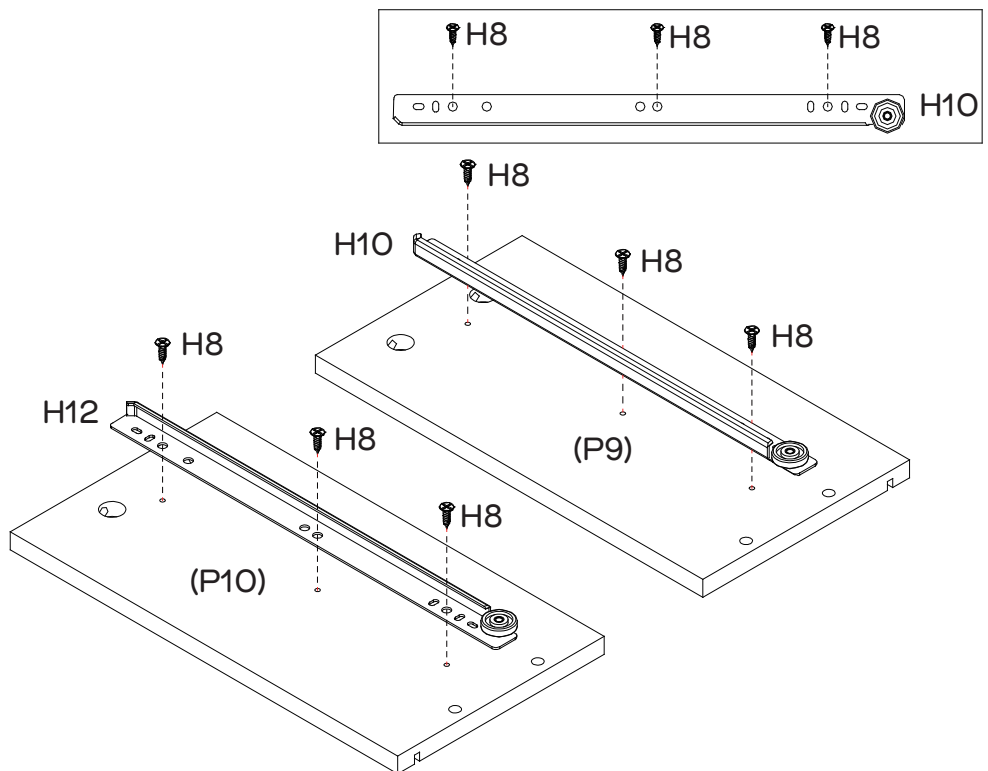


Attach Left Runner (H10) to Drawer Left Side (P9) with 3 x Screws (H8) by tightening with the Phillips Head Screwdriver.

Attach Right Runner (H12) to Drawer Right Side (P10) with 3 x Screws (H8) by tightening with the Phillips Head Screwdriver.

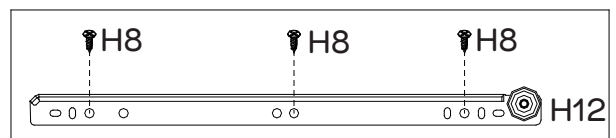



Step 18

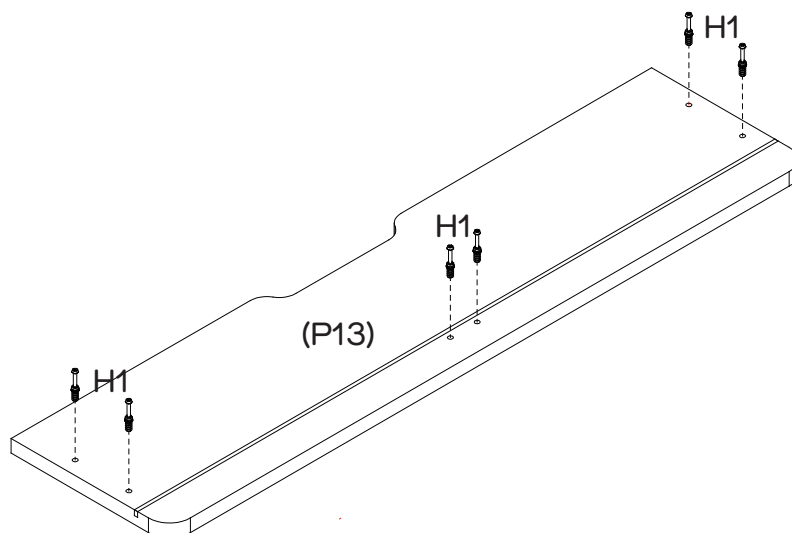
You will need	
6 x Cam Bolts (H1)	Phillips head screwdriver



Secure 6 x Cam Bolts (H1) to Drawer Front (P13) by tightening with the Phillips Head Screwdriver.


Step 19

You will need	
	
6 x Small Cam Nuts (H4)	Phillips head screwdriver

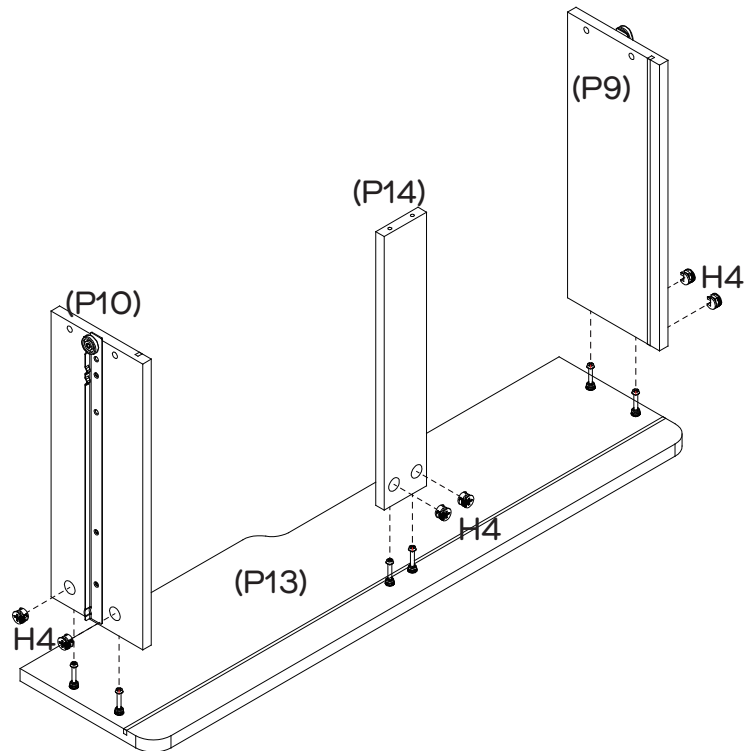



Insert 6 x Small Cam Nuts (H4) into Drawer Rail (P14) and Left & Right Drawer Sides (P9&P10) and rotate so that the arrows point towards the incoming Cam Bolts.
Attach Drawer Front (P13) to Drawer Rail (P14) and Left & Right Drawer Sides (P9&P10) by tightening Cam Nuts with the Phillips Head Screwdriver.



Step 20

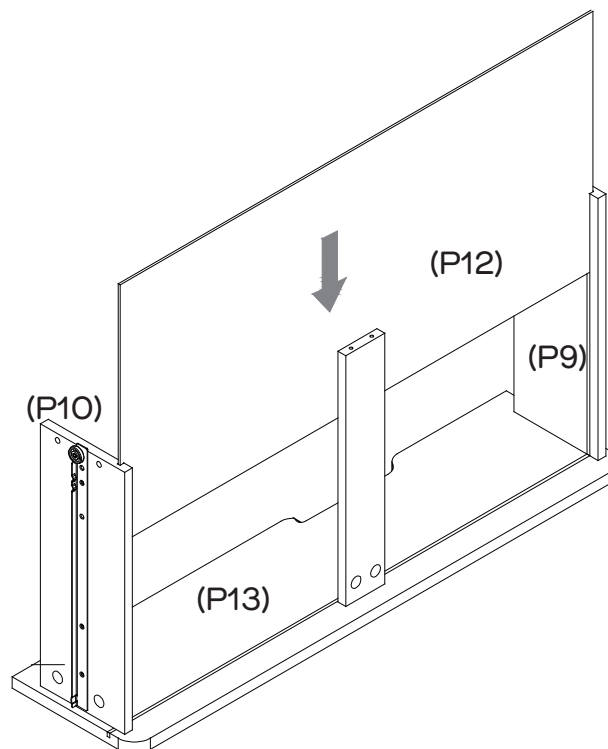

Slide Drawer Base (P12) into the grooves of Drawer Front (P13) and Left & Right Drawer Sides (P9&P10).

Step 21


You will need	
	
6 x Screws (H17)	Phillips head screwdriver

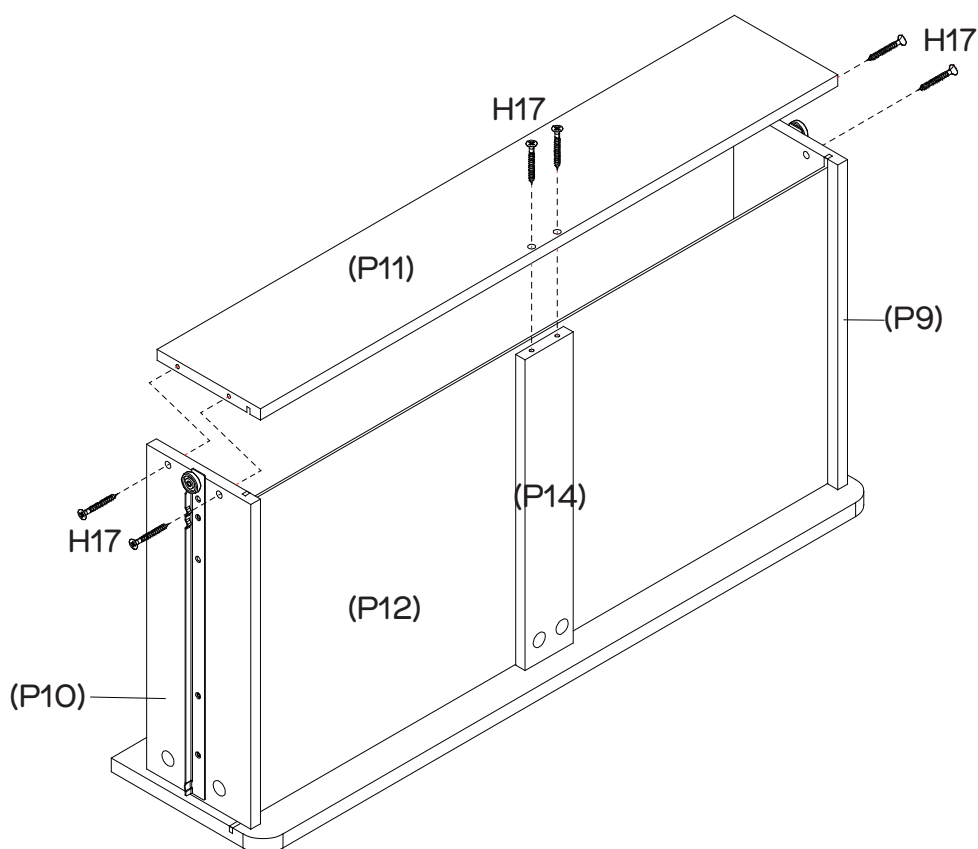





Attach Drawer Back to Drawer Rail (P14) and Left & Right Drawer Sides (P9&P10) with 6 x Screws (H17) by tightening with the Phillips Head Screwdriver. Ensure the Drawer Base (P12) lines up with all grooves and Back Panel (P11) lines up with all holes before securing.

Step 22



Carefully insert the assembled drawer into the bookcase by gently guiding the runners into the tracks.

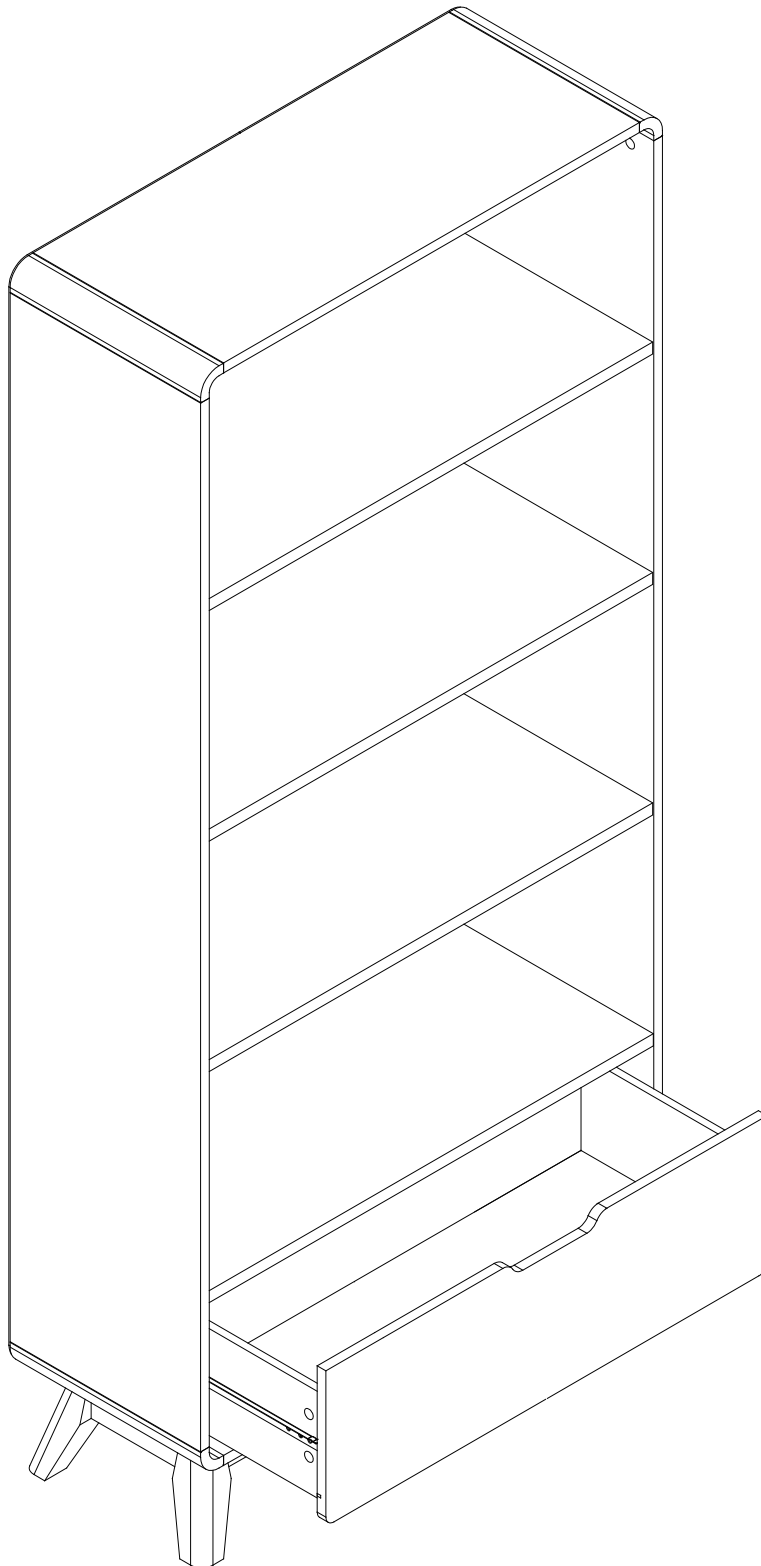

Step 23



You will need	
	
2 x Flat Washers (H15)	2 x Screws (H13)
	
2 x Wall Straps (H14)	Phillips head screwdriver

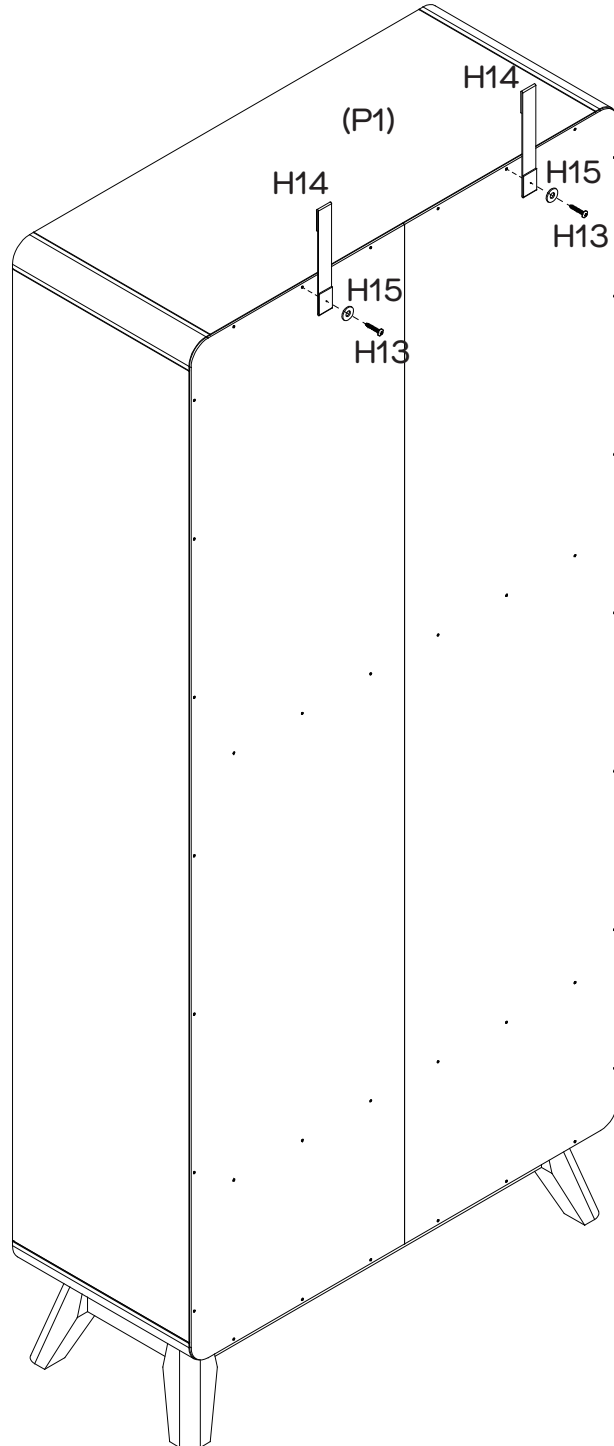
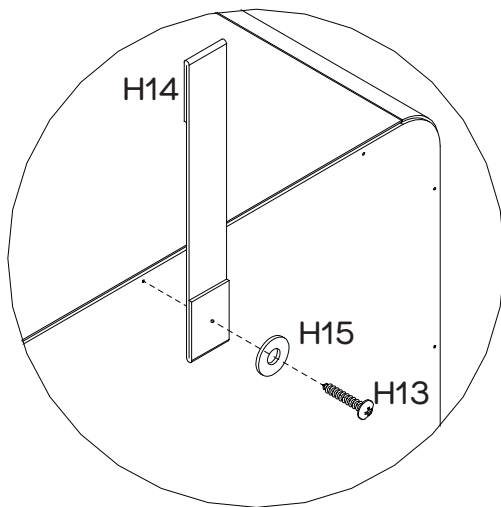
We strongly advise that you use the wall strap provided to prevent the unit toppling.



Attach 2 x Wall Straps (H14) to Top Panel (P1) with 2 x Flat Washers (H15) and 2 x Screws (H13) by tightening with the Phillips Head Screwdriver.

Step 24


You will need	
	
2 x Flat Washers (H15)	Phillips head screwdriver




Seek advice from a qualified trades person on how to attach this wall strap to your specific wall.

Screw and wall plug are not included.
Please use appropriate fixtures for your wall.

Move the Bookcase to the final position. Attach the wall straps to the wall.
Make sure they are firmly attached and fit snugly.

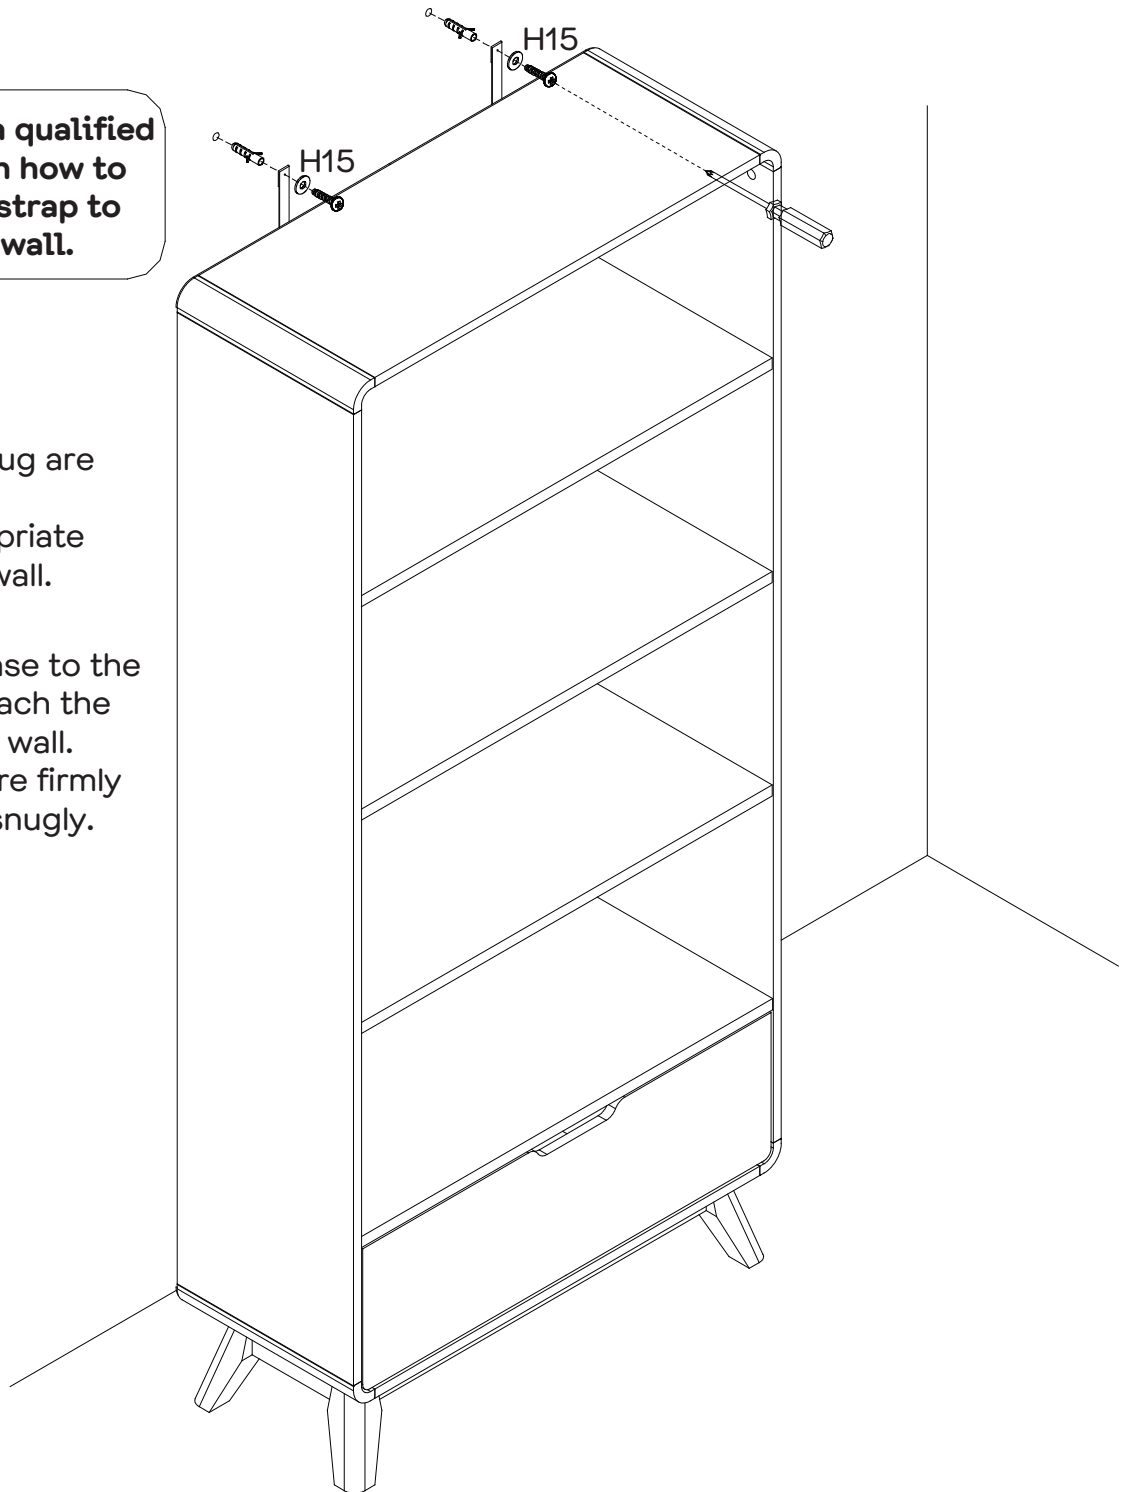

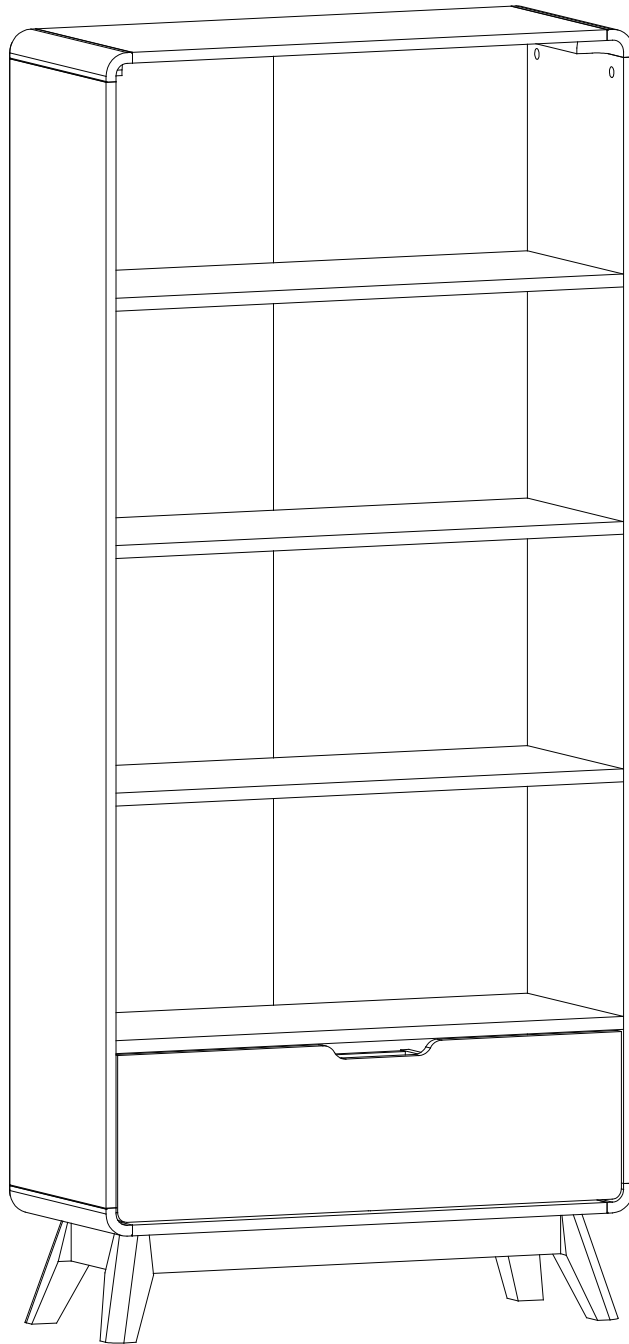

Job complete!

In the interest of our environment please dispose
of all packaging thoughtfully.