




**Fantastic
Furniture**

Version 1.0

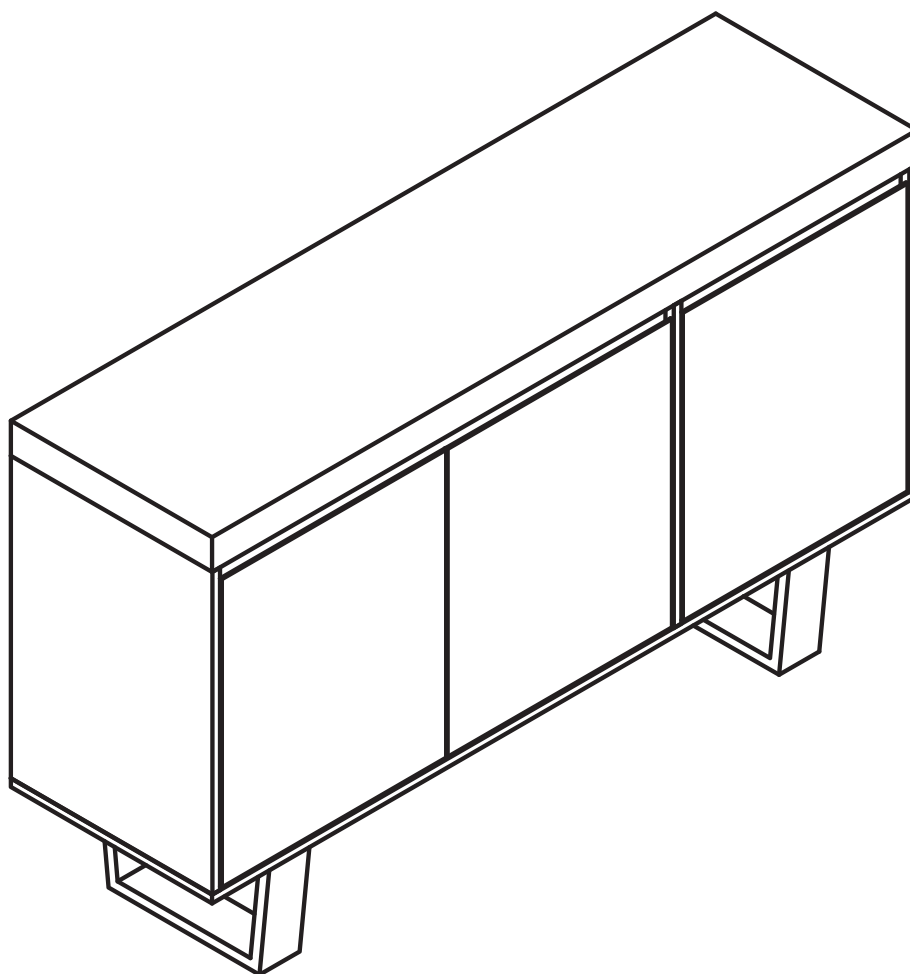


Bridge

Buffet 3 Door Mk2 Oak

fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.



For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture


Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!
@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

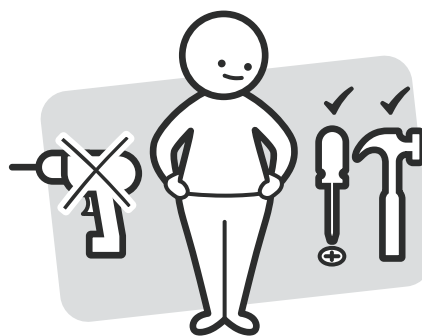

Make sure you have all the required tools. Never use power tools unless instructed.

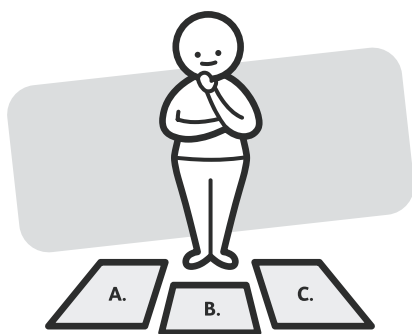

Identify and lay out all of the components before you begin assembly.

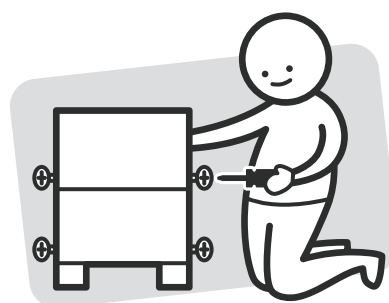

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product




DO NOT USE



Other tools you need:

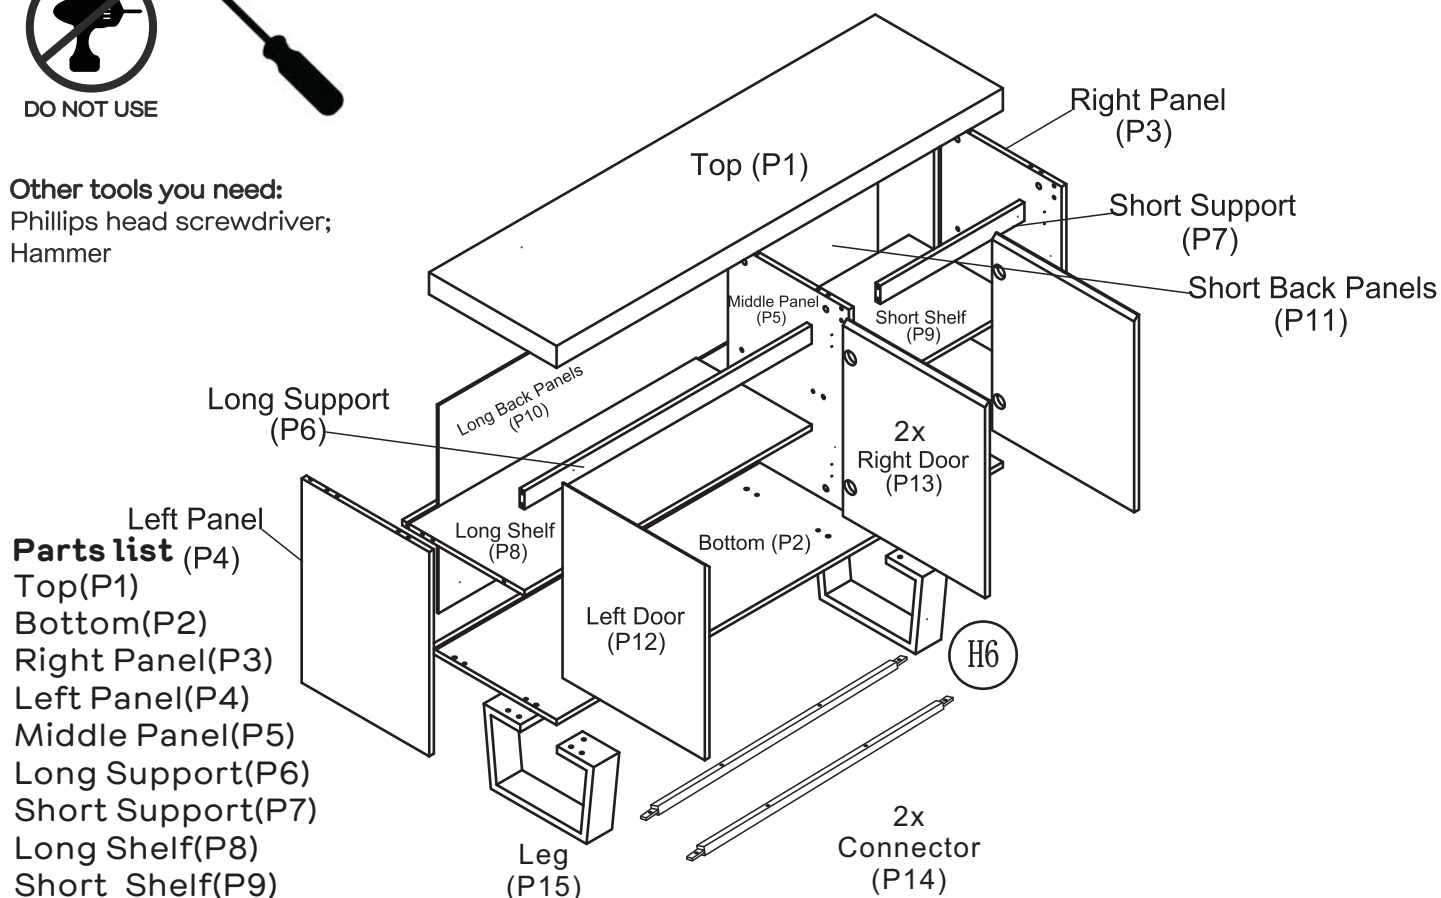

















Phillips head screwdriver;
Hammer






Parts list


Top(P1)
Bottom(P2)
Right Panel(P3)
Left Panel(P4)
Middle Panel(P5)
Long Support(P6)
Short Support(P7)
Long Shelf(P8)
Short Shelf(P9)
2 x Long Back Panels(P10)
Short Back Panel(P11)
Left Door(P12)
2 x Right Door(P13)
2 x Connector(P14)
2 x Legs(P15)

Hardware Pack

					
20 x Cam Bolts (H1)	20 x Cam Nuts (H2)	24 x Dowels (H3)	6 x Hinges (H4)	48 x Short Screws (H5)	4 x Bolts (H6)
					
16 x Washers (H7)	8 x Bolts (H8)	1 x Allen Key (H9)	4 x Levelling Feet (H10)	12 x Wedges (H11)	1 x Long Screw (H12)
					
1 x Support Leg (H13)	2 x Bolts (H14)	2 x Dowels (H15)	2 x Washers (H16)	1 x Wall Strap (H17)	4 x Bolts (H18)



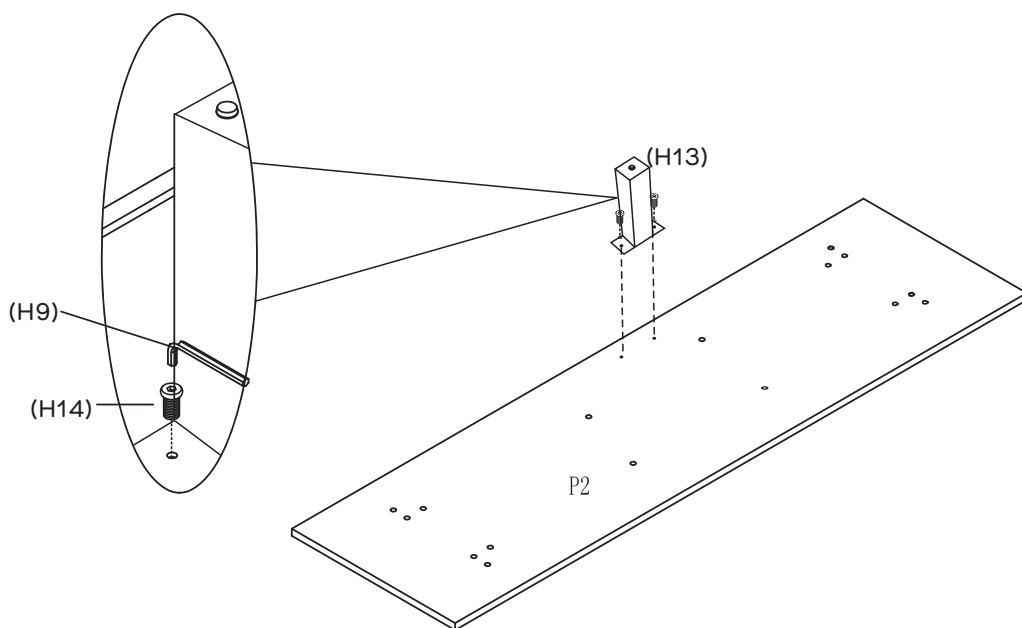

Step 1


You will need:	
	
1 x Support Leg (H13)	2 x Bolts (H14)
	
1 x Allen Key (H9)	



Using 2 x Bolts(H14) secure the Support Leg(H13) to the Unit Bottom(P2) by tightening with Allen Key(H9).




Step 2

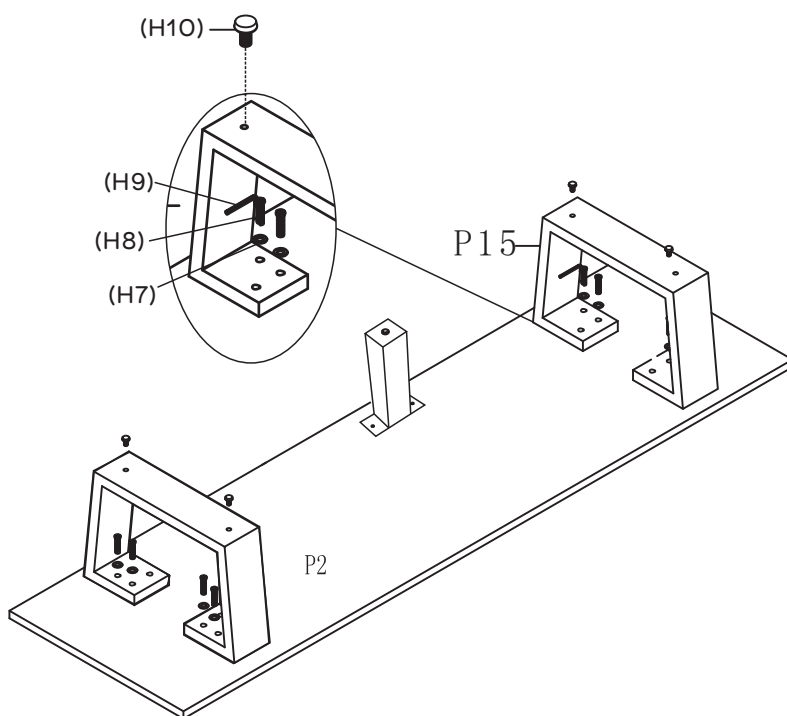
You will need:	
	
8 x Washers (H7)	8 x Bolts (H8)
	
1 x Allen Key (H9)	4 x Levelling Feet (H10)



Use 8 x Bolts(H8) and 8 x Washers(H7) to secure the Leg(P15) to Bottom(P2). Tighten with Allen Key (H9), do not tighten fully.
Screw in 4 x Levelling Feet(H10) to the bottom of the 2 x Legs(P15). Ensure they are secure, and if required can be adjusted accordingly.

Step 3

You will need:	
	
8 x Washers (H7)	4 x Bolts (H6)
	
4 x Bolts (H18)	1 x Allen Key (H9)

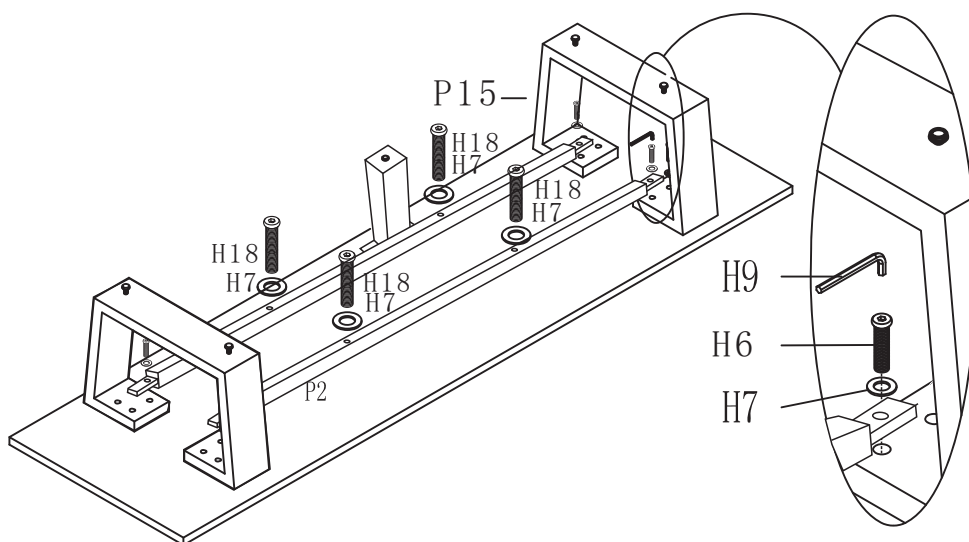




Align the 2 x Connectors(P14) onto the Bottom(P2) as shown.


Use 4 x Bolts(H6) and 4 x Washers(H7) to secure the 2 x Connectors(P14) to the 2 x Legs(P15), tightening with Allen Key(H9).

Use 4 x Bolts(H18) and 4 x Washers (H7) to secure the 2 x Connectors(P14) to the Bottom (P2), tightening with Allen Key(H9).

Ensure bolts are fully tightened.




Step 4

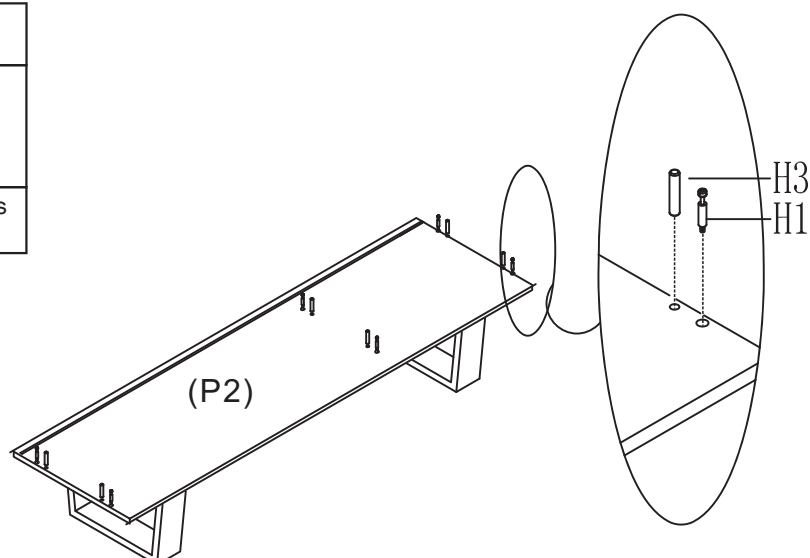
You will need:	
	
6 x Cam Bolts (H1)	6 x Dowels (H3)
	
Phillips Head Screwdriver	



Insert 6 x Dowels(H3) into Unit Bottom(P2) and secure 6 x Cam Bolts(H1) to Unit Bottom(P2) by tightening with the Phillips Head Screwdriver.

Step 5

You will need:	
	
8 x Cam Bolts (H1)	8 x Dowels (H3)
	
Phillips Head Screwdriver	

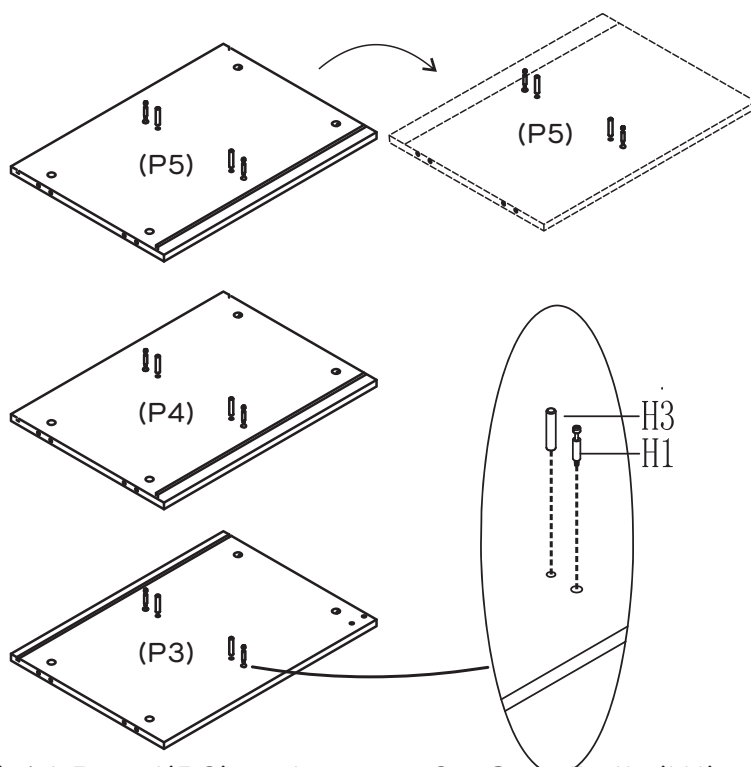


Insert 2 x Dowels(H3) into Right Panel(P3) and secure 2 x Cam Bolts(H1) to Right Panel(P3) by tightening with the Phillips Head Screwdriver.

Repeat previous step for Left Panel (P4)

Insert 2 x Dowels(H3) into Middle Panel(P5) and secure 2 x Cam Bolts(H1) to Middle Panel(P5) by tightening with the Phillips Head Screwdriver,
Then turn over, repeat previous step for another side of Middle Panel(P5)


Step 6

You will need:	
	
2 x Cam Nuts (H2)	Phillips Head Screwdriver

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

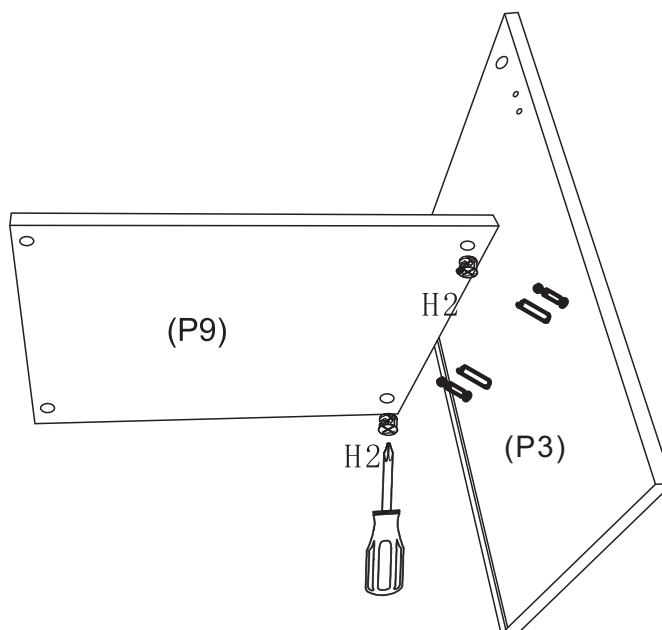

Insert 2 x Cam Nuts(H2) into Short Shelf(P9) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts.


Attach Short Shelf(P9) to Right Panel(P3) by tightening the cam nuts(H2) with the Phillips Head Screwdriver

Step 7

You will need:



2 x Dowels
(H3)

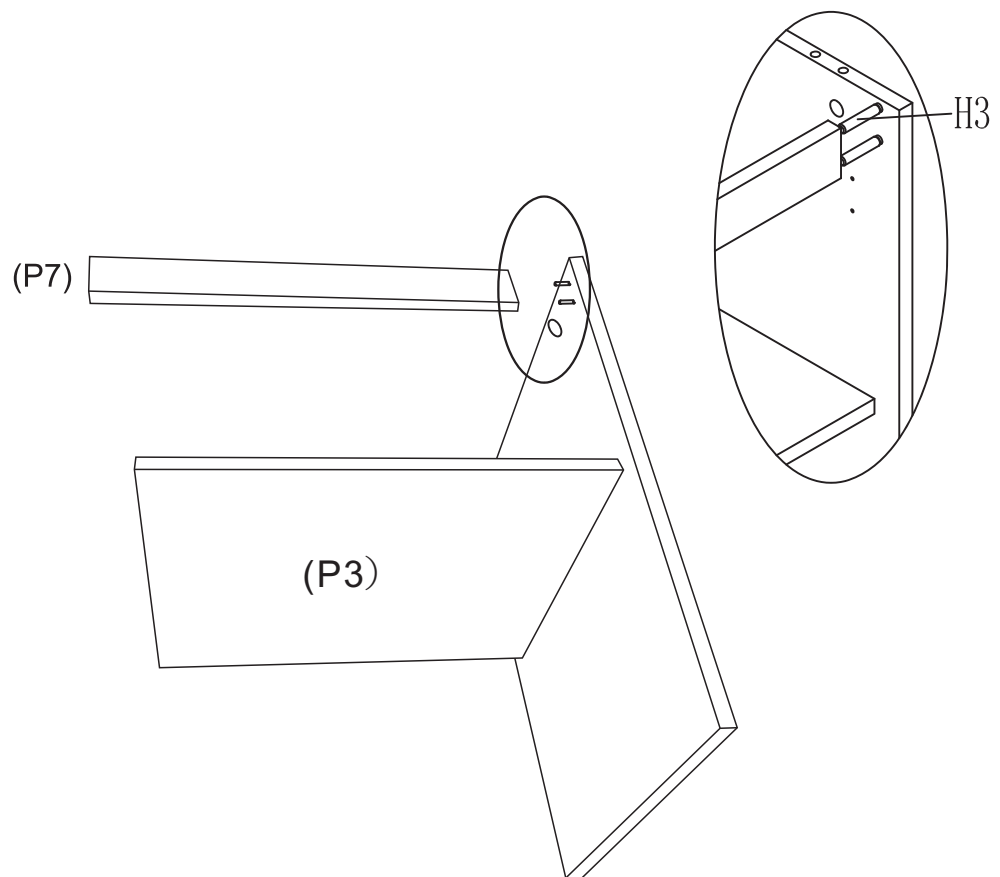

Insert 2 x Dowels(H3)into Right Panel(P3) and connect Short Support(P7) to Right Panel(P3).

Step 8

You will need:



2 x Dowels
(H15)



2 x Cam Nuts
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

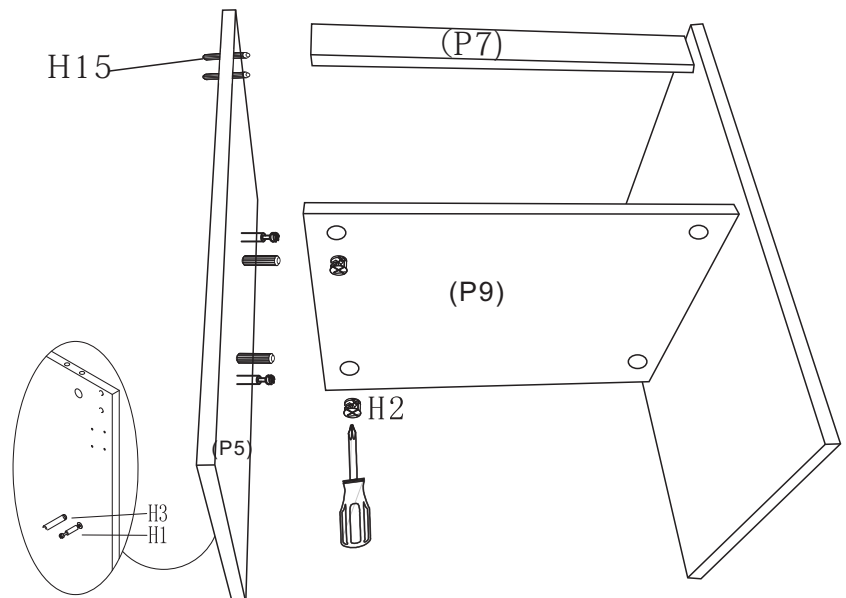

Insert 2 x Dowels(H15) into Middle Panel(P5)

Insert 2 x Cam Nuts(H2) into Short Shelf(P9) as shown.

Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach the Short Shelf (P9) and Short Support(P7) to Middle Panel(P5) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver.

Step 9


You will need:

	
2 x Cam Nuts (H2)	Phillips Head Screwdriver

This is how a cam nut works.....



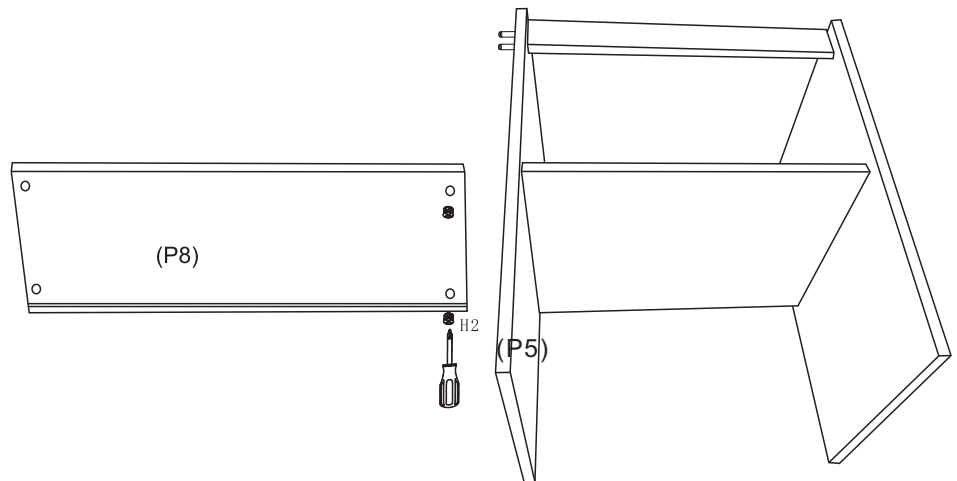

The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.




Insert 2 x Cam Nuts(H2) into Long Shelf(P8) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Attach Long Shelf(P8) to Middle Panel(P5) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver


Step 10

You will need:


	
2 x Cam Nuts (H2)	2 x Dowels (H3)


Phillips Head Screwdriver

This is how a cam nut works.....




The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

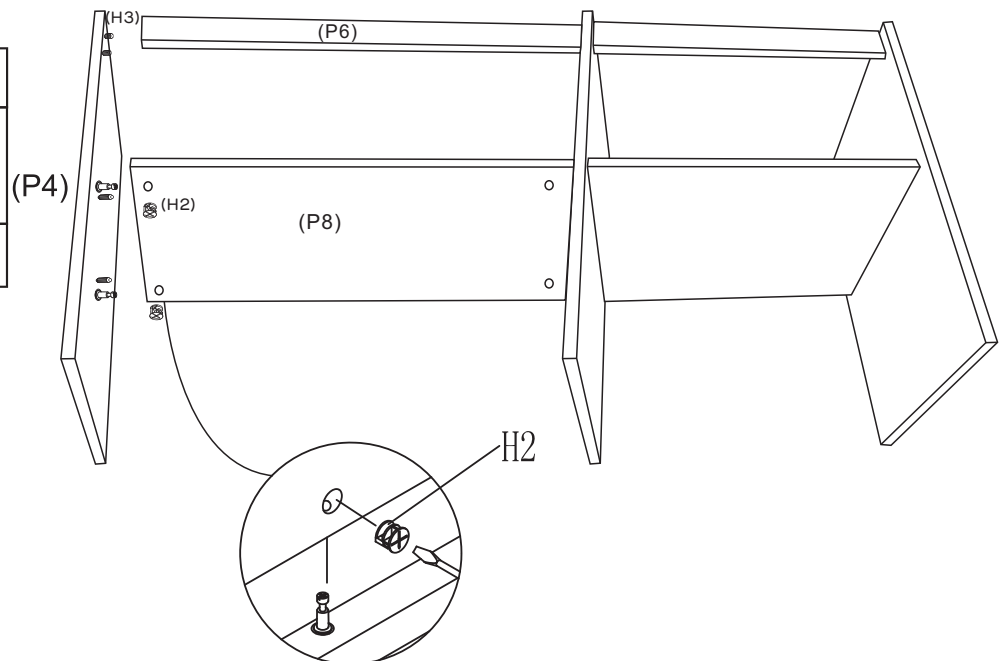

Connect Long Support(P6) to Middle Panel(P5) by Dowels(H15).
Insert 2 x Dowels(H3) into Left Panel(P4) to connect with Long Support(P6).
Insert 2 x Cam Nuts (H2) into Long Shelf(P8) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Attach Long Shelf(P8) to Left Panel(P4) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver

Step 11


TWO PEOPLE

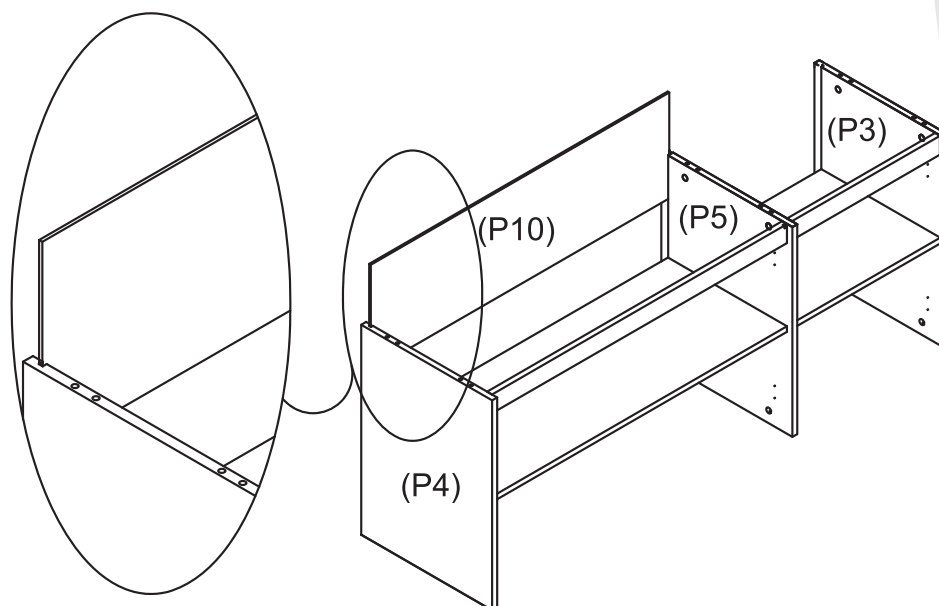

With assistance, carefully turn the buffet upright. Slide Long Back Panel(P10) into the groove of Left Panel(P4) and Middle Panel(P5) as shown.

Step 12

You will need:	
6 x Cam Bolts (H1)	6 x Dowels (H3)

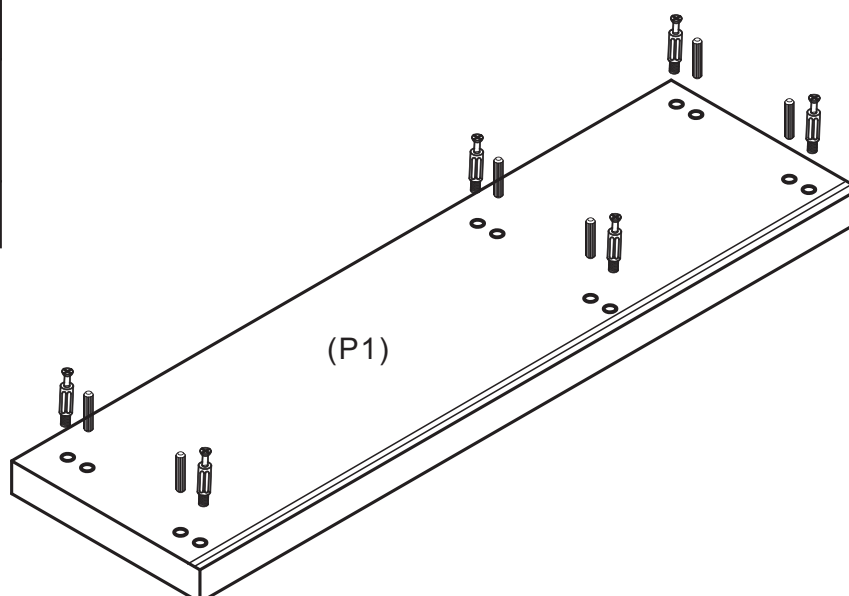

Insert 6 x Dowels(H3) into Unit Top(P1) and secure 6 x Cam Bolts(H1) into Unit Top(P1) by tightening with the Phillips Head Screwdriver.

Step 13

You will need:



6 x Cam Nuts
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....




The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

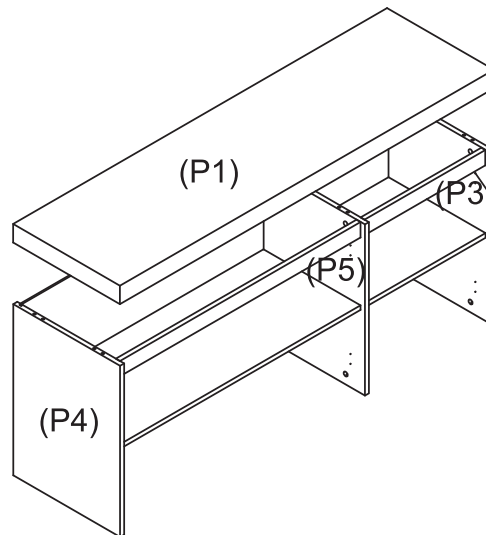

TWO PEOPLE




REQUIRED



Insert 6 x Cam Nuts(H2) into Panel(P3&P4&P5) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. With assistance, attach Top(P1) to Panel(P3&P4&P5) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver

Step 14

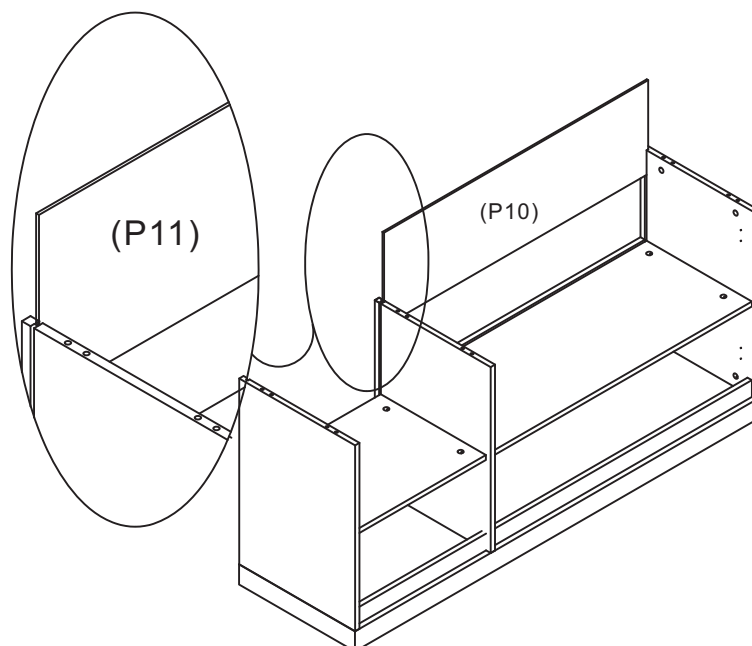

TWO PEOPLE




REQUIRED

With assistance, carefully turn the buffet upside down. Slide another Long Back Panel(P10) and Short Back Panel(P11) into the groove.

Step 15

TWO PEOPLE



REQUIRED

You will need:



6 x Cam Nuts
(H2)





Phillips Head
Screwdriver

This is how a cam nut works.....




The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

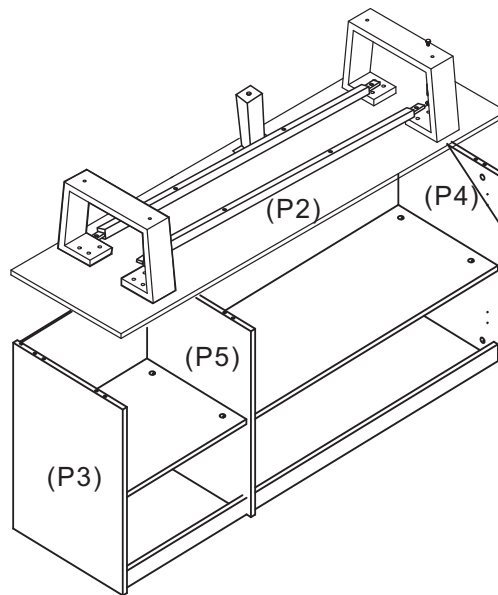

Insert 6 x Cam Nuts(H2) into Panel(P3&P4&P5) as shown.
Rotate the cam nuts so the arrows point towards the incoming cam bolts.
With assistance, attach Bottom(P2) to Panel(P3&P4&P5) by tightening the Cam Nuts(H2) with the Phillips Head Screwdriver

Step 16


You will need:



6 x Hinges
(H4)



12 x Short Screws
(H5)

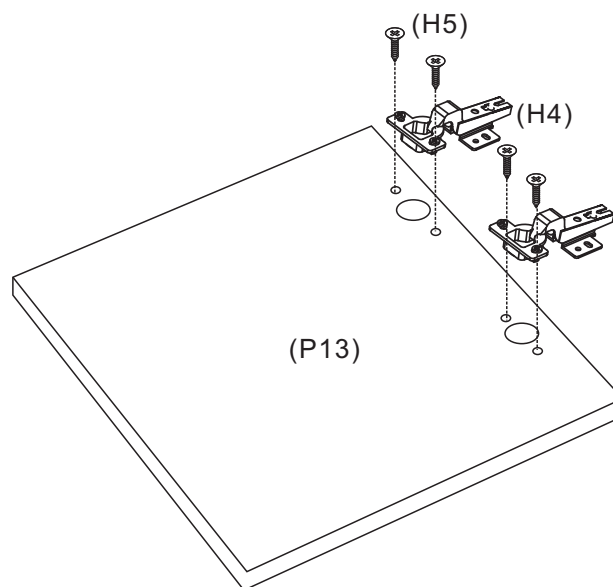


Using 4 x Short Screws(H5) to connect 2 x Hinges(H4) to Right Door(P13)
Adjust the door then tighten all screws with a Phillips Head Screwdriver.
Repeat previous step for Another Right Door(P13) and Left Door(P12)

Step 17

TWO PEOPLE



REQUIRED

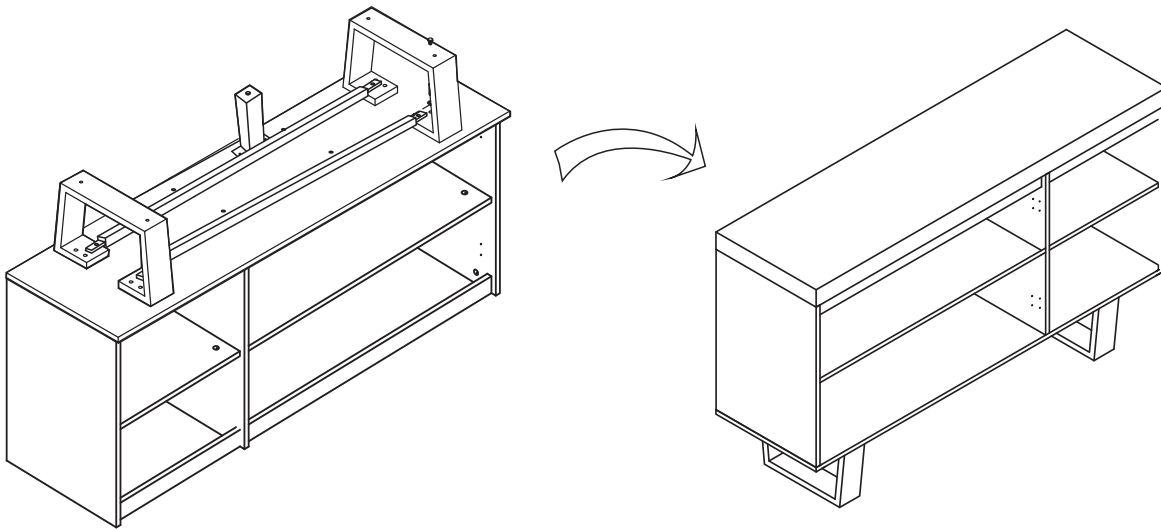

With assistance, carefully turn the unit upright. Note: Avoid using the centre support leg as a handle or pivoting point when turning the buffet over

Step 18

TWO PEOPLE




REQUIRED

You will need:




24 x Short Bolts
(H5)

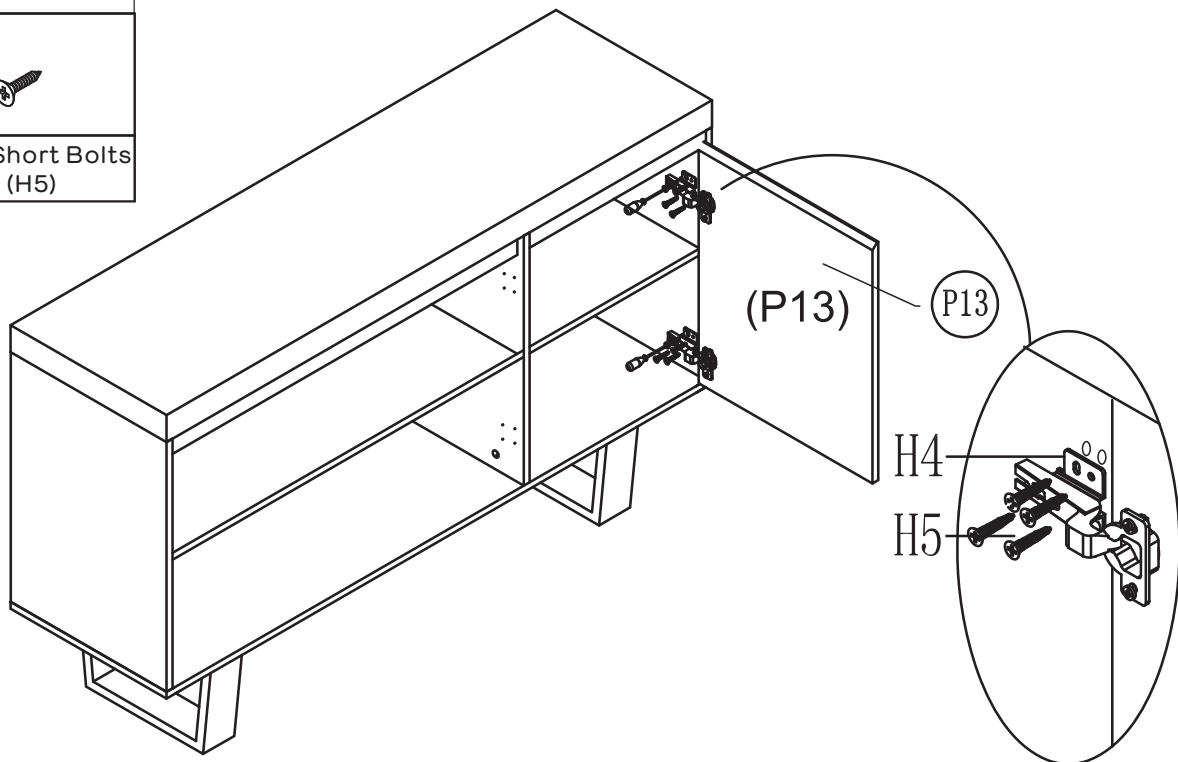






Using 8 x Short Screws(H5) to connect Right Door(P13) to Buffet by tightening with a Phillips head screwdriver.
Repeat previous step for Right Door(P13) and Left Door(P12)

Step 19

TO ADJUST YOU DOORS TO MAKE THE GAPS MORE EVEN (OPTIONAL)

You will need	
	
Phillips head Screwdriver	

STEP 19.1
Open the door.

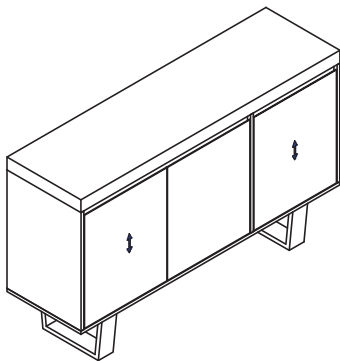
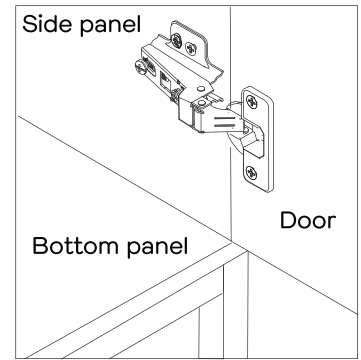


**MOVE DOOR UPWARD
OR DOWNWARD**


STEP 19.2
**Adjust the door panels
upward or downward**

Unscrew 2 screws in round
holes loosen 2 screws in
oval holes a bit.


Tighten 2 screws in
oval holes. Screw in
round holes.

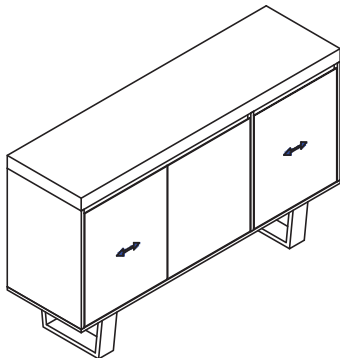

MOVE DOOR OUTWARD
by turning this screw
counter-clockwise





**KEEP DOOR IN
RIGHT POSITION**




**MOVE DOOR
OUTWARD**
by turning this
screw clockwise


STEP 19.3
**Adjust the flush between
door panel and side panel**

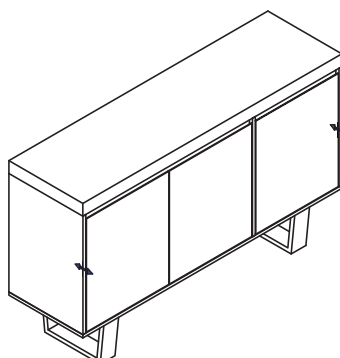

Loosen this screw a bit




**MOVE DOOR
BACK OR FORTH**




Re-tighten this screw

STEP 19.4
**Adjust the gap between door
panel and side panel**




Step 20

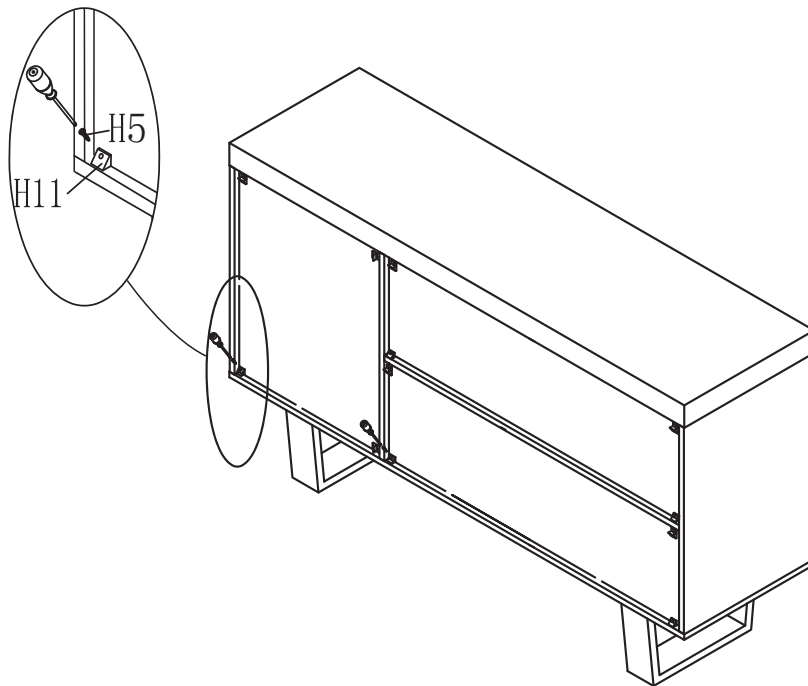
You will need:	
	
12 x Wedges (H11)	12 x Short Screws (H5)
	
Phillips Head Screwdriver	



Insert 12 x Wedges(H11) into all corners of the back of the assembled unit as shown. Secure Wedges(H11) by tightening 12 x Short Screws(H5) with the Phillips Head Screwdriver.

Step 21

You will need:	
	
1 x Long Screw (H12)	1 x Washers (H16)
	
1 x Wall Strap (H17)	

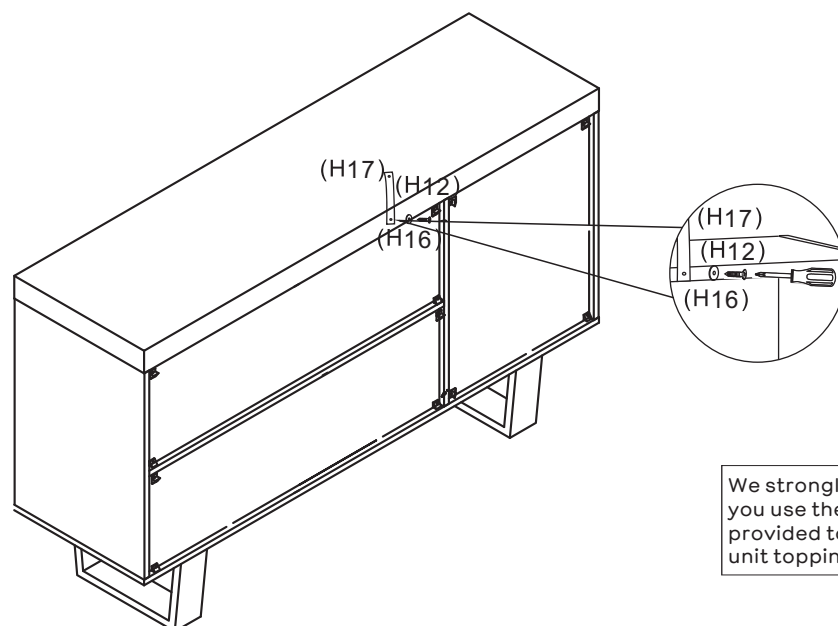

We strongly advise that you use the wall strap provided to prevent the unit topping

Use the Washer(H16)and Long Screw(H12) to connect the Wall Strap (H17) to the Middle of top Shelf (P1) using the Phillips head Screwdriver.

Step 22

You will need:



1 x Washers
(H16)

TWO PEOPLE





REQUIRED


Screws and wall plugs are not provided please use appropriate fixtures for your wall.

Seek advice from a qualified trades person on how to attach this to your specific wall

With assistance, move furniture to its final position, then connect the end of Wall Strap (H17) to the wall. Make sure it is firmly attached and a snug fit.

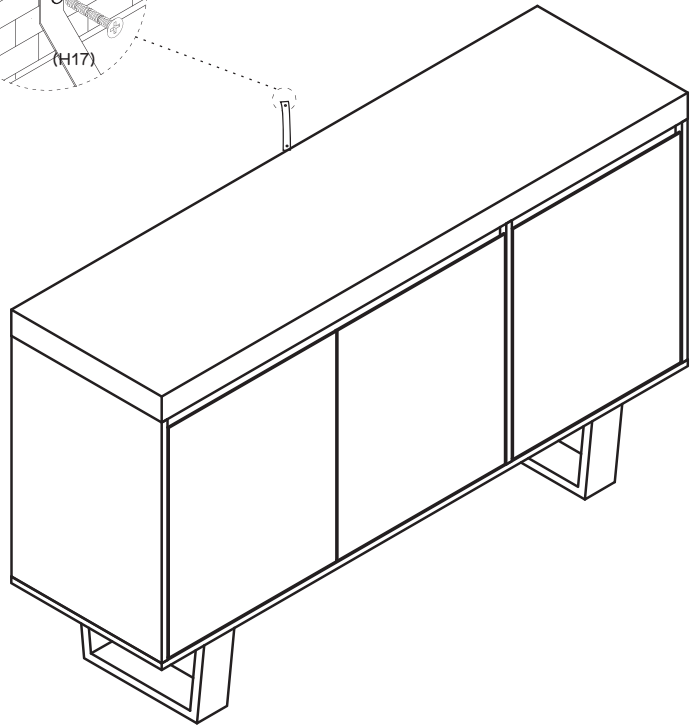

Step 23

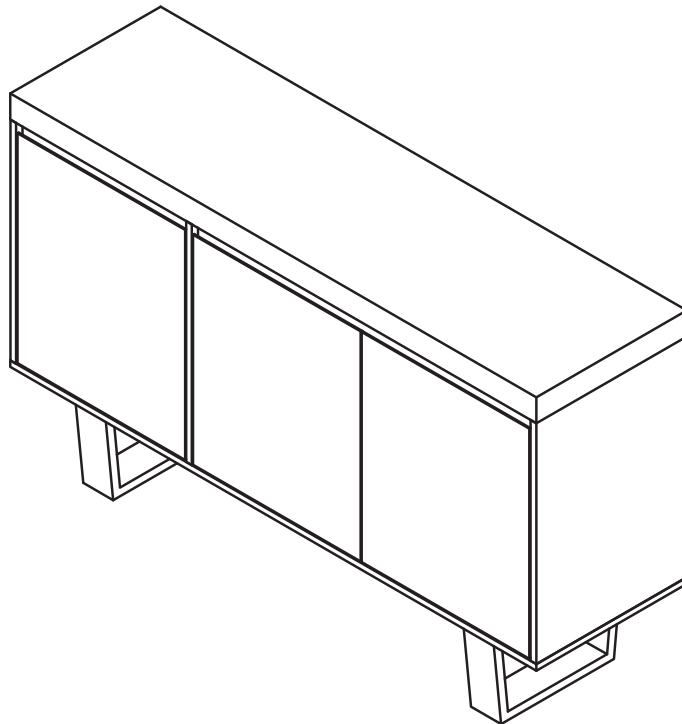

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.