





**Fantastic
Furniture**

Version 1.0

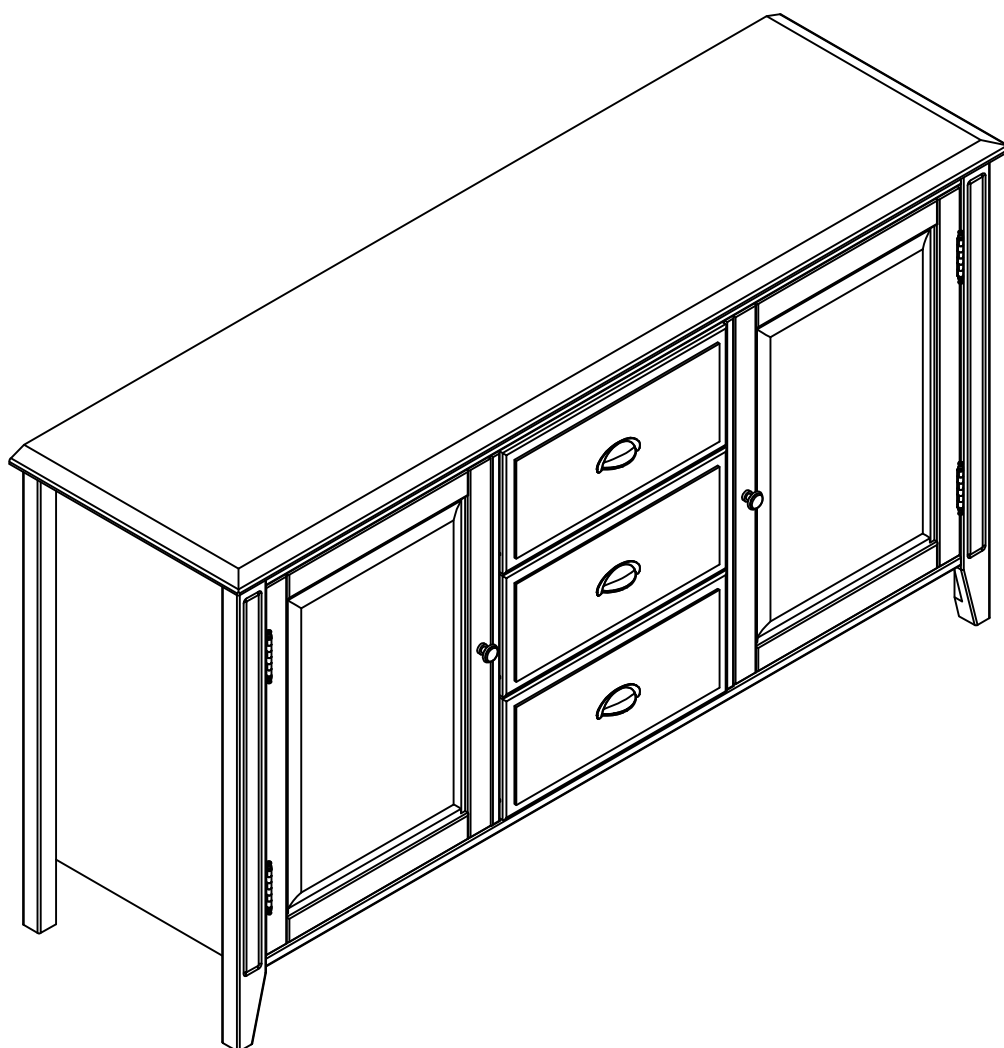

Two People



Required

Torkay

Buffet 3 Drawer 2 Door Walnut

fantasticfurniture.com.au

**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**



To avoid any serious or fatal injury, this product has been provided with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture

Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information


- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you Need

To assemble the product



(Other Tools You Need)
Phillips Head Screwdriver
Soft Headed Mallet

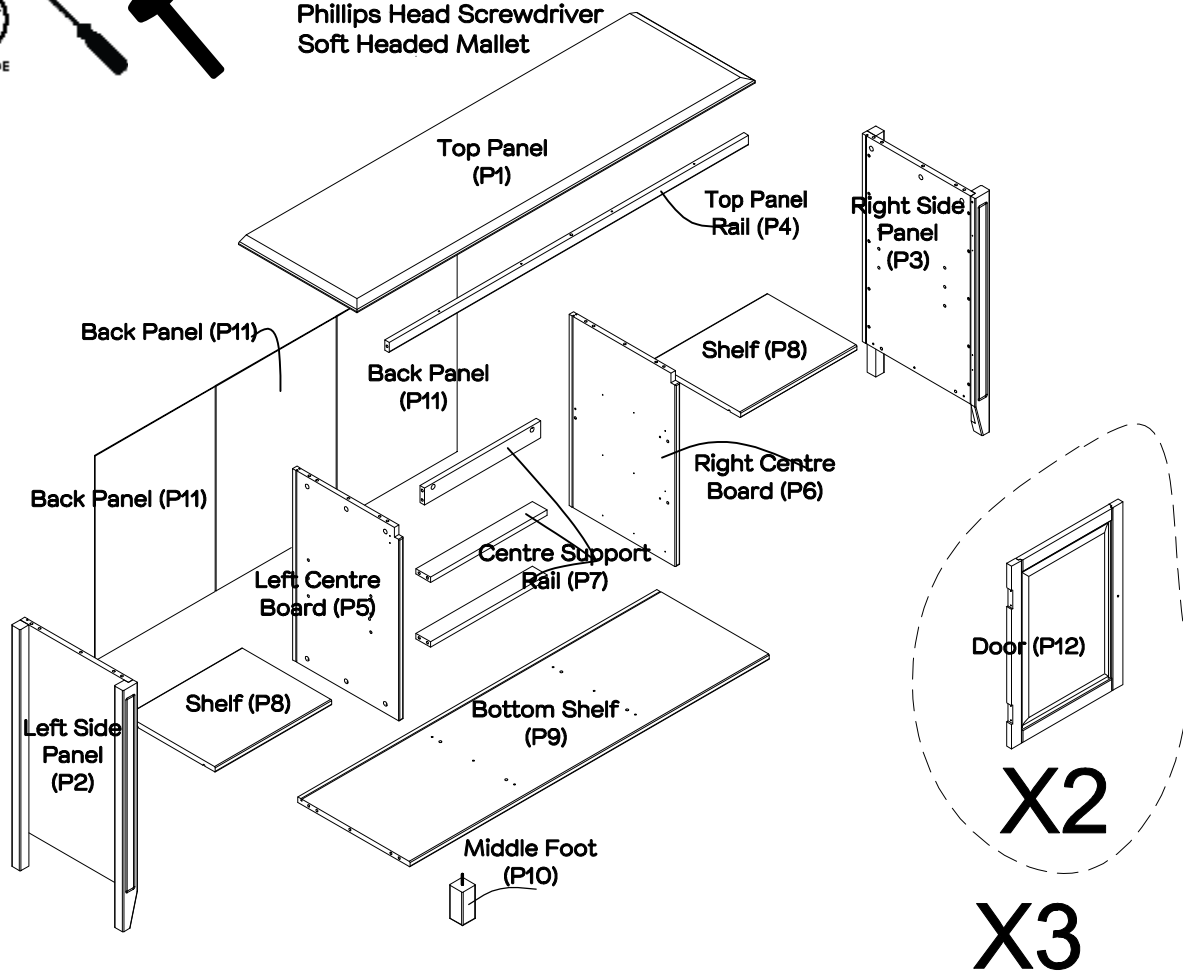


Parts List

Carton 1:

- 1 x Left Side Panel (P2);
- 1 x Right Side Panel (P3);
- 1 x Left Centre Board (P5);
- 1 x Right Centre Board (P6);
- 1 x Middle Foot (P10);
- 3 x Back Panels (P11)
- 2 x Doors (P12);
- 3 x Drawer Fronts (P13);
- 3 x Left Drawer Sides (P14);
- 3 x Right Drawer Sides (P15);
- 3 x Drawer Bases (P17);












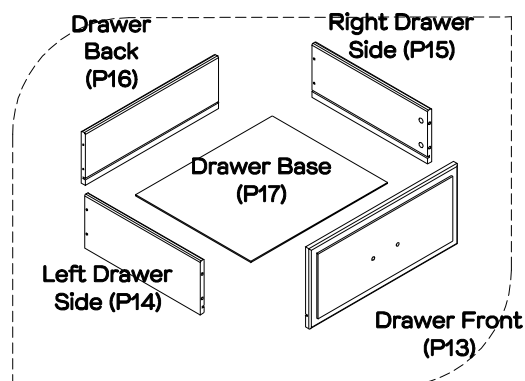















Carton 2:

- 1 x Top Panel (P1);
- 1 x Top Panel Rail (P4)
- 3 x Centre Support Rails (P7)
- 2 x Shelves (P8);
- 1 x Bottom Shelf (P9);
- 3 x Drawer Backs (P16);




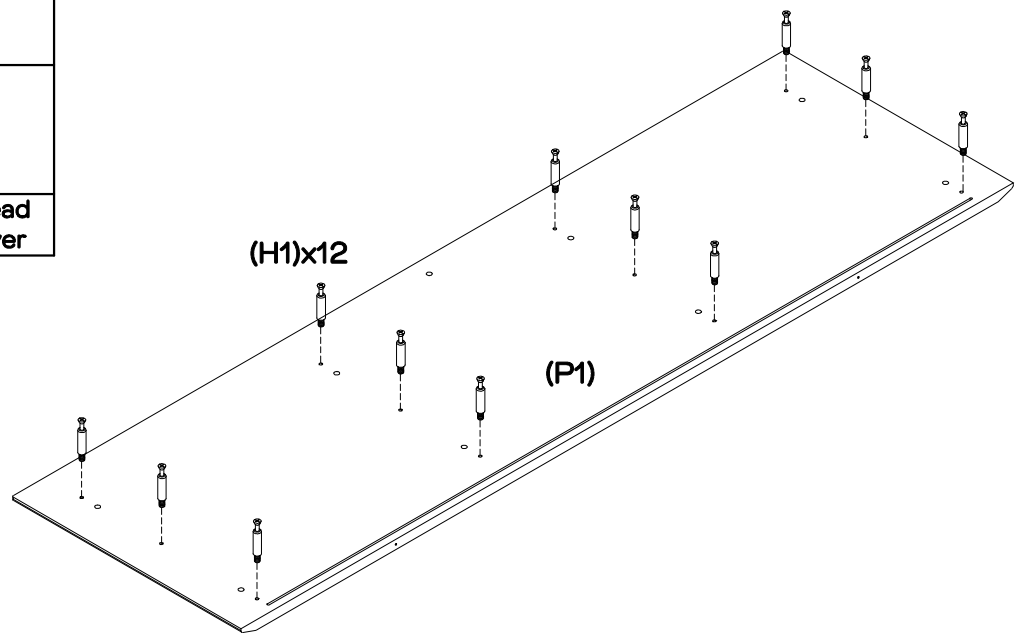
Fantastic
Furniture

Hardware Pack

								
32 x Cam Bolts (H1)	32 x Cam Nuts (H2)	23x Wooden Dowels (H3)	4 x Rail Screws (H4)	4 x Back Panel Supports(H5)	4 x Panel Support Screws (H6)	6x Drawer Handle Scres(H7)	3 x Drawer Handles (H8)	36 x Track Screws (H9)
								
14 x 25mm Screws (H10)	3 x Left Runner Tracks (H11)	3 x Right Runner Tracks (H12)	3 x Left Runners (H13)	3 x Right Runners (H14)	2x Door Handle Screws (H15)	2 x Wall Straps (H16)	4 x Washers (H17)	12 x Small Cam Bolts (H18)
								
12 x Small Cam Nuts (H19)	8 x Shelf Supports (H20)	2 x Door Magnets (H21)	4 x Magnet Screws (H22)	2 x Washer Screws (H23)	2 x Washers (H24)	4 x Hinges (H25)	24 x Hinge Screws (H26)	2 x Door Handles (H27)





Step 1


You will need:	
	
12 x Cam Bolts (H1)	Phillips Head Screwdriver



Attach 12 x cam bolts (H1) to top panel (P1) using a phillips head screwdriver.





Step 2


You will need:			
	11 x Wooden Dowels (H3)		Soft Headed Mallet
	6 x Cam Bolts (H1)		Phillips Head Screwdriver

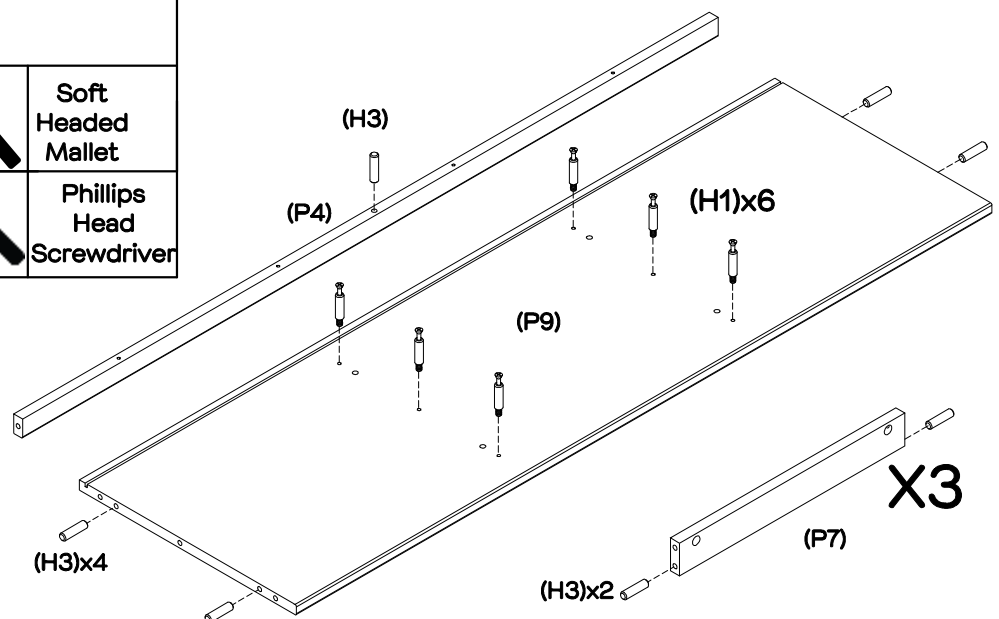

Insert 11 x wooden dowels (H3) into the top rail (P4), 3 x centre support rails (P7) and bottom shelf (P9). Attach 6 x cam bolts (H1) to bottom shelf (P9) using a phillips head screwdriver.
fantasticfurniture.com.au




Step 3


You will need:			
	Soft Headed Mallet		4 x Cam Bolts (H1)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver

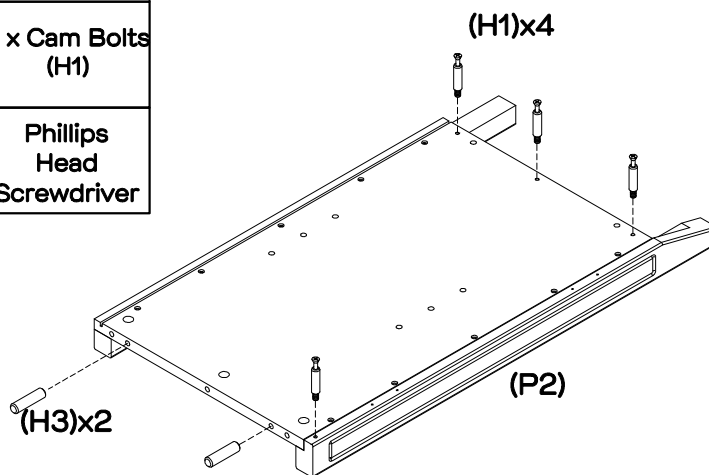

Insert 2 x wooden dowels (H3) into left side panel (P2).
Attach 4 x cam bolts (H1) to left side panel (P2) using a phillips head screwdriver.






Step 4

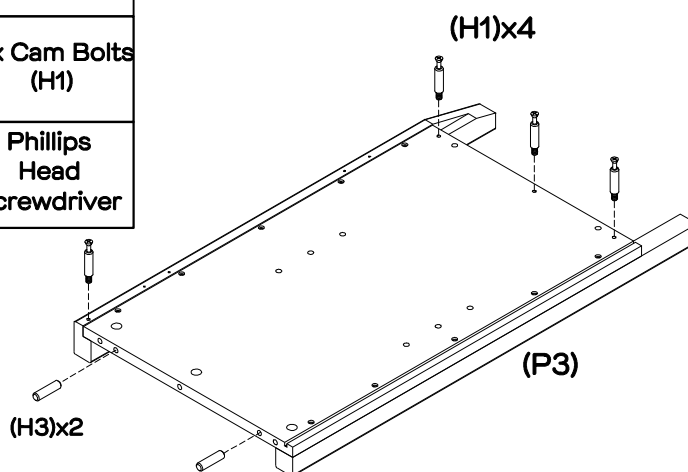
You will need:			
	Soft Headed Mallet		4 x Cam Bolts (H1)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver



Insert 2 x wooden dowels (H3) into right side panel (P3).
Attach 4 x cam bolts (H1) to right side panel (P3) using a phillips head screwdriver.



Step 5


You will need:			
	Soft Headed Mallet		9 x Track Screws (H9)
	4 x Wooden Dowels (H3)		Phillips Head Screwdriver
	3 x Left Runner Tracks (H11)		

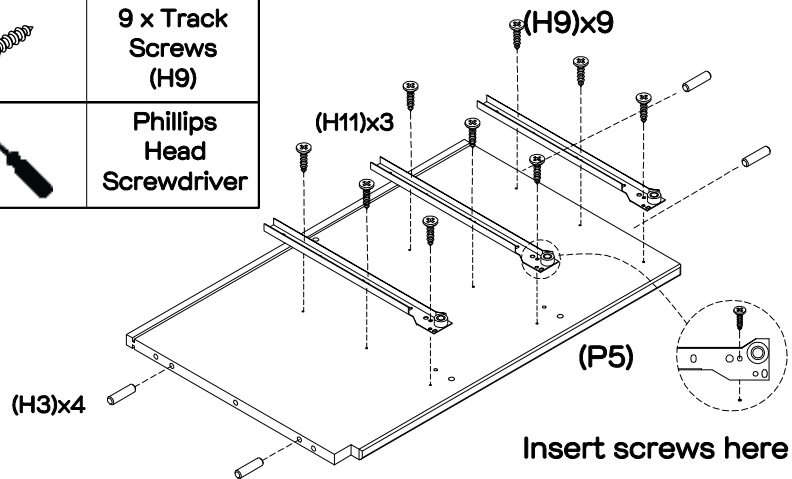

Insert 4 x wooden dowels (H3) into left centre board (P5).
Attach 3 x left runner tracks (H11) to the left centre board (P5) using 9 x track screws (H9) threaded through the holes shown. Tighten the screws using a phillips head screwdriver.






Step 6

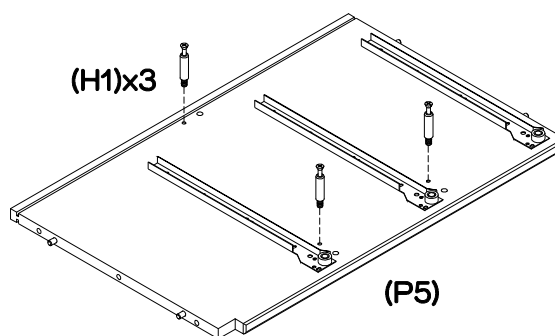
You will need:	
	
Phillips Head Screwdriver	3 x Cam Bolts (H1)



Attach 3 x cam bolts (H1) into left centre board (P5) using a phillips head screwdriver.



Step 7


You will need:			
	Soft Headed Mallet		9 x Track Screws (H9)
	4 x Wooden Dowels (H3)		Phillips Head Screwdriver
	3 x Right Runner Tracks (H12)		

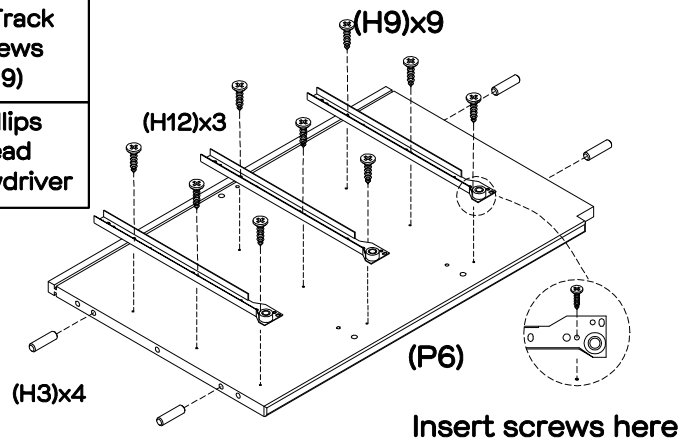

Insert 4 x wooden dowels (H3) into right centre board (P6). Attach 3 x right runner tracks (H12) to the right centre board (P6) using 9 x track screws (H9) threaded through the holes shown. Tighten the screws using a phillips head screwdriver.




Step 8


You will need:	
	
Phillips Head Screwdriver	3 x Cam Bolts (H1)

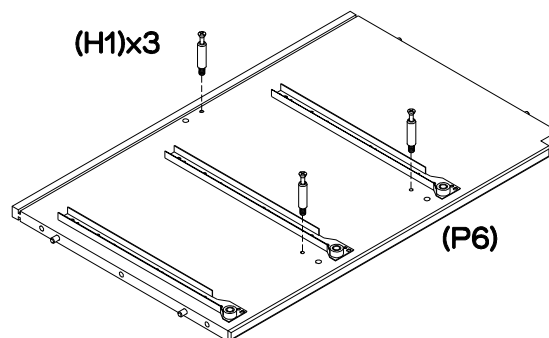

Attach 3 x cam bolts (H1) into right centre board (P6) using a phillips head screwdriver.



Step 9

You will need:			
	4 x Hinges (H25)		12 x Hinge Screws (H26)
	Phillips Head Screwdriver		

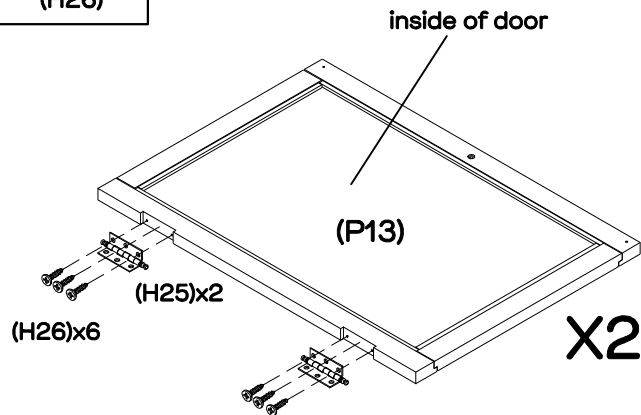


Attach 2 x hinges (H25) to 1 x door (P13) with 6 x hinge screws (H26), tightening with a phillips head screwdriver.
Repeat process for the other door (P13).


Step 10

You will need:	
	
3 x Cam Nut (H2)	Phillips Head Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

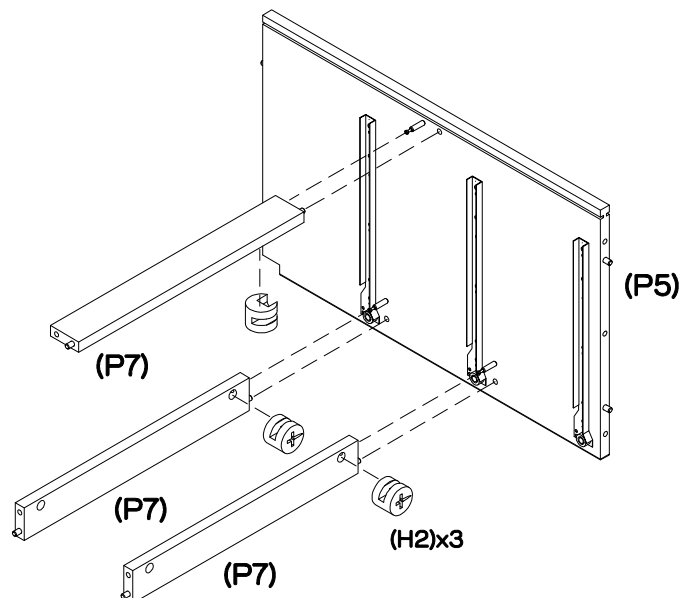

Attach 3 x centre support rails (P7) to the left centre board (P5). Insert 3 x cam nuts (H2) into the 3 x centre support rails (P7) as shown, ensuring the arrow on the cam nuts (H2) face the incoming cam bolts.

Using a phillips head screwdriver, turn the cam nuts (H2) clockwise to lock.

Step 11

You will need:



3 x Cam Nut
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

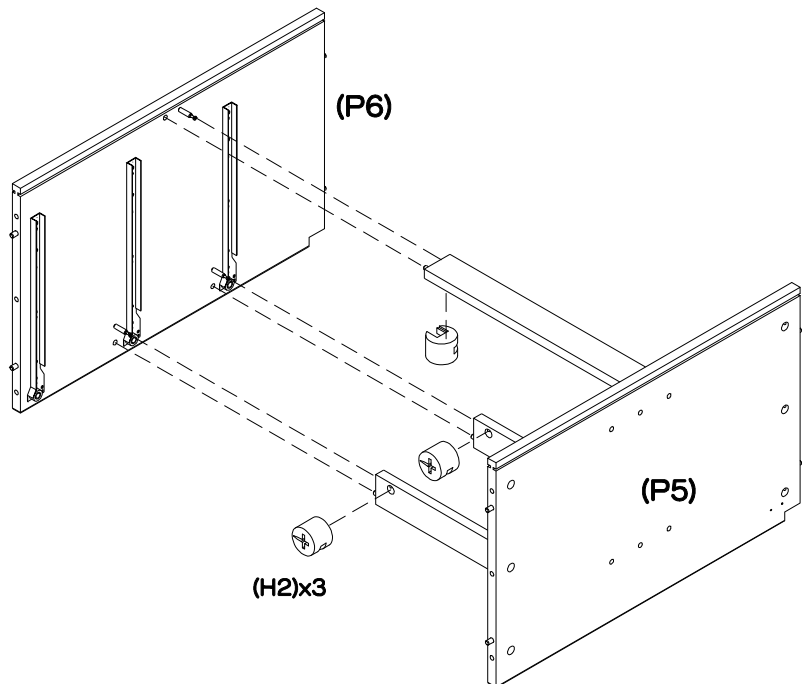

Attach right centre board (P6) to the 3 x centre support rails (P7) already attached to the left centre board (P5). Insert 3 x cam nuts (H2) into the 3 x centre support rails (P7) as shown, ensuring the arrow on the cam nuts (H2) face the incoming cam bolts. Using a phillips head screwdriver, turn the cam nuts (H2) clockwise to lock.


Step 12

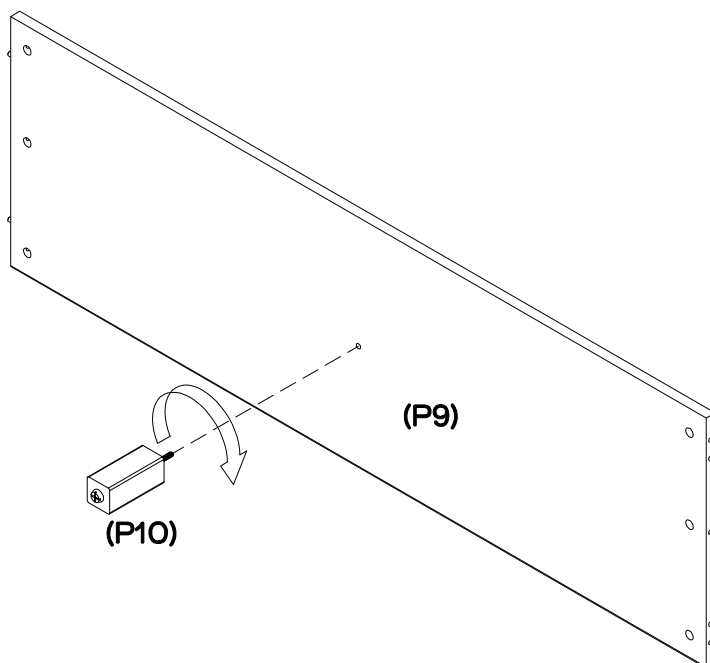

Attach middle foot (P10) to bottom shelf (P9) by turning clockwise as shown.

Step 13

Two People



Required

You will need:



6 x Cam Nut
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

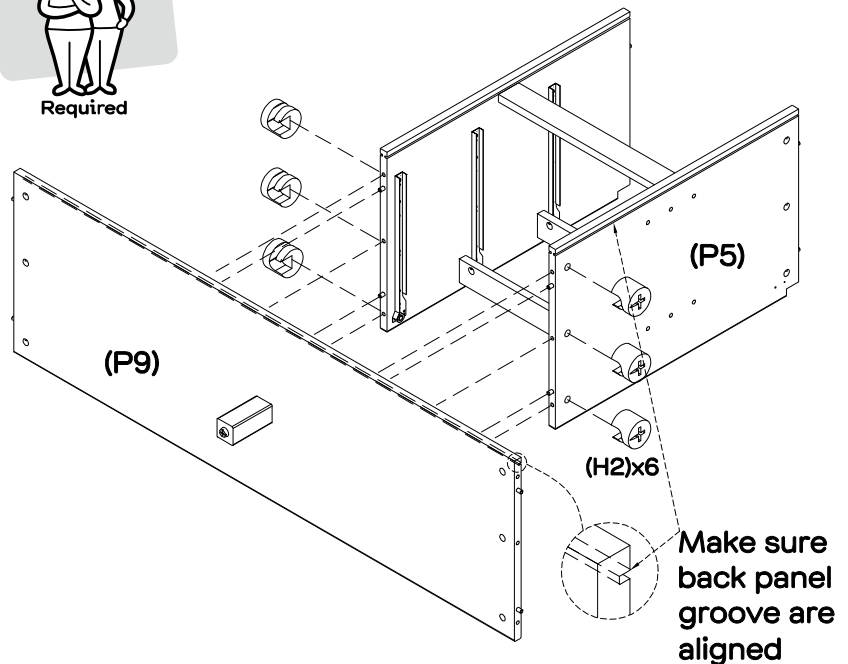

With assistance, attach the bottom shelf (P9) to the centre boards (P5, P6). Insert 6 x cam nuts (H2) into the centre boards (P5, P6), ensuring the arrows on the cam nuts (H2) point towards the incoming cam bolts. Using a phillips head screwdriver, turn the cam nuts (H2) clockwise to lock.

Step 14

You will need:




3 x Cam Nuts
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

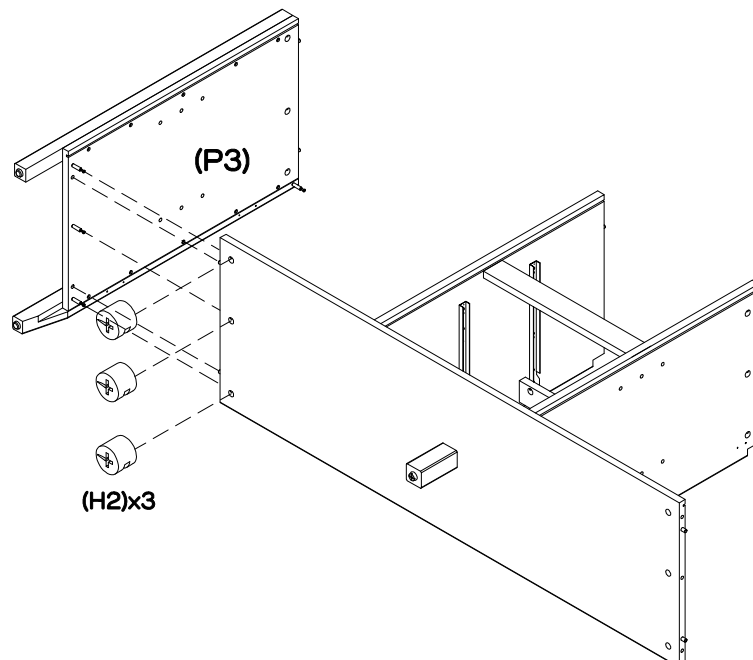

Attach right side panel (P3) to the unit as shown. Insert 3 x cam nuts (H2) into the bottom shelf (P9), ensuring the arrows on the cam nuts (H2) face incoming cam bolts. Using a phillips head screwdriver, turn cam nuts (H2) clockwise to lock.



Fantastic
Furniture

Step 15

You will need:




1 x Cam Nut
(H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach top panel rail (P4) to the unit as shown and insert 1 x cam nut (H2), ensuring the arrow faces incoming cam bolt. Using a phillips head screwdriver, rotate cam nut (H2) clockwise to lock.

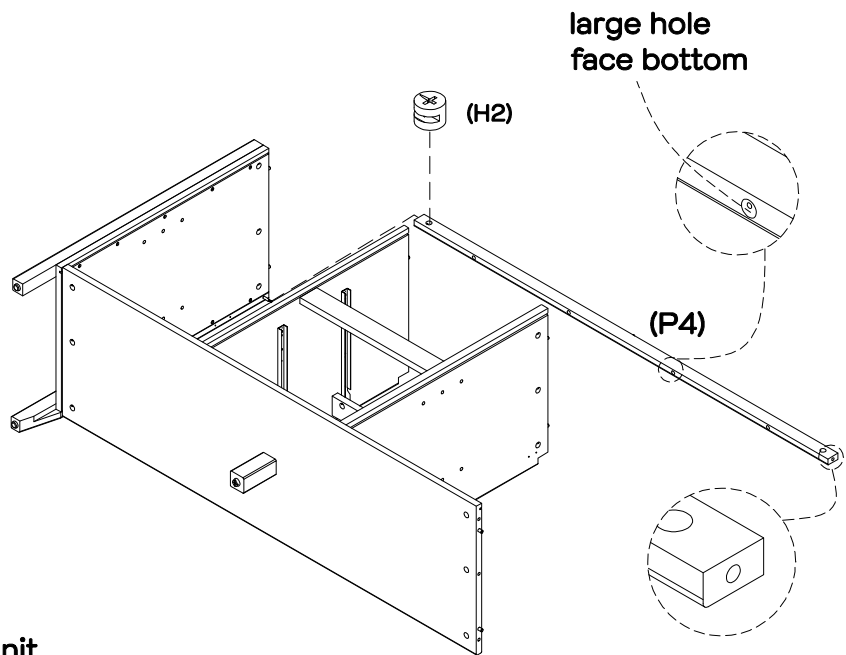

Step 16

You will need:




4 x Cam Nut
(H2)



Phillips Head
Screwdriver


This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

With assistance, attach the left side panel (P2) to the assembled unit. Insert 4 x cam nuts (H2) into bottom shelf (P9), ensuring arrow faces incoming bolts. Using a phillips head screwdriver, rotate the cam nut (H2) clockwise to lock.


Two People



Required


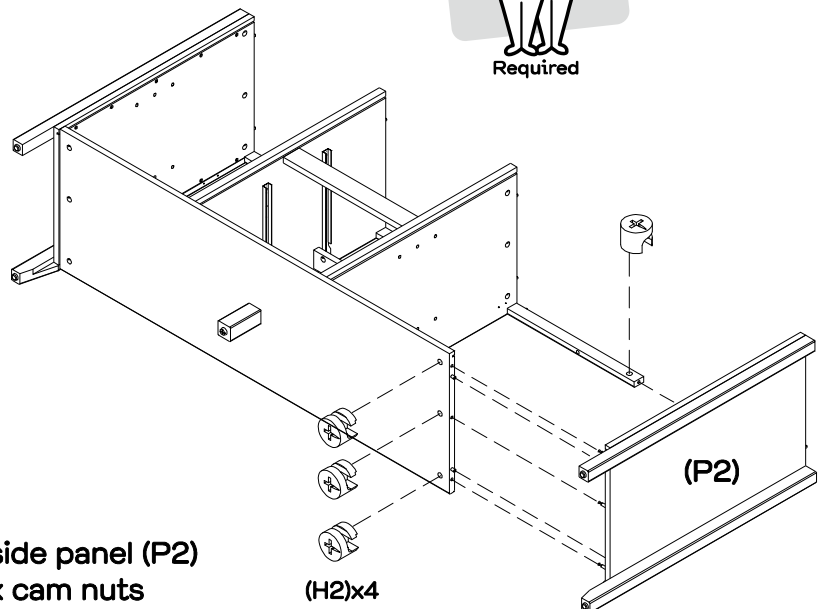


Step 17

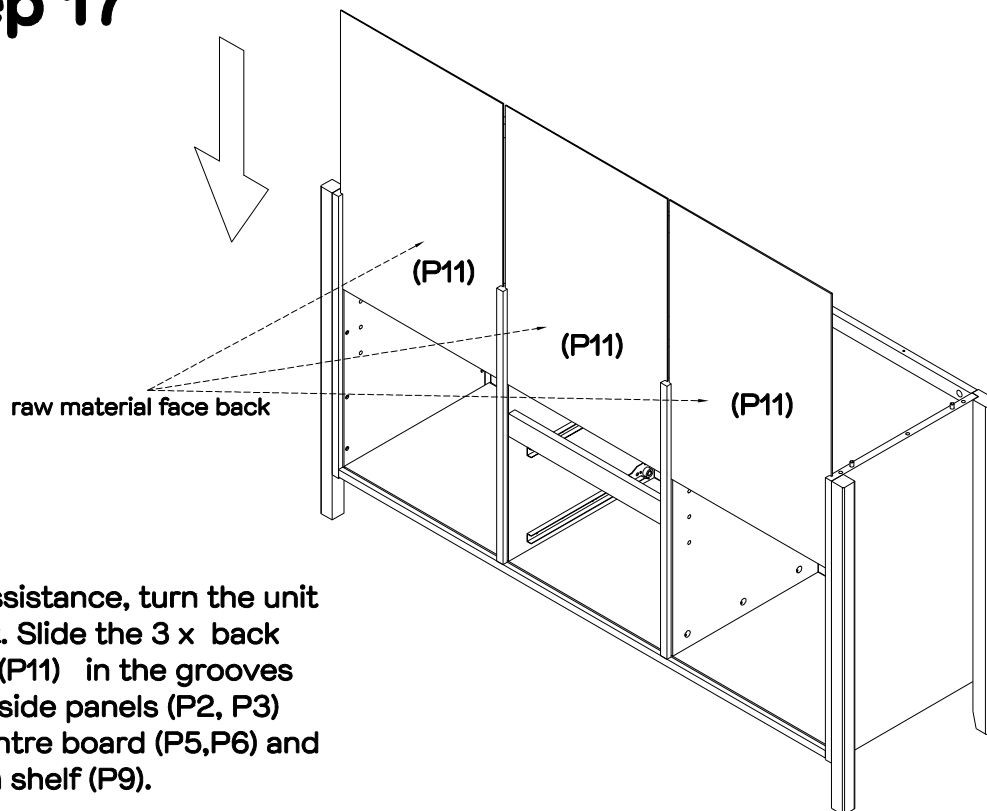



With assistance, turn the unit upright. Slide the 3 x back panels (P11) in the grooves on the side panels (P2, P3) and centre board (P5,P6) and bottom shelf (P9).


Step 18

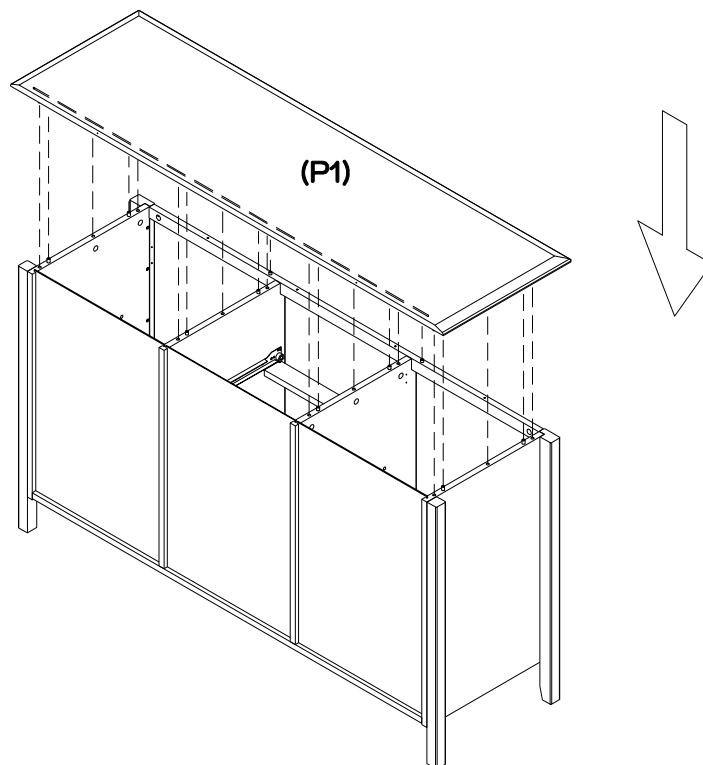

With assistance, attach top panel (P1) to the assembled unit as shown.




Step 19


You will need:	
	
12 x Cam Nut (H2)	Phillips Head Screwdriver
	
4 x Rail Screws (H4)	

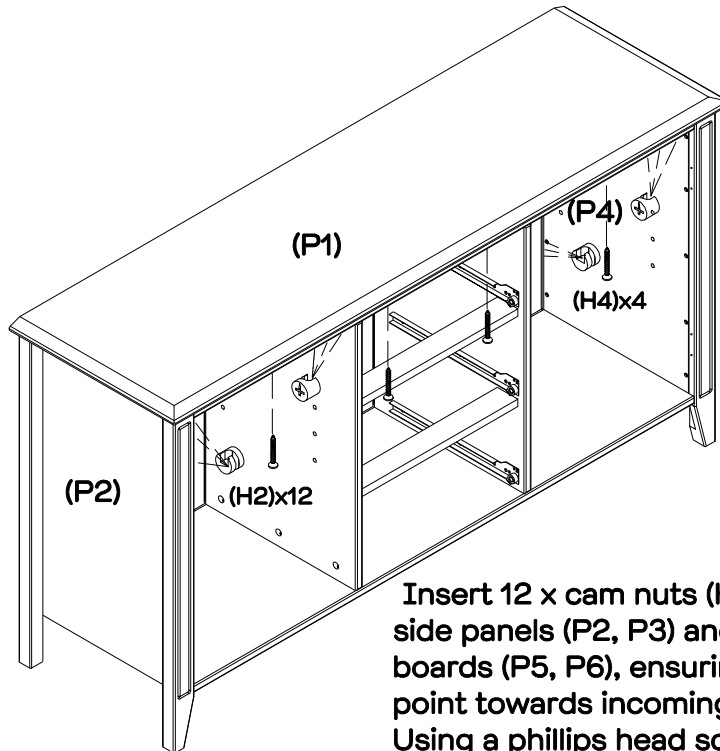

Insert 12 x cam nuts (H2) into the side panels (P2, P3) and centre boards (P5, P6), ensuring the arrows point towards incoming cam bolts. Using a phillips head screwdriver, turn the cam nuts (H2) clockwise to lock. Attach the top panel rail (P4) to top panel (P1) using 4 x rail screws (H4).

Step 20



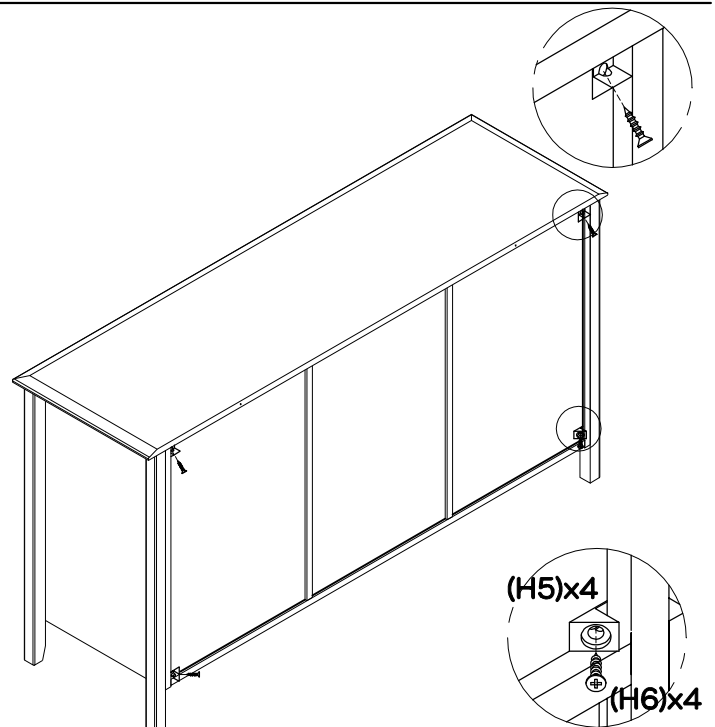
You will need:	
	
4 x Back Panel Supports (H5)	Phillips Head Screwdriver
	
4 x Panel Support Screws (H6)	




Insert 4 x back panel supports (H5) into each corner of the unit using 4 x panel support screws (H6), tightening with a phillips head screwdriver.




Step 21


You will need:	
	
2 x Door Magnets (H21)	Phillips Head Screwdriver
	
4 x Magnet Screws (H22)	

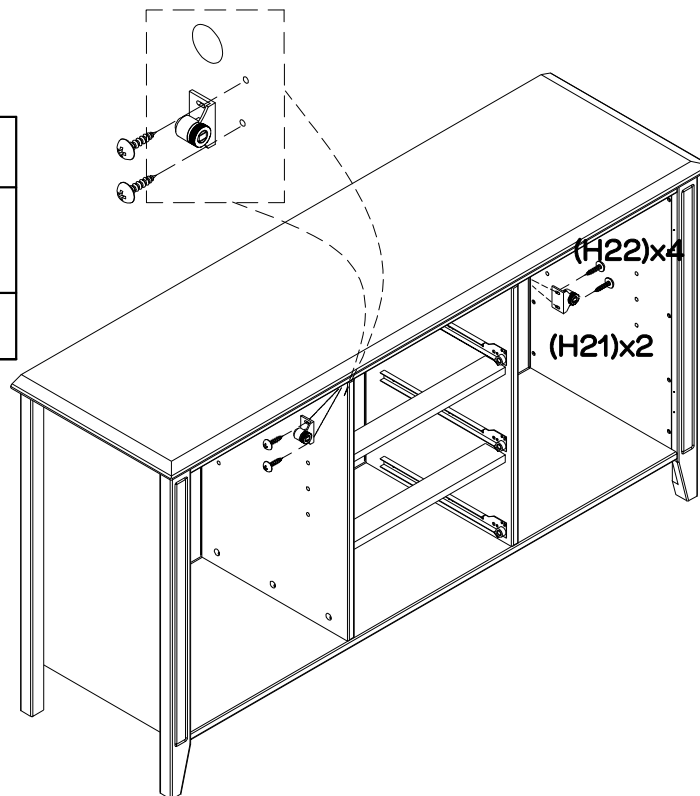

Attach 2 x door magnets (H21) to centre boards (P5, P6) using 4 x magnet screws (H22), Tightening using a phillips head screwdriver.

Step 22


You will need:	
	
8 x Shelf Supports (H20)	

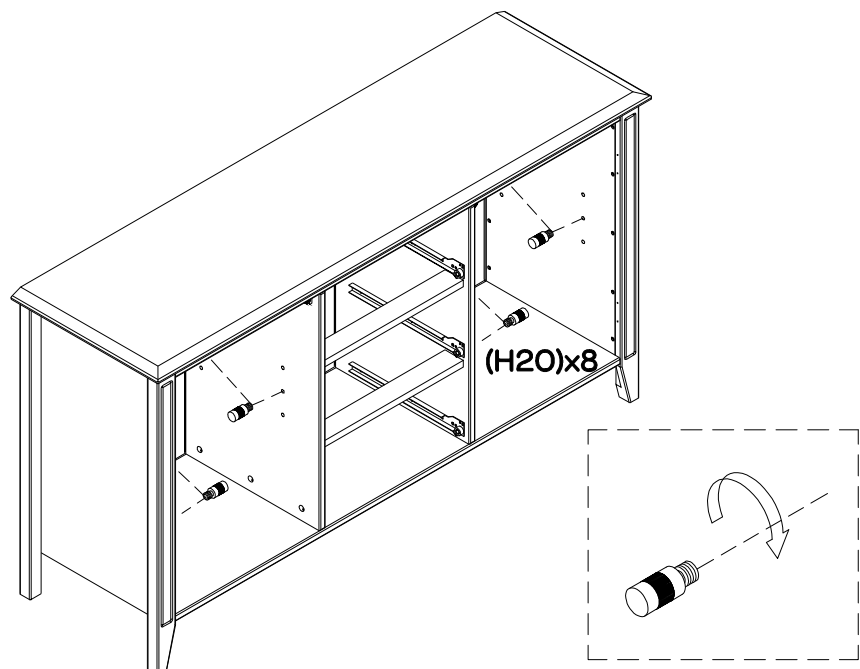

Attach 8 x shelf supports (H20) to the side panels (P2, P3) and centre boards (P5, P6) at your desired height by turning clockwise to secure.





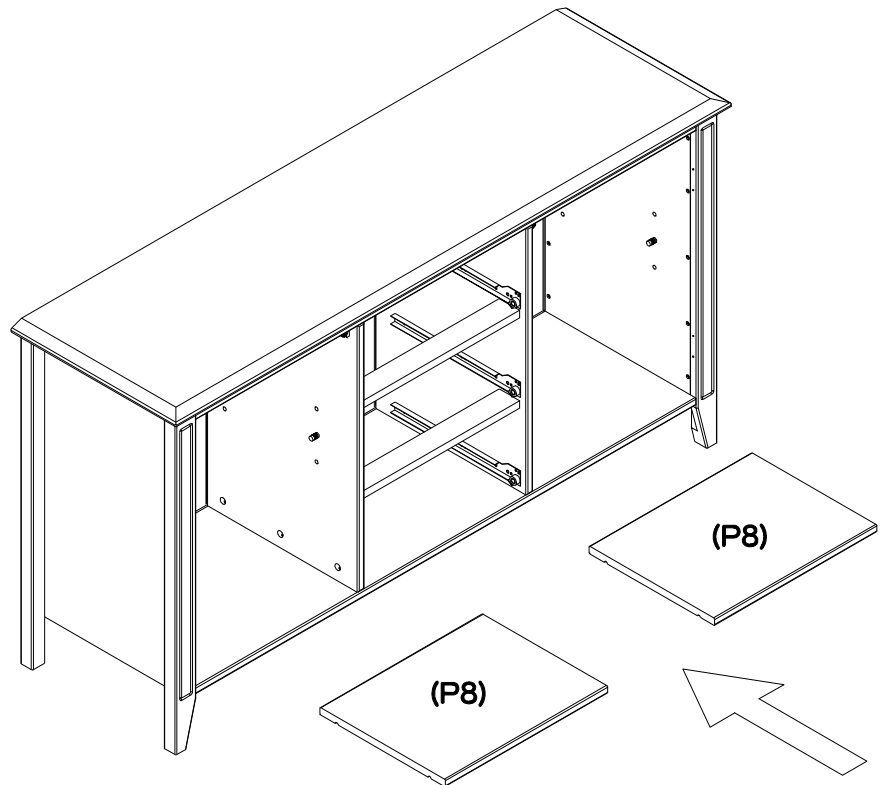

Step 23

Insert 2 x shelves (P8) into the unit and lock into place with the shelf supports (H20).




Step 24

You will need:



	2 x Washer Screws (H23)		12 x Hinge Screws (H26)
	2 x Washers (H24)		Phillips Head Screwdriver
	2 x Door Handles (H27)		2x Door Handle Screws (H15)

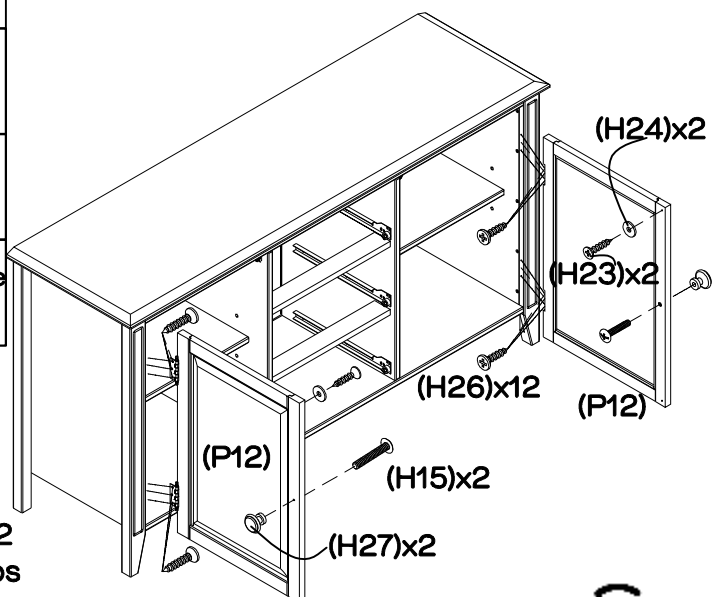Attach the hinges (H25) on the 2 x doors (P12) to the side panels (P2, P3) using 2 x hinge screws (H26), tightening with a phillips head screwdriver. Attach 2 x washers (H24) to the corners of the 2 x doors (P12) as shown using 2 x washer screws (H23), tightening with a phillips head screwdriver. Attach 2 x handles (H27) to the 2 x doors (P12) using 2 x door handle screws (H15), tightening with a phillips head




Step 25

You will need:



	
12 x Small Cam Bolts (H18)	Phillips Head Screwdriver

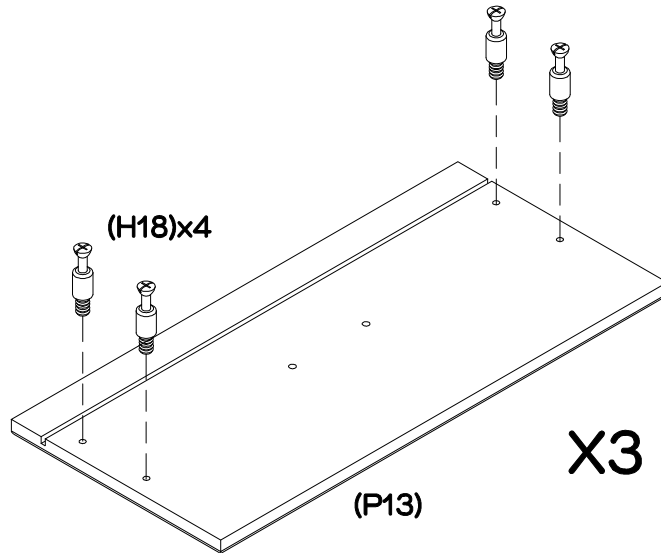Attach 4 x small cam bolts (H18) to 1 x drawer front (P13) using a phillips head screwdriver.
Repeat this process for the other 2 x drawer fronts (P13).





Step 26

You will need:

	
12x Small Cam Nuts (H19)	Phillips Head Screwdriver


This is how a cam nut works.....

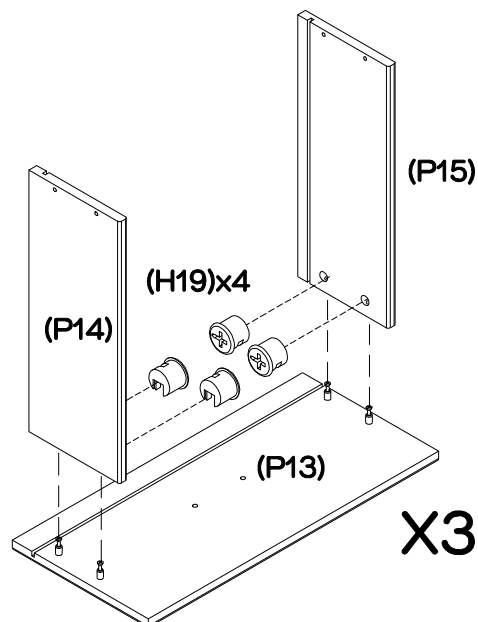

Attach 1 x left drawer side (P14) and 1 x right drawer side (P15) to 1 x drawer front (P13), ensuring the grooves on all panels align. Insert 4 x small cam nuts (H19) into the drawer sides (P14, P15), ensuring the arrow on the small cam nuts (H19) faces the incoming cam bolts. Using a phillips head screwdriver, turn the cam nuts (H19) clockwise to lock. Repeat this process for the other 2 x drawers.

Step 27



paper Lamination face inside

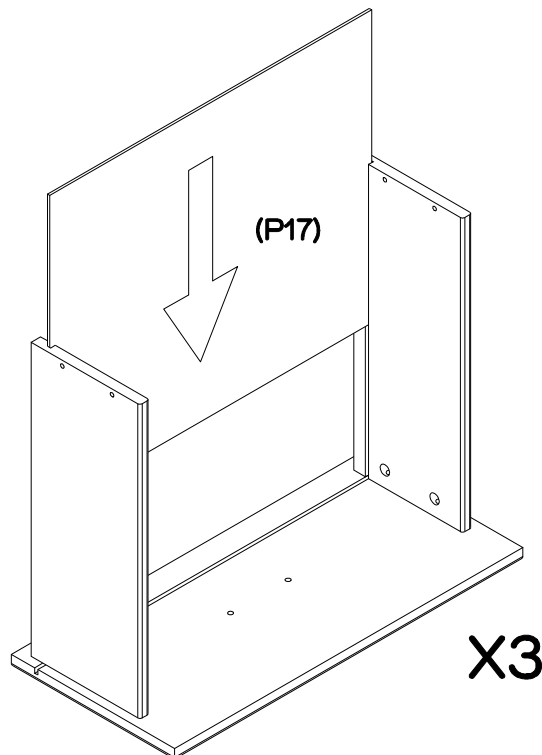


Insert 1 x drawer base (P17) into the grooves on the drawer sides (P14, P15) and drawer front (P13). Repeat this process for the other 2 x drawers.

Step 28





You will need:

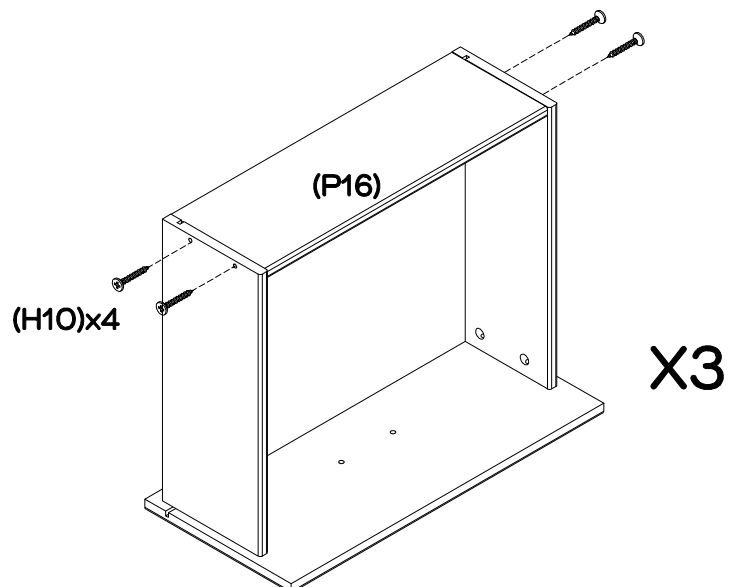
	
12 x 25mm Screws(H10)	Phillips Head Screwdriver



Use 4 x 25mm screws (H10) to attach 1 x drawer back panel (P16) to the drawer sides (P14, P15). Repeat process for the other 2 x drawers.

Step 29



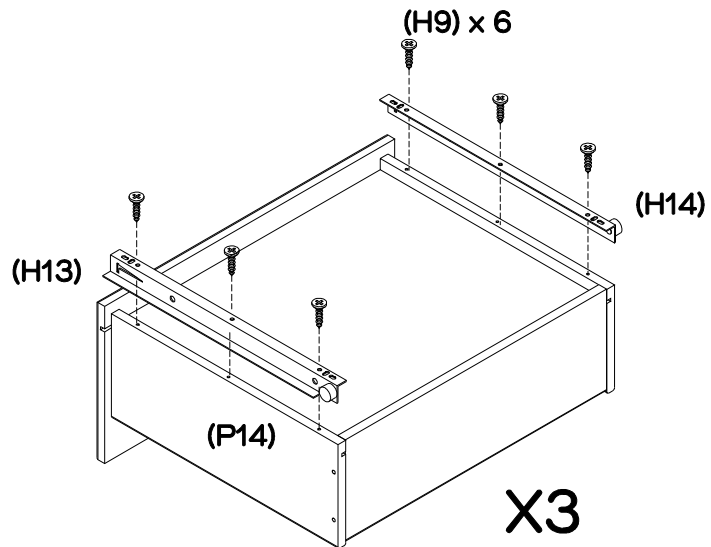
You will need:	
	
18 x Track Screws (H9)	Phillips Head Screwdriver
	
3 x left Runners (H13)	3 x Right Runners (H14)




Attach 1 x left runner (H13) to left drawer side (P14) and 1 x right runner (H14) to right drawer side (P15) using 6 x track screws (H9), tightening with a phillips head screwdriver.

Repeat this process for the other 2 x drawers.

Step 30


You will need:		
		
6x Drawer Handle Screws(H7)	3 x Drawer Handles (H8)	Phillips Head Screwdriver

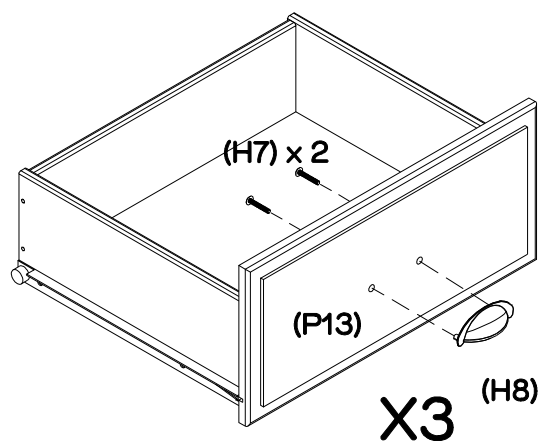

Attach 1 x drawer handle (H8) to 1 x drawer front (P13) using 2 x drawer handle screws (H7), tightening with a phillips head screwdriver.



Repeat this process for the other 2 x drawers.

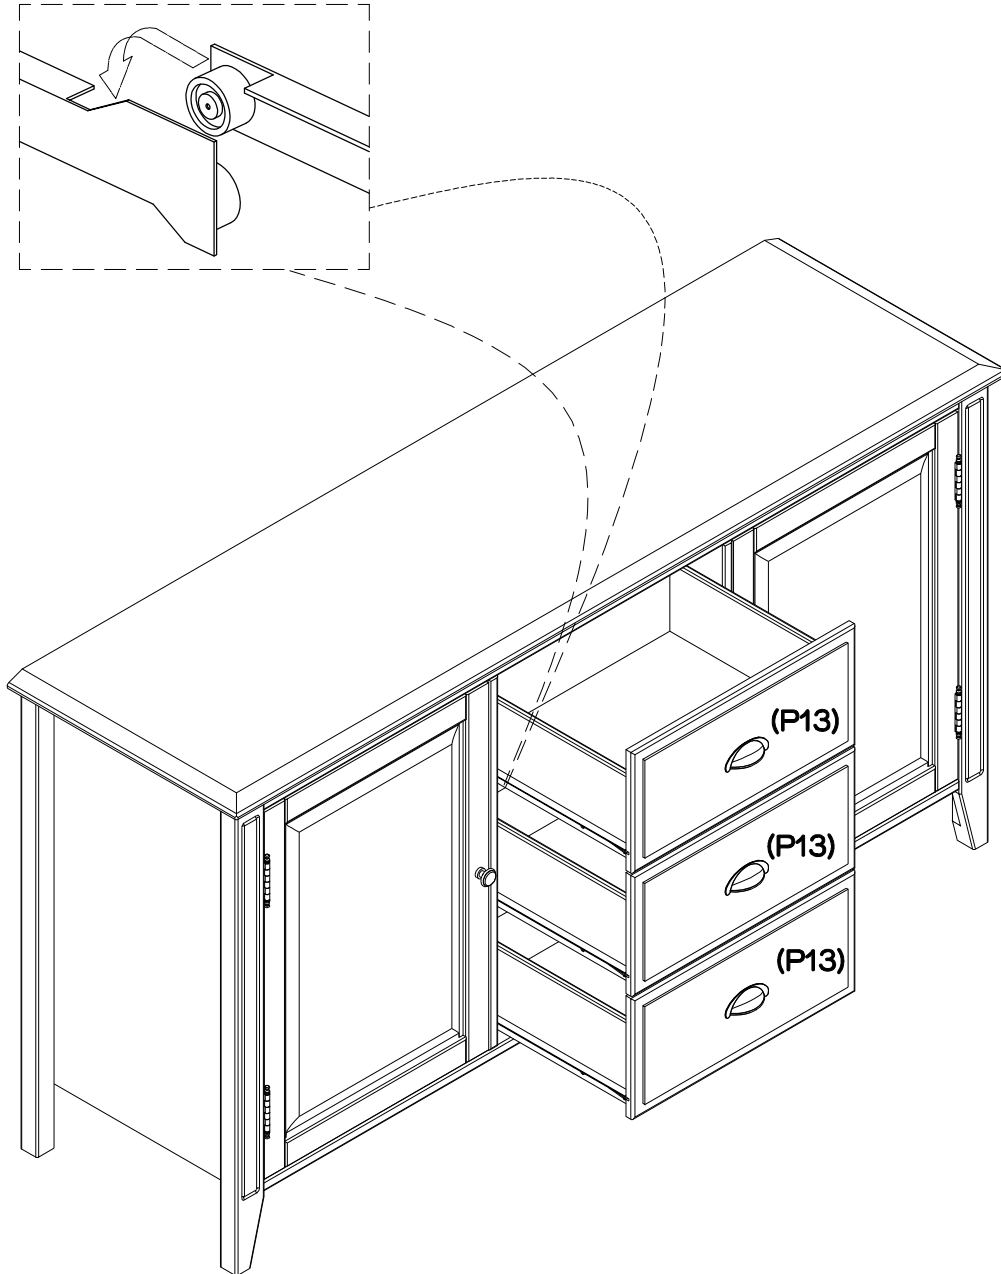Step 31




Slide the 3 x assembled drawers into the buffet as shown.

Step 32

You will need:	
	
2 x Wall Straps (H16)	Phillips Head Screwdriver
	
2 x Washers (H17)	2 x 25mm Screws (H10)

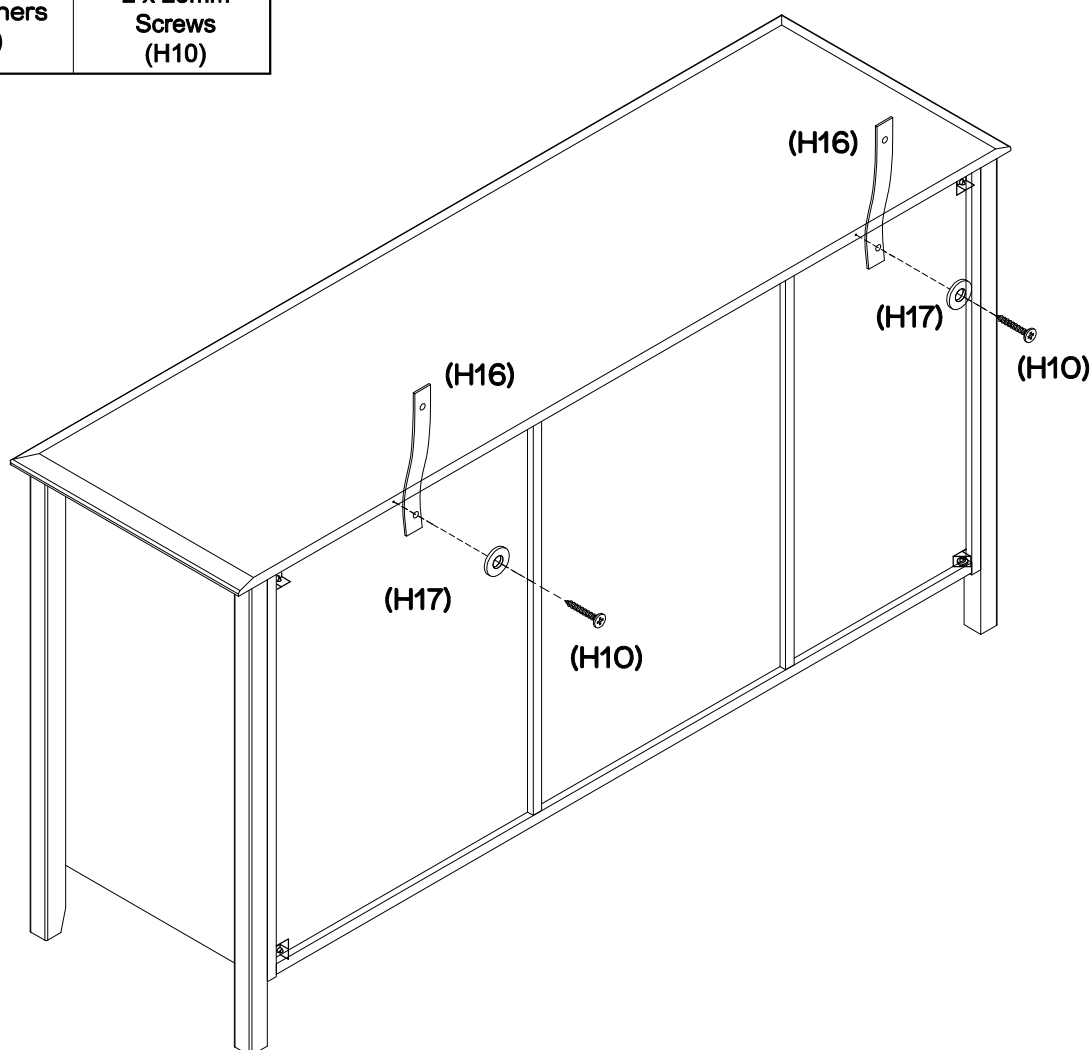

We strongly advise that you use the wall safety strap provided to prevent the unit toppling.



Attach 2 x wall straps (H16) to the back of the top panel (P1) using 2 x 25mm screws (H10) and 2 x washers (H17).

Step 33



You will need:

	
2 x Washers (H17)	Phillips Head Screwdriver

Screw and Wall Plug are not provided.
Please use appropriate fixtures for your wall.


Seek advice from a qualified trades person on how to attach safety strap to the wall .

Two People

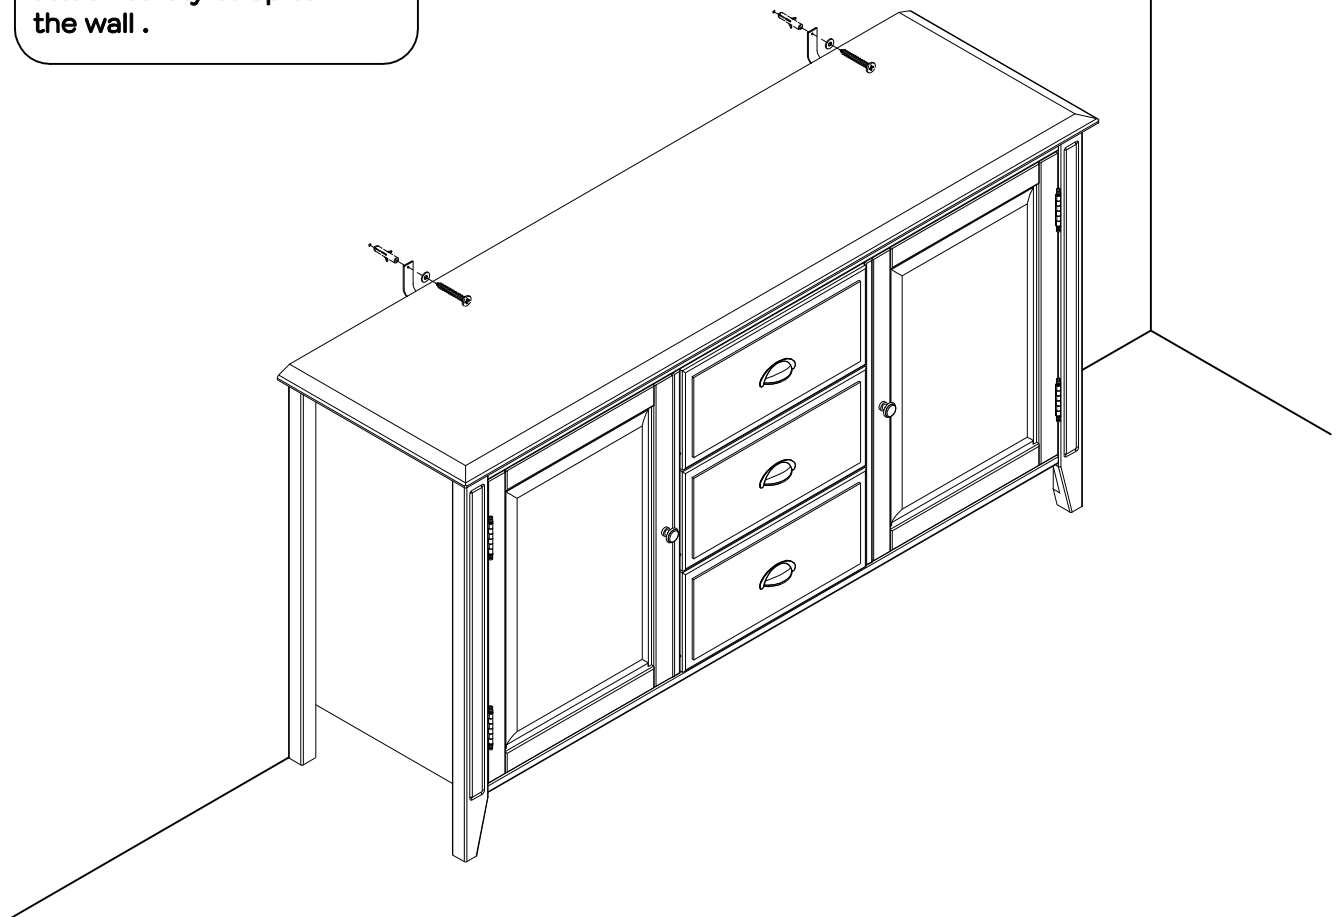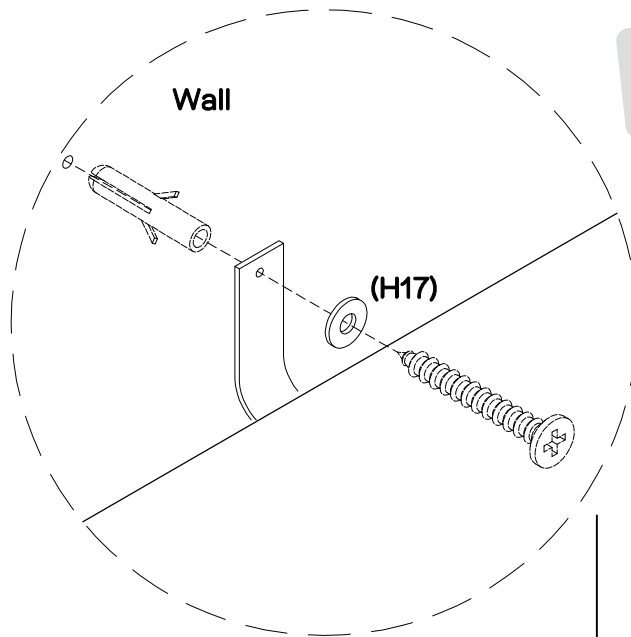

With assistance, move the buffet to its final position. Attach the 2 x wall straps to the wall, ensuring it is firmly attached and secure.

If the door and drawer fronts gaps are not even please adjust the adjustable leveler on centre leg accordingly

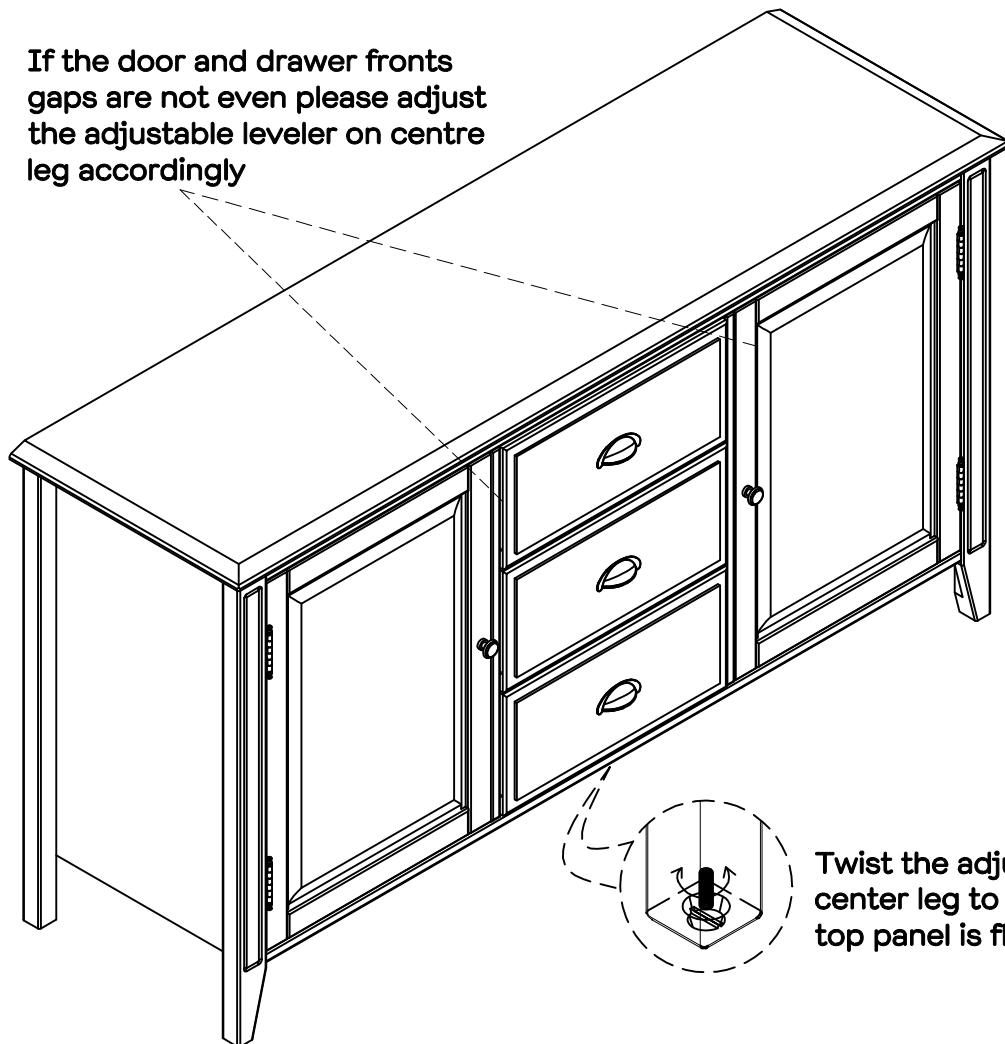

Twist the adjuster on center leg to make the top panel is flush

Job Complete!

In the interest of our environment please dispose of all packing thoughtfully.