




**Fantastic
Furniture**

Version 1.0



Two People



Required

Torkay

Dresser 6 Drawer White Walnut

fantasticfurniture.com.au

**WARNING: ENSURE THE WALL STRAP IS ATTACHED TO
AVOID SERIOUS INJURY.**



To avoid any serious or fatal injury, this product has been provided with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture

Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you Need

To assemble the product



(Other Tools You Need)
Phillips Head Screwdriver
Mallet (soft headed)


Parts List

Carton 1:


1 x Top Panel (P1);
1 x Front Support Rail (P4);
4 x Centre Support Rails (P5);
1 x Base Frame (P7);
1 x Middle Leg (P8);
1 x Upper Back Panel (P9);
1 x Lower Back Panel (P10);
6 x Drawer Fronts (P11);
6 x Drawer Bases (P15);

Carton 2:

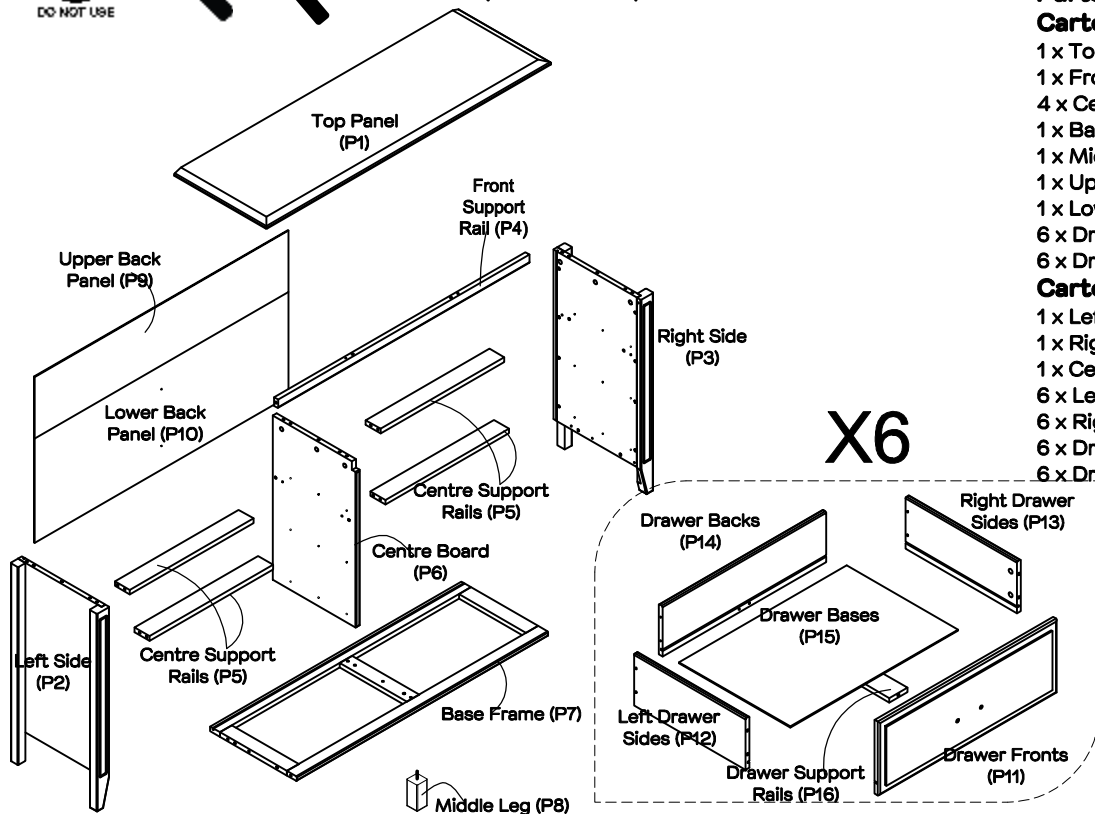

1 x Left Side (P2);
1 x Right Side (P3);
1 x Centre Board (P6);
6 x Left Drawer Sides (P12);
6 x Right Drawer Sides (P13);
6 x Drawer Backs (P14);
6 x Drawer Support Rails (P16);

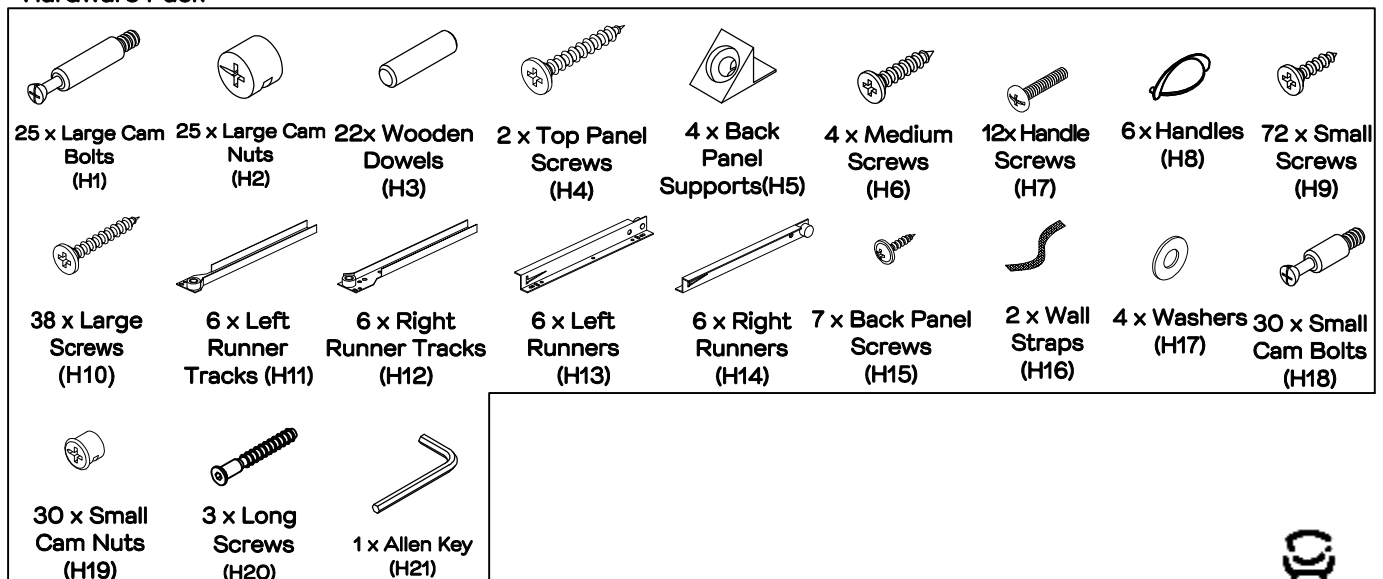


Hardware Pack





Step 1


You will need:	
	
9 x Large Cam Bolts (H1)	Phillips Head Screwdriver

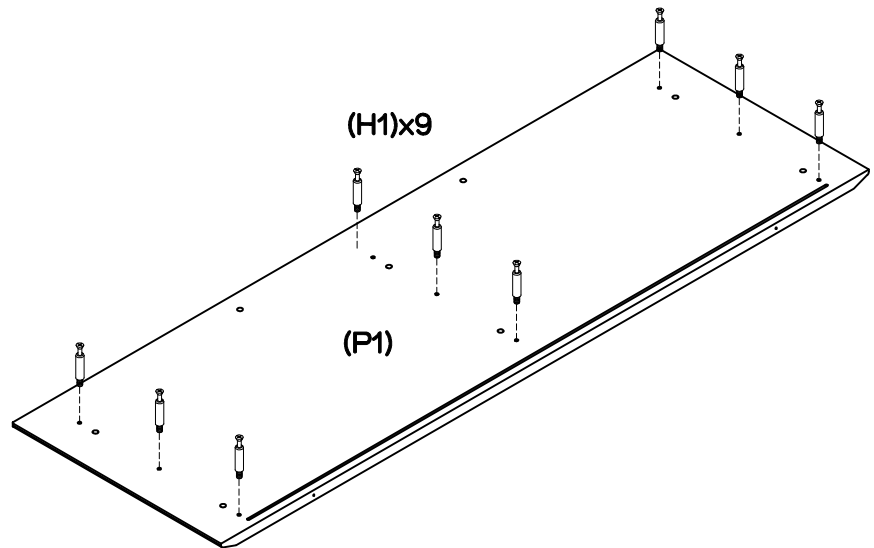

Attach 9 x large cam bolts (H1) to top panel (P1) using a phillips head screwdriver.





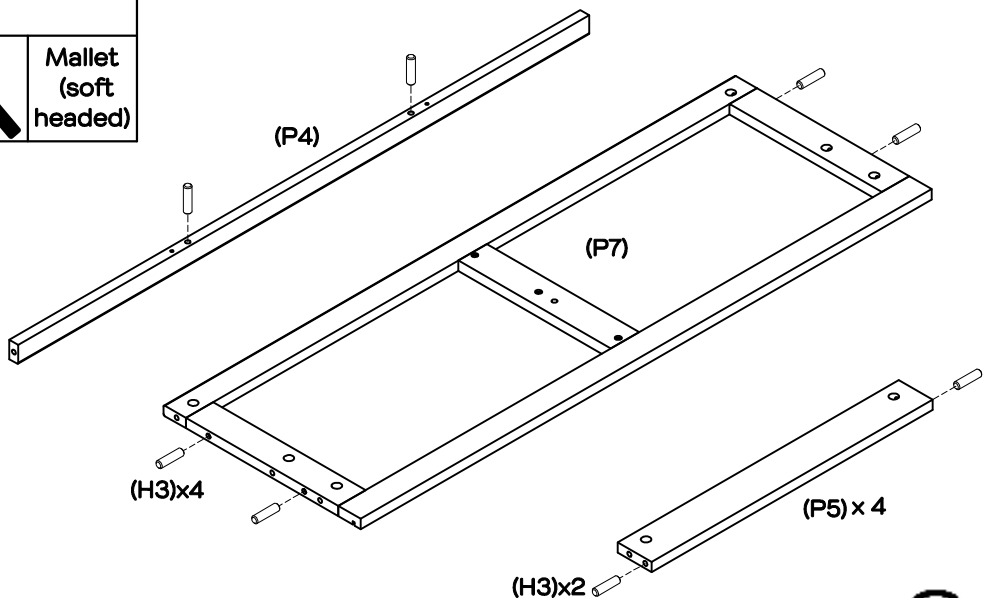
Step 2


You will need:			
	14 x Wooden Dowels (H3)		Mallet (soft headed)



Insert 14 x wooden dowels (H3) into the front support rail (P4), the 4 x centre support rails (P5) and base frame (P7) as shown.





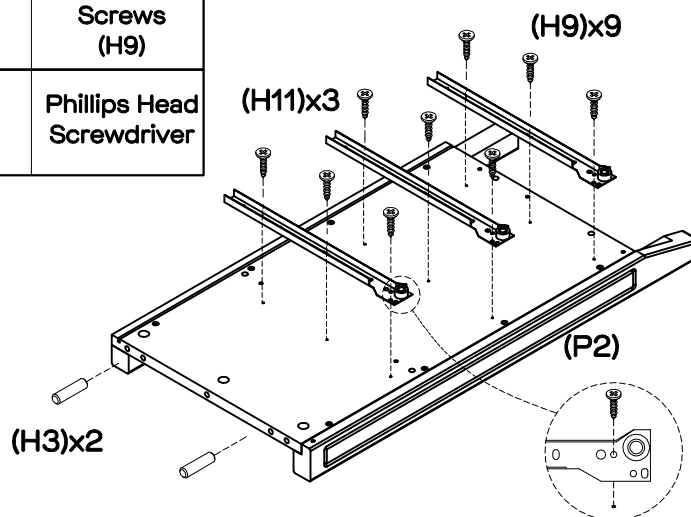
Step 3


You will need:			
	Mallet (soft headed)		9 x Small Screws (H9)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver
	3 x Left Runner Tracks (H11)		



Insert 2 x wooden dowels (H3) into left side (P2) as shown. Attach 3 x left runner tracks (H11) to left side (P2) using 9 x small screws (H9), tightening with a phillips head screwdriver. Ensure the screws are inserted through the holes shown in the image above.



Step 4


You will need:			
	Mallet (soft headed)		9 x Small Screws (H9)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver
	3 x Right Runner Tracks (H12)		

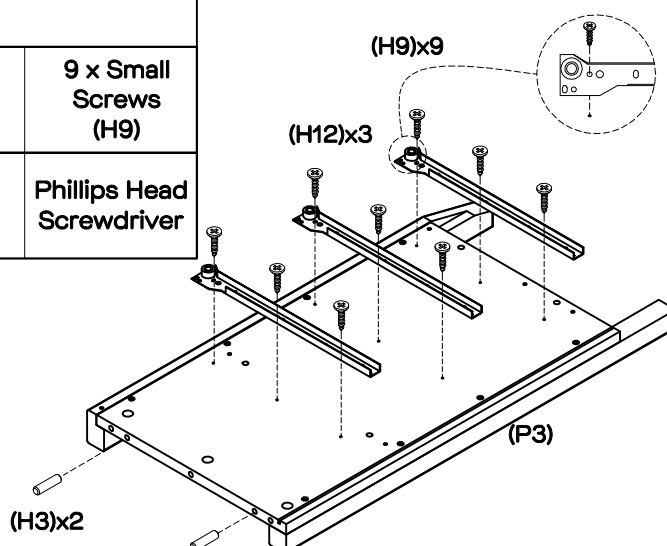

Insert 2 x wooden dowels (H3) into right side (P3) as shown. Attach 3 x right runner tracks (H12) to right side (P3) using 9 x small screws (H9), tightening with a phillips head screwdriver. Ensure the screws are inserted through the holes shown in the image above.

Step 5


You will need:	
	
Phillips Head Screwdriver	6 x Large Cam Bolts(H1)

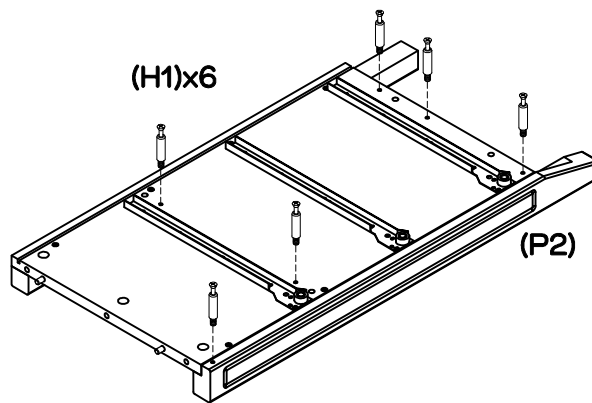

Attach 6 x large cam bolts (H1) to left side (P2) using a phillips head screwdriver.



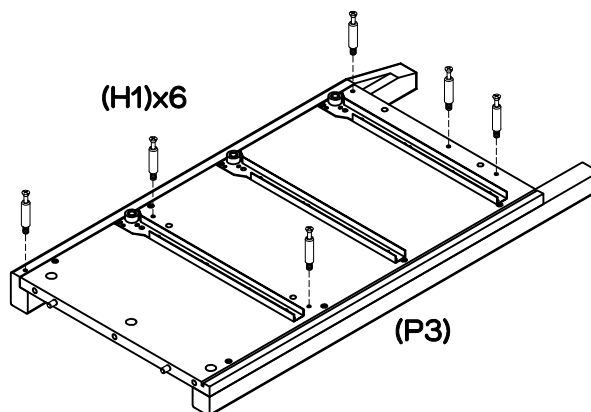


Step 6

You will need:	
	
Phillips Head Screwdriver	6 x Large Cam Bolts(H1)




Attach 6 x large cam bolts (H1) to right side (P3) using a phillips head screwdriver.

Step 7

You will need:			
	Mallet (soft headed)		9 x Small Screws (H9)
	4 x Wooden Dowels (H3)		Phillips Head Screwdriver
	3 x Right Runner Tracks (H12)		


Note: the left side of the centre board (P6) has 3 x large holes at the top.

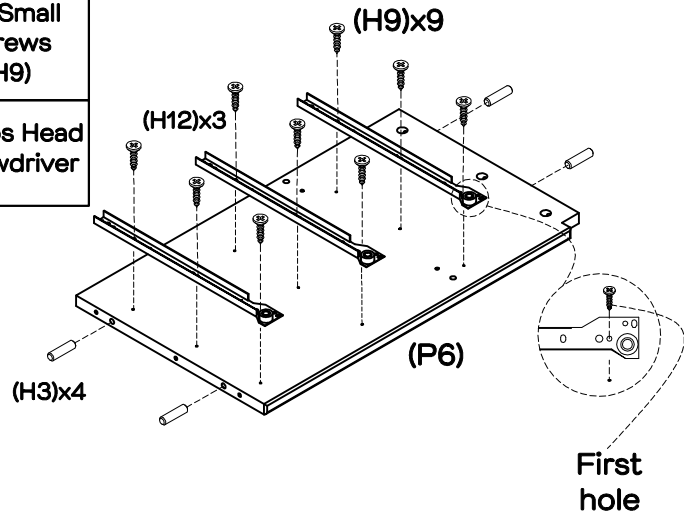

Insert 4 x wooden dowels (H3) into centre board (P6) as shown.
Attach 3 x right runner tracks (H12) onto the left side of the centre board (P6) using 9 x small screws (H9), tightening with a phillips head screwdriver.
Ensure the screws are inserted through the holes shown in the image above.




Step 8

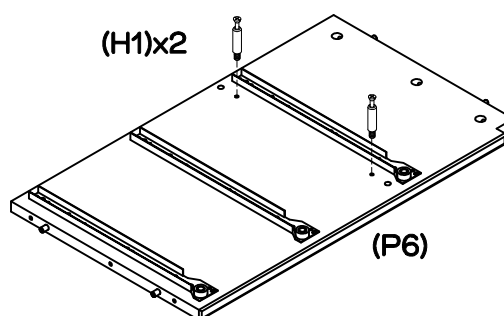
You will need:	
	
Phillips Head Screwdriver	2 x Large Cam Bolts(H1)



Attach 2 x large cam bolts (H1) to centre board (P6) using a phillips head screwdriver.



Step 9

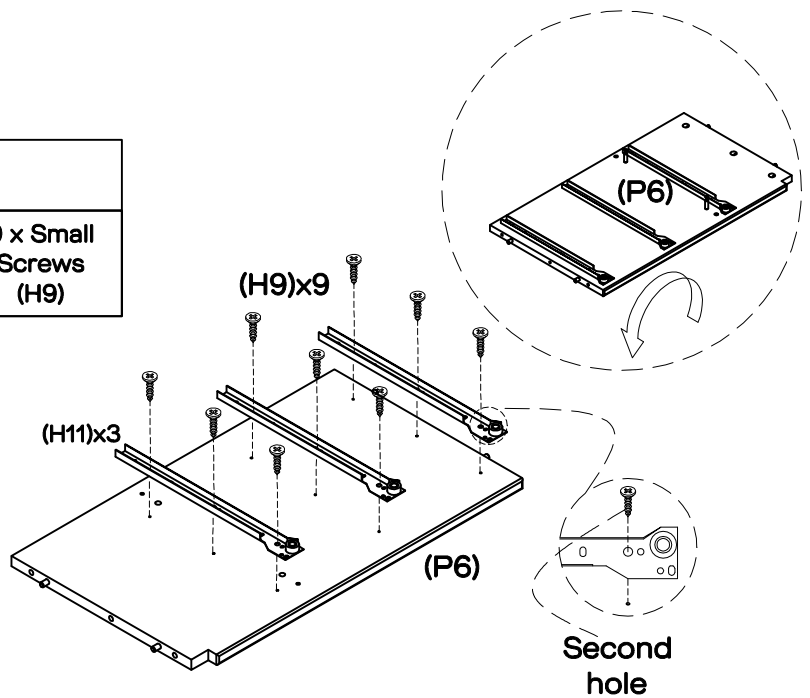
You will need:			
	3 x Left Runner Tracks (H11)		9 x Small Screws (H9)
	Phillips Head Screwdriver		



Turn over the centre board (P6) and attach 3 x left runner tracks (H11) to the right side of the centre board (P6) using 9 x small screws (H9), tightening with a phillips head screwdriver. Ensure the screws are inserted through the holes shown in the image above.

Step 10



You will need:	
	
Phillips Head Screwdriver	2 x Large Cam Bolts (H1)

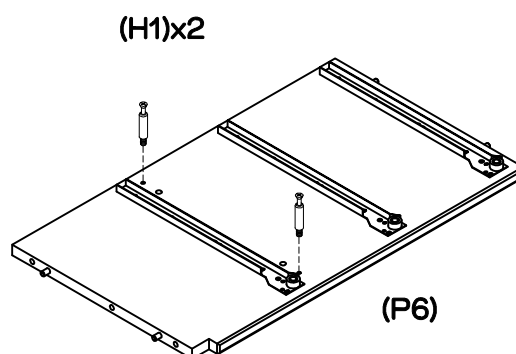


Attach 2 x large cam bolts (H1) to centre board (P6) using a phillips head screwdriver.

Step 11


Note: the left side of the centre board (P6) has 3 x large holes at the top.

You will need:	
	
2 x Large Cam Nuts (H2)	Phillips Head Screwdriver

This is how a cam nut works.....





The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

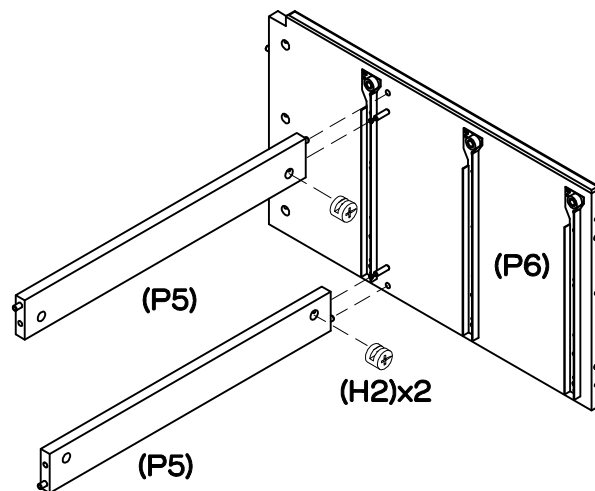


Attach 2 x centre support rails (P5) to the left side of the centre board (P6), ensuring the cam nut holes on the rails (P5) face downwards. Insert 2 x large cam nuts (H2) into the 2 x centre support rails (P5). Using a phillips head screwdriver rotate the cam nuts so the arrow points towards the incoming cam bolt. Turn the cam nuts clockwise to lock.


Step 12

You will need:	
	
2 x Large Cam Nuts (H2)	Phillips Head Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

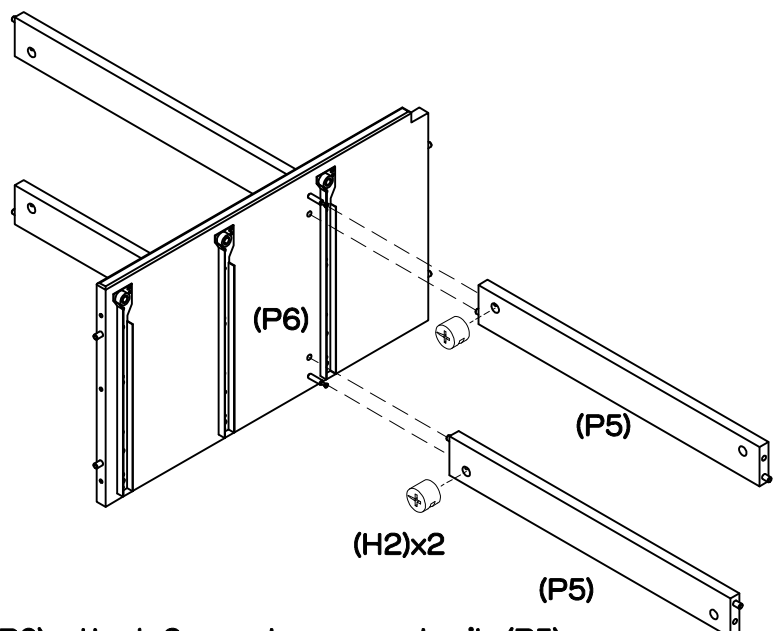

On the other side of the centre board (P6), attach 2 x centre support rails (P5) ensuring the cam nut holes on the rails (P5) face downwards. Insert 2 x large cam nuts (H2) into the 2 x centre support rails (P5). Using a phillips head screwdriver rotate the cam nuts so the arrow points towards the incoming cam bolt. Turn the cam nuts clockwise to lock.


Step 13

Two People



Required

You will need:	
3 x Long Screws (H20)	1 x Allen Key (H21)

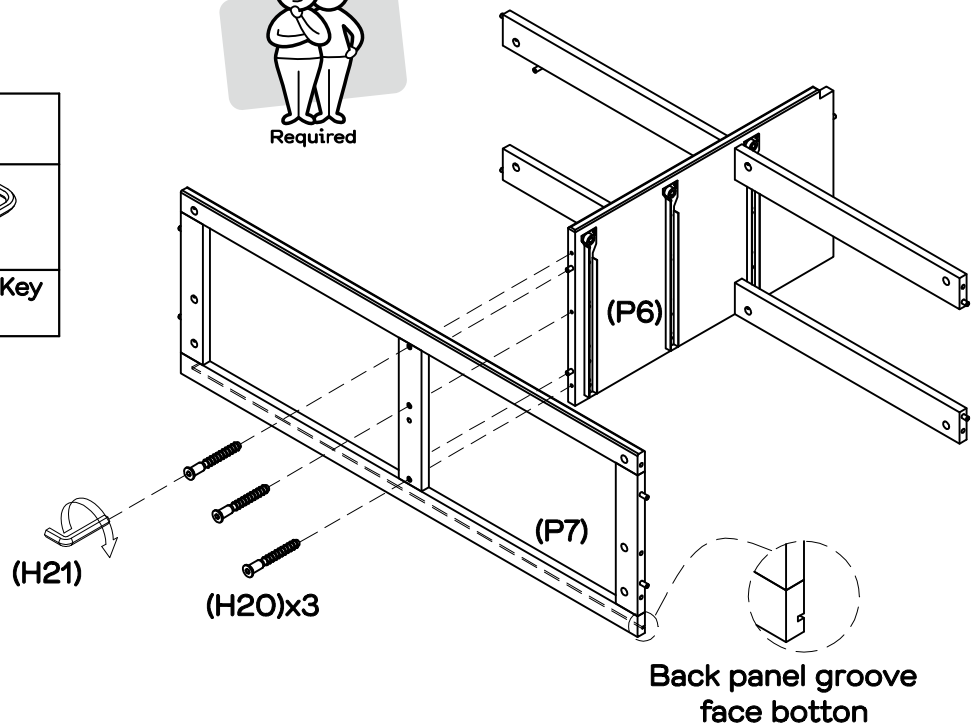

With assistance, attach the base frame (P7) to the bottom of the centre board (P6) as shown using 3 x long screws (H20). Ensure the side of the base frame (P7) with the cam nut holes are facing down. Tighten the screws by turning clockwise to lock using the allen key (H21).

Step 14


Two People




Required

You will need:	
5 x Large Cam Nuts (H2)	Phillips Head Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

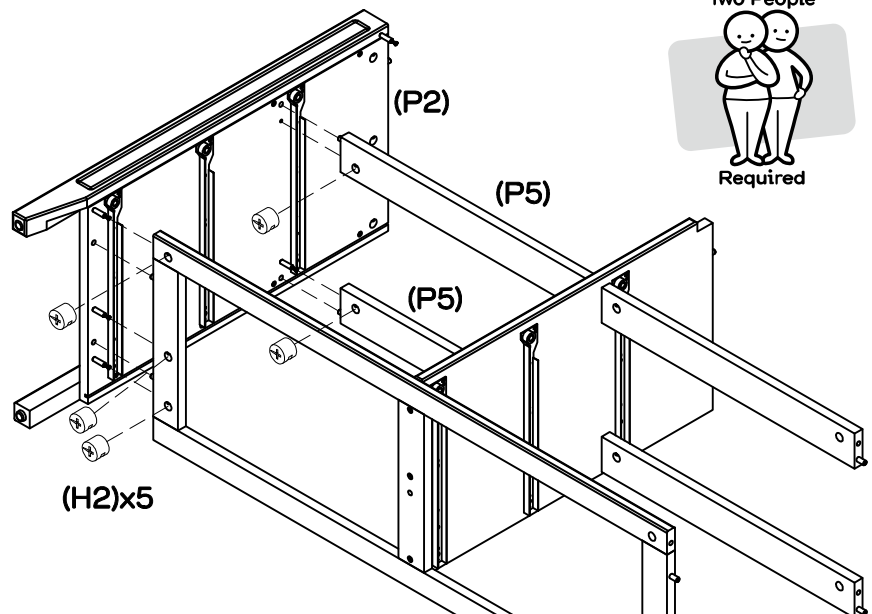

With assistance, attach left side (P2) to the assembled unit. Insert 5 x large cam nuts (H2) into the base frame (P7) and 2 x centre support rails (P5) as shown. Using a phillips head screwdriver, rotate the cam nuts so the arrow points towards the incoming cam bolt. Turn clockwise to lock.

Step 15

You will need:




1 x Large Cam
Nuts (H2)




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach front support rail (P4) to the left side (P2) as shown, ensuring the side with cam nut holes faces inwards. Insert 1 x large cam nut (H2) into the front support rail (P4). Using a phillips head screwdriver, rotate the cam nuts so the arrow points towards the incoming cam bolts. Turn clockwise to lock.

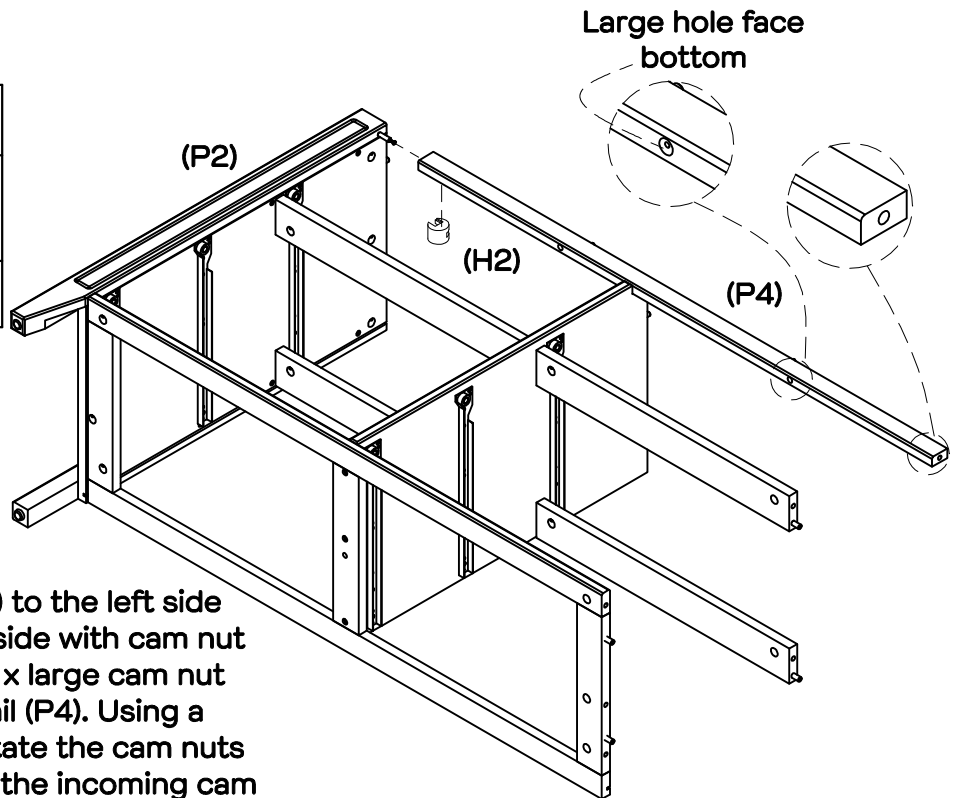

Step 16

You will need:




6 x Large Cam
Nuts (H2)




Phillips Head
Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

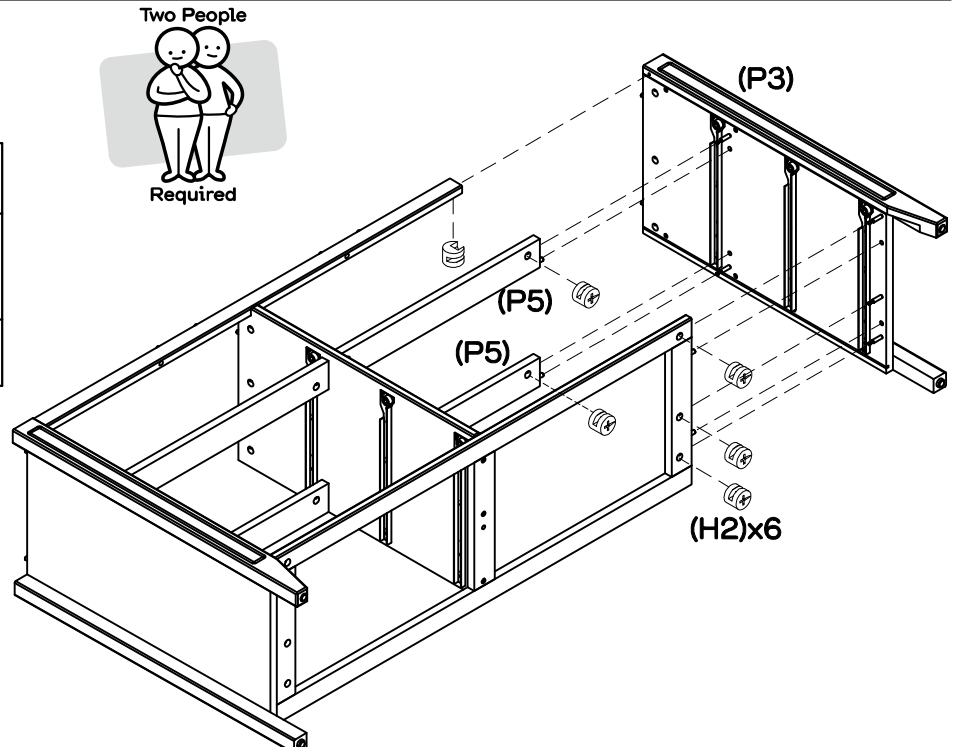

With assistance, attach right side (P3) to the assembled unit. Insert 6 x large cam nuts (H2) into the base frame (P7) and 2 x centre support rails (P5) and front support rail (P4) as shown. Using a phillips head screwdriver, rotate the cam nuts so the arrow points towards the incoming cam bolt. Turn clockwise to lock.



fantasticfurniture.com.au

Step 17

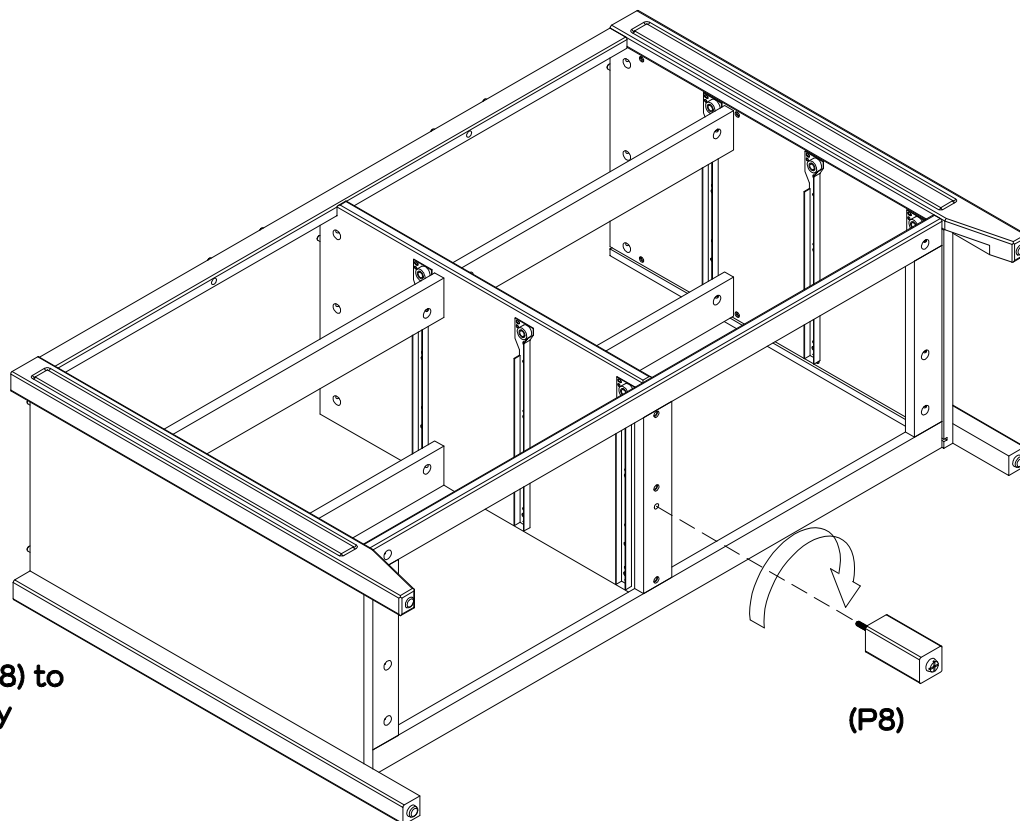

Attach middle foot (P8) to the base frame (P7) by turning clockwise to tighten.


Step 18

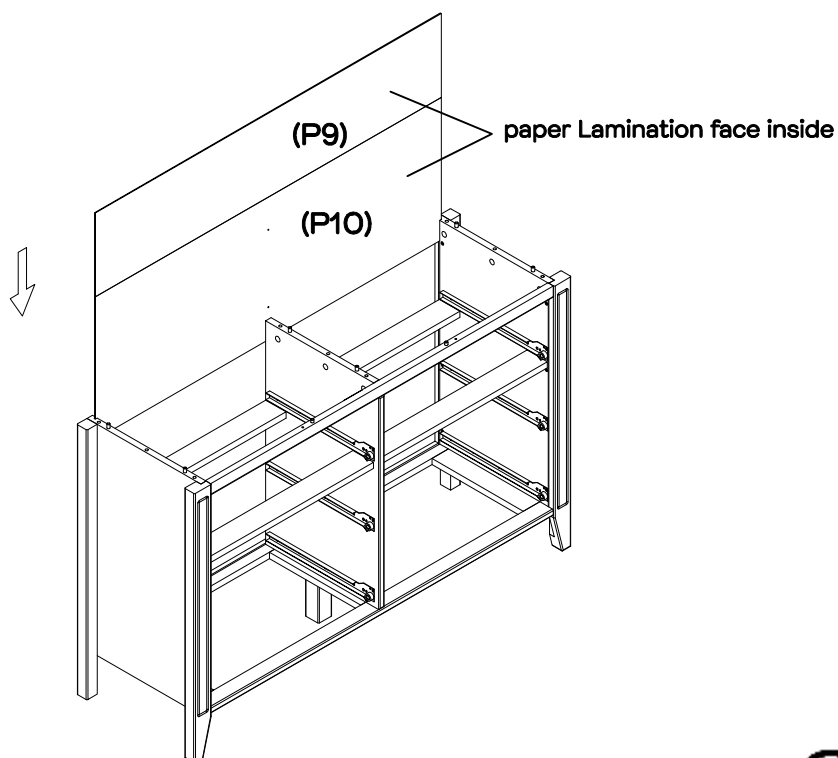

With assistance, carefully turn the unit upright. Slide the lower back panel (P10) and upper back panel (P9) into the grooves on the left and right side (P2, P3) as shown.

Step 19

Two People



You will need:



9 x Large Cam
Nuts (H2)




Phillips Head
Screwdriver

This is how a cam nut works.....




The head of the cam
bolt goes into the open
mouth of the cam nut.
You then turn the cam
nut so it tightens over
the bolt.

With assistance, attach top panel (P1) to unit as shown. Insert 9 x large cam nuts (H2) into the side panels (P2, P3) and centre board (P6). Using a phillips head screwdriver, rotate the cam nuts so the arrow points towards the incoming cam bolts. Turn clockwise to lock.

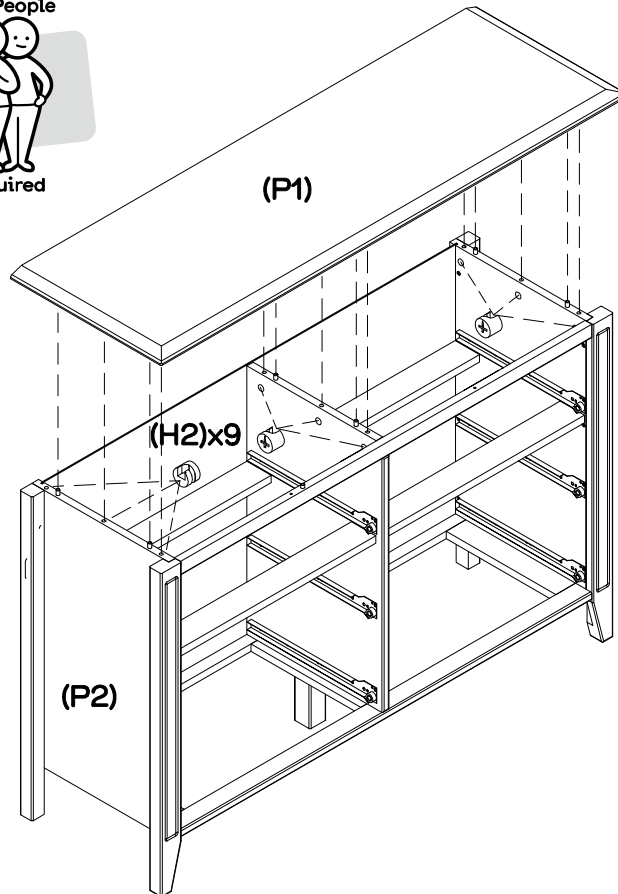

Step 20


You will need:



2 x Top Panel
Screws (H4)



Phillips Head
Screwdriver

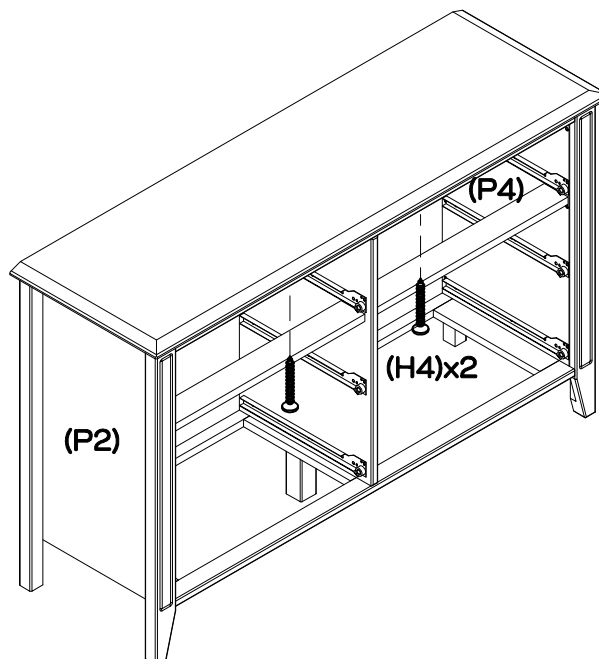





Attach the front support rail (P4) to top panel (P1) using 2 x top panel screws (H4) with a phillips head screwdriver.




Fantastic
Furniture


Step 21


You will need:	
	
4 x Back Panel Supports(H5)	Phillips Head Screwdriver
	
4 x Medium Screws (H6)	7 x Back Panel Screws (H15)

Secure the back panels (P9, P10) using 7 x back panel screws (H15) positioned as shown. Tighten with a phillips head screwdriver. Attach 4 x back panel supports (H5) to each corner of the units using the 4 x medium screws (H6).

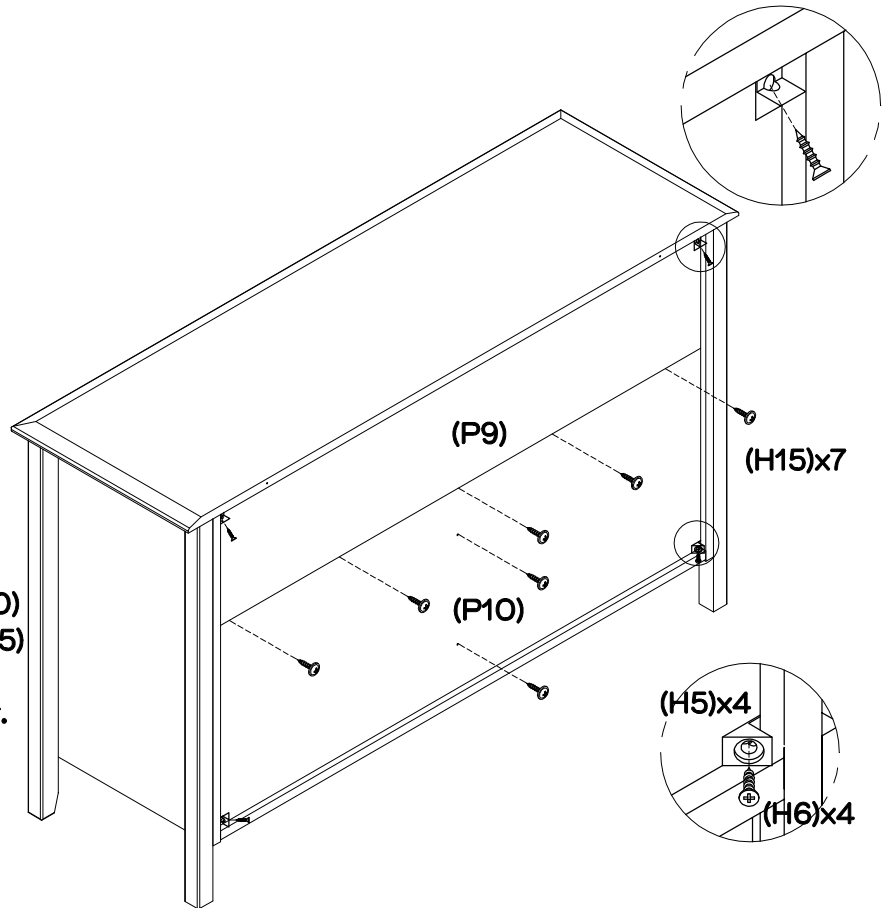

Step 22

You will need:	
	
30 x Small Cam Bolts (H18)	Phillips Head Screwdriver

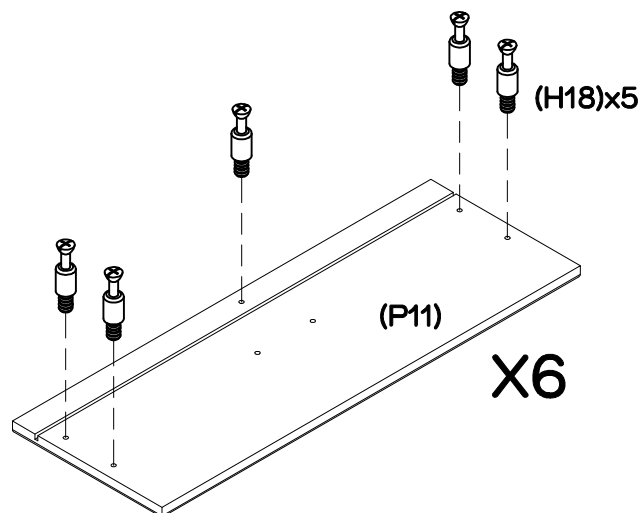

Attach 5 x small cam bolts (H18) to 1 x drawer front (P11) using a phillips head screwdriver. Repeat this step for the other 5 x drawer fronts (P11).

Step 23

You will need:



24 x Small
Cam Nuts (H19)



Phillips Head
Screwdriver


This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach 1 x drawer left side (P12) and 1 x drawer right side (P13) to 1 x drawer front (P11), ensuring the grooves on all the panels align.

Insert 4 x small cam nuts (H19) into the drawer sides (P12, P13). Using a phillips head screwdriver, rotate the cam nuts so the arrow points towards the incoming cam bolts. Turn clockwise to lock. Repeat this process for the other 5 x drawer side panels (P12, P13).

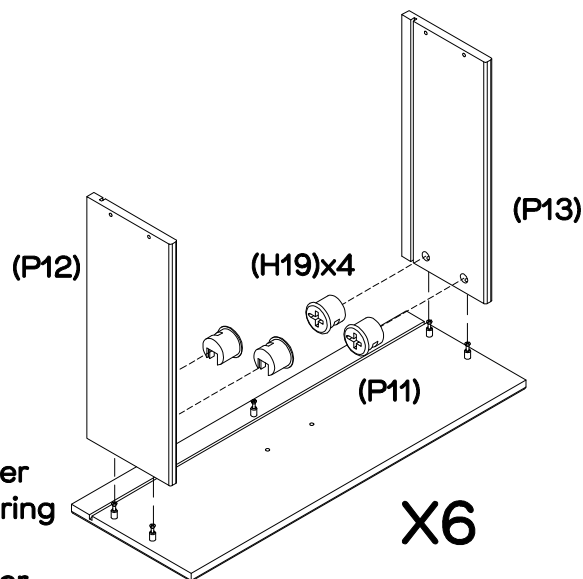

Step 24

You will need:




6x Small Cam
Nuts (H19)




Phillips Head
Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

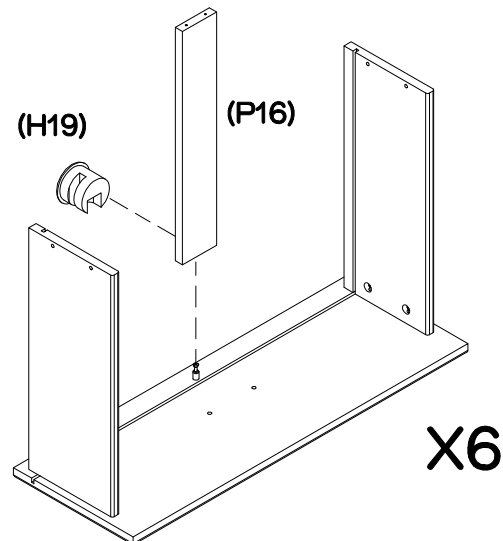

Attach 1 x drawer support rail (P16) to 1 x drawer front (P11), ensuring the side with the cam nut holes faces outwards. Insert 1 x small cam nut (H19) into the drawer support rail (P16). Using a phillips head screwdriver, rotate the cam nut so the arrows faces incoming cam bolt. Turn clockwise to lock.



Step 25

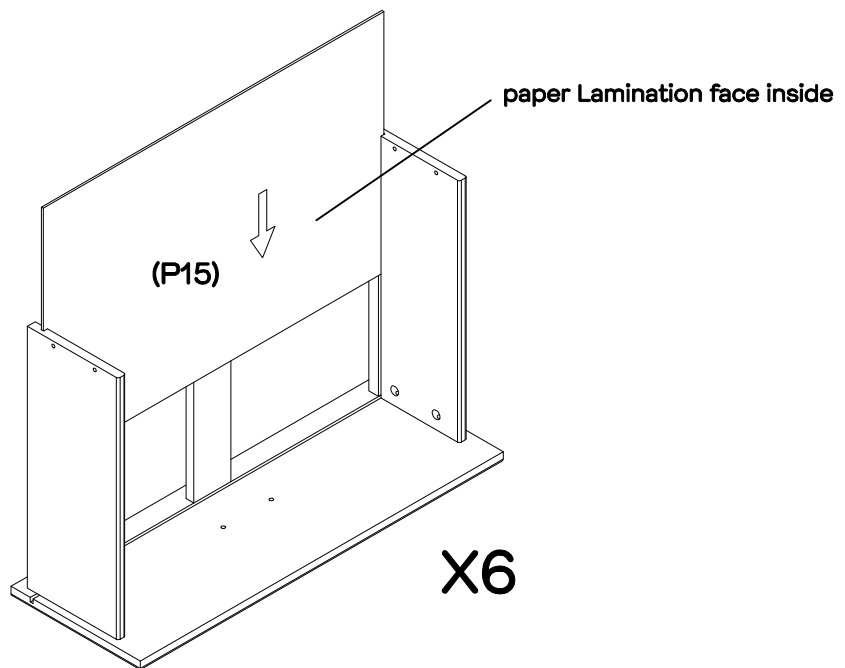


Slide 1 x drawer base (P15) into the grooves on the drawer sides (P12, P13) and drawer front (P11).

Repeat this process for the other 5 x drawer bases (P15).

Step 26


You will need:	
	
36 x Large Screws (H10)	Phillips Head Screwdriver

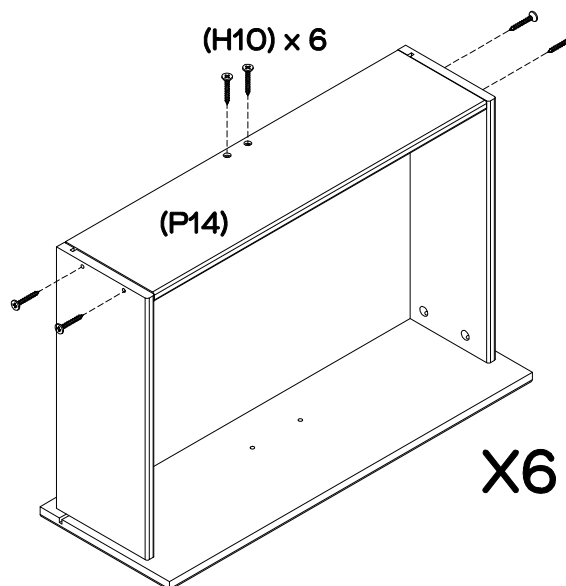

Attach 1 x drawer back panel (P14) to the side panels (P12, P13) and drawer support rail (P16) using 6 x large screws (H10), tightening with a phillips head screwdriver. Repeat this process for the other 5 x drawer back panels (P14).




Step 27

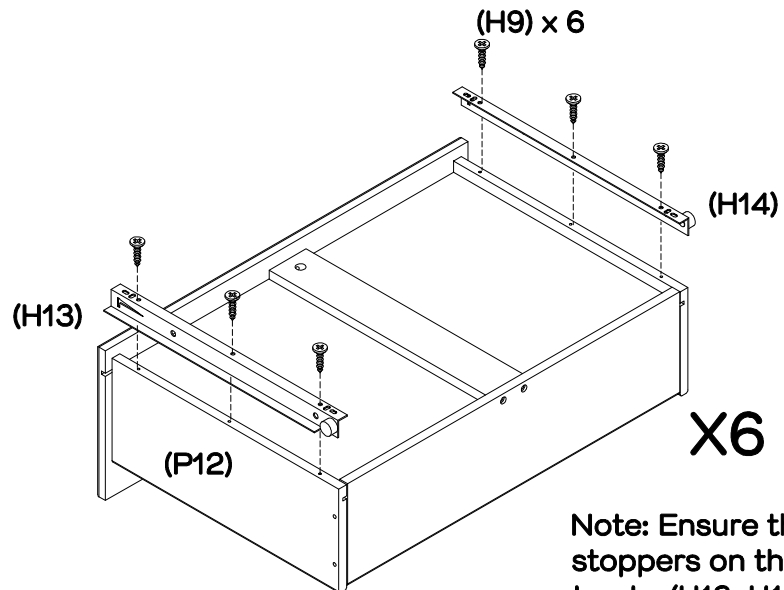
You will need:	
	
36 x Small Screws (H9)	Phillips Head Screwdriver
	
6 x left Runners (H13)	6 x Right Runners (H14)



Attach 1 x left runner (H13) to the left drawer side (P12) and 1 x right runner (H14) to the right drawer side (P13) using 6 x small screws (H9), tightening with a phillips head screwdriver. Repeat this process for the other 5 x assembled drawers.


Step 28

You will need:		
		
12 x Handle Screws (H7)	6 x Handles (H8)	Phillips Head Screwdriver

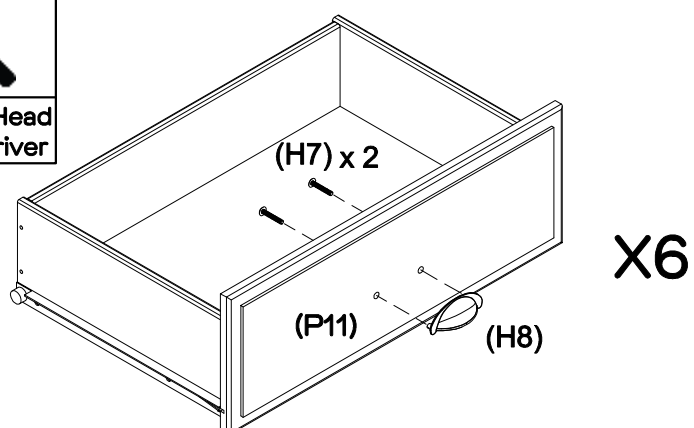

Attach 1 x handle (H8) to 1 x drawer front (P11) using 2 x handle screws (H7), tightening with a phillips head screwdriver. Repeat this process for the other 5 x drawers.

Step 29

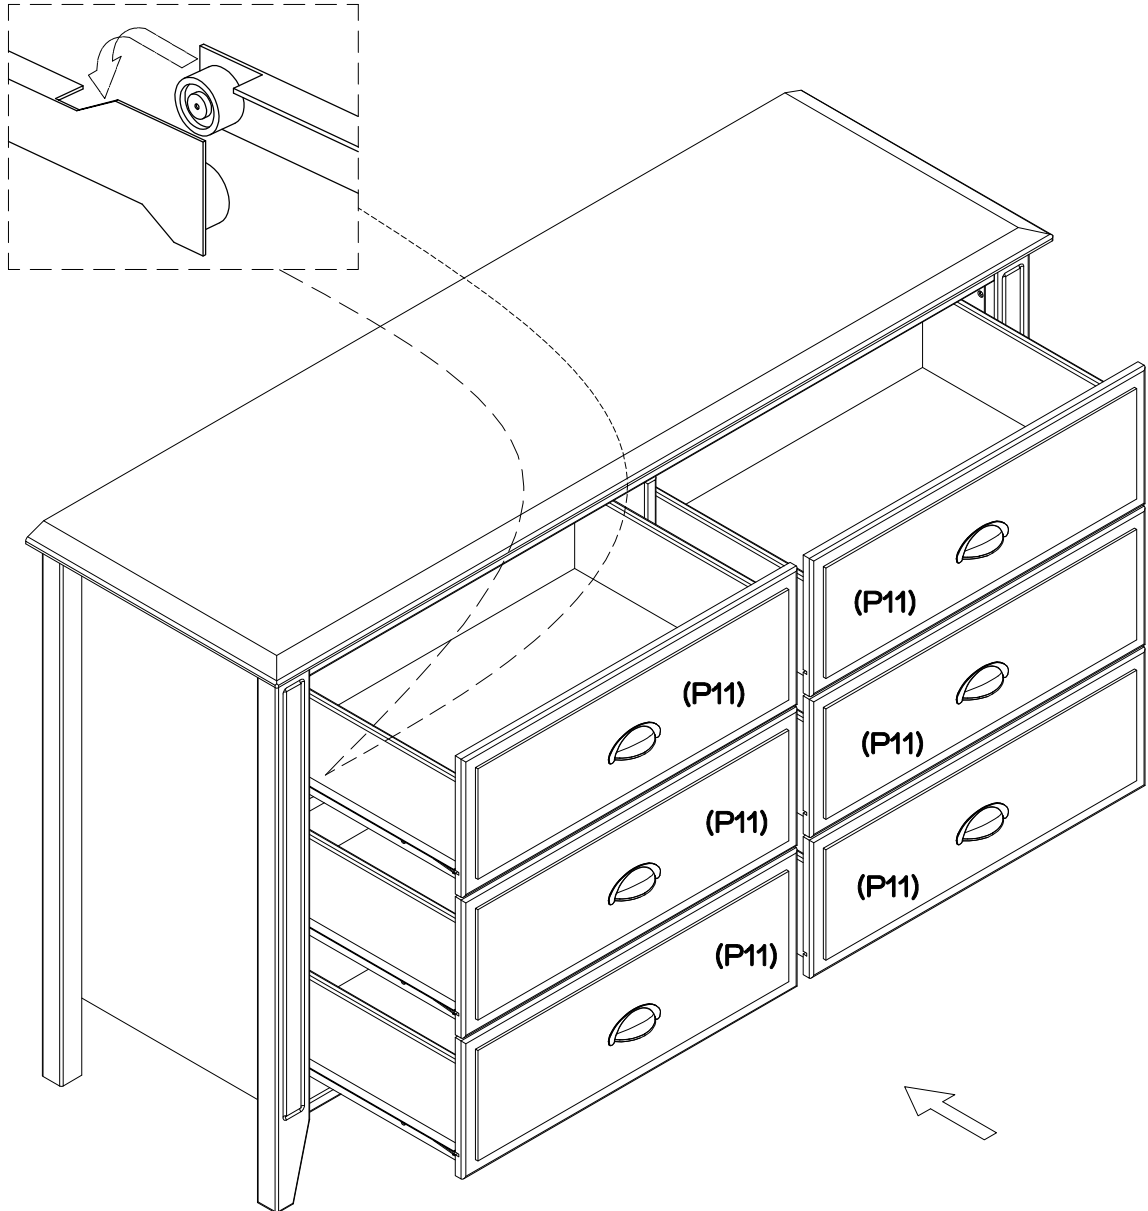


Slide the drawers into the dresser as shown.

Step 30

You will need:	
	
2 x Wall Straps (H16)	Phillips Head Screwdriver
	
2 x Washers (H17)	2 x Large Screws (H10)

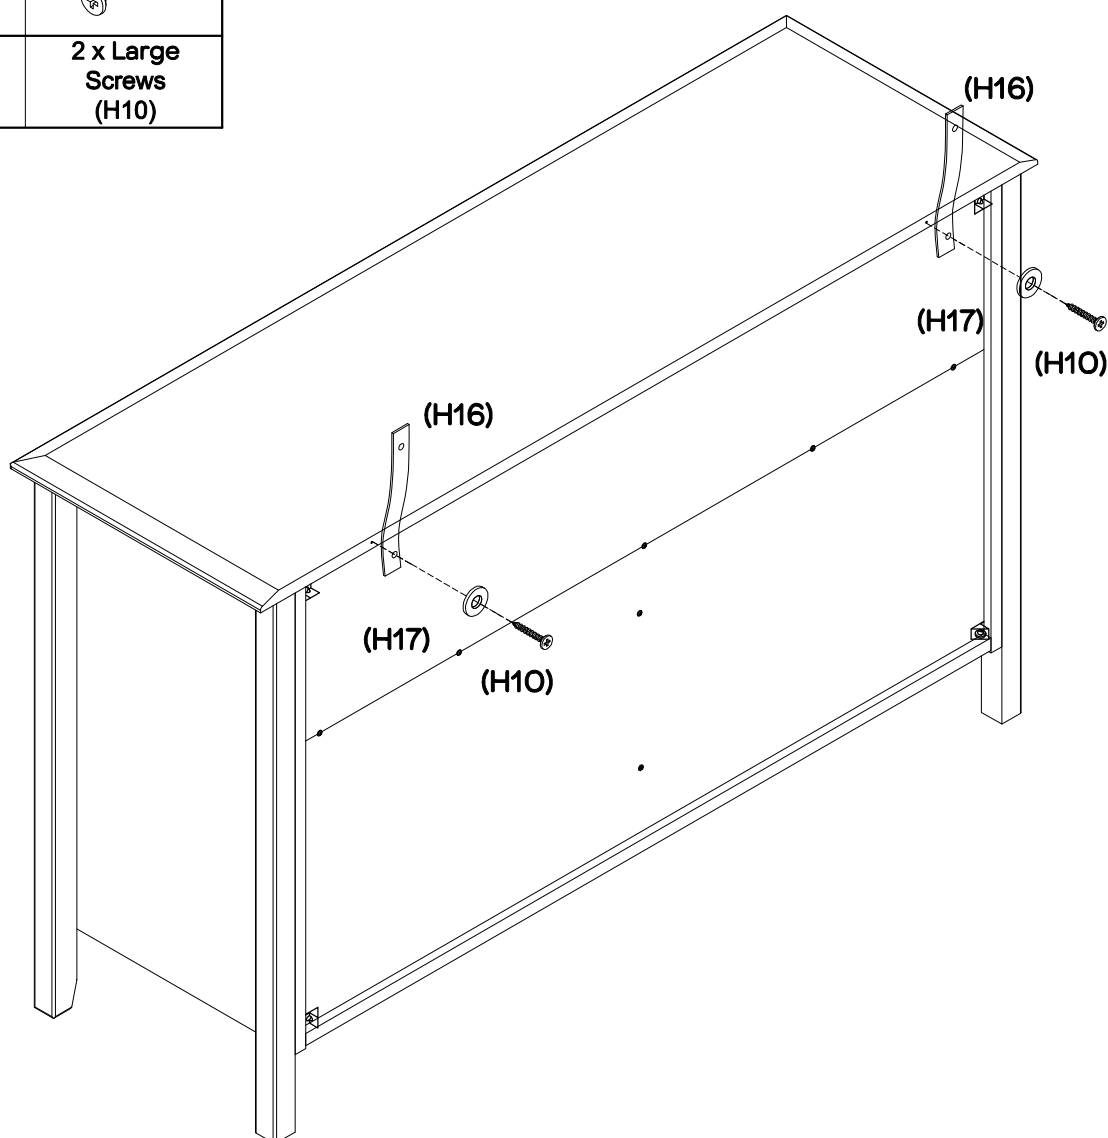

We strongly advise that you use the wall safety strap provided to prevent the unit toppling.



Attach 2 x wall straps (H16) to the back of the top panel (P1) using 2 x large screws (H10) and 2 x washers (H17).




Step 31


You will need:	
	
2 x Washers (H17)	Phillips Head Screwdriver

Screw and Wall Plug are not provided.
Please use appropriate fixtures for your wall.


Seek advice from a qualified trades person on how to attach safety strap to the wall .

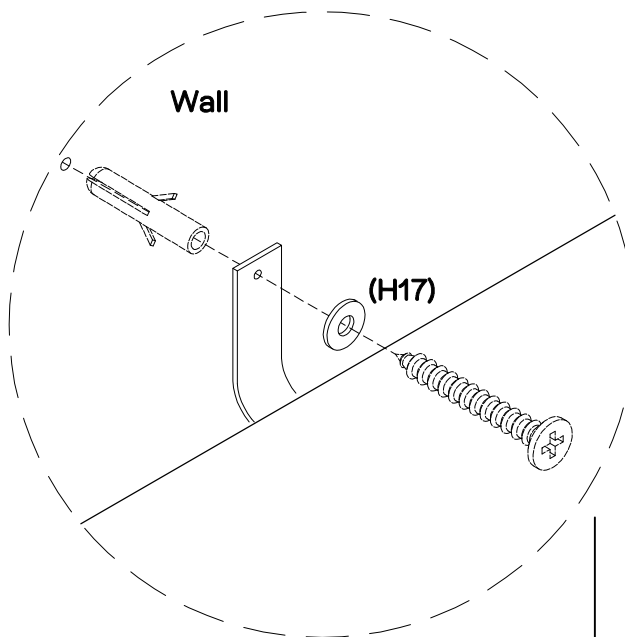

Two People




Required

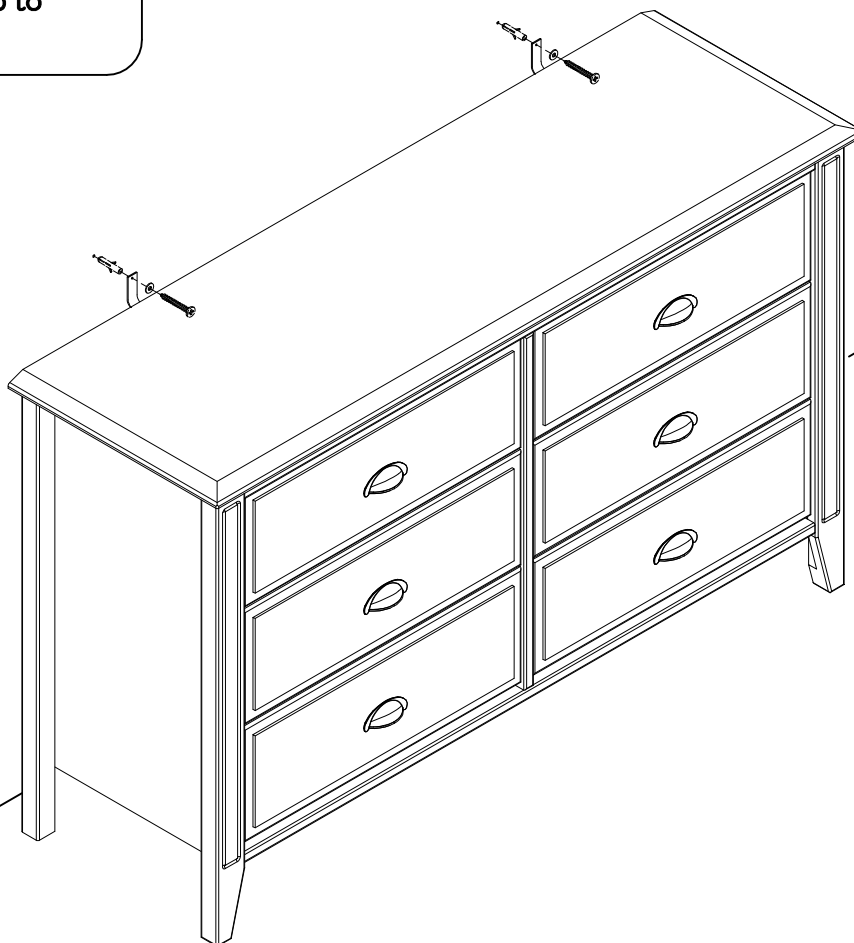

With assistance, move the dresser to its final position. Attach the 2 x wall straps (H16) to the wall. Ensure it is firmly attached and secure.

If drawer fronts gaps are not even please adjust the adjustable leveler on centre leg accordingly

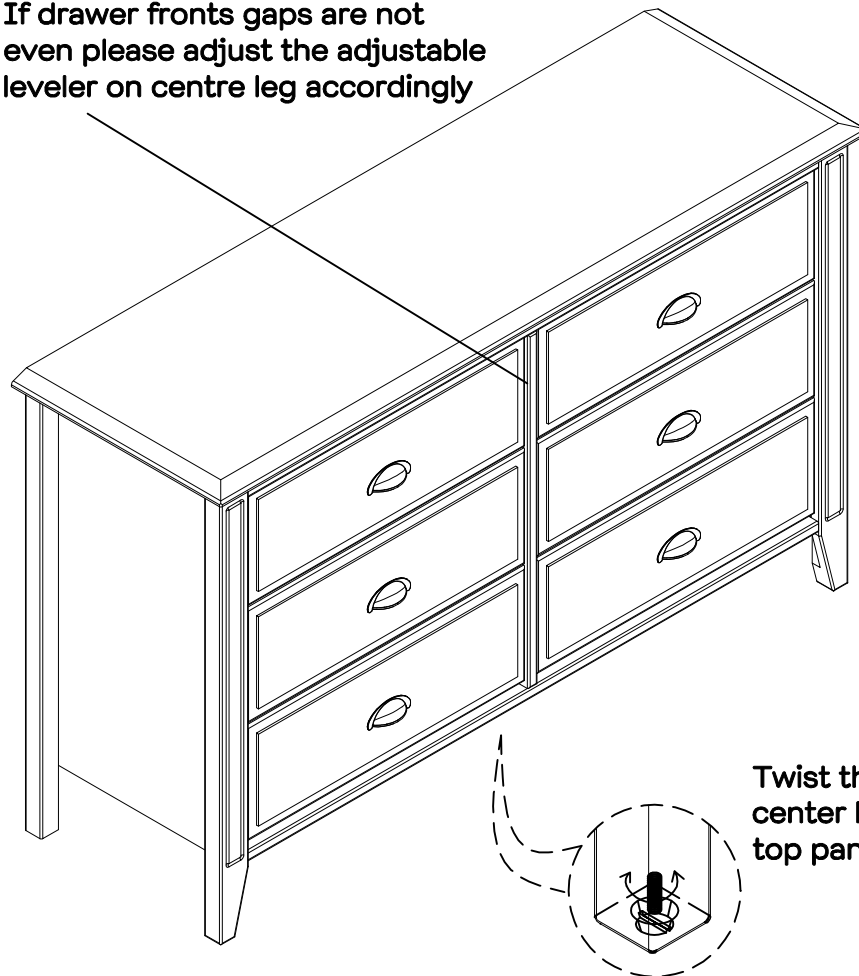

Twist the adjuster on center leg to make the top panel is flush

Job Complete!

In the interest of our environment please dispose of all packing thoughtfully.