


Version 1.0



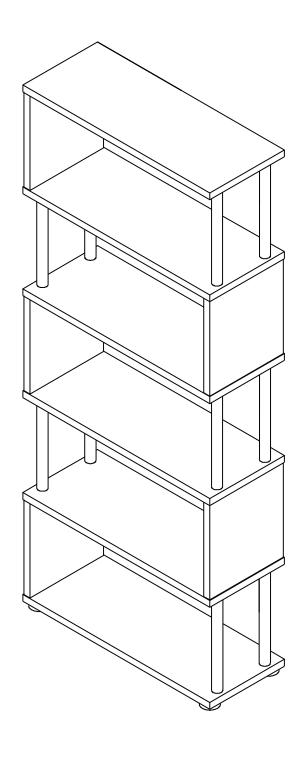

# Secure it!

Reduce the risk of furniture tip-over accidents





# WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

#### Recommended weight capacity: 25kg per Shelf

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.
- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.




- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended.
   Check anchors regularly.
- Avoid putting a TV on this product.

#### Wall attachment guide




For plasterboard (without available wood stud)

**Securing method:** Self drilling plasterboard anchor.



For plasterboard (with available wood stud)

Securing method: Screw inserted directly into stud.





For masonry wall

Securing method: Solid wall: Plug with screw Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



#### Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!


@fantasticfurniture




## Assembly checklist



Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the compenents before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

#### Useful information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky itmes such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasterners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.



## What you need

to assemble the product




#### Other tools you need:


Phillips head screwdriver; Mallet.


#### Parts list


Shelf Panel 1 (P1); Shelf Panel 2 (P2); 4x Sehlf Panels 3 (P3); 5x Vertical Panels (P4)

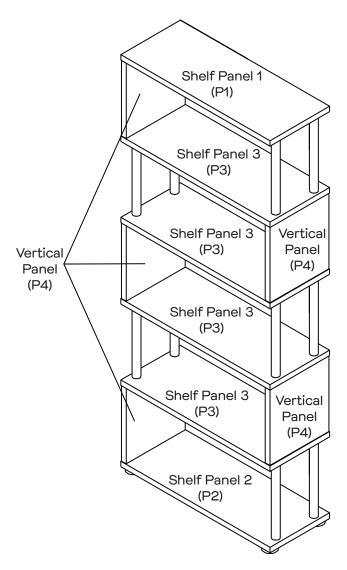


#### Hardware pack

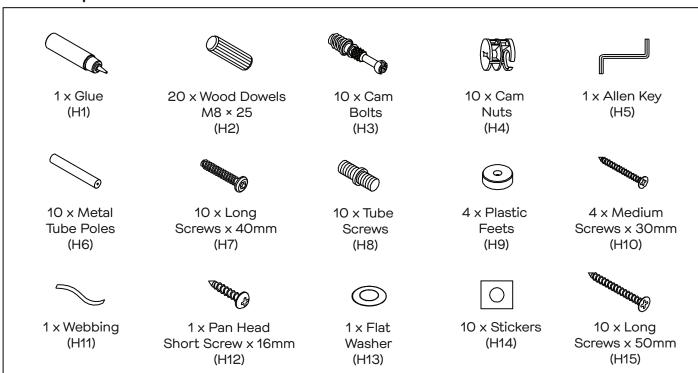






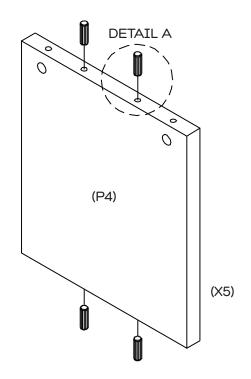


Using a mallet, gently tap 20x Wood Dowels (H2) into pre-drilled holes in 5x Vertical Panels (P4).

## Step 2

You will need			
2 x Cam Bolts (H3)	Phillips Head Screwdriver		




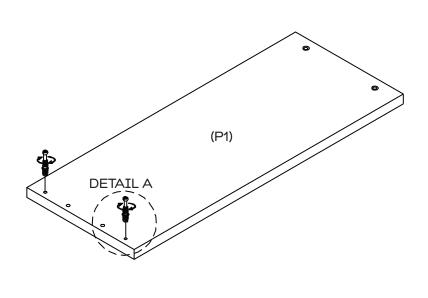


Fix 2x Cam Bolts (H3) to Shelf Panel 1 (P1) as per Detail A. Tighten with a phillips head screwdriver.



You will need				
1 x Glue (H1)	2 x Cam Nuts (H4)	2 x Metal Tube Poles (H6)	2 x Tube Screws (H8)	Phillips Head Screwdriver

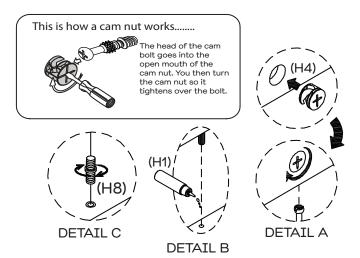


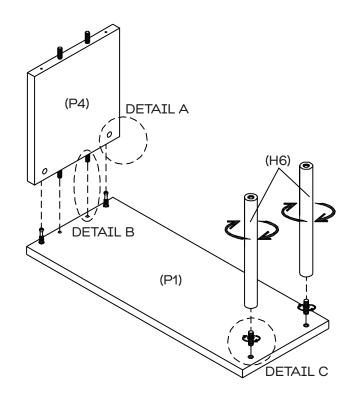


Fix 2x Tube Screws (H8) to Shelf Panel 1 (P1) as per Detail C. Fix 2x Metal Tube Poles (H6) to Shelf Panel 1 (P1). Place a small amount of Glue (H1) to dowel holes as per Detail B. Fix Vertical Panel (P4) to Shelf Panel 1 (P1) using 2x Cam Nuts (H4) as per Detail A and tighten using phillips head screwdriver.

### Step 4


You will need				
Ca.			THE REAL PROPERTY.	
1 x Glue (H1)	1 x Allen Key (H5)	2 x Long Screws x40mm (H7)	2 x Long Screws x50mm (H15)	Phillips Head Screwdriver



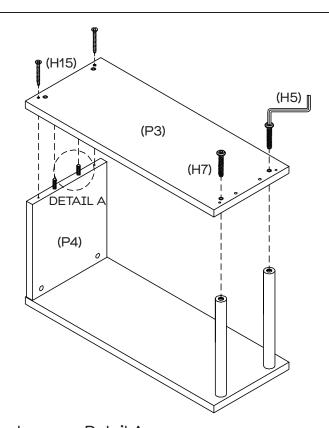

Place a small amount of Glue (H1) in Wood Dowels as per Detail A. Fix Shelf Panel 3 (P3) to Vertical Panel (P4) and Metal Tube Poles (H6). Tighten with 2x Long Screws x 50mm (H15) using phillips head screwdriver and 2x Long Screws x 40mm (H7) using Allen Key (H5).



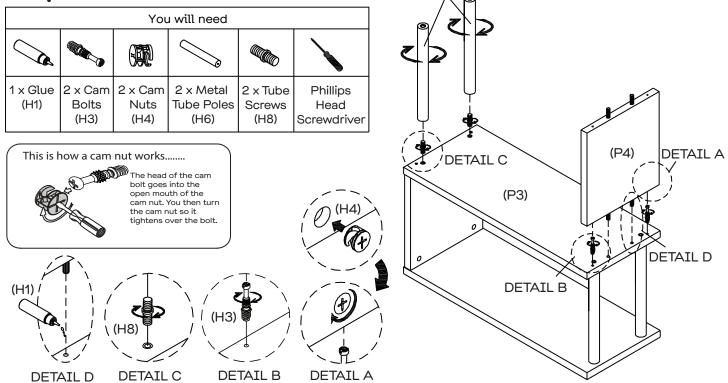



(H6)

Fix 2x Tube Screws (H8) to Shelf Panel 3 (P3) as per Detail C. Fix 2x Metal Tube Poles (H6) to Shelf Panel 3 (P3). Fix 2x Cam Bolts (H3) to Shelf Panel 3 (P3) as per Detail B. Place a small amount of Glue (H1) to dowel holes as per Detail D. Fix Vertical Panel (P4) to Shelf Panel 3 (P3) using 2x Cam Nuts (H4) as per Detail A and tighten using phillips head screwdriver.

#### Step 6

You will need				
Ca.			THE REAL PROPERTY.	
1 x Glue (H1)	1 x Allen Key (H5)	2 x Long Screws x40mm (H7)	2 x Long Screws x50mm (H15)	Phillips Head Screwdriver



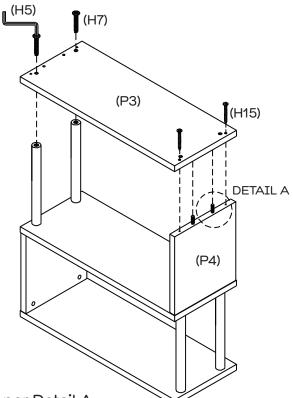


Place a small amount of Glue (H1) in Wood Dowels as per Detail A.

Fix Shelf Panel 3 (P3) to Vertical Panel (P4) and Metal Tube Poles (H6).

Tighten with 2x Long Screws x 50mm (H15) using phillips head screwdriver and 2x Long Screws x 40mm (H7) using Allen Key (H5).




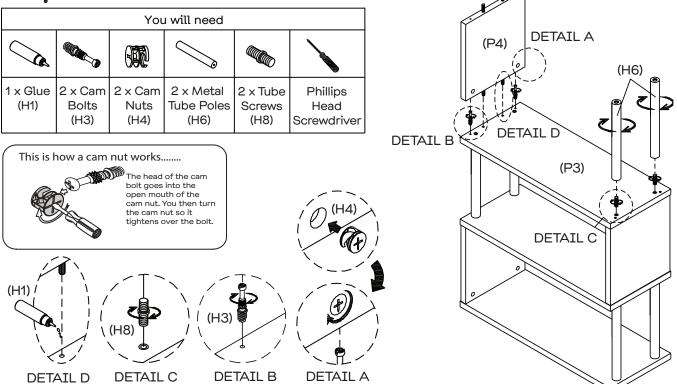


Fix 2x Tube Screws (H8) to Shelf Panel 3 (P3) as per Detail C. Fix 2x Metal Tube Poles (H6) to Shelf Panel 3 (P3). Fix 2x Cam Bolts (H3) to Shelf Panel 3 (P3) as per Detail B. Place a small amount of Glue (H1) to dowel holes as per Detail D. Fix Vertical Panel (P4) to Shelf Panel 3 (P3) using 2x Cam Nuts (H4) as per Detail A and tighten using phillips head screwdriver.

#### Step 8

You will need				
Ca.			* Control of the Cont	
1 x Glue (H1)	1 x Allen Key (H5)	2 x Long Screws x40mm (H7)	2 x Long Screws x50mm (H15)	Phillips Head Screwdriver




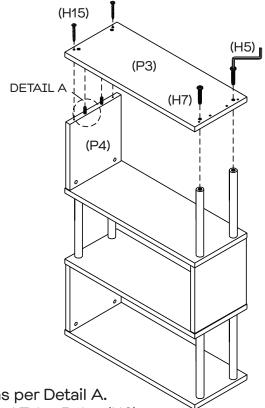

Place a small amount of Glue (H1) in Wood Dowels as per Detail A.

Fix Shelf Panel 3 (P3) to Vertical Panel (P4) and Metal Tube Poles (H6).


Tighten with 2x Long Screws x 50mm (H15) using phillips head screwdriver and 2x Long Screws x 40mm (H7) using Allen Key (H5).

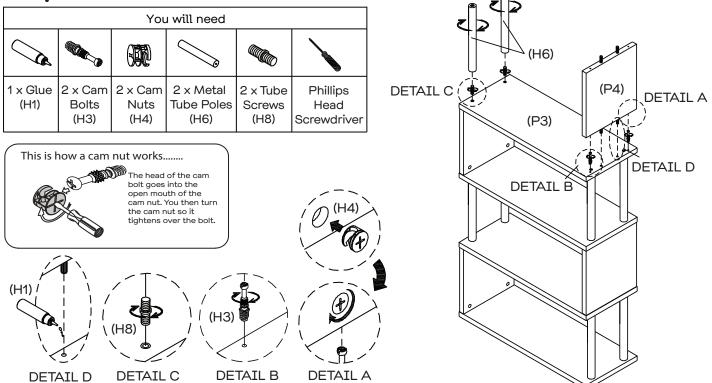

Fix 2x Tube Screws (H8) to Shelf Panel 3 (P3) as per Detail C. Fix 2x Metal Tube Poles (H6) to Shelf Panel 3 (P3). Fix 2x Cam Bolts (H3) to Shelf Panel 3 (P3) as per Detail B. Place a small amount of Glue (H1) to dowel holes as per Detail D. Fix Vertical Panel (P4) to Shelf Panel 3 (P3) using 2x Cam Nuts (H4) as per Detail A and tighten using phillips head screwdriver.


#### Step 10


You will need				
Ca.			* Control of the Cont	
1 x Glue (H1)	1 x Allen Key (H5)	2 x Long Screws x40mm (H7)	2 x Long Screws x50mm (H15)	Phillips Head Screwdriver




(H5) (H15) (P4) DETAIL A

Place a small amount of Glue (H1) in Wood Dowels as per Detail A.
Fix Shelf Panel 3 (P3) to Vertical Panel (P4) and Metal Tube Poles (H6).
Tighten with 2x Long Screws x 50mm (H15) using phillips head screwdriver and 2x Long Screws x 40mm (H7) using Allen Key (H5).

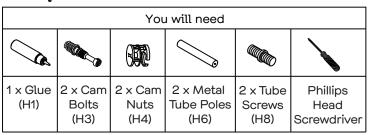

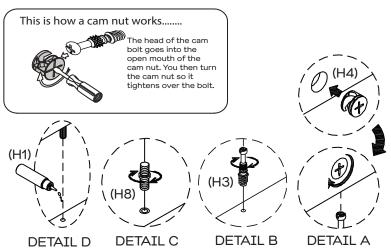


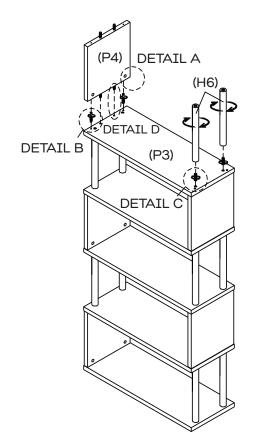


Fix 2x Tube Screws (H8) to Shelf Panel 3 (P3) as per Detail C. Fix 2x Metal Tube Poles (H6) to Shelf Panel 3 (P3). Fix 2x Cam Bolts (H3) to Shelf Panel 3 (P3) as per Detail B. Place a small amount of Glue (H1) to dowel holes as per Detail D. Fix Vertical Panel (P4) to Shelf Panel 3 (P3) using 2x Cam Nuts (H4) as per Detail A and tighten using phillips head screwdriver.

#### Step 12

You will need				
Ca.			THE REAL PROPERTY.	
1 x Glue (H1)	1 x Allen Key (H5)	2 x Long Screws x40mm (H7)	2 x Long Screws x50mm (H15)	Phillips Head Screwdriver




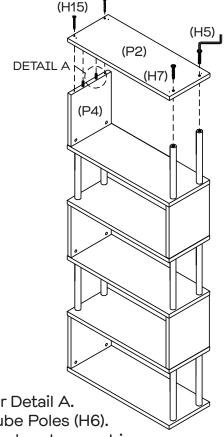


Place a small amount of Glue (H1) in Wood Dowels as per Detail A.
Fix Shelf Panel 2 (P2) to Vertical Panel (P4) and Metal Tube Poles (H6).
Tighten with 2x Long Screws x 50mm (H15) using phillips head screwdriver and 2x Long Screws x 40mm (H7) using Allen Key (H5).



You will need				
0	Commonwell Common Commo	0		
4 x Plastic Feets (H9)	4 x Medium Screws x30mm (H10)	10 x Stickers (H14)	Phillips Head Screwdriver	




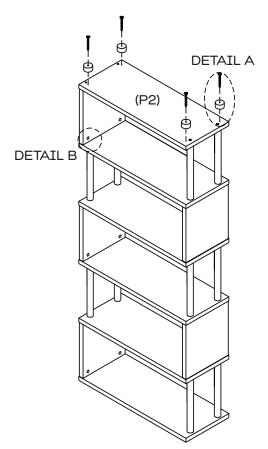


Fix 4x Plastic Feets (H9) to Shelf Panel 2 (P2) with 4x Medium Screws x 30mm (H10) as per Detail A and tighten using phillips head screwdriver. Place 10x Stickers (H14) to cover screws as per Detail B.

#### Step 14

You will need				
	ALL CONTRACTOR OF THE PARTY OF	0		
1 x Webbing (H11)	1 x Pan Head Short Scew x 16mm (H12)	1 x Flat Washer (H13)	Phillips Head Screwdriver	




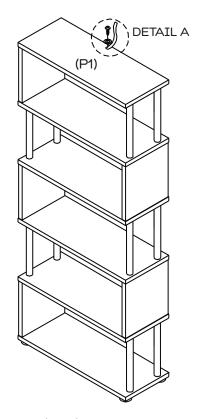

Attach the Webbing (H11) to the unit using the Flat Washer (H13) and Pan Head Short Screw (H12) as per Detail A. We strongly advise that you secure the unit to a wall using the Webbing provided, to prevent the unit from toppling.






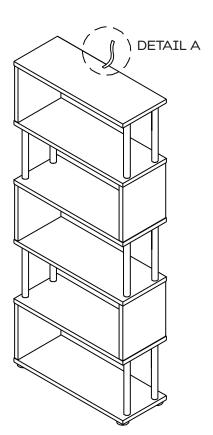

Move furniture to its final position, then connect the end of the Webbing (H11) to the wall, ensuring it is firmly attached. Seek advice from a qualified trades person on how to attach this to your specific wall. Screws and wall plugs are not supplied. Please use appropriate fixtures for your wall.

## Step 16

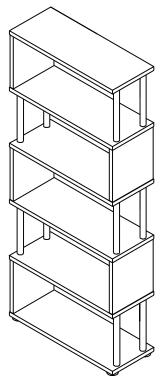

## Job complete!

In the interest of our environment please dispose of all packaging thoughfully.

