



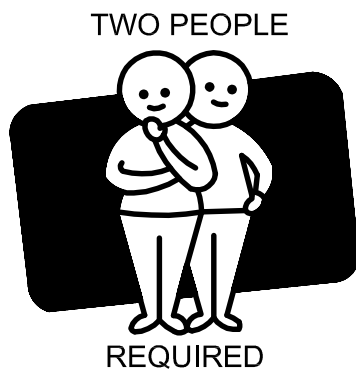

Version 1.0

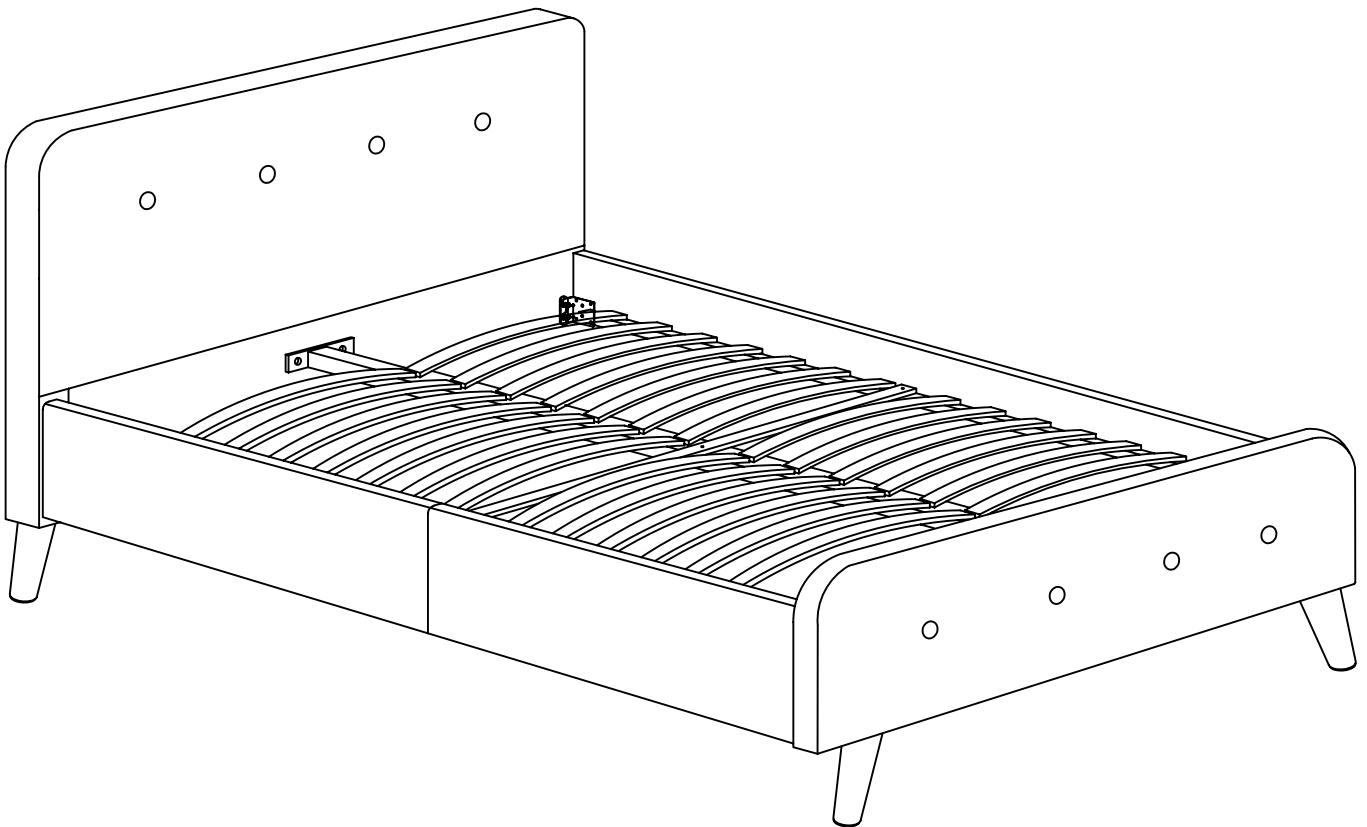

BUTTONS

DOUBLE BED

Enjoy

Your purchase From
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools.
Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

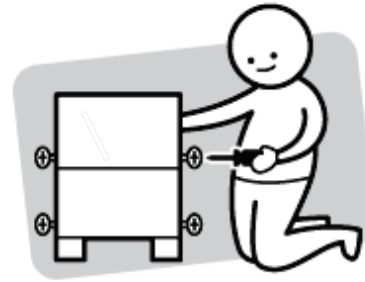

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need


to assemble the product



DO NOT USE




Other tools you need
Phillips head screwdriver

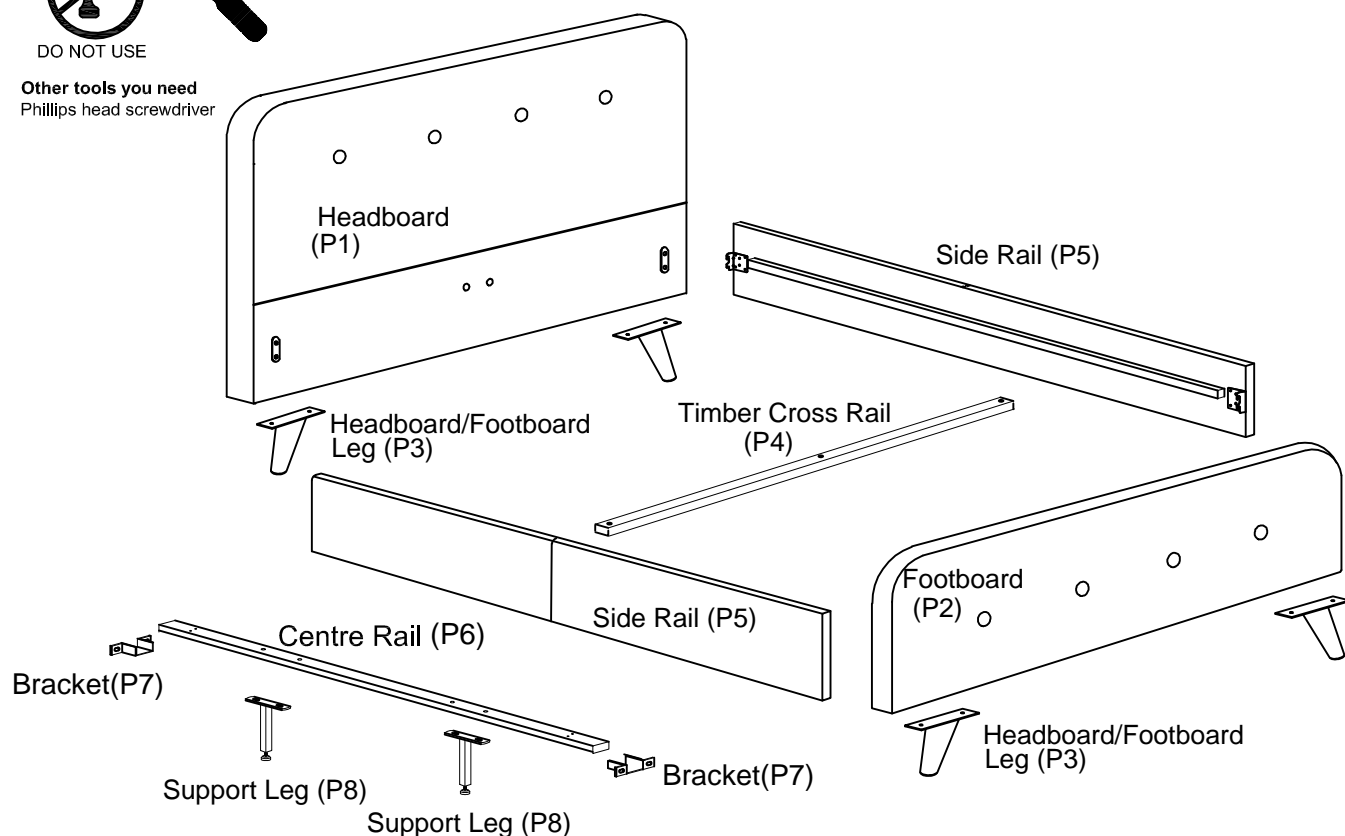

Parts list

Box 1 : Footboard (P2) ; Headboard/Footboard Leg (P3) ; Timber Cross Rail (P4) ; Side Rail (P5) ; Center Rail (P6) ; Bracket (P7) ; Support Leg (P8) ; Hardware Pack


Box 2 : Headboard (P1) ; Slats (P9)



26 x Slats (P9)



(Bolt)
8 x M8 x 18mm
(H1)




1 x M5 (Allen Key)
(H2)



(Bolt)
14 x M8 x 20mm
(H3)



(Plastic nut)
8 x M6 x 13mm
(H4)



(Bolt)
4 x M8 x 40mm
(H5)



(Washer)
22 x M8 x 19mm
(H6)



(Screw)
3 x M4 x 32mm
(H7)



1 x Spanner
(H8)



(Nut)
4 x M8
(H9)






(Bolt)
4 x M6 x 40mm
(H10)




(Bolt)
4 x M6 x 35mm
(H11)

Please make sure you have all these parts before you start


Step 1

You will need		
		
8 x Washer M8 (H6)	8 x Bolt 20mm (H3)	Allen Key (H2)

TWO PEOPLE






REQUIRED

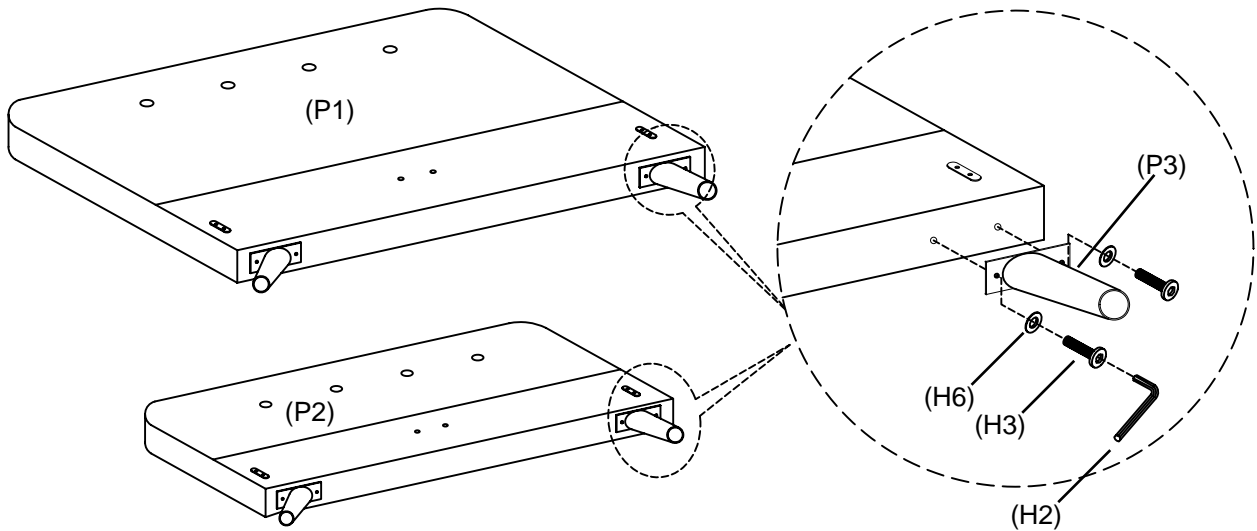

Attach legs (P3) to the bottom of headboard (P1) and footboard (P2).
With 8 x Bolt 20mm (H3) and 8 x Washer (H6) by using Allen Key (H2).

Step 2

You will need	
	
8 x Bolt 18mm (H1)	Allen Key (H2)

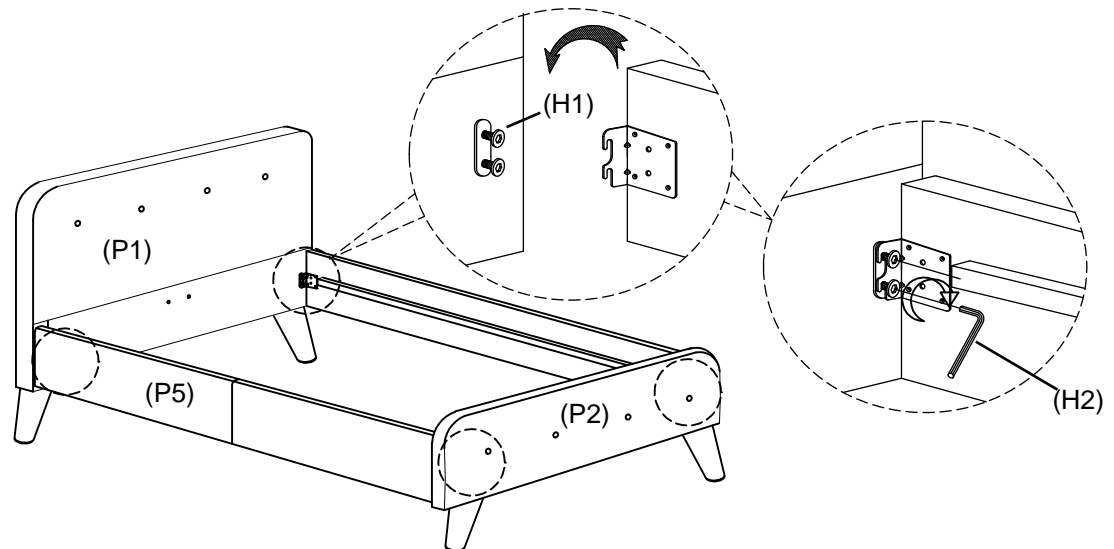







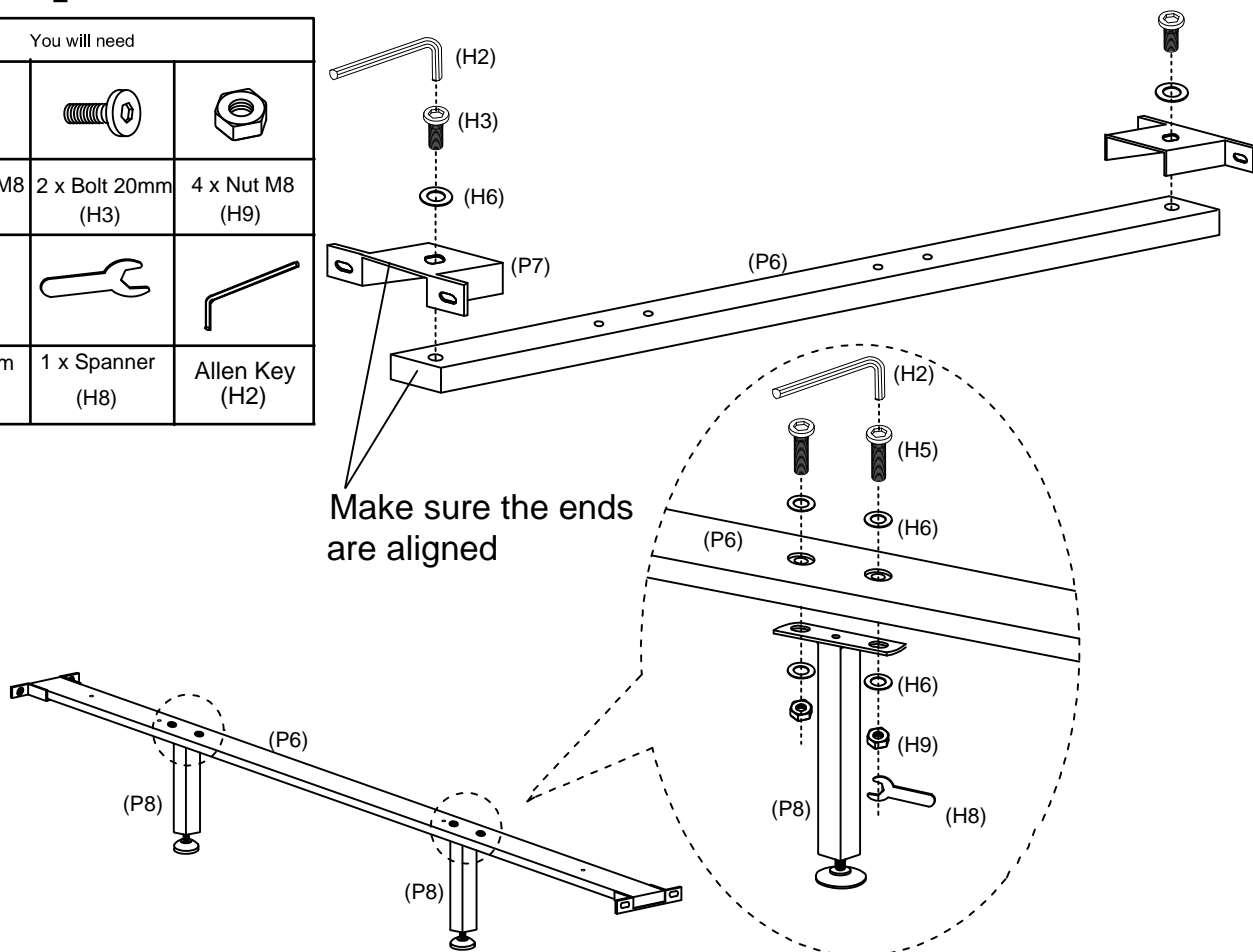
Install the bolts (H1) to the brackets by using Allen Key (H2) as shown, do not tighten the bolts and keep them 8 mm loose. Then attach side rail (P5) to headboard (P1) and footboard (P2) by slotting the bracket on the side rail (P5) over the bolt as shown. No need to tighten bolts until step 6.



PAGE 5




Step 3


You will need		
		
10 x Washer M8 (H6)	2 x Bolt 20mm (H3)	4 x Nut M8 (H9)
		
4 x Bolt 40mm (H5)	1 x Spanner (H8)	Allen Key (H2)



Attach the support legs (P8) to the centre rail (P6) using 4 x Bolt (H5) , 8 x Washer (H6) and 4 x nut (H9), attach 2 x bracket (P7) to the centre rail (P6) using 2 x bolt (H3) and 2 x washer (H6) as shown.




Step 4


You will need		
		
(Bolt) 4 x M6 x 35mm (H11)	(Plastic nut) 4 x M6 x 13mm (H4)	Phillips head screwdriver (no provided)

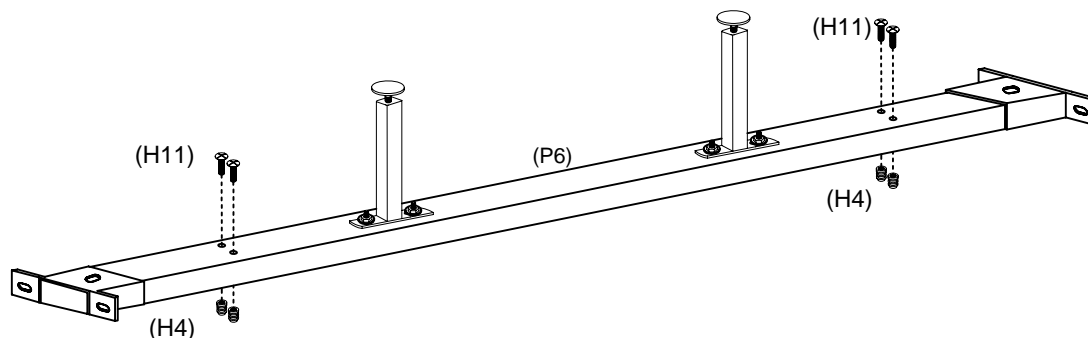

Attach the plastic nut (H4) to the centre rail (P6) using 4 x Bolt (H11).

Step 5


You will need		
		
4 x Washer M8 (H6)	4 x Bolt 20mm (H3)	Allen Key (H2)

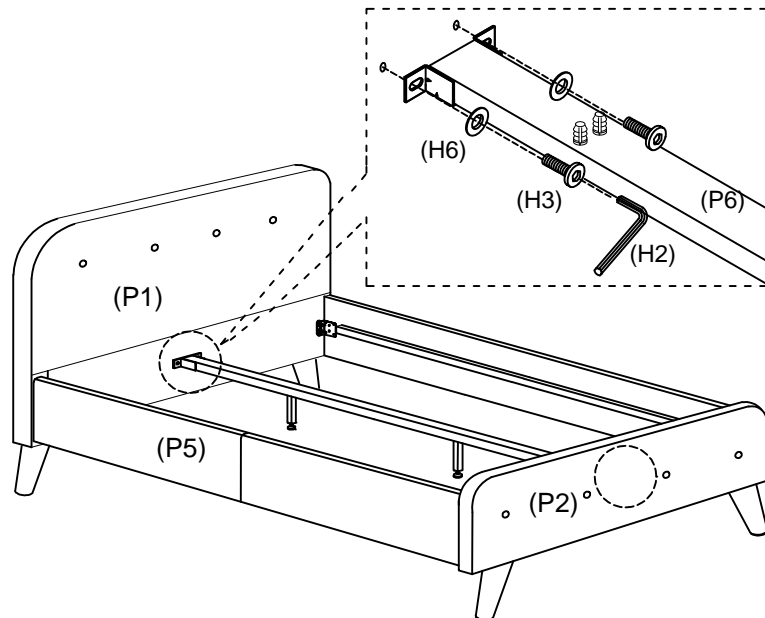

Slot the Centre rail (P6) into the headboard (P1) and footboard (P2).
Rotate 3/4 bolts (H3) using Allen Key (H2) to the headboard (P1) and footboard (P2). No need to tighten bolts until step 6.


Step 6

You will need	
	
4 x Plastic nut (H4)	Phillips head screwdriver (no provided)
	
4 x Bolt 40mm (H10)	Allen Key (H2)

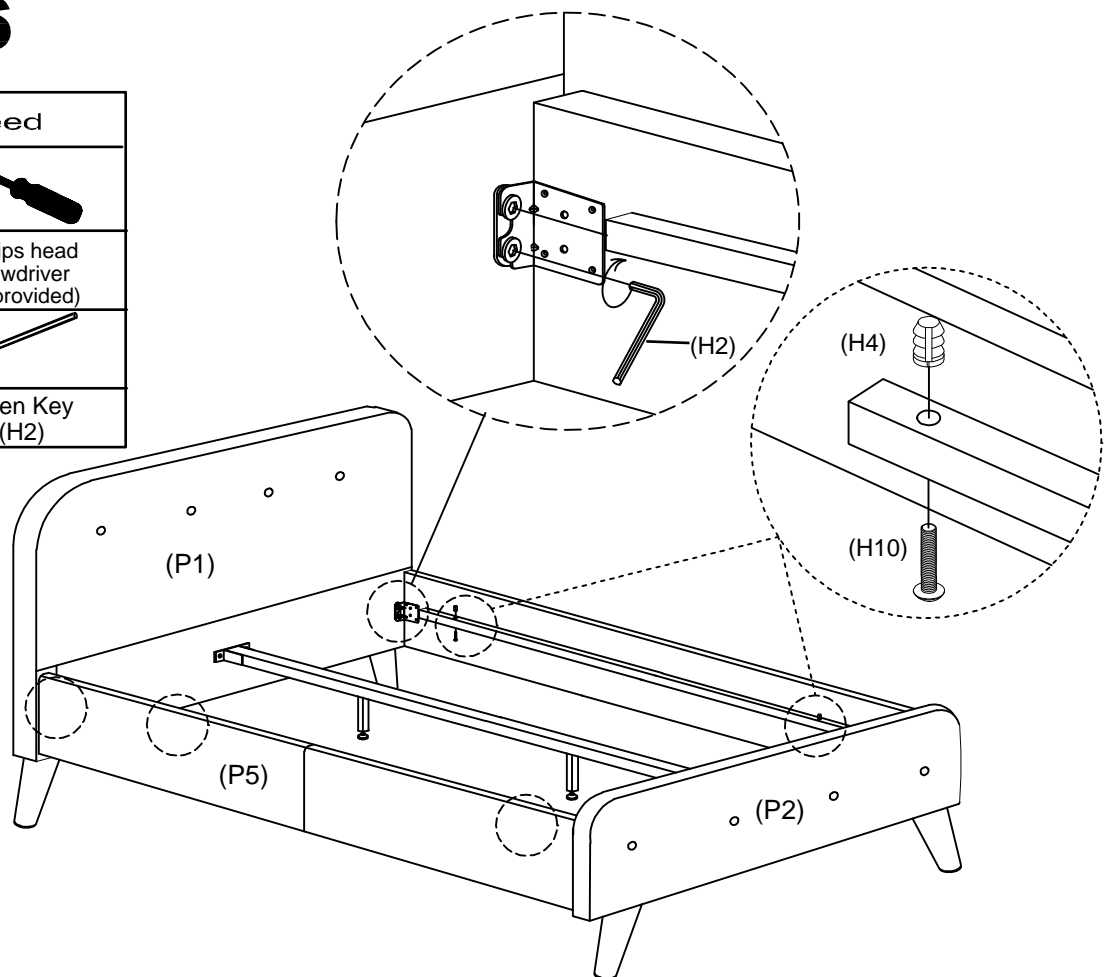



Attach the plastic nut (H4) to the side rail (P5) by using 4 x Bolt (H10) .
Now tighten all the bolts on the corner bracket and tighten bolts on the headboard (P1) and footboard (P2).


Step 7

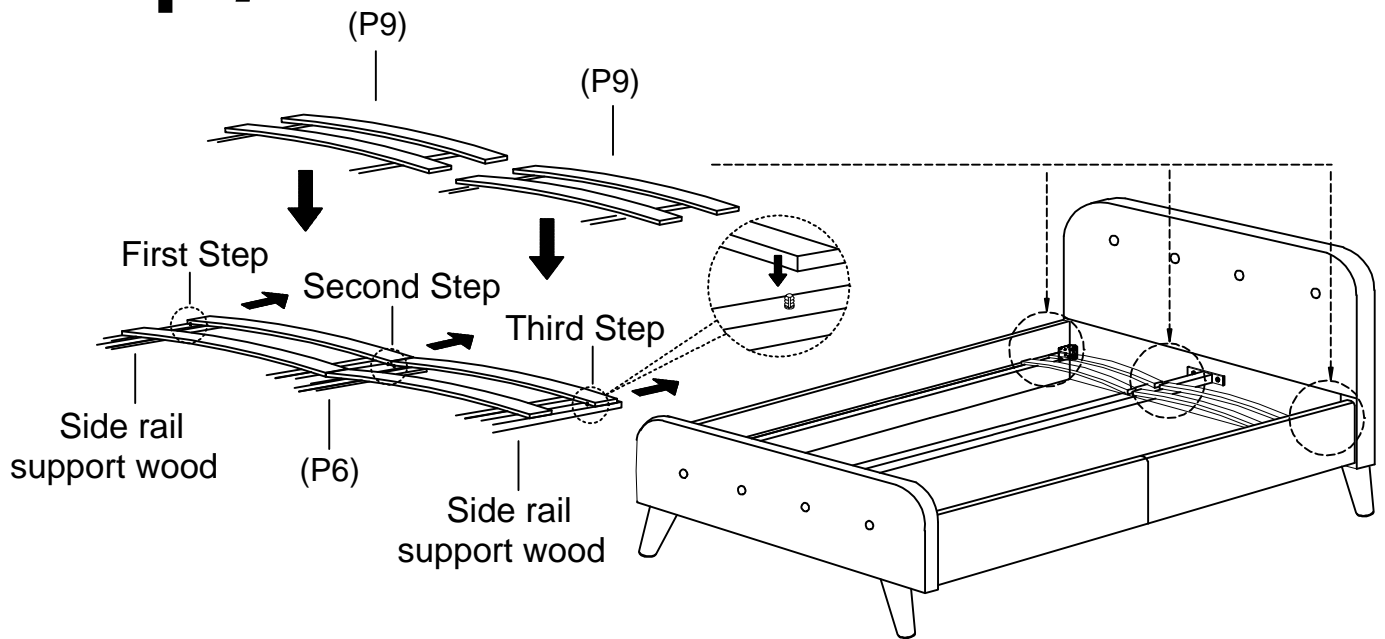

Fix slats (P9) on one end of the side rail (P5) and centre rail (P6). By using the plastic nut (H4) as stopper. Then spread out the slats and fix the slats to the other end of the side rail (P5) and centre rail (P6). By using the plastic nuts (H4) as stopper.


Step 8

You will need	
	
3 x Screw 32mm (H7)	Phillips head screwdriver (no provided)

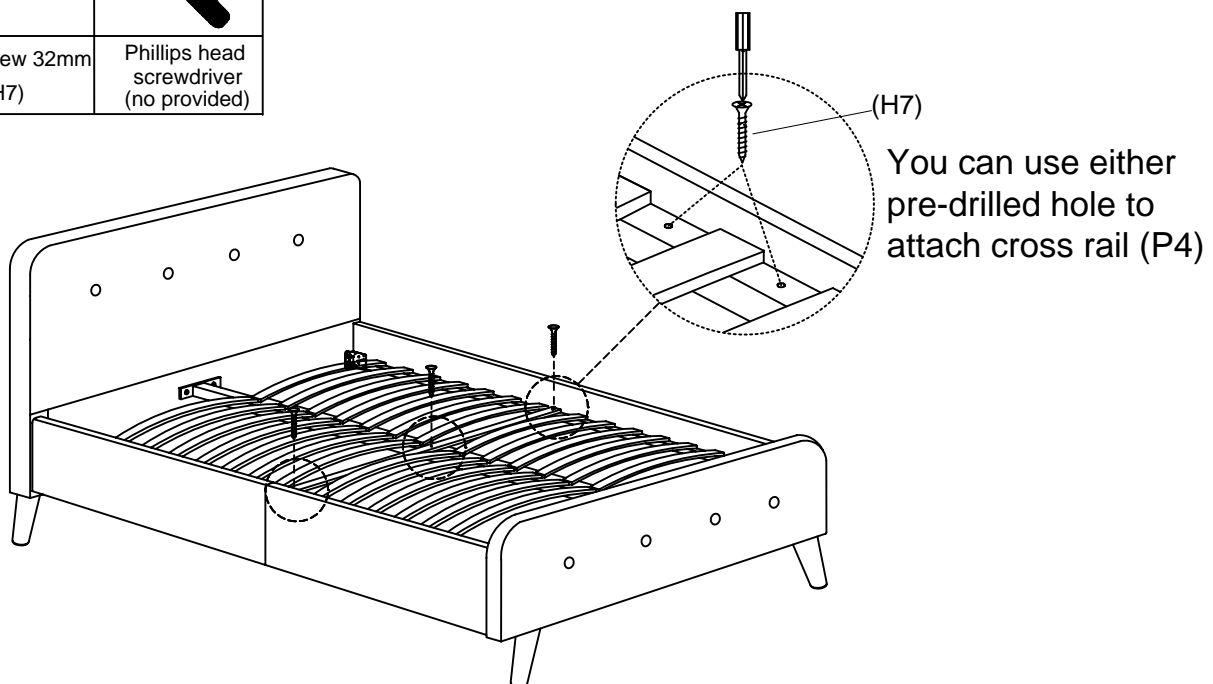

Attach the cross rail (P4) to the side rails (P5) and centre rail (P6) by using 3 x screw (H7).

Step 9

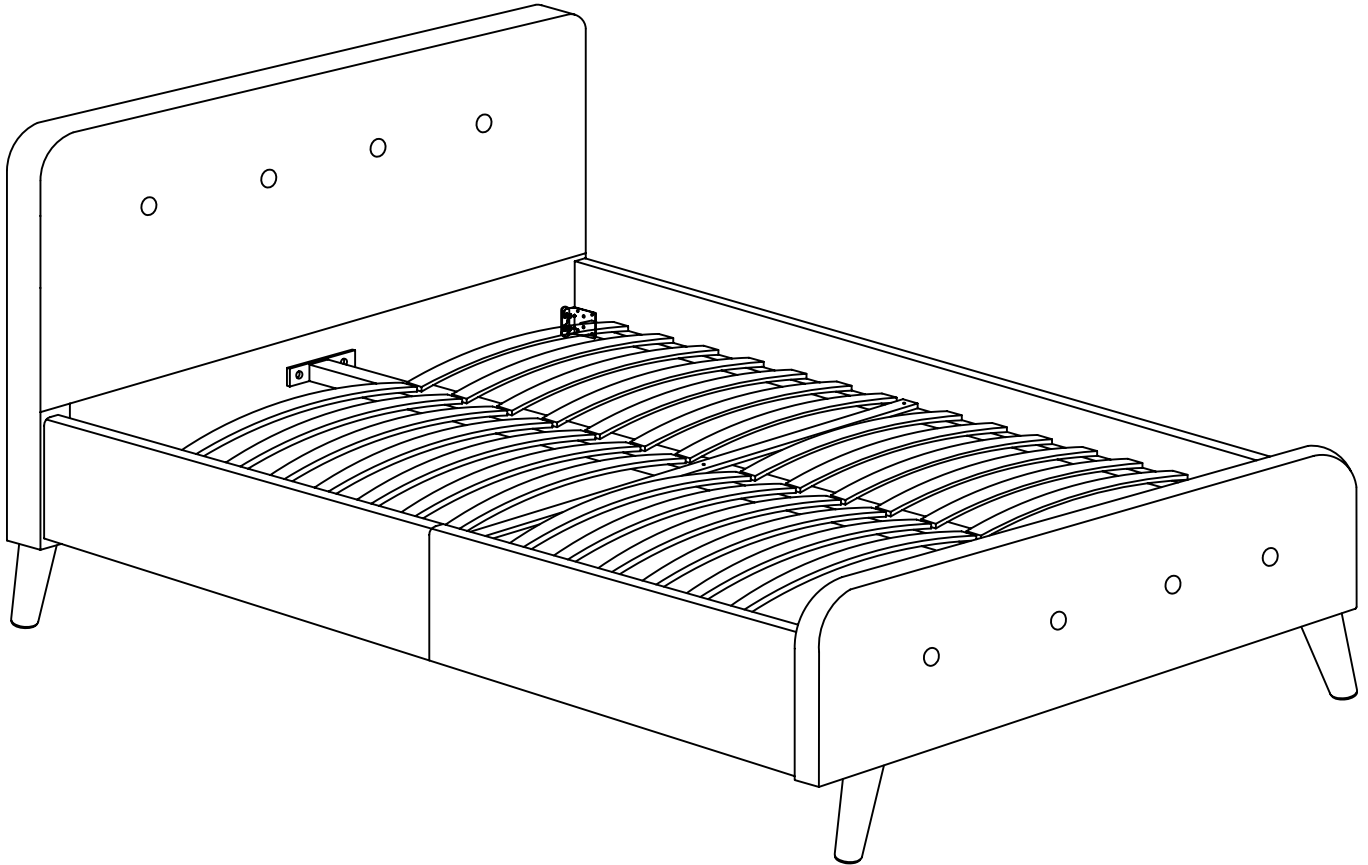


Job Complete

In the interest of our environment please dispose of all packaging thoughtfully.





Version 1.0

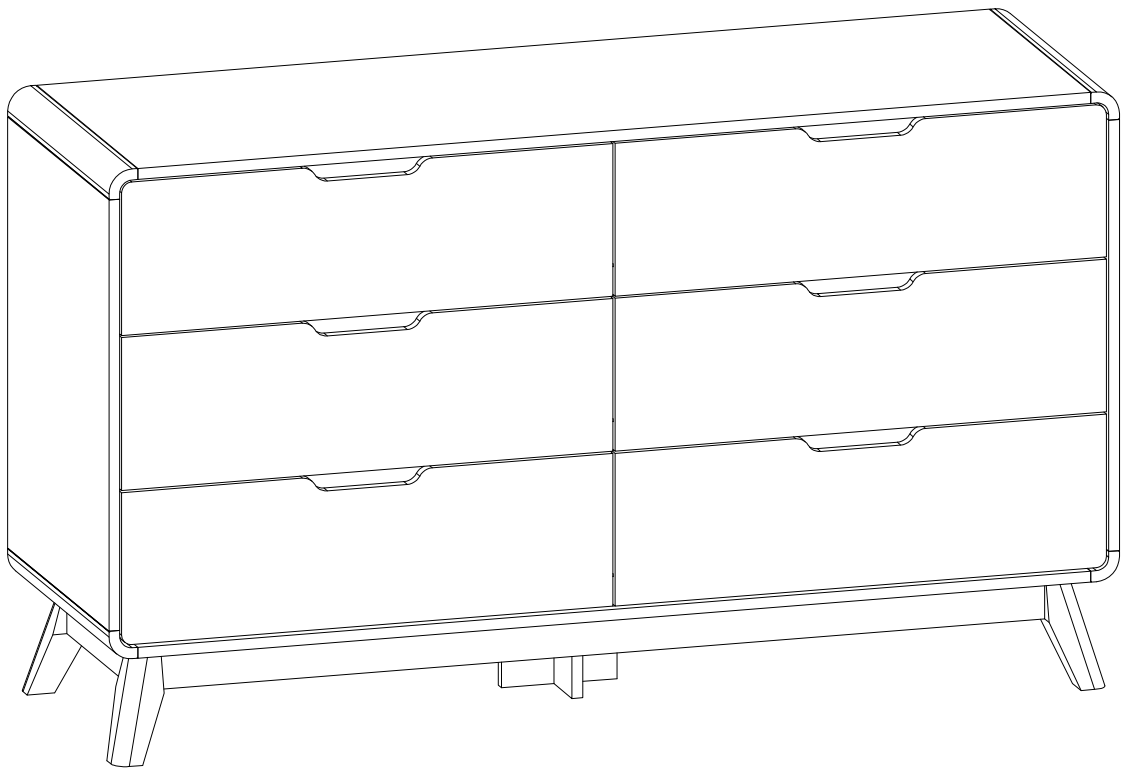

TWO PEOPLE



REQUIRED

NIVA
Dresser

www.fantasticfurniture.com.au



**WARNING: ENSURE THE WALL STRAP IS ATTACHED
TO AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Wall fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Enjoy
Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

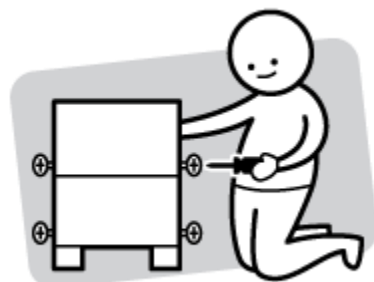

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product




DO NOT USE



Other tools you need

Flat head screwdriver; Phillips head screwdriver; Hammer; Mallet

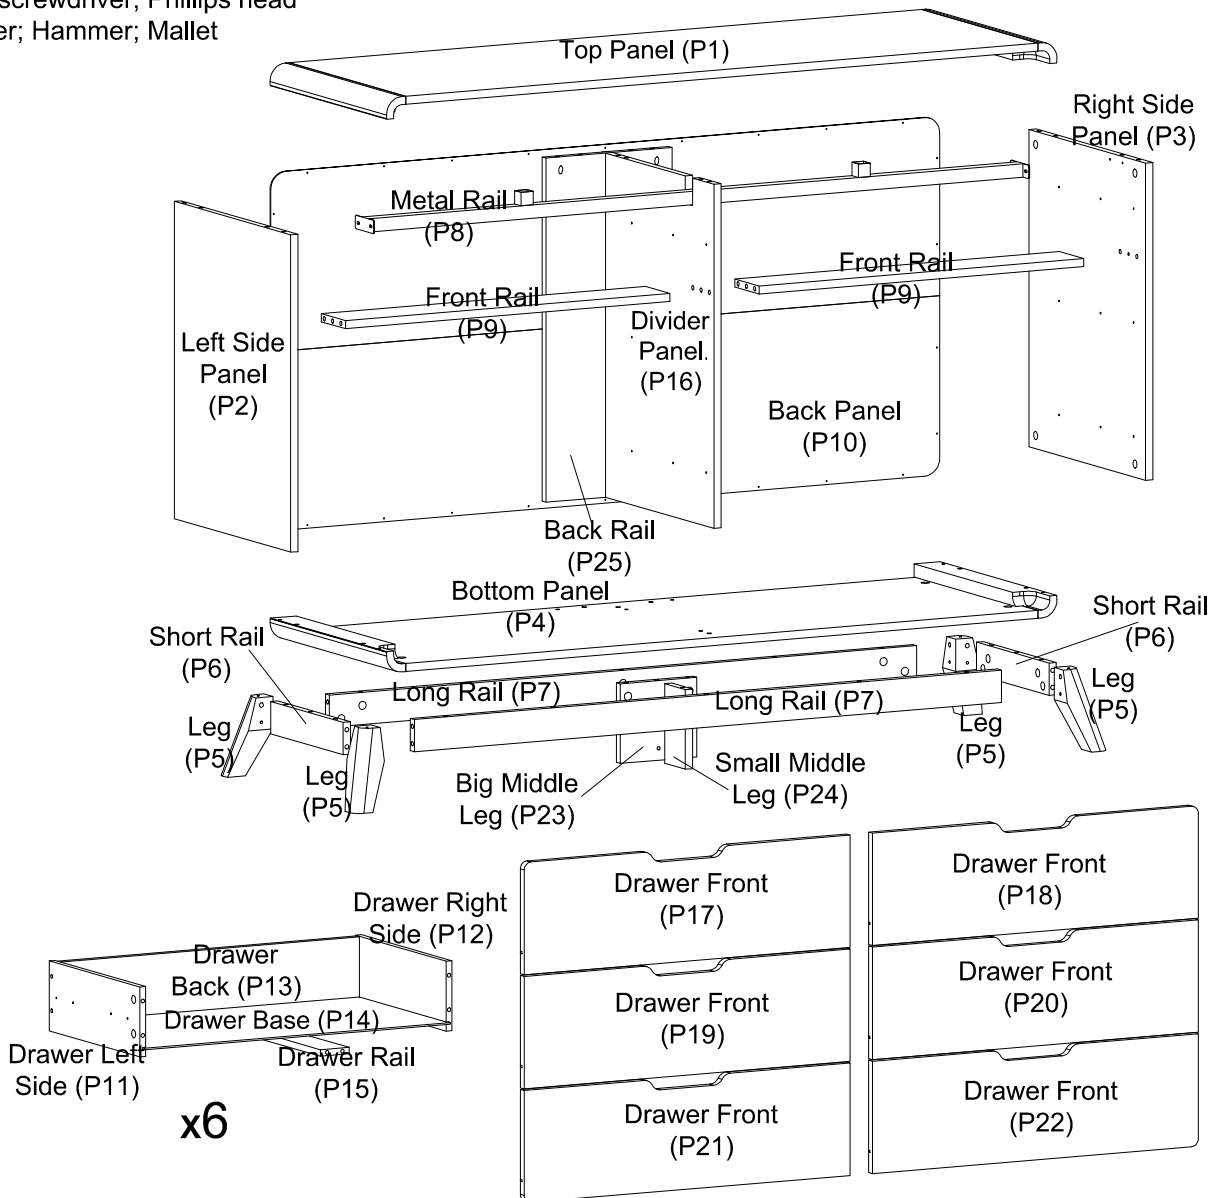


Part list

Box 1: Top Panel (P1); Left Side Panel (P2); Right Side Panel (P3); Bottom Panel (P4); 4 x Leg (P5); 2 x Short Rail (P6); 2 x Long Rail (P7); Metal Rail (P8); 2 x Front Rail (P9); Back Panel (P10); Big Middle Leg (P23); Small Middle Leg (P24); Back Rail (P25); Hardware Pack.

Box 2: 6 x Drawer Left Side (P11); 6 x Drawer Right Side (P12); 6 x Drawer Back (P13); 6 x Drawer Base (P14); 6 x Drawer Rail (P15); Divider Panel (P16); Drawer Front (P17); Drawer Front (P18); Drawer Front (P19); Drawer Front (P20); Drawer Front (P21); Drawer Front (P22).

Hardware pack



71 x Cam Bolts
(H1)




37 x Big Cam
Nuts (H2)




38 x Dowels
(H3)



36 x Small Cam
Nuts (H4)



4 x Screws
(H5)



34 x Nails
(H6)



4 x Felt Feet
(H7)




63 x Screws
(H8)



6 x Left Runner
Tracks (H9)




6 x Left Runners
(H10)




6 x Right Runner
Tracks (H11)



6 x Right Runners
(H12)



2 x Screws
(H13)




2 x Wall Straps
(H14)



4 x Flat Washers
(H15)




1 x Adjustable
Foot (H16)




43 x Screws
(H17)



4 x Screws
(H18)



2 x Long
Dowels (H19)






1 x Long Cam
Bolt (H20)



9 x Screws
(H21)


Step 1


You will need	
	
13 x Cam Bolts (H1)	Phillips head screwdriver

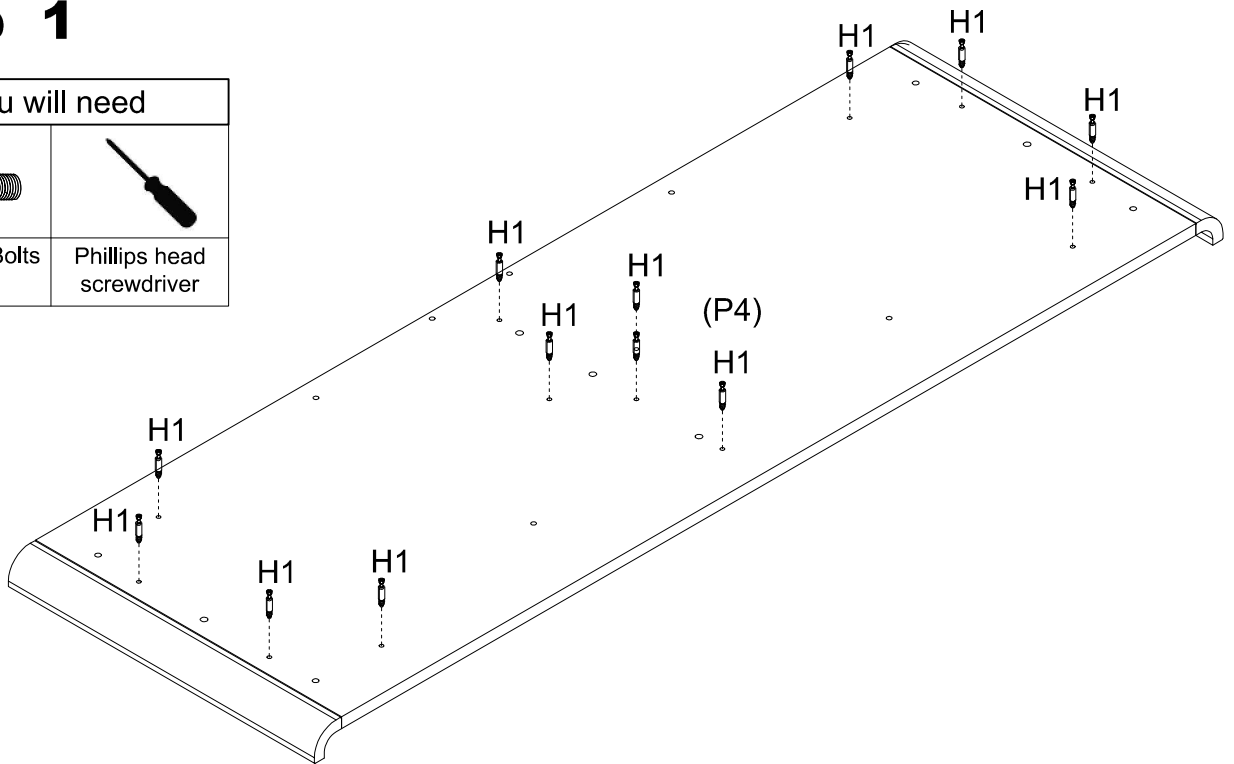

Screw 13 x cam bolts (H1) into bottom panel (P4) as shown.




Step 2

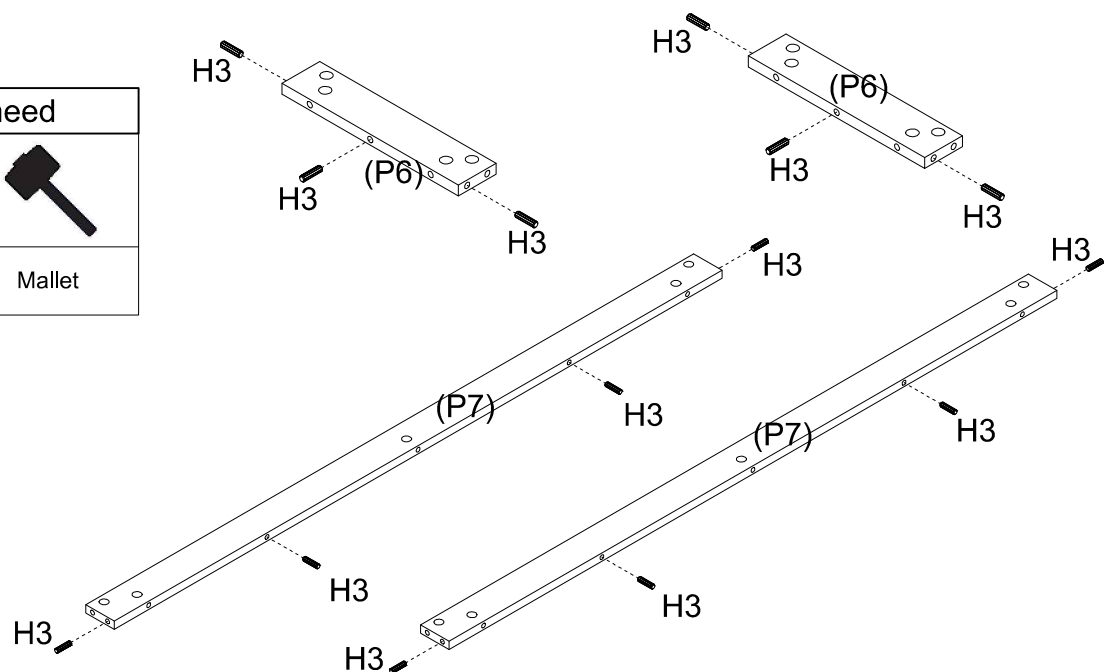
You will need	
	
14 x Dowels (H3)	Mallet



Insert each 3 x dowels (H3) into short rail (P6) and each 4 x dowels (H3) into long rail (P7).

Step 3


You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver
	
4 x Felt Feet (H7)	

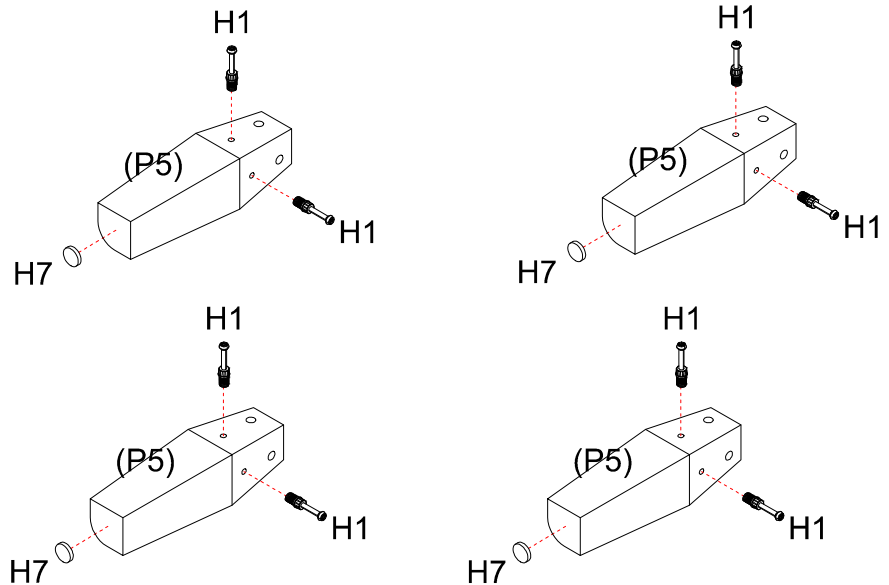


Screw each 2 x cam bolts (H1) into leg (P5).
Attach each 1 x felt feet (H7) to leg (P5).

Step 4

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

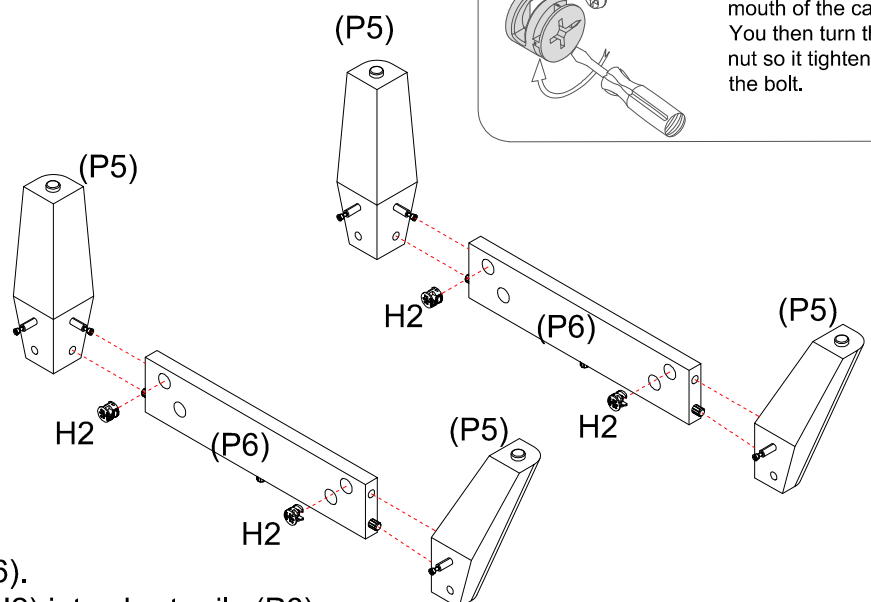



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach leg (P5) to short rail (P6).
Insert each 2 x big cam nuts (H2) into short rails (P6).
Push leg (P5) into place and tighten the cam nuts.


Step 5

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....



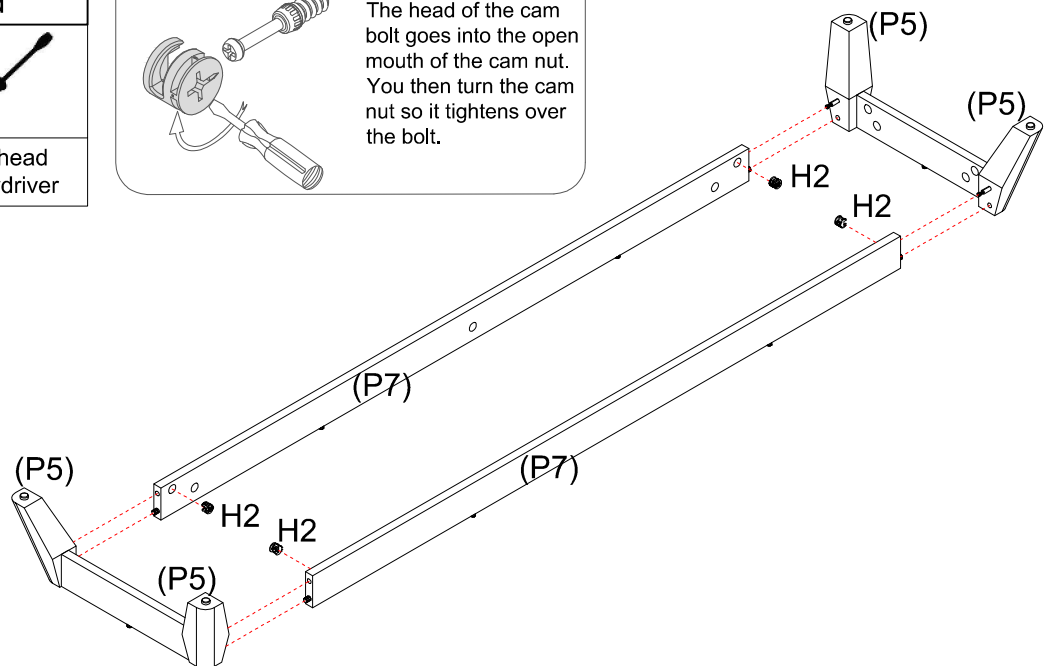

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.




Attach leg (P5) to long rail (P7).


Insert 4 x big cam nuts (H2) into long rails (P7) and turn clockwise to lock.

Step 6

You will need	
	
10 x Big Cam Nuts (H2)	Flat head screwdriver

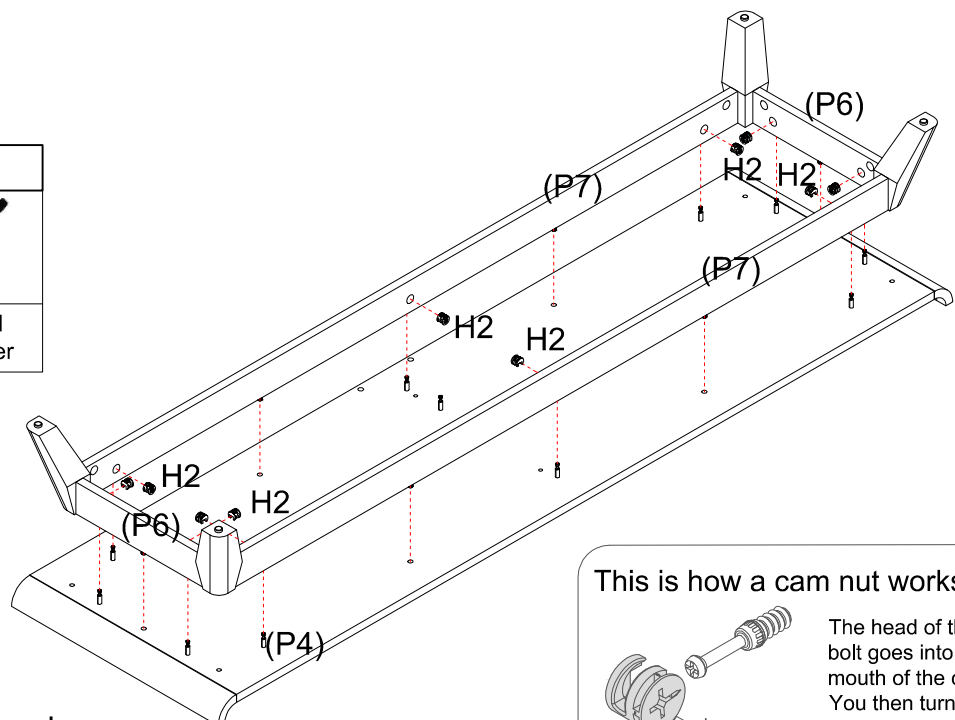

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.


Attach short rails (P6) and

long rails (P7) to bottom panel (P4).

Insert 10 x big cam nuts (H2) into short rails (P6) and long rails (P7), and turn clockwise to lock.




Step 7

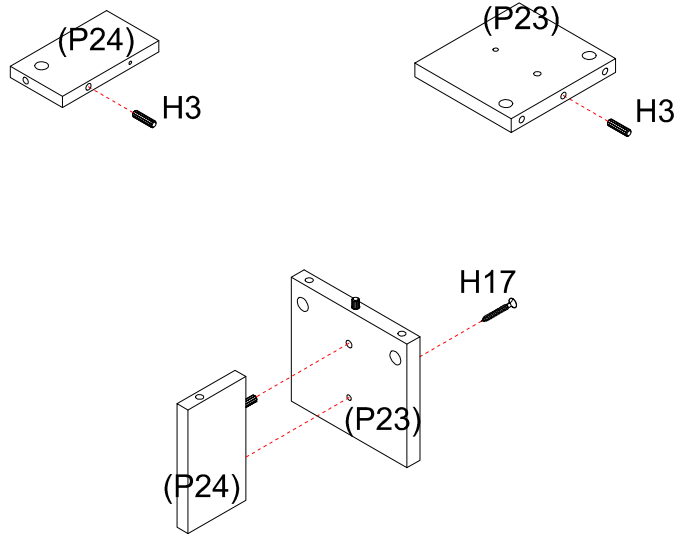
You will need	
	
2 x Dowels (H3)	1 x Screws (H17)
	
Phillips head screwdriver	Mallet




Insert 2 x dowels (H3) into small middle leg (P24) and big middle leg (P23).
Attach small middle leg (P24) to big middle leg (P23) with 1 x screw (H17).

Step 8

You will need	
	
3 x Big Cam Nuts (H2)	1 x Adjustable Foot (H16)
	
Flat head screwdriver	

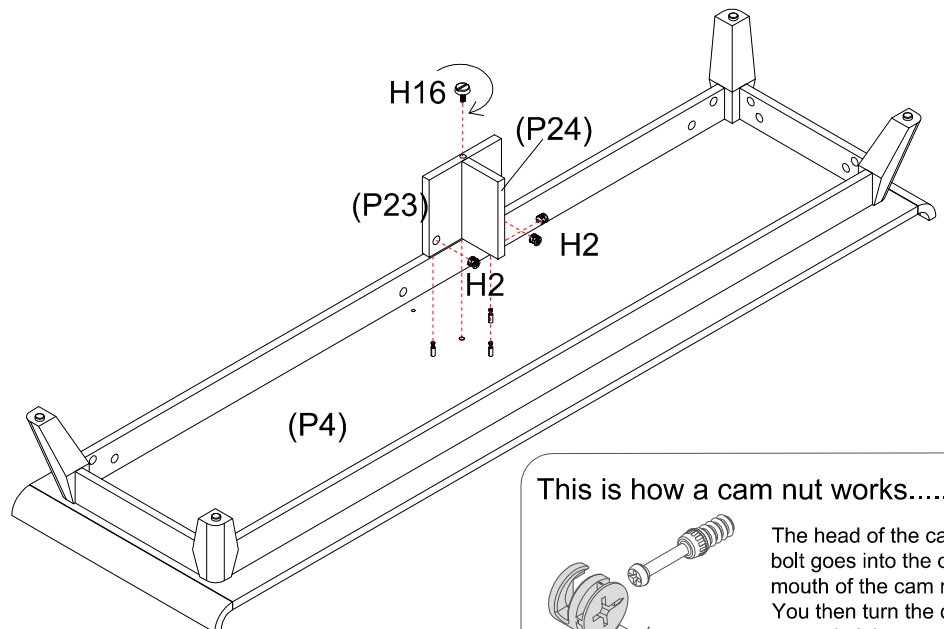




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach middle legs (P23) & (P24) to bottom panel (P4).
Insert 3 x big cam nuts (H2) into middle legs (P23) & (P24), and turn clockwise to lock.
Screw 1 x adjustable foot (H16) to big middle leg (P23).

Step 9


You will need	
	
4 x Cam Bolts (H1)	4 x Screws (H5)
	
Phillips head screwdriver	

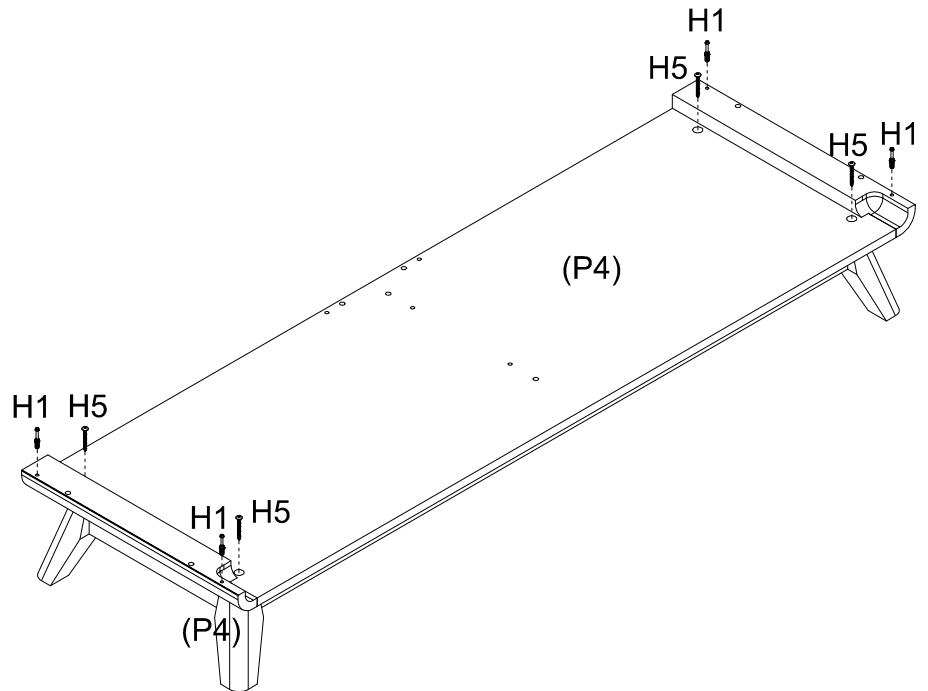

Screw 4 x cam bolts (H1) into bottom panel (P4) as shown.
Screw 4 x screws (H5) into bottom panel (P4).





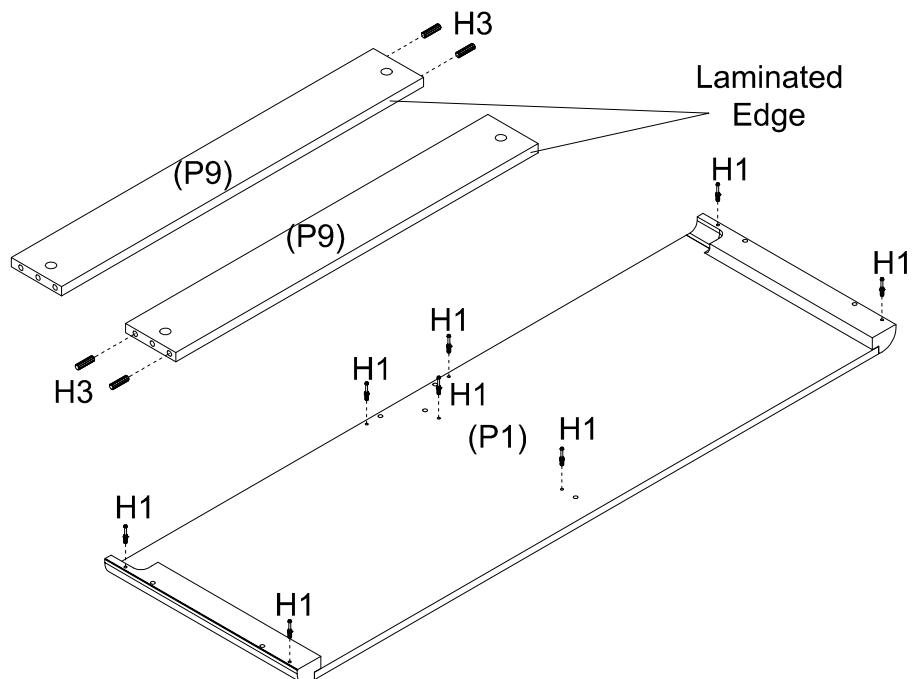

Step 10


You will need	
	
8 x Cam Bolts (H1)	4 x Dowels (H3)
	
Phillips head screwdriver	Mallet



Insert each 2 x dowels (H3) into front rail (P9) as shown.
Screw 8 x cam bolts (H1) into top panel (P1).

Step 11

You will need	
	
1 x Cam Bolts (H1)	4 x Dowels (H3)
	
9 x Screws (H8)	3 x Left Runner Tracks (H9)
	
Phillips head screwdriver	Mallet

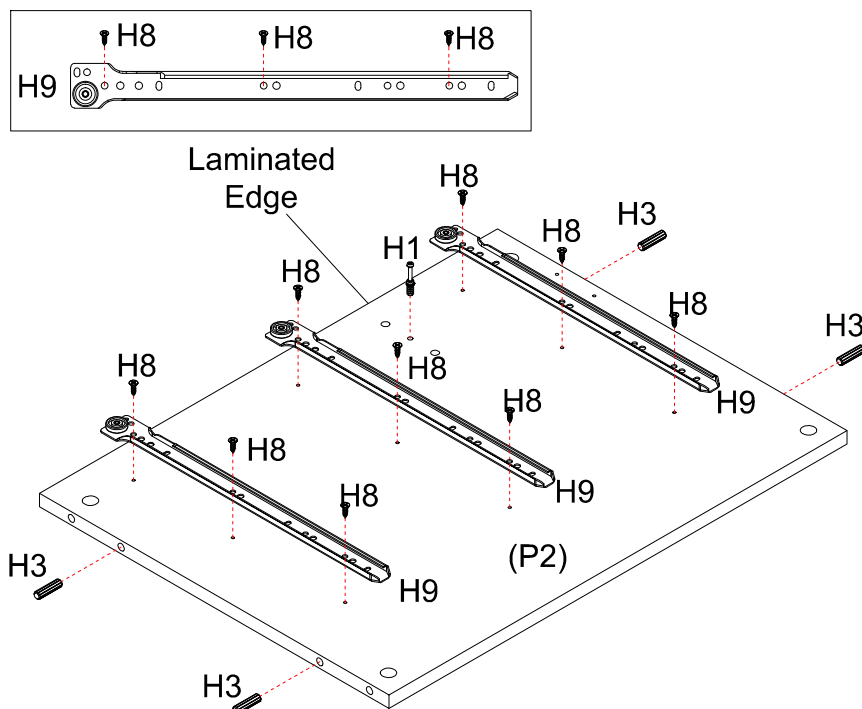







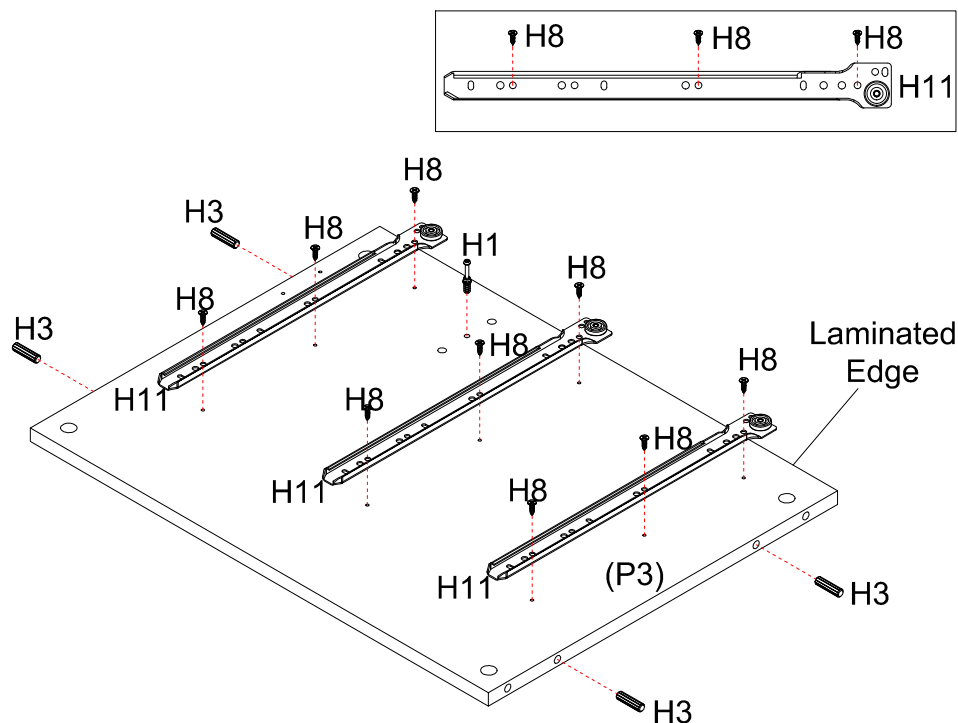
Insert 4 x dowels (H3) into left side panel (P2).

Attach 3 x left runner tracks (H9) to left side panel (P2) with 9 x screws (H8).

Insert 1 x cam bolt (H1) into left side panel (P2).

Step 12

You will need	
	
1 x Cam Bolts (H1)	4 x Dowels (H3)
	
9 x Screws (H8)	3 x Right Runner Tracks (H11)
	
Phillips head screwdriver	Mallet










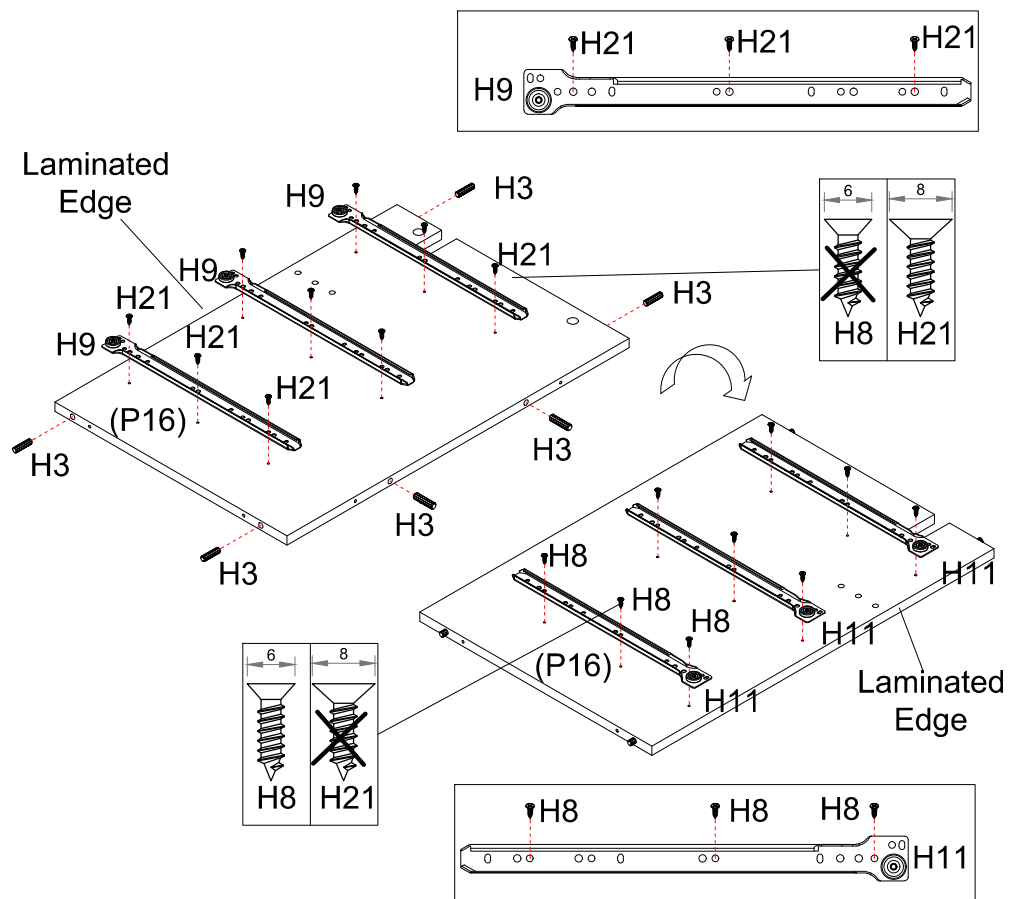
Insert 4 x dowels (H3) into right side panel (P3).

Attach 3 x right runner tracks (H11) to right side panel (P3) with 9 x screws (H8).

Insert 1 x cam bolt (H1) into right side panel (P3).

Step 13

You will need	
	
6 x Dowels (H3)	9 x Screws (H8)
	
9 x Screws (H21)	3 x Left Runner Tracks (H9)
	
3 x Right Runner Tracks (H11)	Phillips head screwdriver
	
Mallet	



Insert 6 x dowels (H3) into divider panel (P16).


Attach 3 x left runner tracks (H9) to divider panel (P16) with 9 x screws (H21).

Turn over the divider panel.

Attach 3 x right runner tracks (H11) to divider panel (P16) with 9 x screws (H8).

Step 14

You will need	
	
4 x Dowels (H3)	2 x Screws (H17)
	
Phillips head screwdriver	Mallet

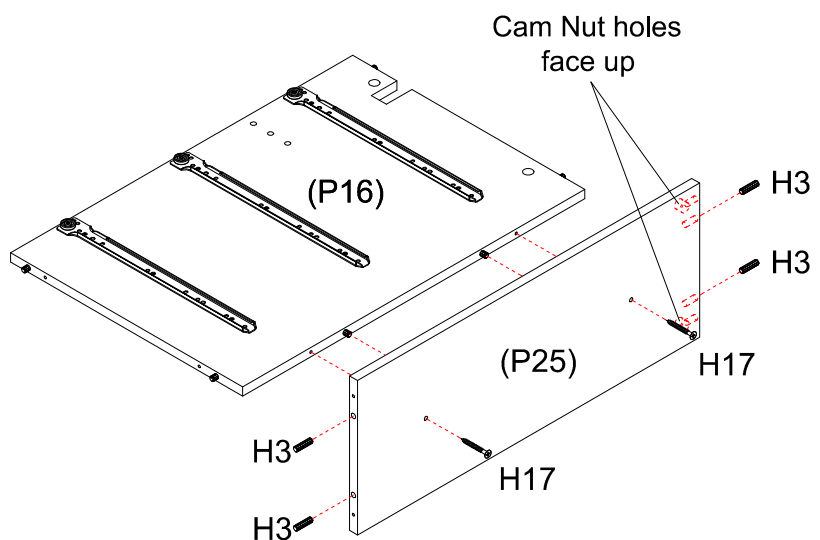


Insert 4 x dowels (H3) into back rail (P25).

Attach back rail (P25) to divider panel (P16) with 2 x screws (H17).

Step 15


You will need	
	
2 x Long Dowels (H19)	1 x Long Cam Bolt (H20)
	
2 x Big Cam Nuts (H2)	Flat head screwdriver

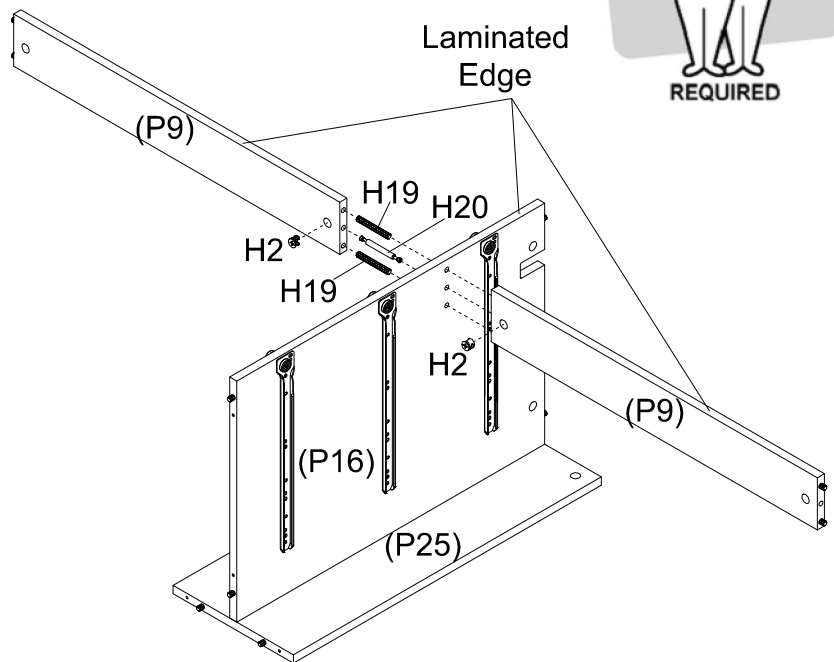

Attach front rails (P9) to divider panel (P16) with 2 x long dowels (H19) and 1 x long cam bolt (H20) as shown.
Insert 2 x big cam nuts (H2) into rails (P9) and turn clockwise to lock.

Step 16

You will need	
	
2 x Big Cam Nuts (H2)	4 x Screws (H18)
	
Phillips head screwdriver	Flat head screwdriver

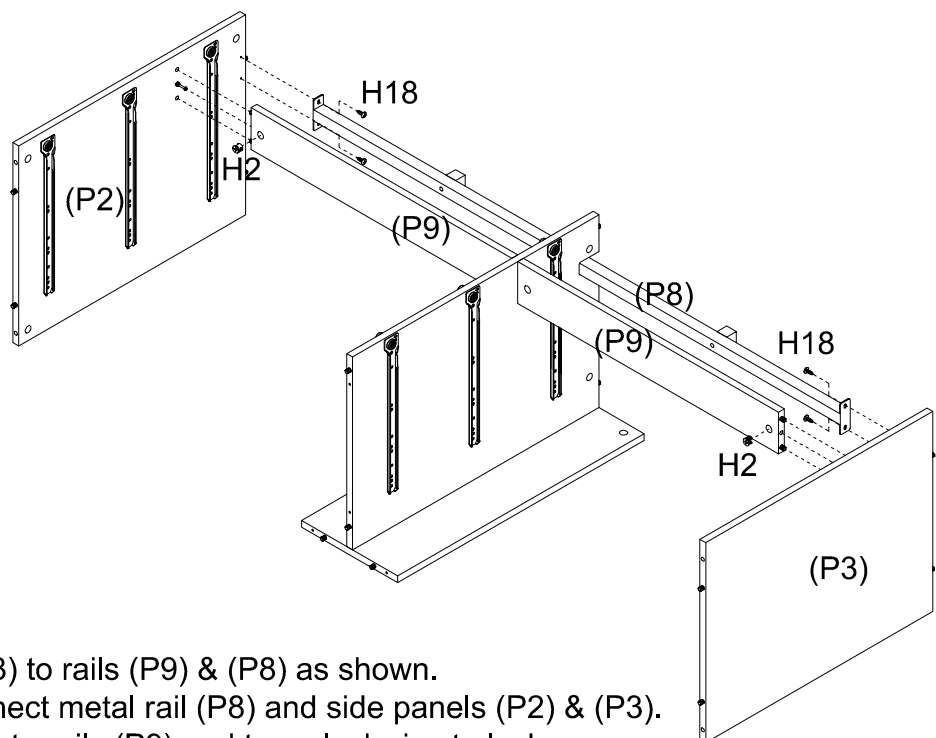

Attach side panels (P2) & (P3) to rails (P9) & (P8) as shown.
Use 4 x screws (H18) to connect metal rail (P8) and side panels (P2) & (P3).
Insert 2 x big cam nuts (H2) into rails (P9) and turn clockwise to lock.


Step 17

TWO PEOPLE




You will need	
4 x Big Cam Nuts (H2)	4 x Screws (H17)
Phillips head screwdriver	Flat head screwdriver

This is how a cam nut works.....



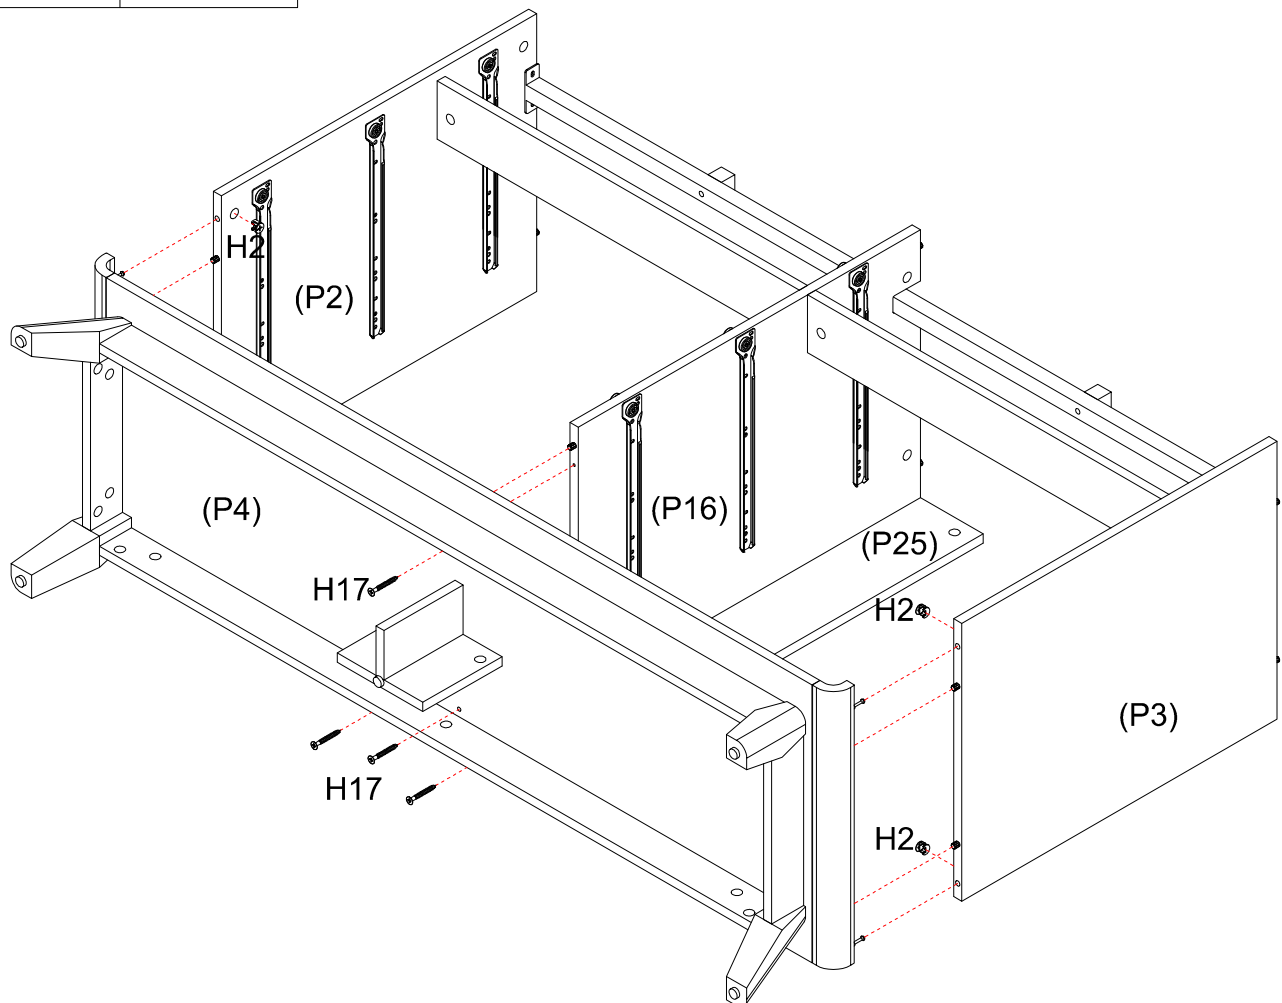

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.




Attach panels (P2) (P3) (P16) and back rail (P25) to bottom panel (P4).
Insert 4 x big cam nuts (H2) into side panels (P2) & (P3) and turn clockwise to lock.
Screw 4x screws (H17) into bottom panel (P4).

Step 18

You will need	
	
8 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

TWO PEOPLE



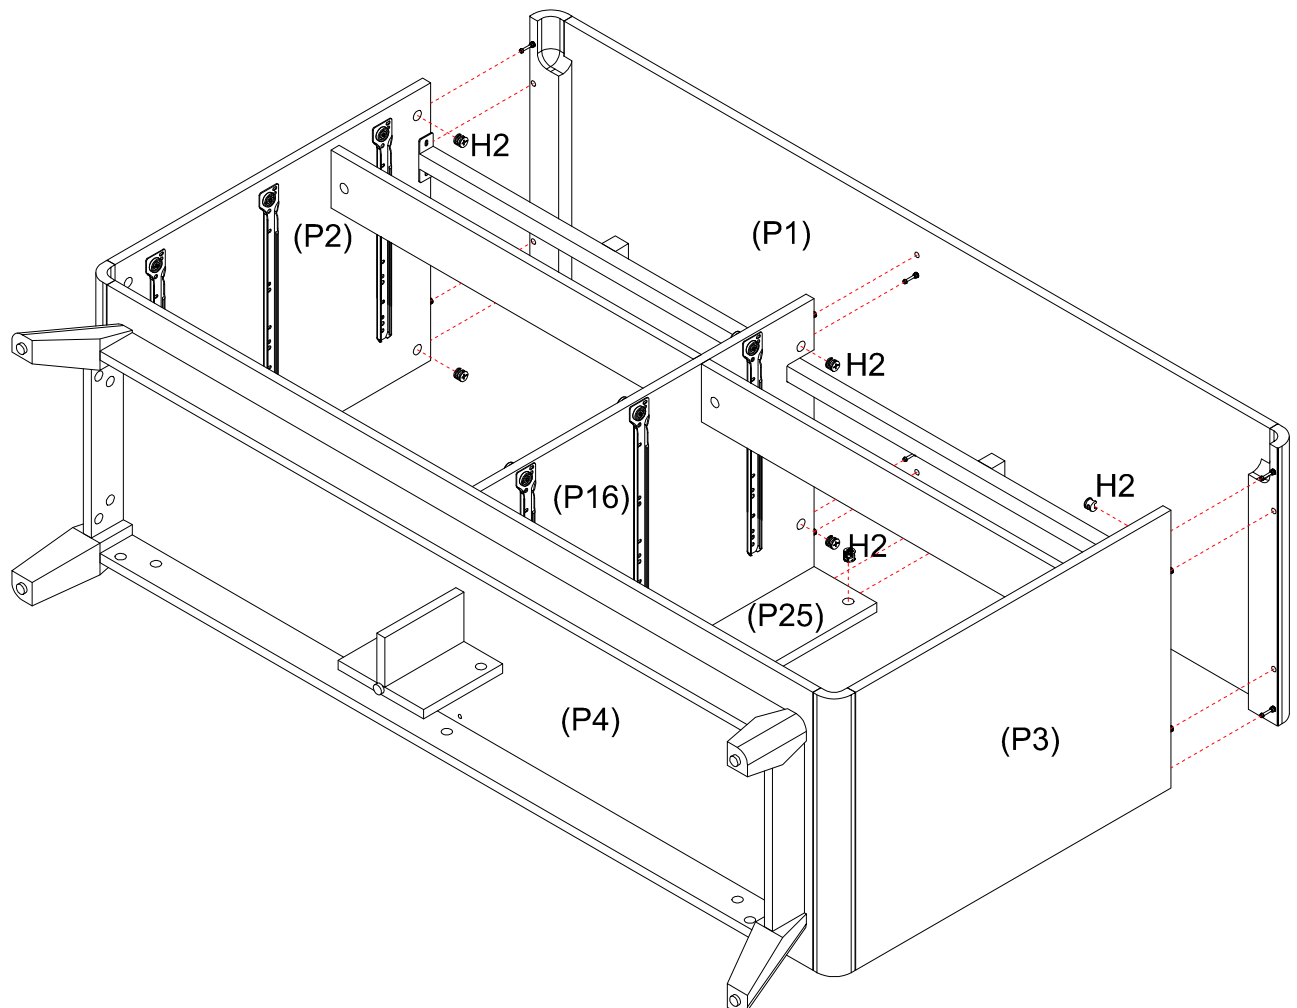

REQUIRED




Attach top panel (P1) to panels (P2) (P3) (P16) and back rail (P25).

Insert 8 x big cam nuts (H2) into panels (P3) (P2) (P16) and back rail (P25), turn clockwise to lock.

Step 19

You will need	
	
34 x Nails (H6)	Hammer

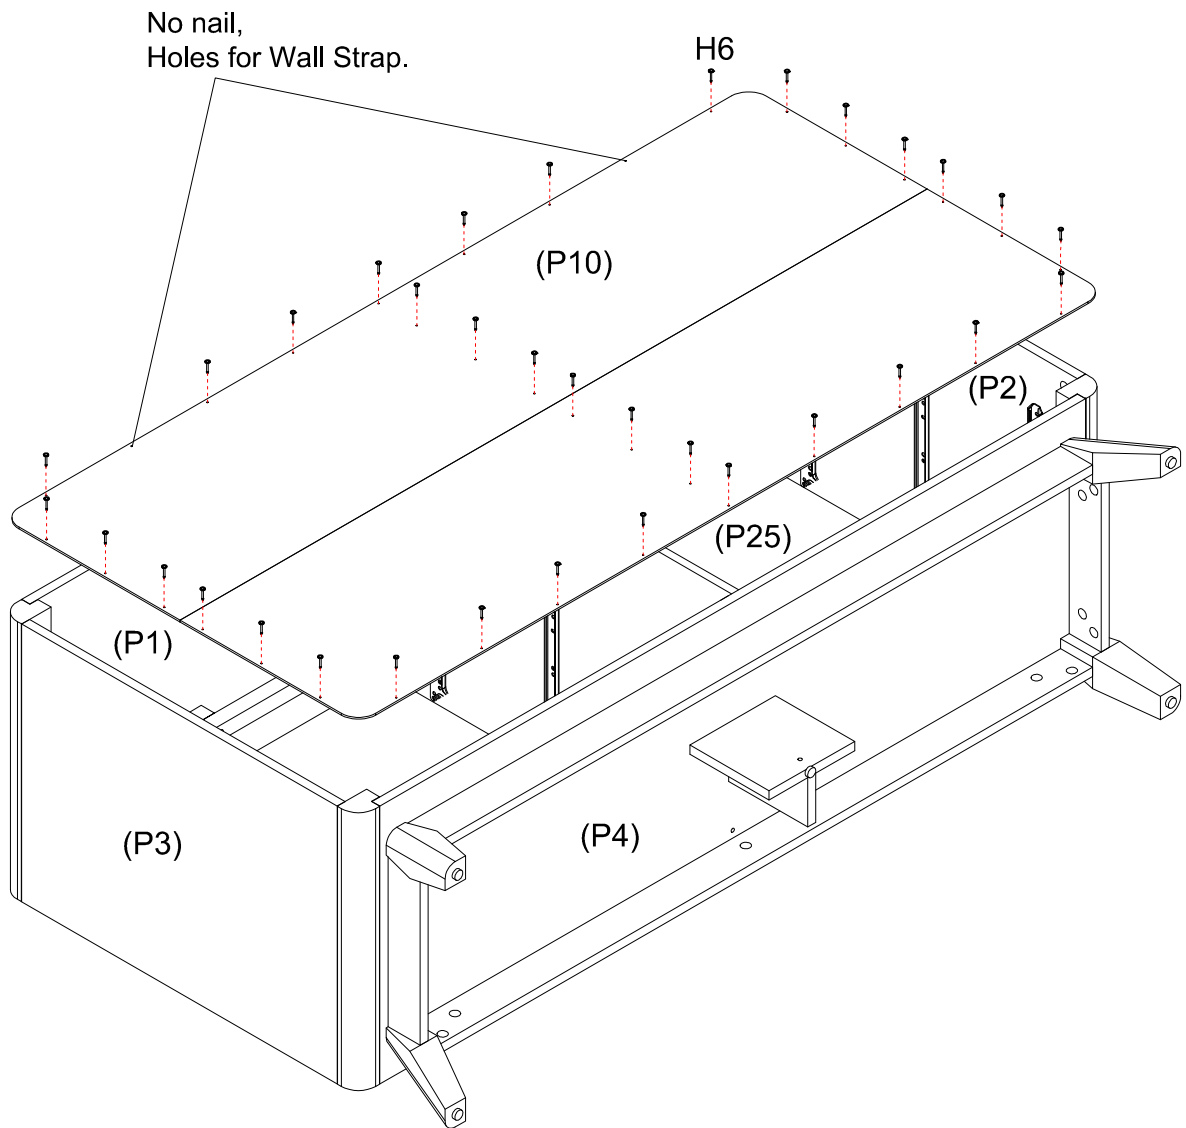


Attach back panel (P10) to panels (P1) (P2) (P3) (P4) and (P25) with 36 x nails (H6).



Step 20


You will need	
6 x Left Runners (H10)	6 x Right Runners (H12)
36 x Screws (H8)	Phillips head screwdriver

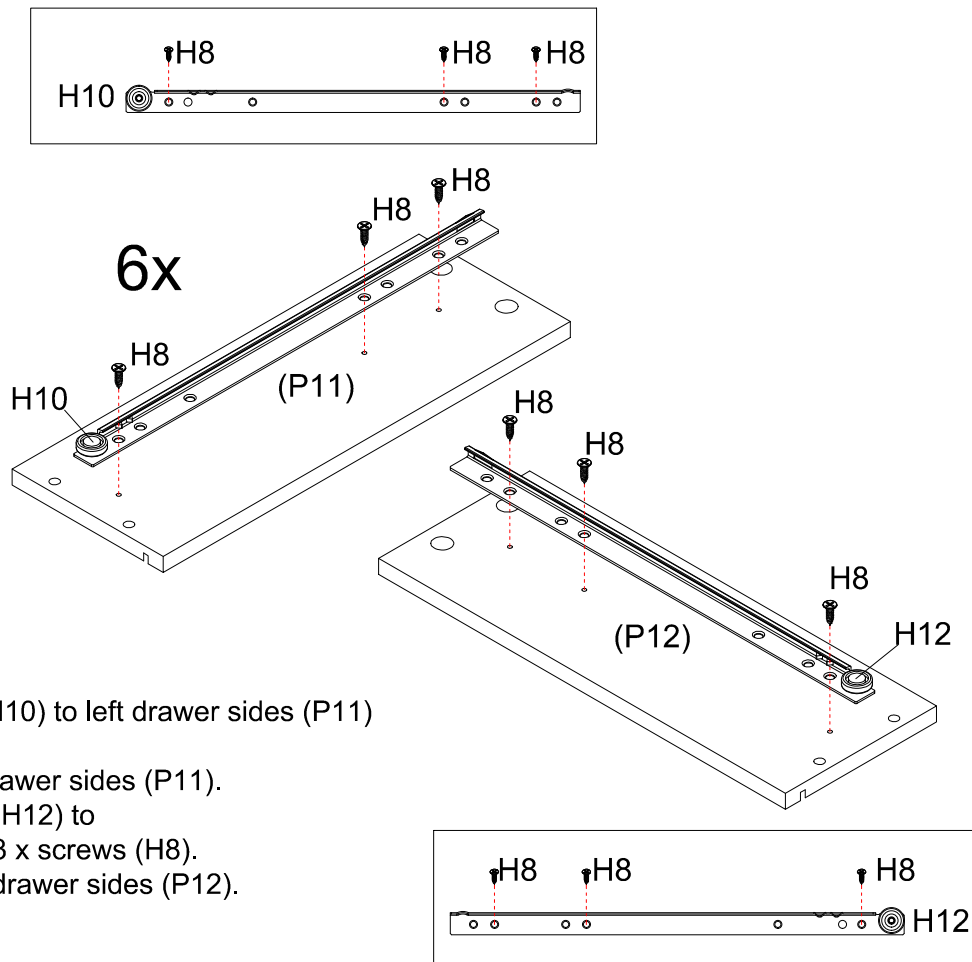

Attach each one left runner (H10) to left drawer sides (P11) with 3 x screws (H8).
Repeat five times for all left drawer sides (P11).
Attach each one right runner (H12) to right drawer sides (P12) with 3 x screws (H8).
Repeat five times for all right drawer sides (P12).



Step 21


You will need	
36 x Cam Bolts (H1)	Phillips head screwdriver

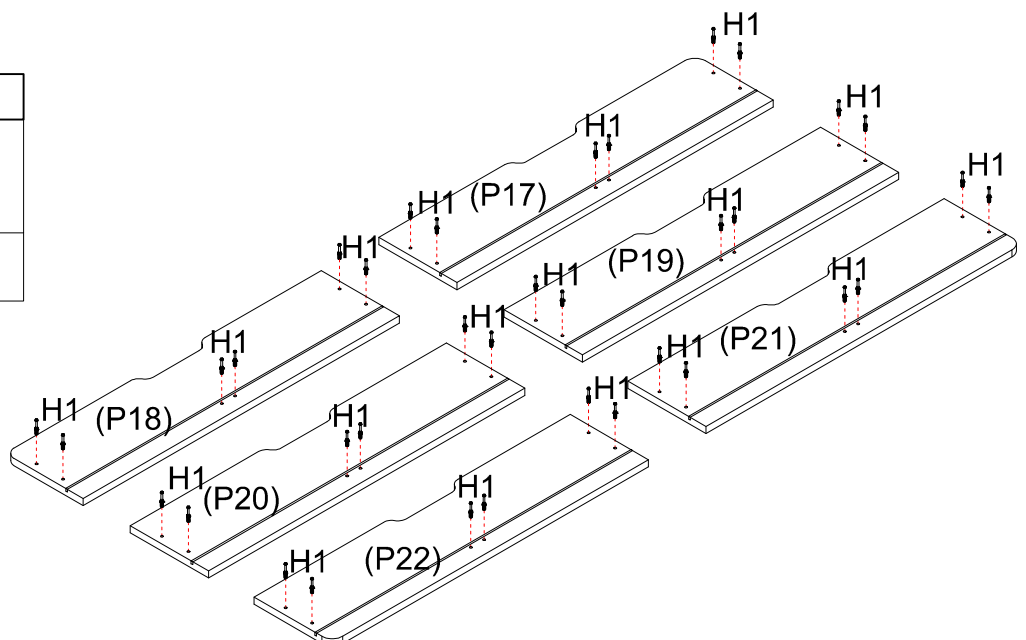

Screw each 6 x cam bolts (H1) into drawer fronts (P17) (P18) (P19) (P20) (P21) and (P22).


Step 22

You will need	
	
36 x Small Cam Nuts (H4)	Flat head screwdriver

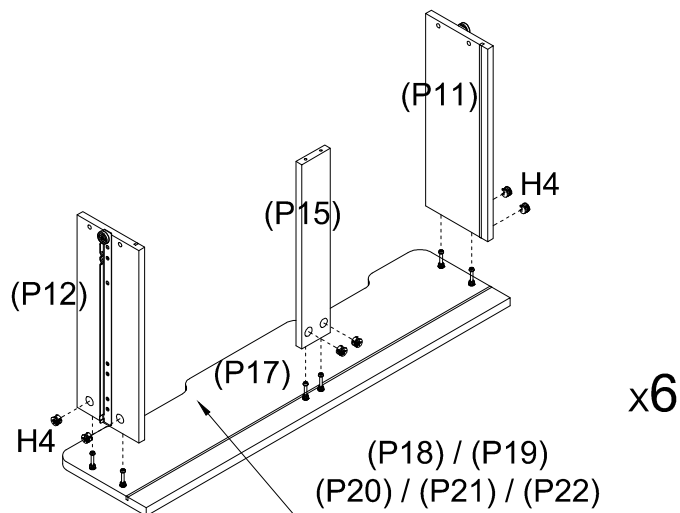



Attach drawer sides (P11) & (P12) and drawer rail (P15) to drawer front (P17). Insert 6 x small cam nuts (H4) into drawer sides (P11) & (P12) and drawer rail (P15), turn clockwise to lock. Repeat five times for others drawer fronts (18) (19) (20) (21) (22).


Step 23

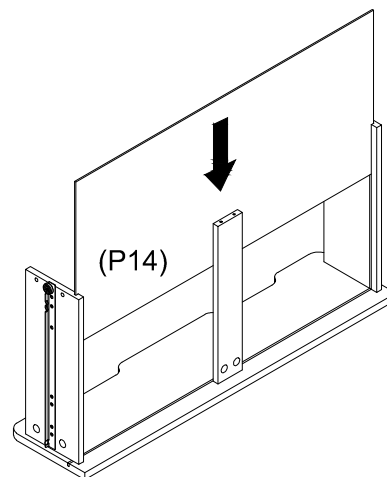

Slide each drawer base (P14) into the groove in the drawer panels (P11), (P12) and drawer fronts. Repeat with all drawer bases (P14).

Step 24

You will need	
	
36 x Screws (H17)	Phillips head screwdriver

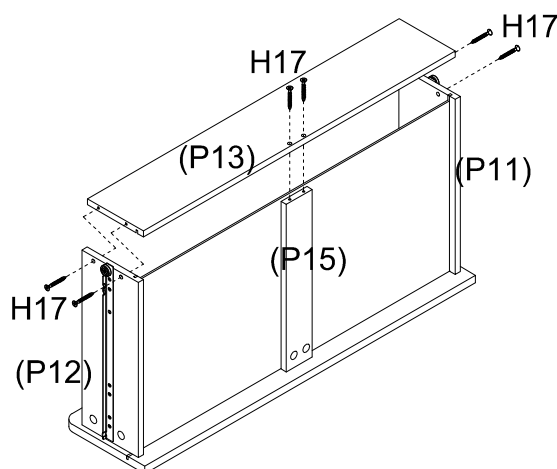


Attach each drawer back (P13) to drawer sides (P11) & (P12) and drawer rail (P15) with 6 x screws (H17). Repeat for all drawer backs (P13).





Step 25

Insert drawers into cabinet carefully as shown.
Slide drawers runners into position gently to avoid
damaging runners.


Note: Follow the correct order of these
Six drawers as shown.

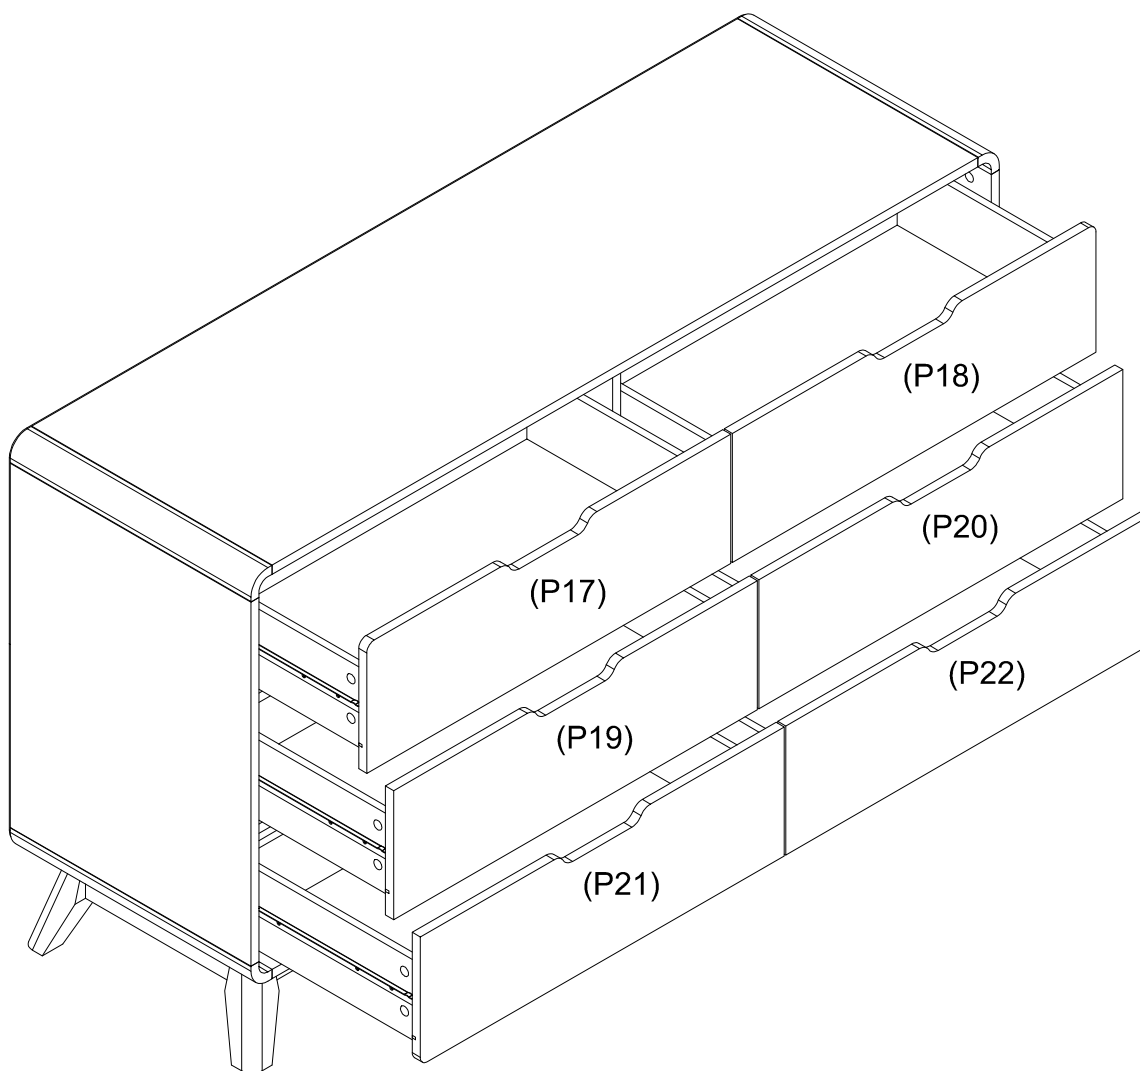

Step 26



You will need	
	
2 x Flat Washers (H15)	2 x Screws (H13)
	
2 x Wall straps (H14)	Phillips head screwdriver

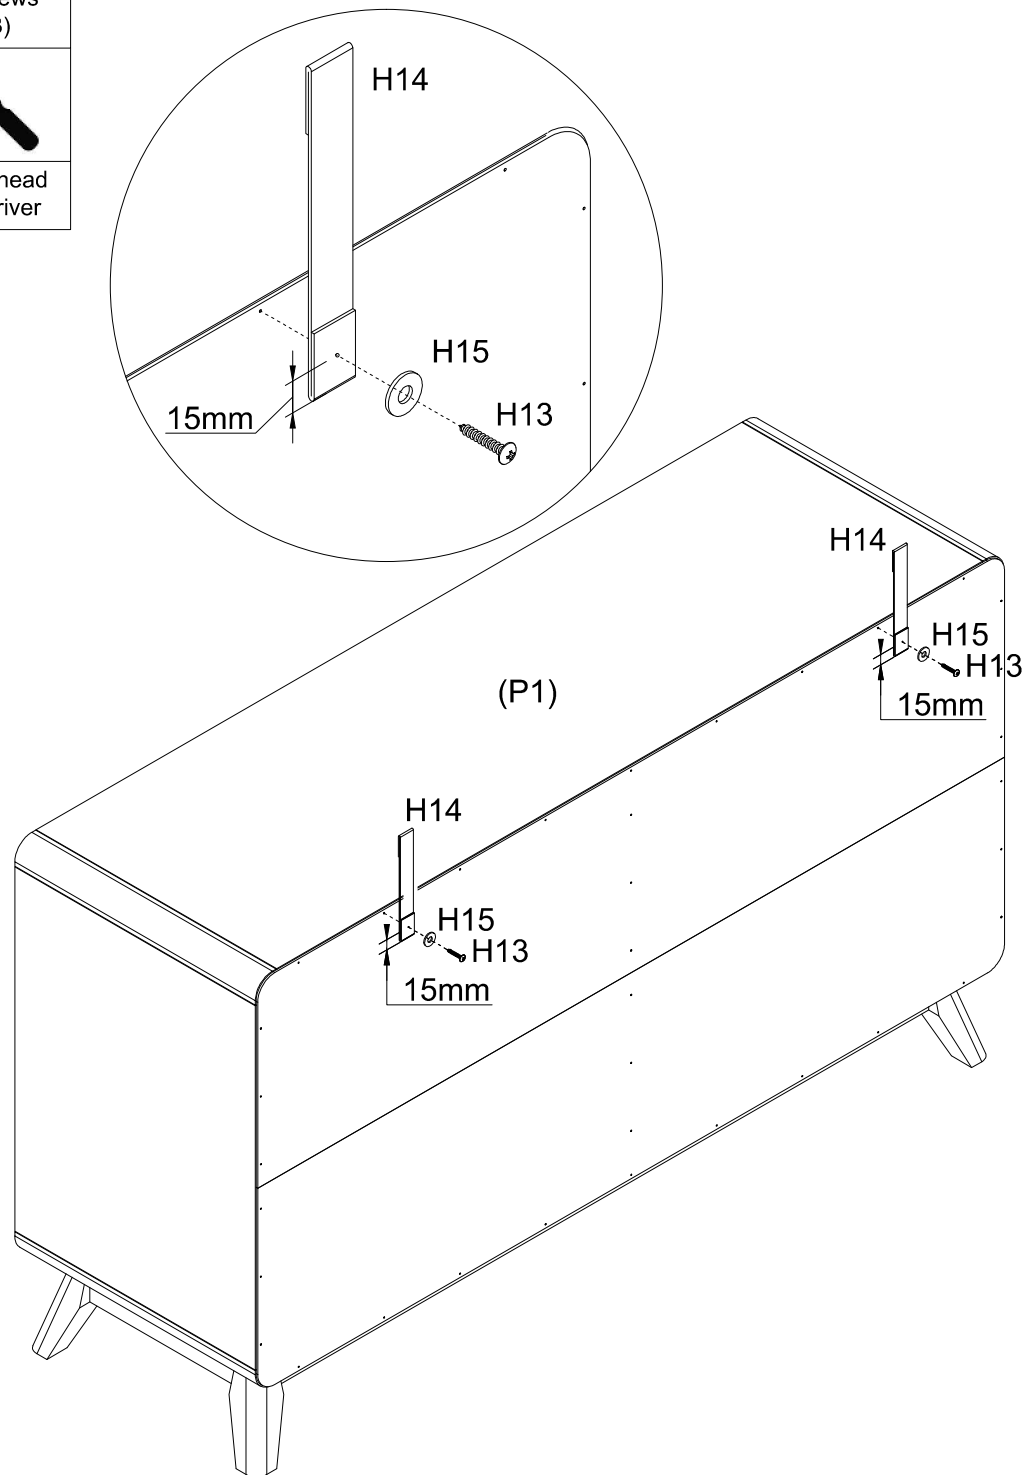We strongly advise that you use the wall strap provided to prevent the unit toppling.



Use screw (H13) to connect wall strap (H14) on top panel (P1).



Step 27

You will need	
	
2 x Flat Washers (H15)	Phillips head screwdriver


Seek advice from a qualified trades person on how to attach this wall strap to your specific wall.

Screw and Wall Plug are not included.
Please use appropriate fixtures for your wall.

Move the Dresser to the final position. Attach the wall strap to the wall. Make sure it is firmly attached and a snug fit.

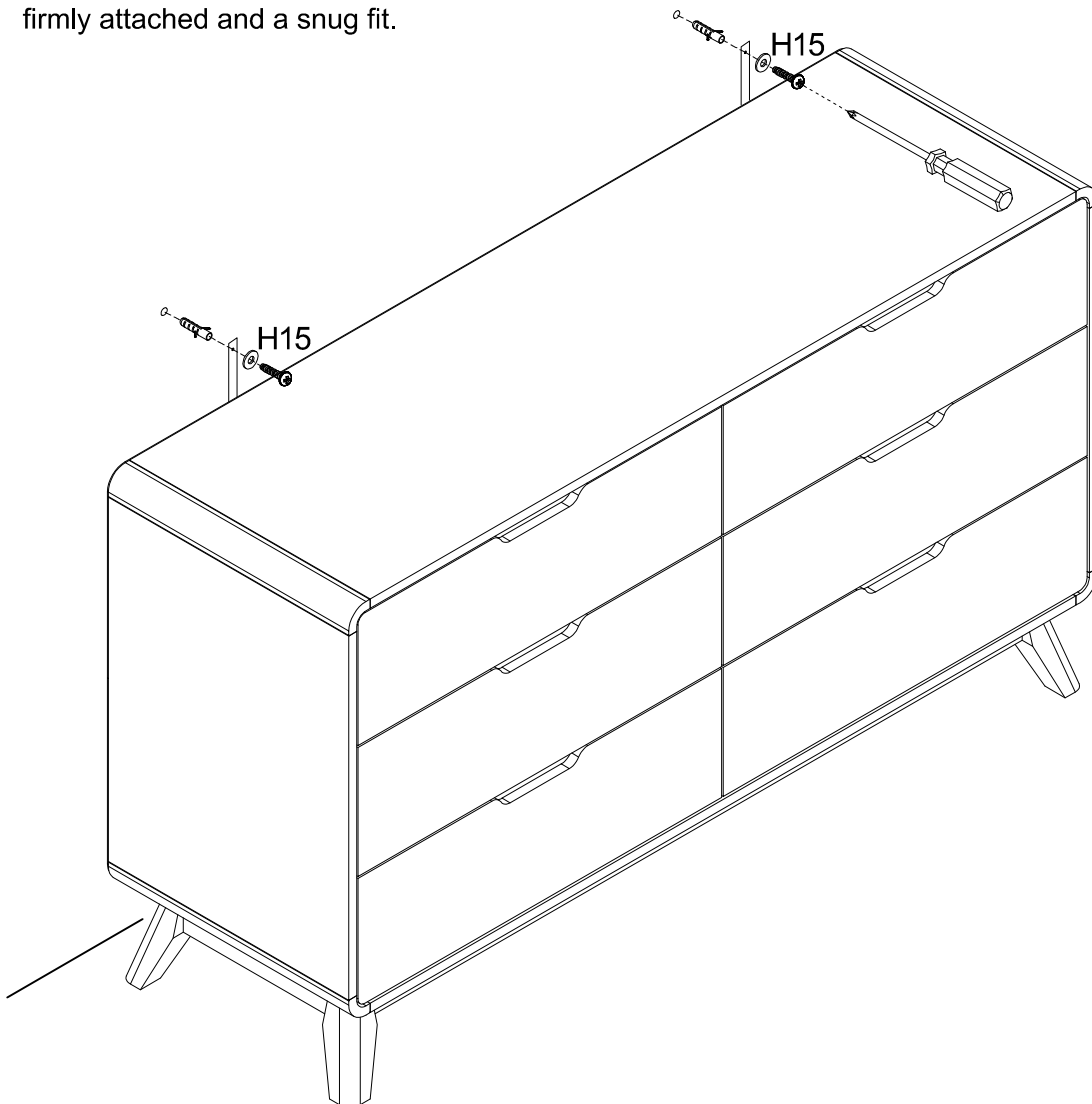

Step 28

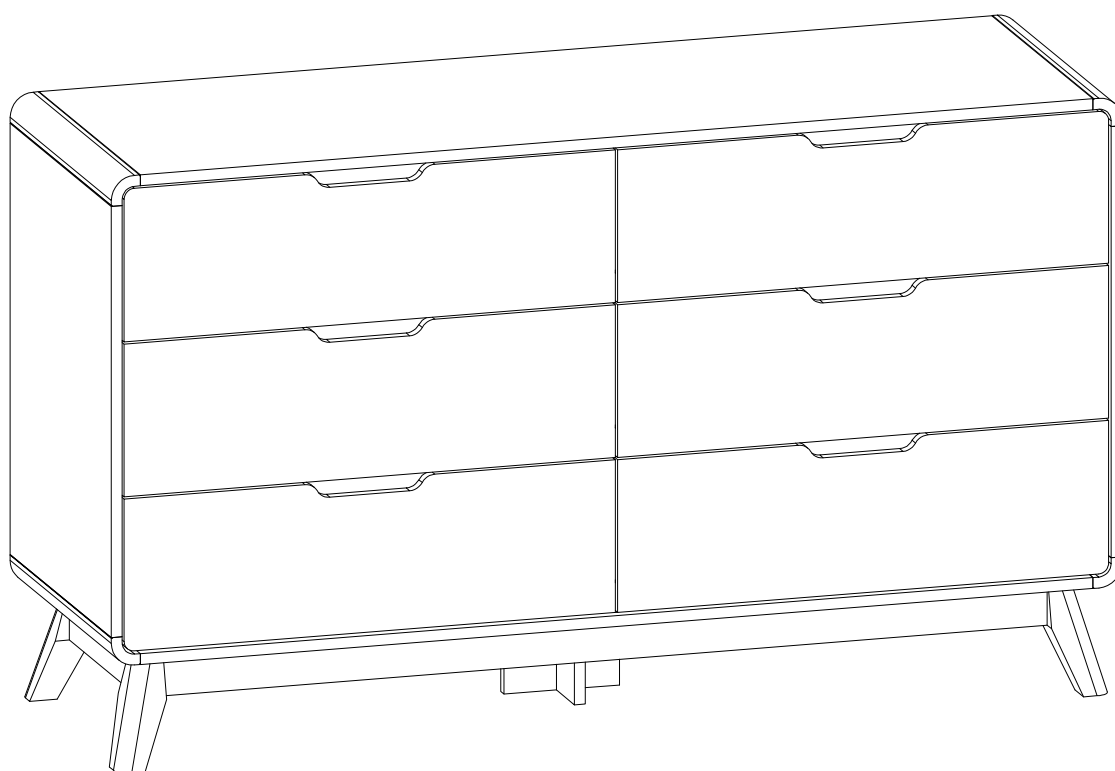


Job Complete !

In the interest of our environment please dispose of all packaging thoughtfully.



Version 1.1

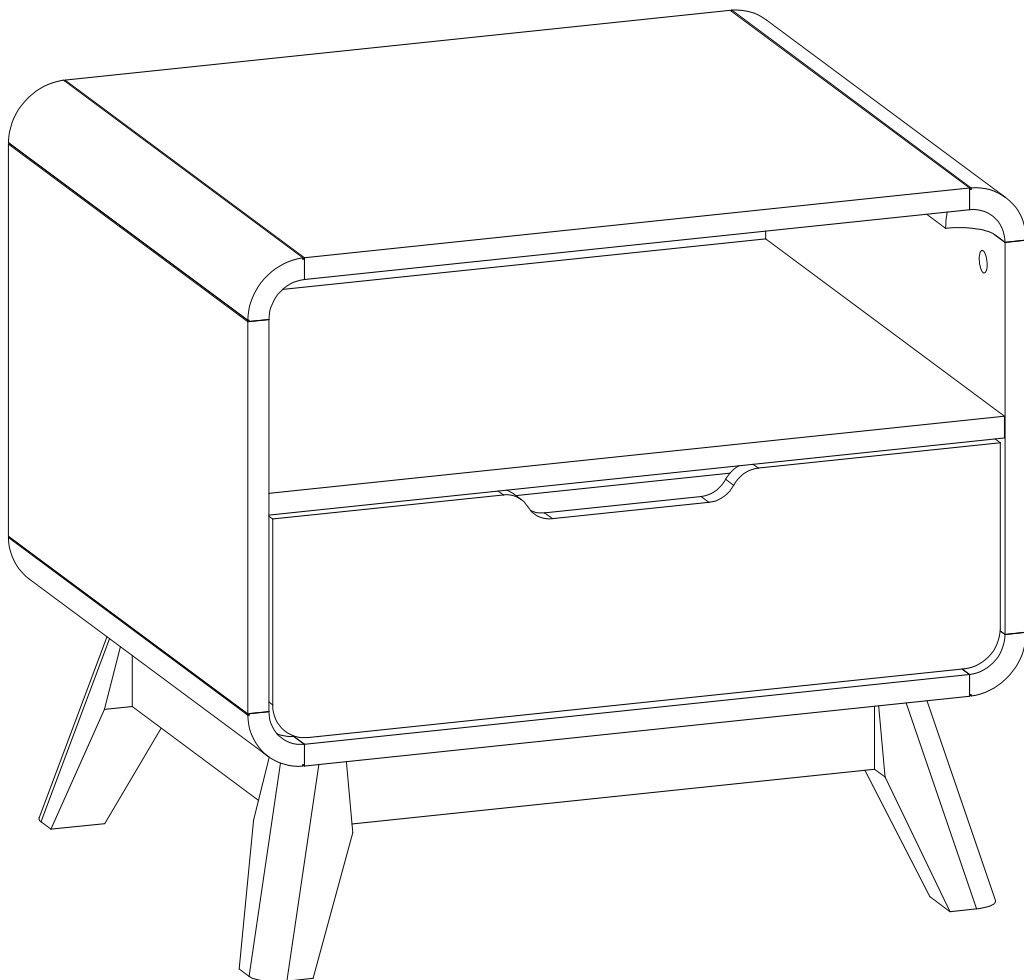

TWO PEOPLE



REQUIRED

NIVA
Lamp Table 1 Drawer
www.fantasticfurniture.com.au

Enjoy

Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

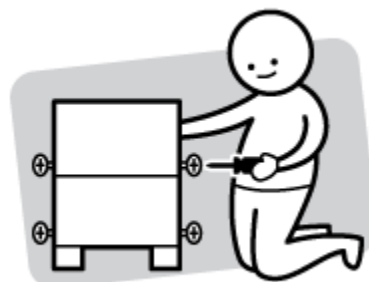

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product



DO NOT USE





Other tools you need

Flat head screwdriver; Phillips head screwdriver; Mallet

Part list

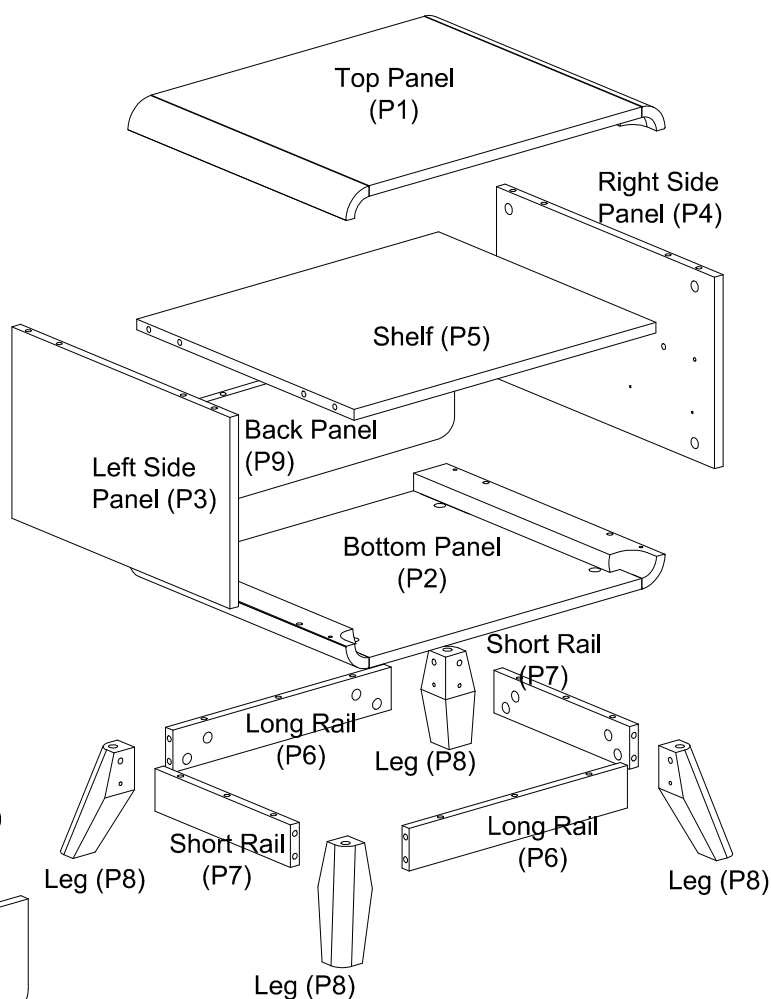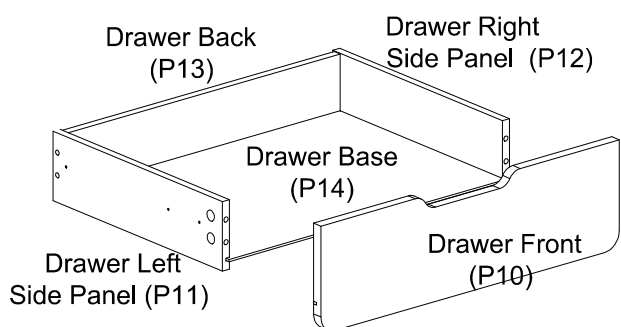

Box 1: Top Panel (P1); Bottom Panel (P2); Left Side Panel (P3); Right Side Panel (P4); Shelf (P5); Long Rail (P6); Short Rail (P7); Leg (P8); Back Panel (P9); Drawer Front (P10); Drawer Left Side Panel (P11); Drawer Right Side Panel (P12); Drawer Back (P13); Drawer Base (P14); Hardware Pack.




Hardware pack

36 x Cam Bolt (H1)	32 x Big Cam Nut (H2)	28 x Wood Dowel (H3)	4 x Felt Feet (H4)	4 x Small Cam Nut (H5)	14 x Screw (H6)	6 x Screw (H7)
4 x Screw (H8)	1 x Left Runner Track (H11)	1 x Left Runner Track (H12)	1 x Right Runner Track (H13)	1 x Right Runner Track (H14)		

Step 1


You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver

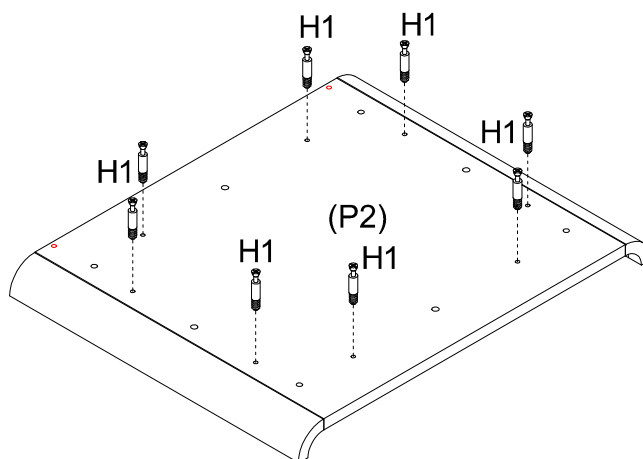

Screw 8 x Cam Bolts (H1) into Bottom Panel (P2) using a Phillips head screwdriver.




Step 2




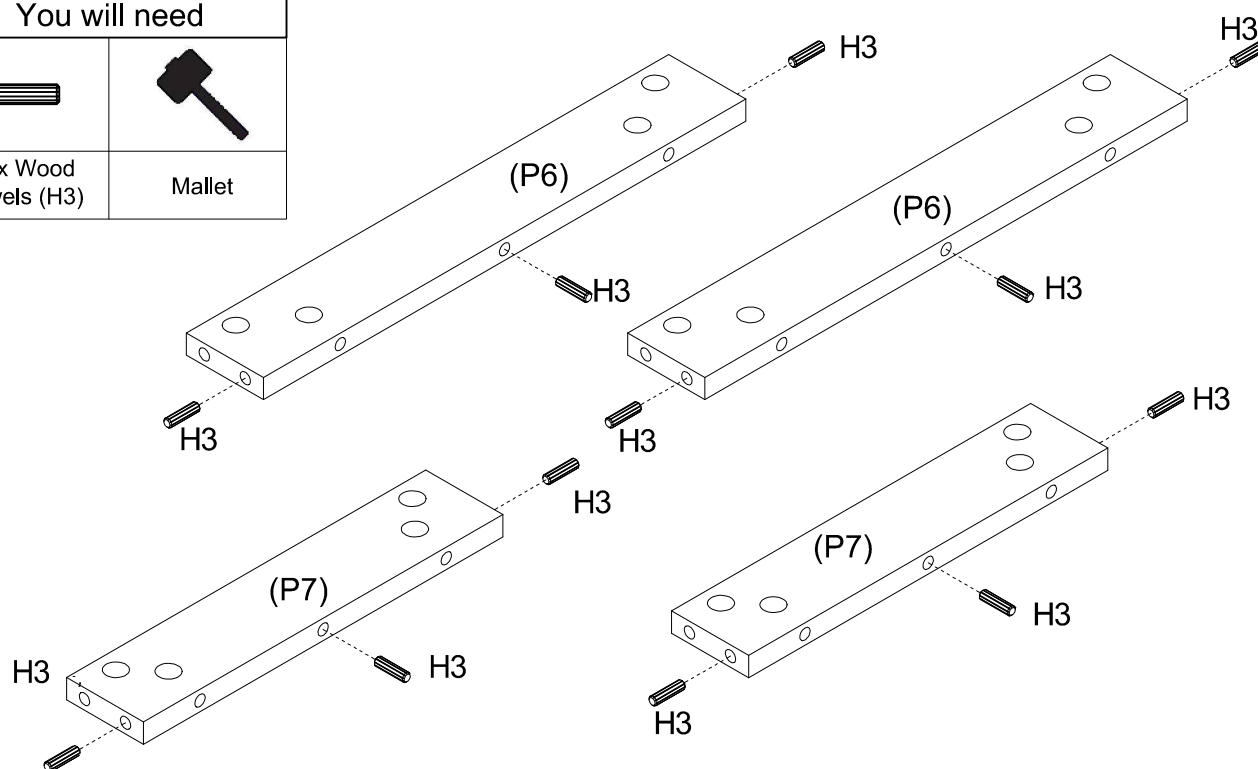
You will need	
	
12 x Wood Dowels (H3)	Mallet



Insert each 3 x Wood Dowels (H3) into Short Rails (P7) and Long Rails (P6).


Step 3

You will need	
	
8 x Cam Bolts (H1)	4 x Felt Feet (H4)
	
Phillips head screwdriver	




Screw each 2 x Cam Bolts (H1) into 4 x Legs (P8).
Attached 4 x Felt Feet (H4) to Legs (P8).


Step 4

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....



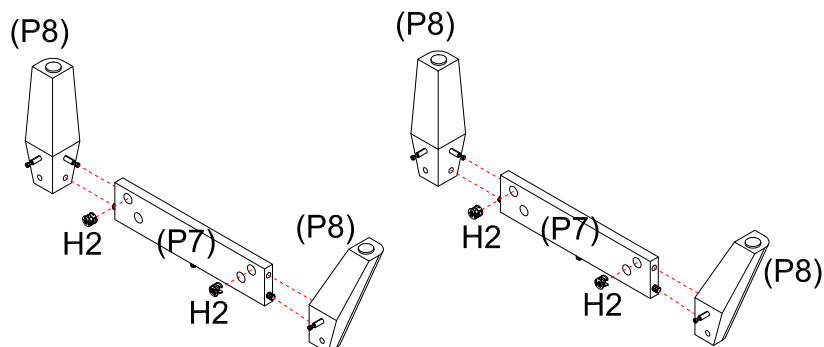


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.




Attach Leg (P8) to Short Rail (P7).
Insert each 2 x Big Cam Nuts (H2) into Short Rails (P7).
Rotate the cam nuts so the arrows point towards the incoming cam bolt.
Push Leg (P8) into place and tighten the cam nuts.

Step 5

You will need	
	
4 x Big Cam Bolts (H2)	Flat head screwdriver

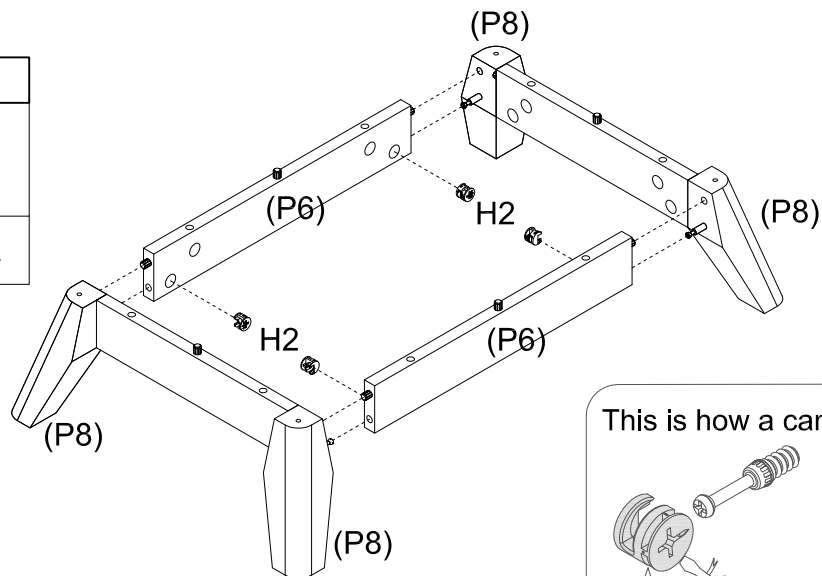



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Leg (P8) to Long Rail (P6).
Insert 4 x Big Cam Nuts (H2) into Long Rails (P6) and turn clockwise to lock.




Step 6


You will need	
	
8 x Big Cam Bolts (H2)	Flat head screwdriver

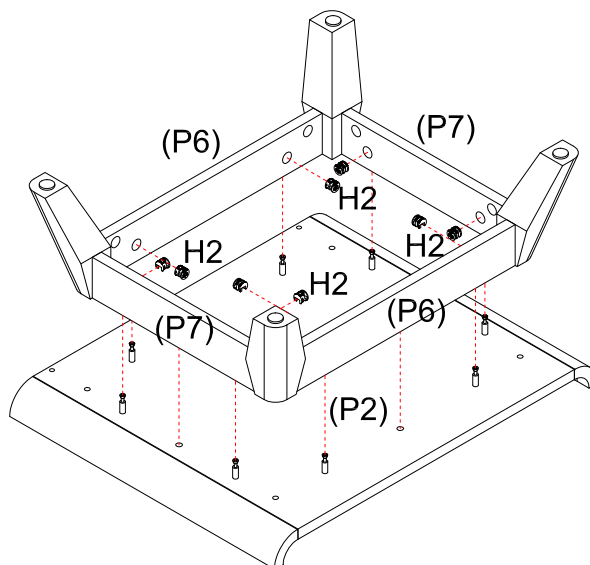

Attach Short Rails (P7) and Long Rails (P6) to Bottom Panel (P2).
Insert 8 x Big Cam Nuts (H2) into Rails (P6) & (P7) and turn clockwise to lock.

Step 7

You will need	
	
4 x Screws (H8)	4 x Cam Bolts (H1)
	
Phillips head screwdriver	

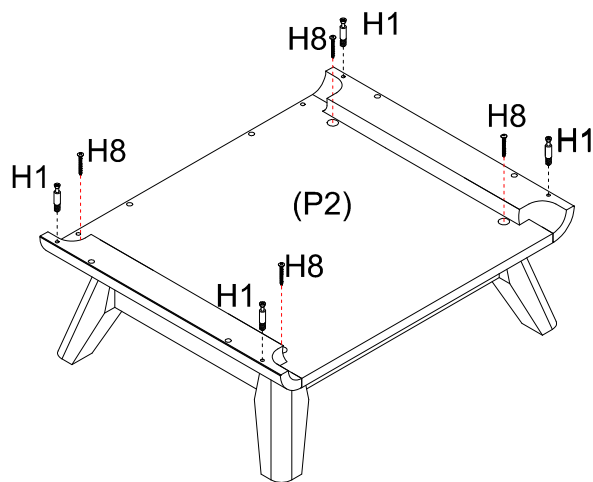


Turn over carefully.

Screw 4 x Cam Bolts (H1) into place using a phillips head screwdriver.
Use 4 x Screws (H8) through Bottom Panel (P2) to connect Leg (P8) with a phillips head screwdriver.



Step 8

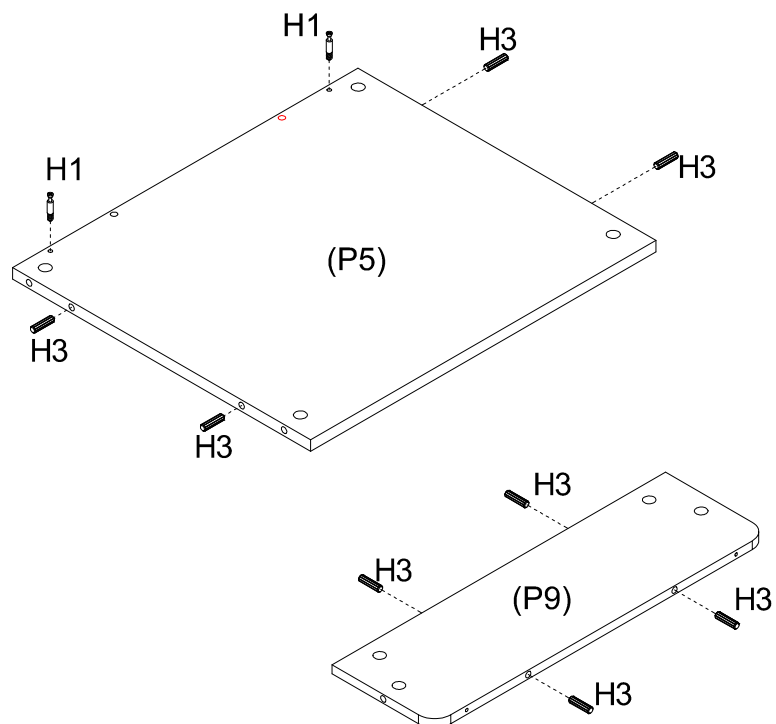You will need	
	
2 x Cam Bolts (H1)	8 x Wood Dowels (H3)
	
Phillips head screwdriver	Mallet




Insert each 4 x Wood Dowels (H3) to Back Panel (P9) and Shelf (P5).
Screw 2 x Cam Bolts (H1) into Shelf (P5) using a phillips head screwdriver.


Step 9

You will need	
	
2 x Big Cam Bolts (H2)	Flat head screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

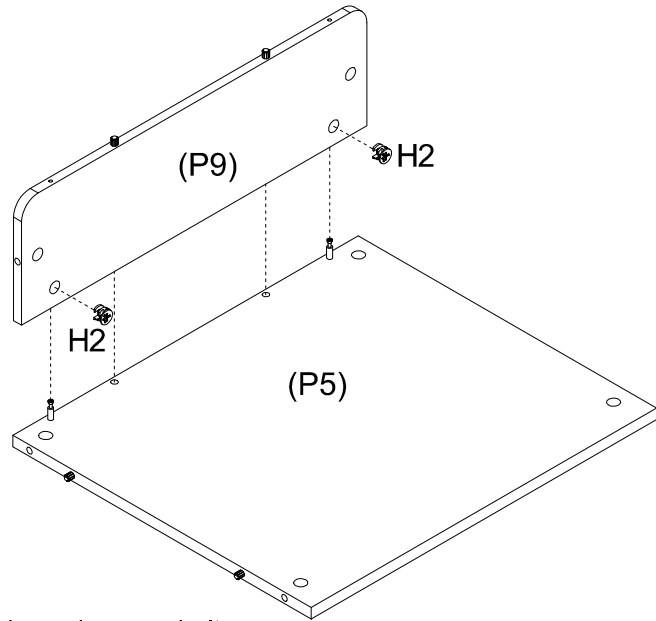

Attach Back Panel (P9) to Shelf (P5).


Insert 2 x Big Cam Nuts (H2) into Back Panel (P9).

Rotate the cam nuts so the arrows point towards the incoming cam bolt.

Push Back Panel (P9) into place and tight the cam nuts.

Step 10

You will need	
	
6 x Cam Bolts (H1)	8 x Wood Dowels (H3)
	
Phillips head screwdriver	Mallet




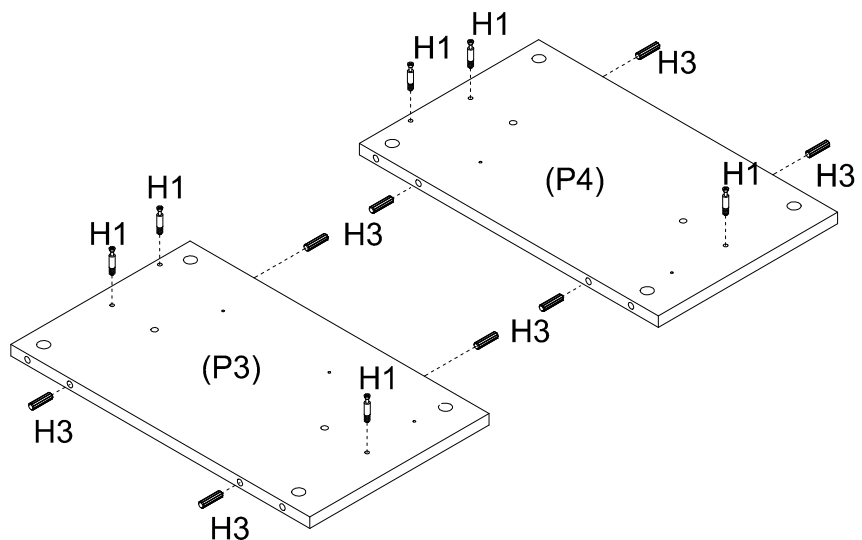


Insert each 4 x Wood Dowels (H3) to Side Panels (P3) & (P4).

Insert each 3 x Cam Bolts (H1) to Side Panels (P3) & (P4).



Step 11

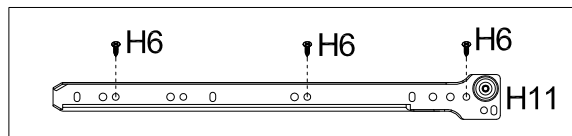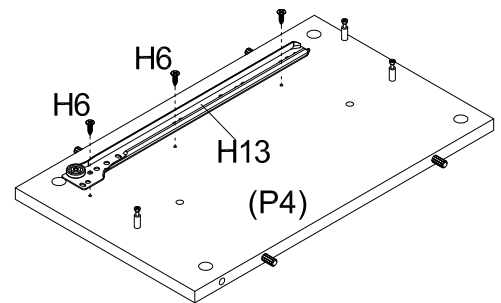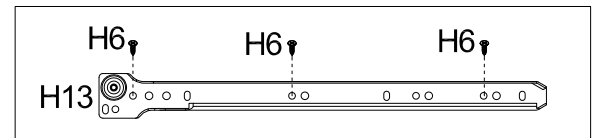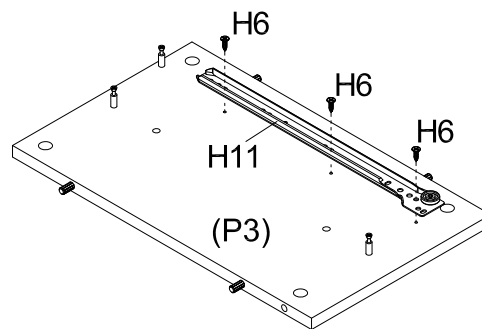You will need	
	
1 x Left Runner Track (H11)	1 x Right Runner Track (H13)
	
6 x Screws (H6)	Phillips head screwdriver



Attach 1 x Left Runner Track (H11) to Left Side Panel (P3) with 3 x Screws (H6).
Attach 1 x Right Runner Track (H13) to Right Side Panels (P4) with 3 x Screws (H6).


Step 12

You will need	
	
3 x Big Cam Nuts (H2)	Flat head screwdriver


TWO PEOPLE



REQUIRED

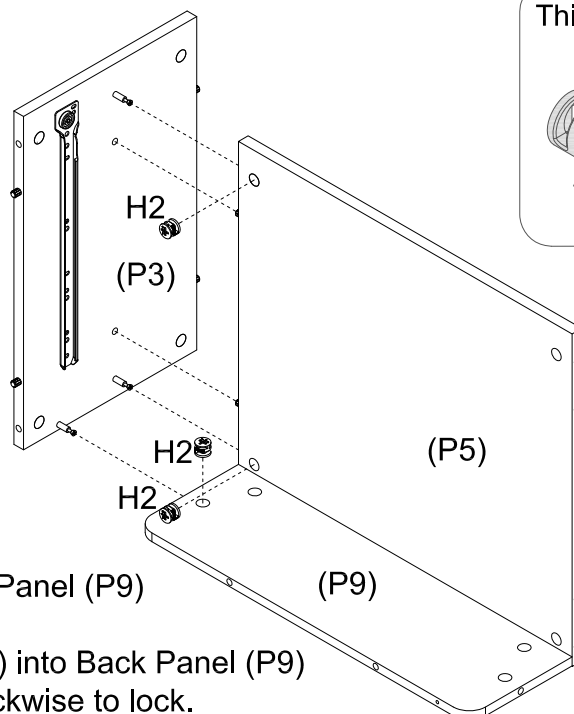



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Shelf (P5) and Back Panel (P9) to Left Side Panel (P3).
Insert 3 x Big Cam Nuts (H2) into Back Panel (P9) and Shelf (P5) and turn clockwise to lock.

Step 13


You will need	
	
3 x Big Cam Nuts (H2)	Flat head screwdriver

TWO PEOPLE

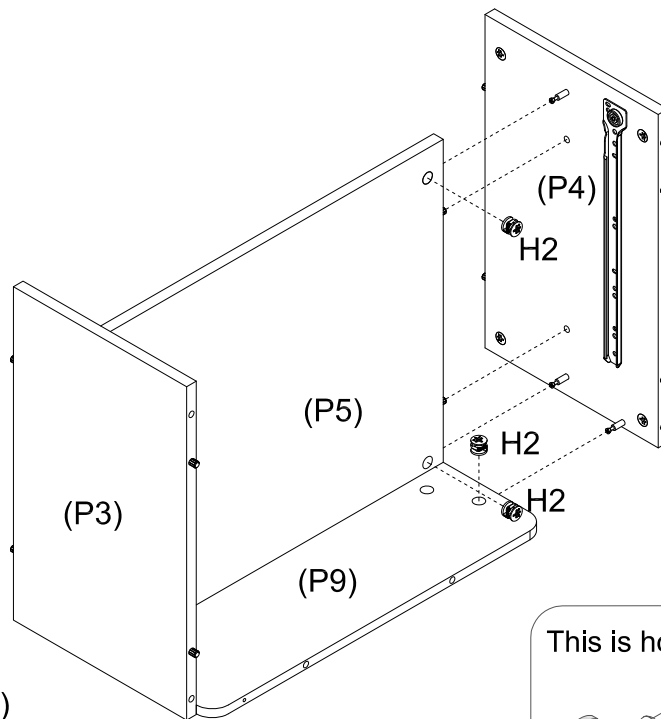



Attach Right Side Panel (P4) to Back Panel (P9) and Shelf (P5).
Insert 3 x Big Cam Nuts (H2) into Back Panel (P9) and Shelf (P5) and turn clockwise to lock.

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Step 14



You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver


TWO PEOPLE

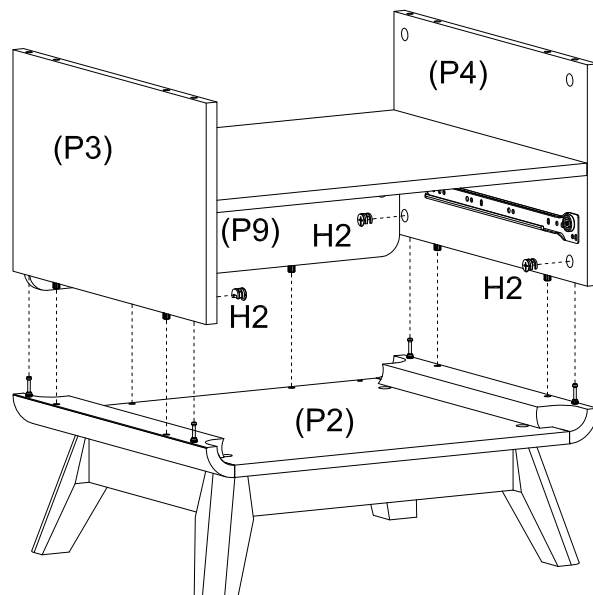

Attach Side panels (P3) & (P4) and Back Panel (P9) to Bottom Panel (P2).
Insert 4 x Big Cam Nuts (H2) into Side Panels (P3) and (P4), turn clockwise to lock.



Step 15


You will need	
	
2 x Screws (H7)	Phillips head screwdriver

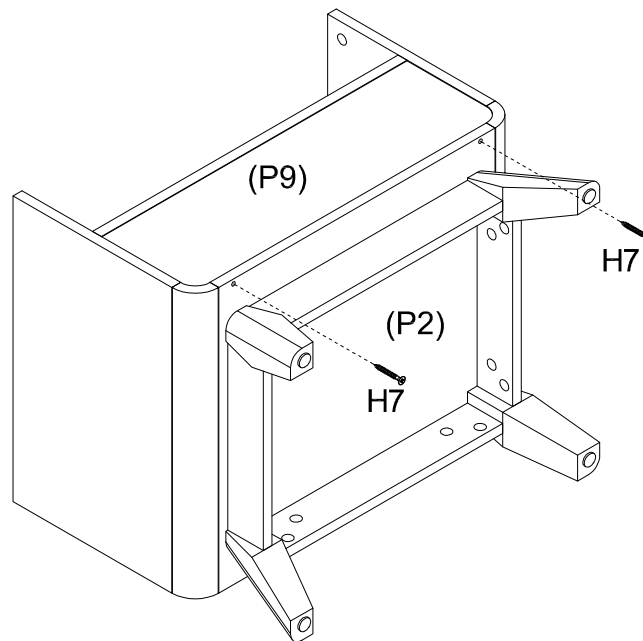

Use 2 x Screws (H7) through Bottom Panel (P2) to connect Back Panel (P9) with a phillips screwdriver.



Step 16

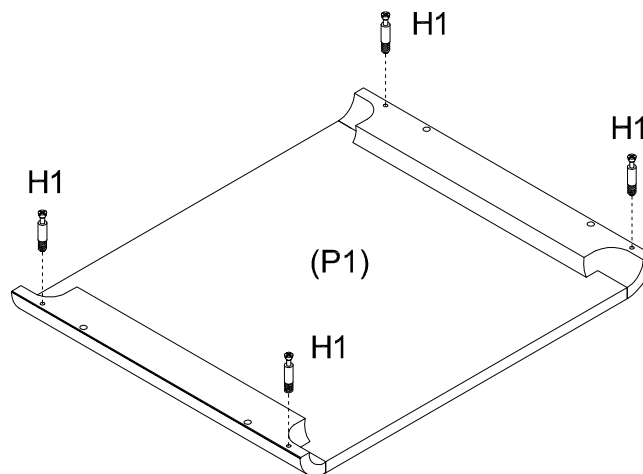
You will need	
	
4 x Cam Bolts (H1)	Phillips head screwdriver




Screw 4 x Cam Bolts (H1) into place using a phillips head screwdriver.

Step 17

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

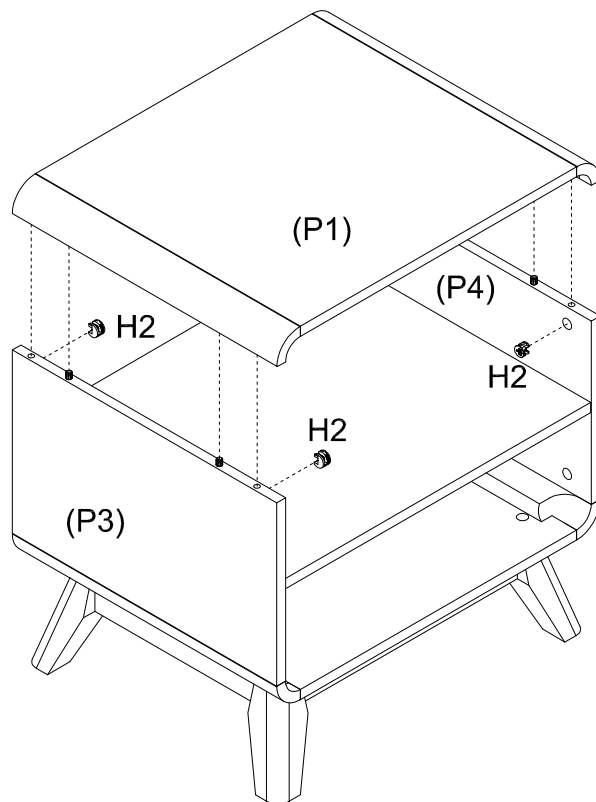



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Top Panel (P1) to Side Panels (P3) & (P4).
Insert 4 x Big Cam Nuts (H2) into Side Panels (P3) & (P4), turn clockwise to lock.



Step 18

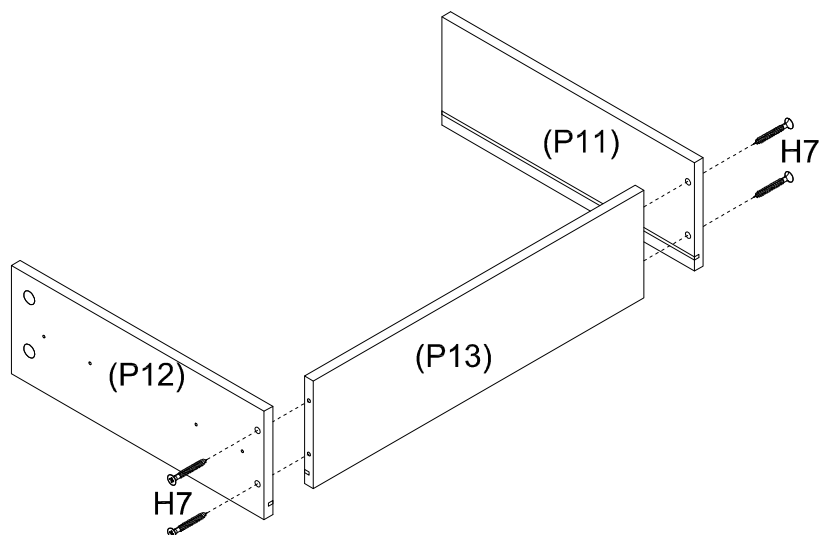You will need	
	
4 x Screws (H7)	Phillips head screwdriver




Attach Drawer Side Panels (P11) and (P12) to Drawer Back (P13) with 4 x Screws (H7).


Step 19

You will need	
	
4 x Cam Bolts (H1)	Phillips head screwdriver

Screw 4 x Cam Bolts (H1) into Drawer Front (P10) using a Phillips head screwdriver.

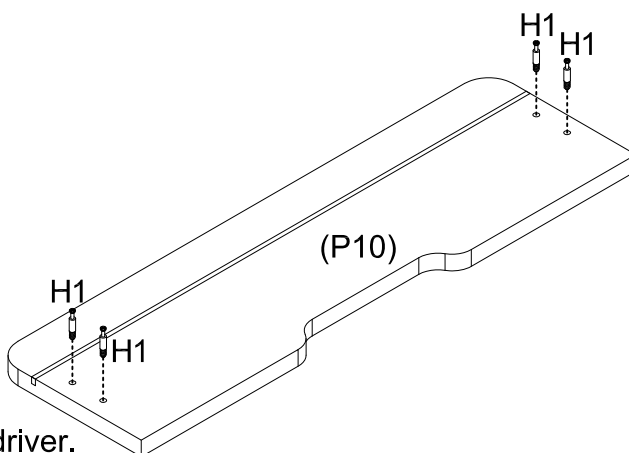

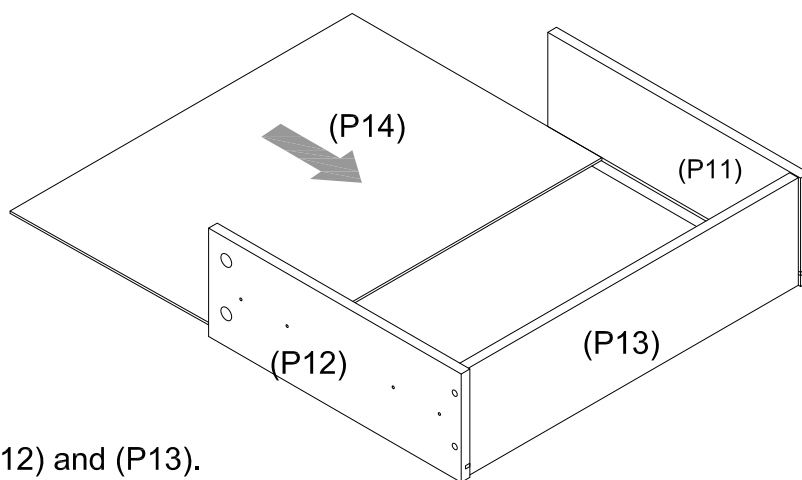

Step 20




Slide Drawer Base (P14) into the groove in Drawer Panels (P11), (P12) and (P13).


Step 21

You will need	
	
4 x Small Cam Nuts (H5)	Flat head screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

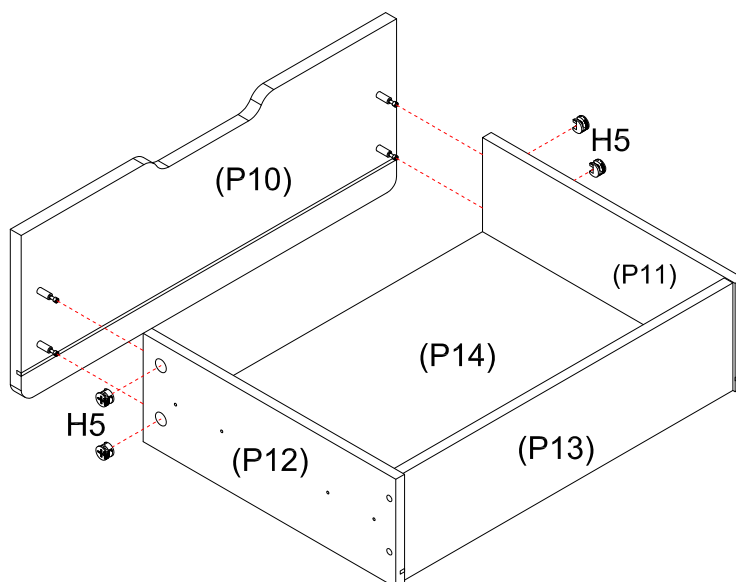

Attach Drawer Front (P10) to Drawer Sides (P11) & (P12).
 Insert 4 x Small Cam Nuts (H5) into Drawer Sides (P11) & (P12).
 Rotate the cam nuts so the arrows point towards the incoming cam bolt.
 Push Drawer Front (P10) into place and turn the cam nuts clockwise to lock.

Step 22


You will need	
1 x Left Runner (H12)	1 x Right Runner (H14)
8 x Screws (H6)	Phillips head screwdriver

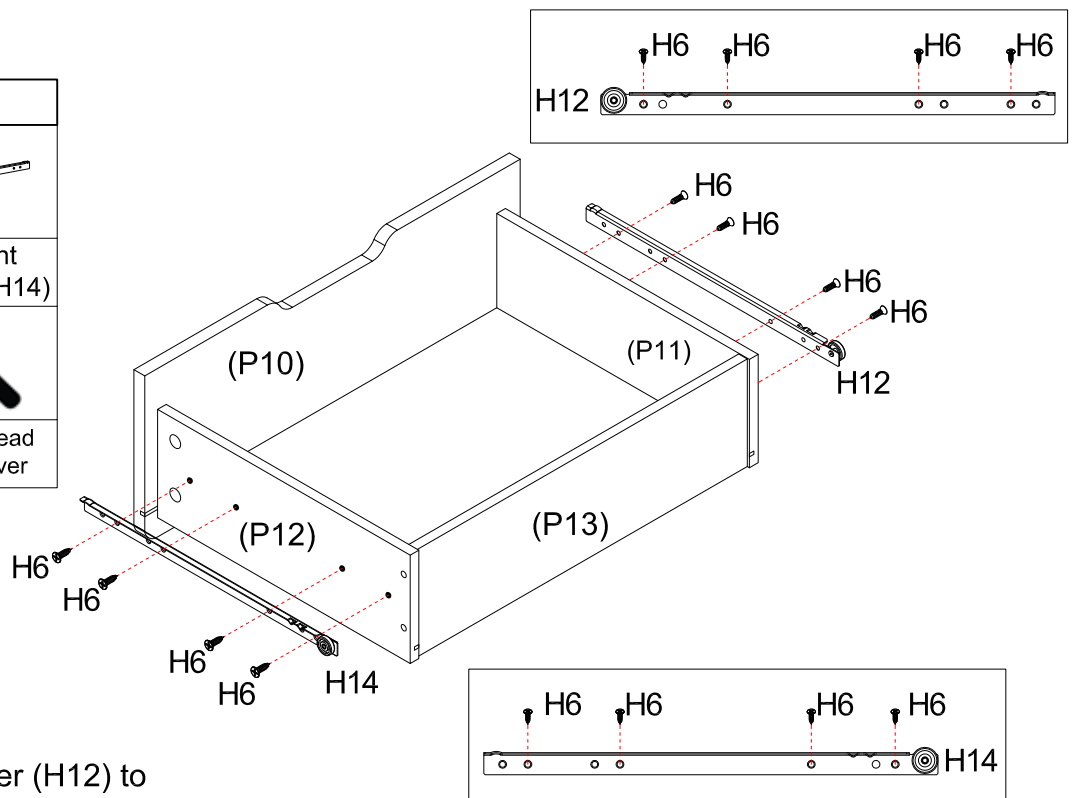

Attach 1 x Left Runner (H12) to Drawer Left Side Panel (P11) with 4 x Screws (H6).


Attach 1 x Right Runner (H14) to Drawer Right Side Panel (P12) with 4 x Screws (H6).

Step 23

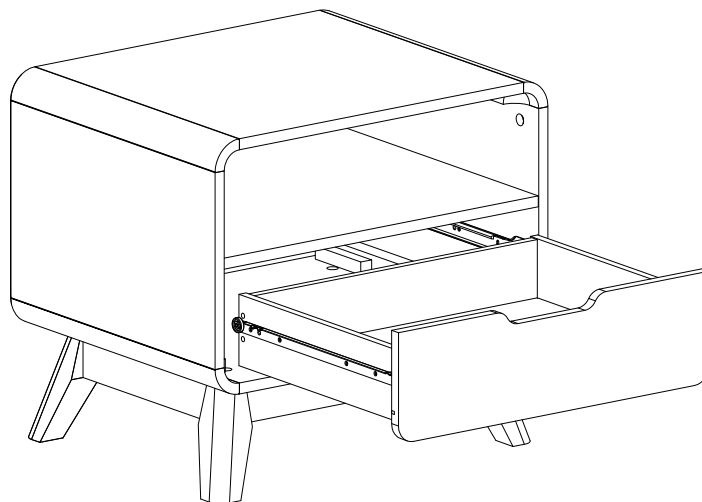

Slide the Drawer into the Frame.

Step 24

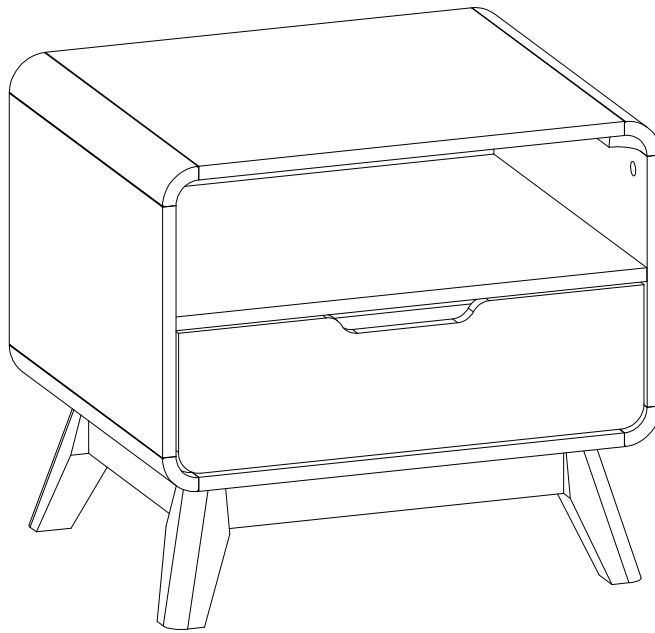

Job Complete !

In the interest of our environment please dispose of all packaging thoughtfully.