




Version 1.1



TWO PEOPLE

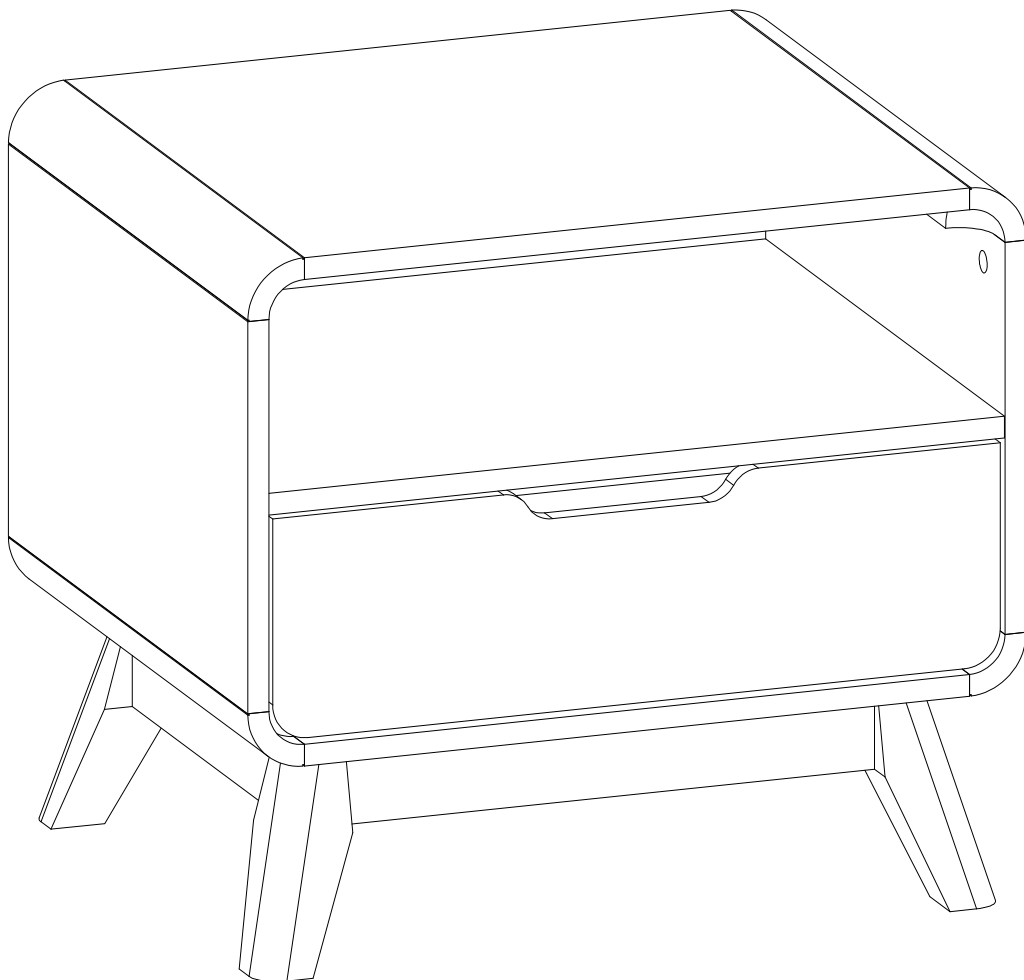

REQUIRED

NIVA
Lamp Table 1 Drawer
www.fantasticfurniture.com.au

Enjoy

Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

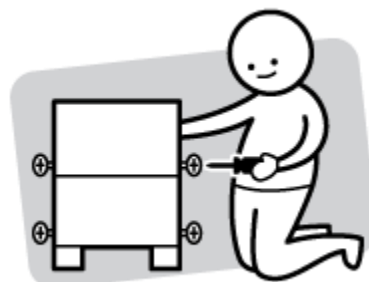

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product



DO NOT USE





Other tools you need

Flat head screwdriver; Phillips head screwdriver; Mallet

Part list

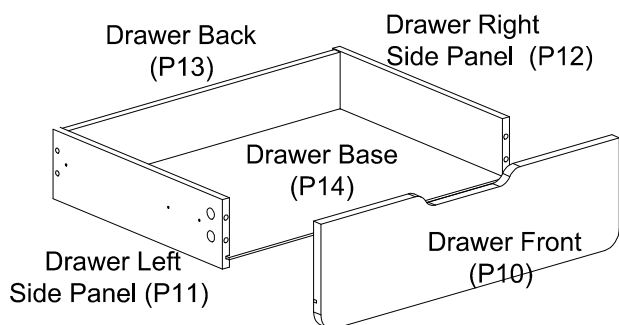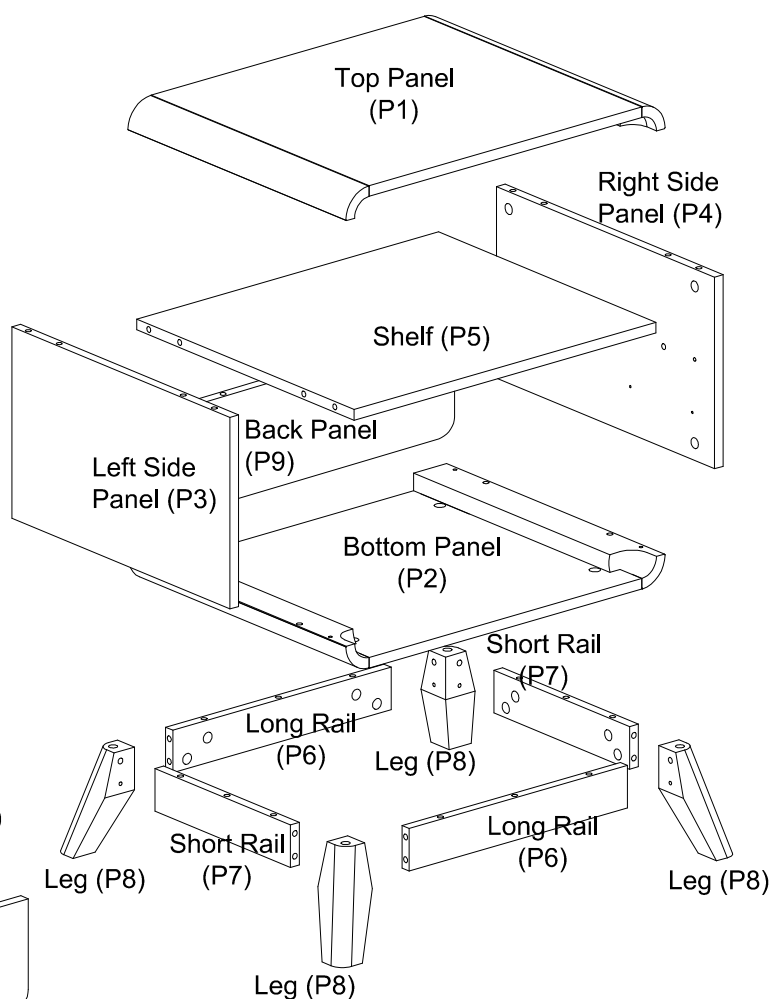

Box 1: Top Panel (P1); Bottom Panel (P2); Left Side Panel (P3); Right Side Panel (P4); Shelf (P5); Long Rail (P6); Short Rail (P7); Leg (P8); Back Panel (P9); Drawer Front (P10); Drawer Left Side Panel (P11); Drawer Right Side Panel (P12); Drawer Back (P13); Drawer Base (P14); Hardware Pack.




Hardware pack

36 x Cam Bolt (H1)	32 x Big Cam Nut (H2)	28 x Wood Dowel (H3)	4 x Felt Feet (H4)	4 x Small Cam Nut (H5)	14 x Screw (H6)	6 x Screw (H7)
4 x Screw (H8)	1 x Left Runner Track (H11)	1 x Left Runner Track (H12)	1 x Right Runner Track (H13)	1 x Right Runner Track (H14)		

Step 1


You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver

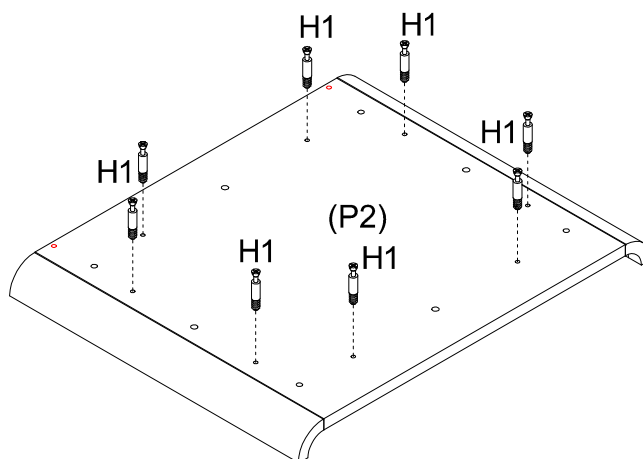

Screw 8 x Cam Bolts (H1) into Bottom Panel (P2) using a Phillips head screwdriver.




Step 2




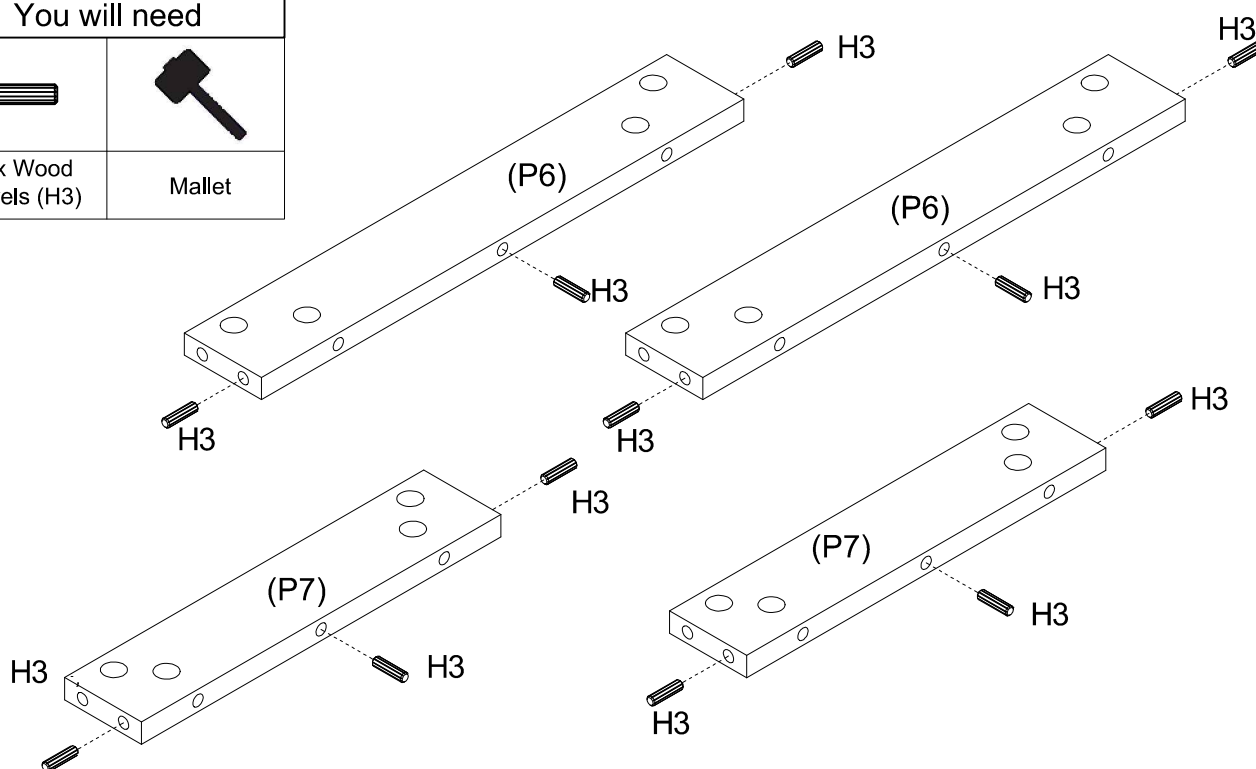
You will need	
	
12 x Wood Dowels (H3)	Mallet



Insert each 3 x Wood Dowels (H3) into Short Rails (P7) and Long Rails (P6).


Step 3

You will need	
	
8 x Cam Bolts (H1)	4 x Felt Feet (H4)
	
Phillips head screwdriver	




Screw each 2 x Cam Bolts (H1) into 4 x Legs (P8).
Attached 4 x Felt Feet (H4) to Legs (P8).



Step 4

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....



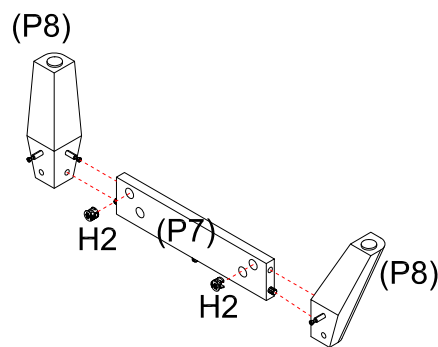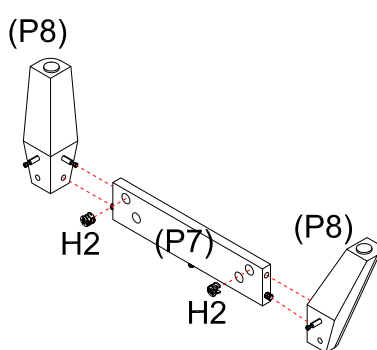


The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.




Attach Leg (P8) to Short Rail (P7).
Insert each 2 x Big Cam Nuts (H2) into Short Rails (P7).
Rotate the cam nuts so the arrows point towards the incoming cam bolt.
Push Leg (P8) into place and tighten the cam nuts.

Step 5

You will need	
	
4 x Big Cam Bolts (H2)	Flat head screwdriver

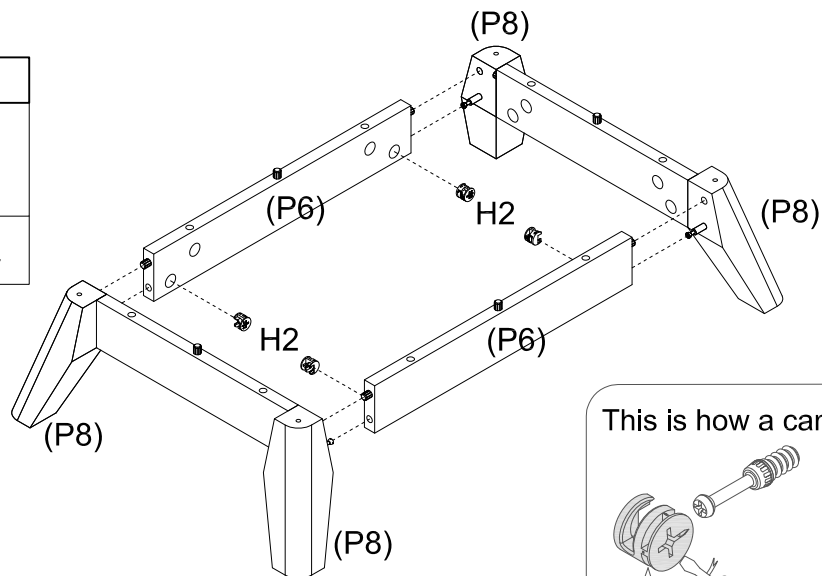

This is how a cam nut works.....






The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Leg (P8) to Long Rail (P6).

Insert 4 x Big Cam Nuts (H2) into Long Rails (P6) and turn clockwise to lock.

Step 6




You will need	
	
8 x Big Cam Bolts (H2)	Flat head screwdriver

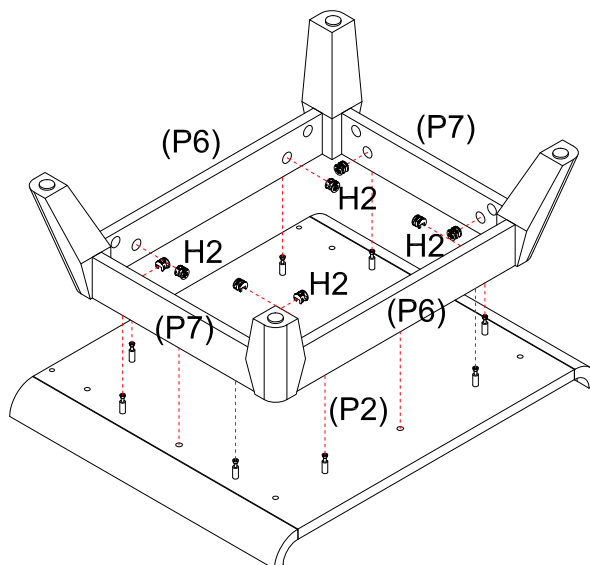


Attach Short Rails (P7) and Long Rails (P6) to Bottom Panel (P2).

Insert 8 x Big Cam Nuts (H2) into Rails (P6) & (P7) and turn clockwise to lock.

Step 7

You will need	
	
4 x Screws (H8)	4 x Cam Bolts (H1)
	
Phillips head screwdriver	

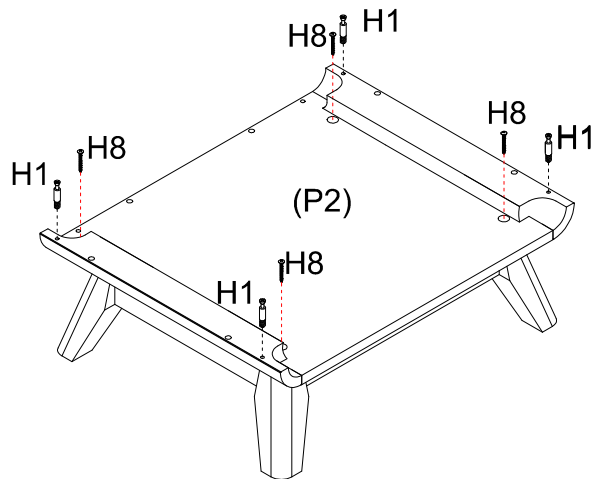


Turn over carefully.

Screw 4 x Cam Bolts (H1) into place using a phillips head screwdriver.
Use 4 x Screws (H8) through Bottom Panel (P2) to connect Leg (P8) with a phillips head screwdriver.



Step 8

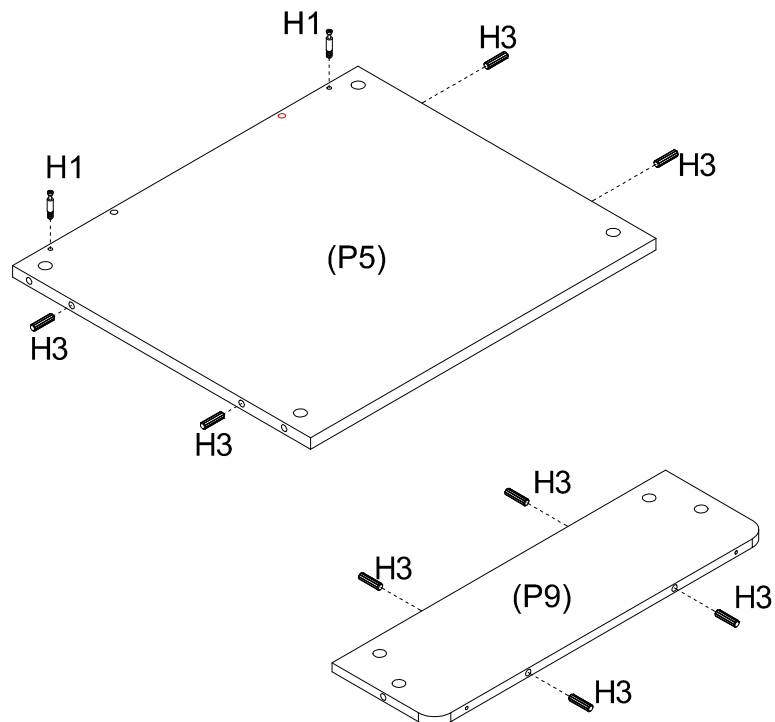You will need	
	
2 x Cam Bolts (H1)	8 x Wood Dowels (H3)
	
Phillips head screwdriver	Mallet




Insert each 4 x Wood Dowels (H3) to Back Panel (P9) and Shelf (P5).
Screw 2 x Cam Bolts (H1) into Shelf (P5) using a phillips head screwdriver.


Step 9

You will need	
	
2 x Big Cam Bolts (H2)	Flat head screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

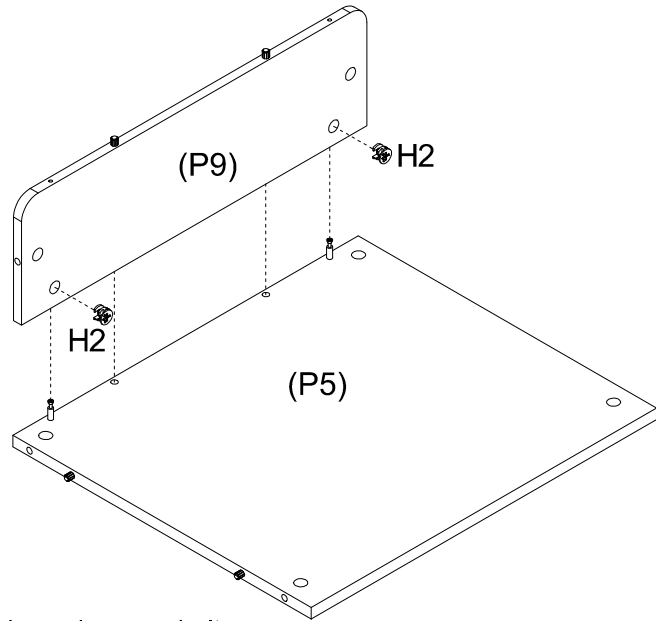

Attach Back Panel (P9) to Shelf (P5).


Insert 2 x Big Cam Nuts (H2) into Back Panel (P9).

Rotate the cam nuts so the arrows point towards the incoming cam bolt.

Push Back Panel (P9) into place and tight the cam nuts.

Step 10

You will need	
	
6 x Cam Bolts (H1)	8 x Wood Dowels (H3)
	
Phillips head screwdriver	Mallet




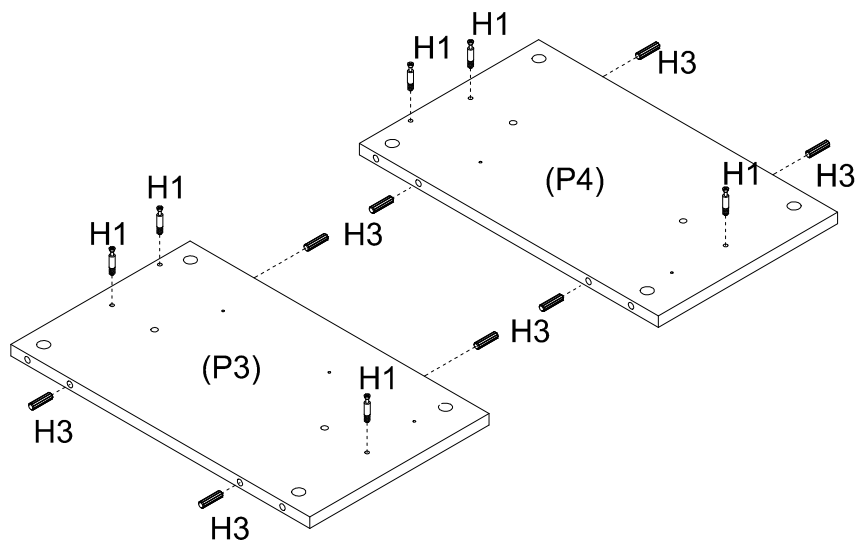


Insert each 4 x Wood Dowels (H3) to Side Panels (P3) & (P4).

Insert each 3 x Cam Bolts (H1) to Side Panels (P3) & (P4).



Step 11

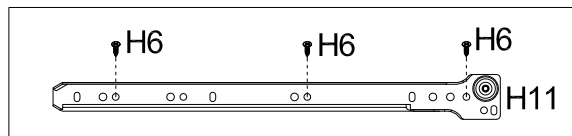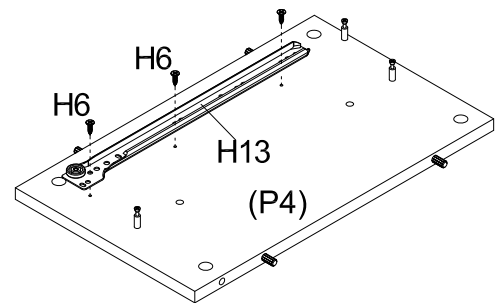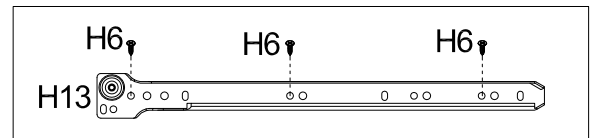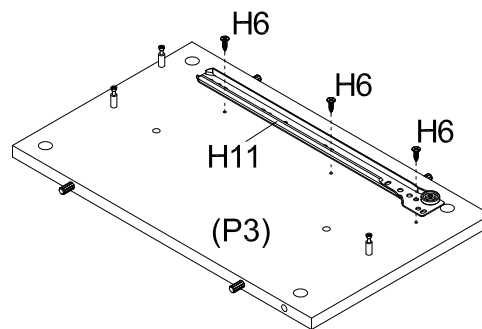You will need	
	
1 x Left Runner Track (H11)	1 x Right Runner Track (H13)
	
6 x Screws (H6)	Phillips head screwdriver



Attach 1 x Left Runner Track (H11) to Left Side Panel (P3) with 3 x Screws (H6).
Attach 1 x Right Runner Track (H13) to Right Side Panels (P4) with 3 x Screws (H6).


Step 12

You will need	
	
3 x Big Cam Nuts (H2)	Flat head screwdriver


TWO PEOPLE



REQUIRED

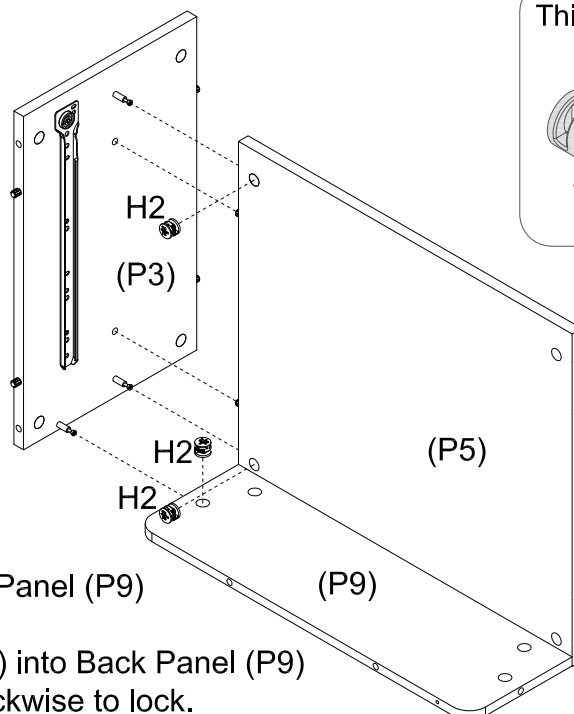



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Shelf (P5) and Back Panel (P9) to Left Side Panel (P3).
Insert 3 x Big Cam Nuts (H2) into Back Panel (P9) and Shelf (P5) and turn clockwise to lock.

Step 13


You will need	
	
3 x Big Cam Nuts (H2)	Flat head screwdriver

TWO PEOPLE

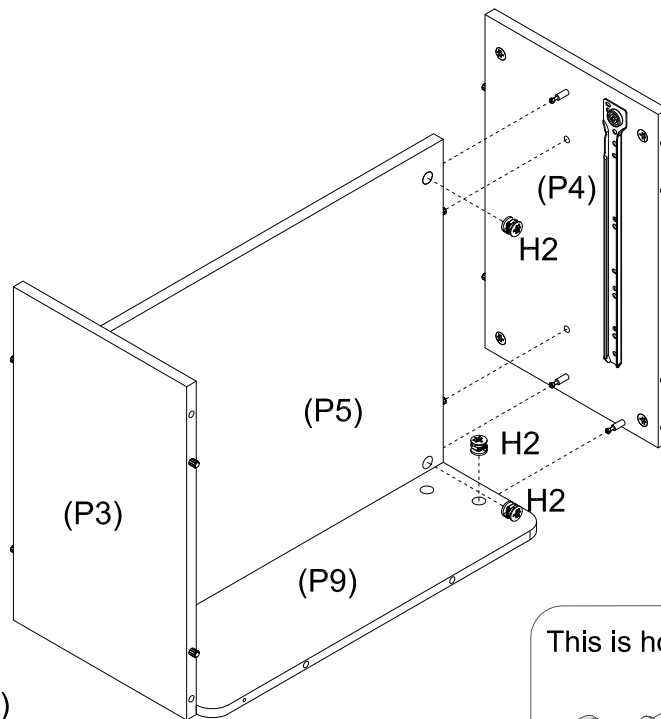



Attach Right Side Panel (P4) to Back Panel (P9) and Shelf (P5).
Insert 3 x Big Cam Nuts (H2) into Back Panel (P9) and Shelf (P5) and turn clockwise to lock.

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Step 14



You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver


TWO PEOPLE

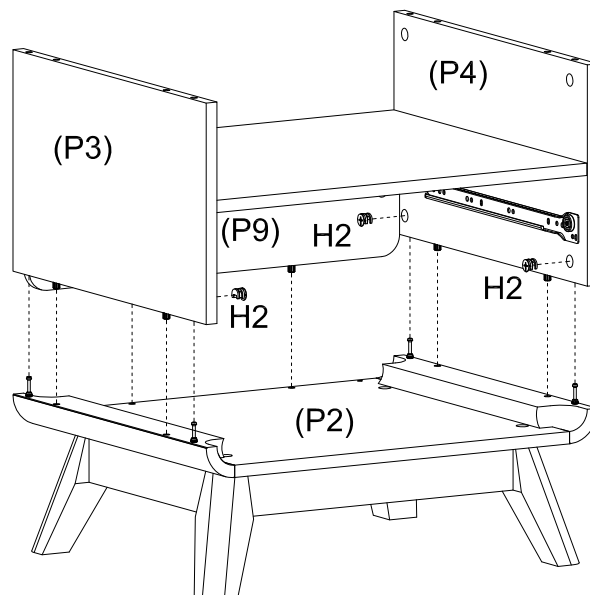

Attach Side panels (P3) & (P4) and Back Panel (P9) to Bottom Panel (P2).
Insert 4 x Big Cam Nuts (H2) into Side Panels (P3) and (P4), turn clockwise to lock.



Step 15


You will need	
	
2 x Screws (H7)	Phillips head screwdriver

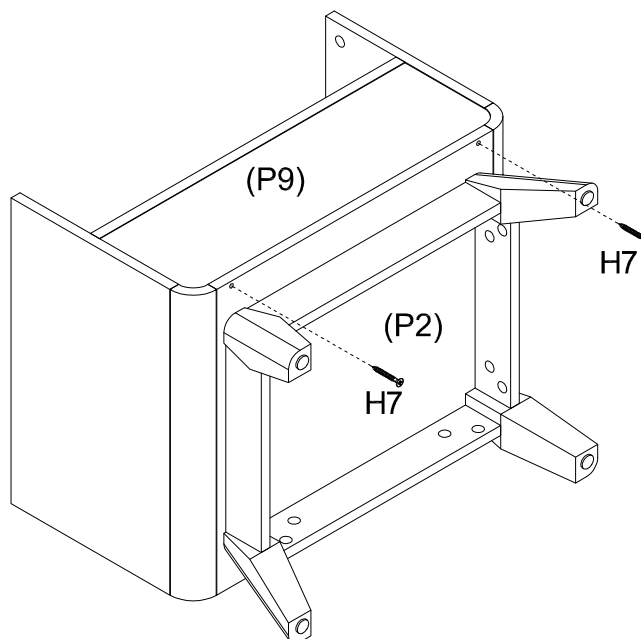

Use 2 x Screws (H7) through Bottom Panel (P2) to connect Back Panel (P9) with a phillips screwdriver.



Step 16


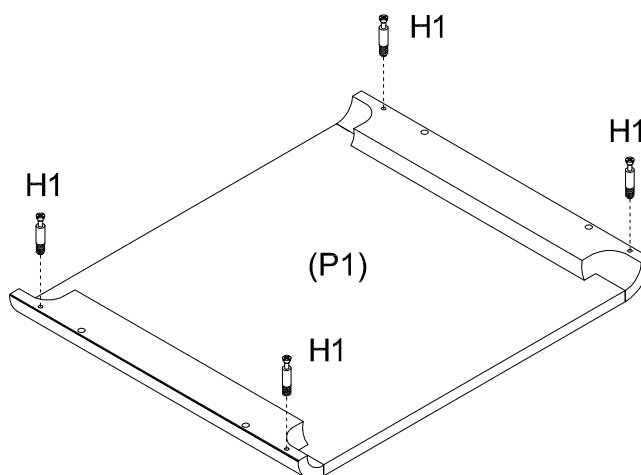
You will need	
	
4 x Cam Bolts (H1)	Phillips head screwdriver



Screw 4 x Cam Bolts (H1) into place using a phillips head screwdriver.



Step 17


You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

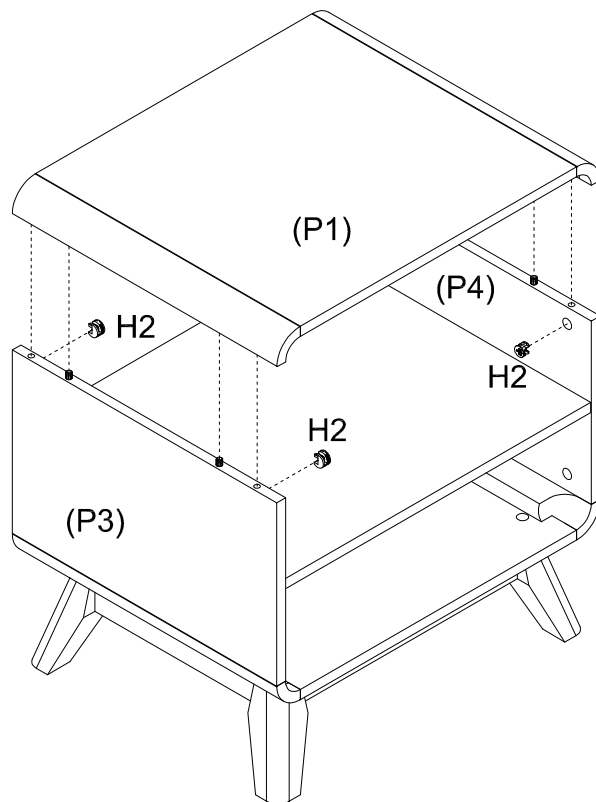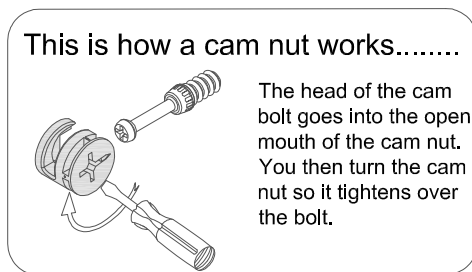

Attach Top Panel (P1) to Side Panels (P3) & (P4).
Insert 4 x Big Cam Nuts (H2) into Side Panels (P3) & (P4), turn clockwise to lock.



Step 18

You will need	
	
4 x Screws (H7)	Phillips head screwdriver

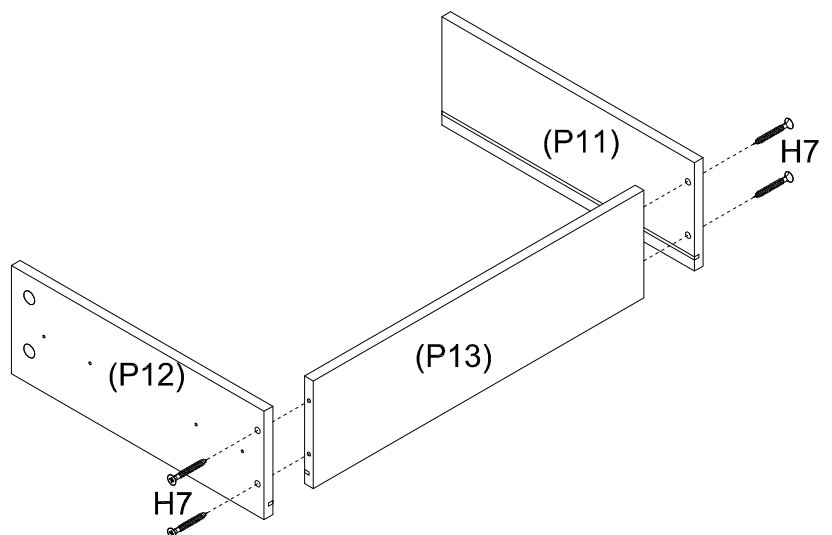


Attach Drawer Side Panels (P11) and (P12) to Drawer Back (P13) with 4 x Screws (H7).


Step 19

You will need	
	
4 x Cam Bolts (H1)	Phillips head screwdriver

Screw 4 x Cam Bolts (H1) into Drawer Front (P10) using a Phillips head screwdriver.

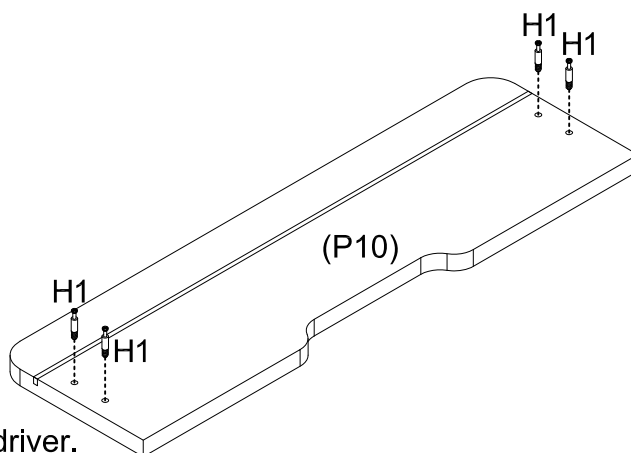


Step 20

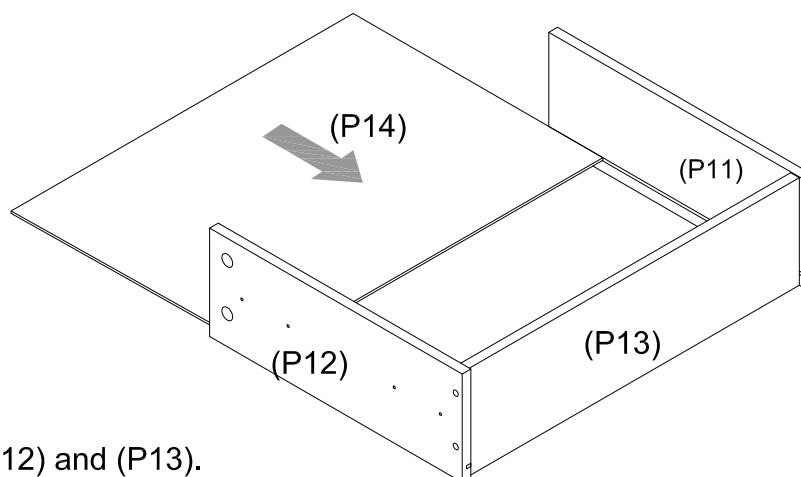


Slide Drawer Base (P14) into the groove in Drawer Panels (P11), (P12) and (P13).


Step 21

You will need	
	
4 x Small Cam Nuts (H5)	Flat head screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

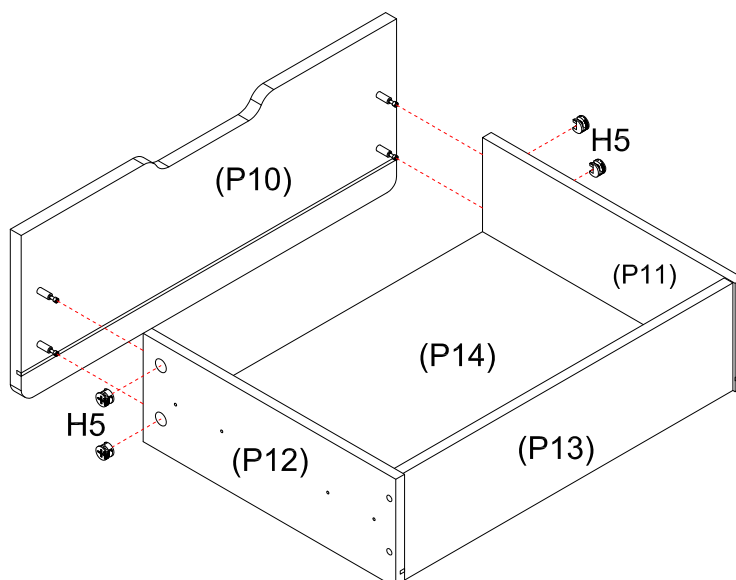

Attach Drawer Front (P10) to Drawer Sides (P11) & (P12).
 Insert 4 x Small Cam Nuts (H5) into Drawer Sides (P11) & (P12).
 Rotate the cam nuts so the arrows point towards the incoming cam bolt.
 Push Drawer Front (P10) into place and turn the cam nuts clockwise to lock.

Step 22


You will need	
1 x Left Runner (H12)	1 x Right Runner (H14)
8 x Screws (H6)	Phillips head screwdriver

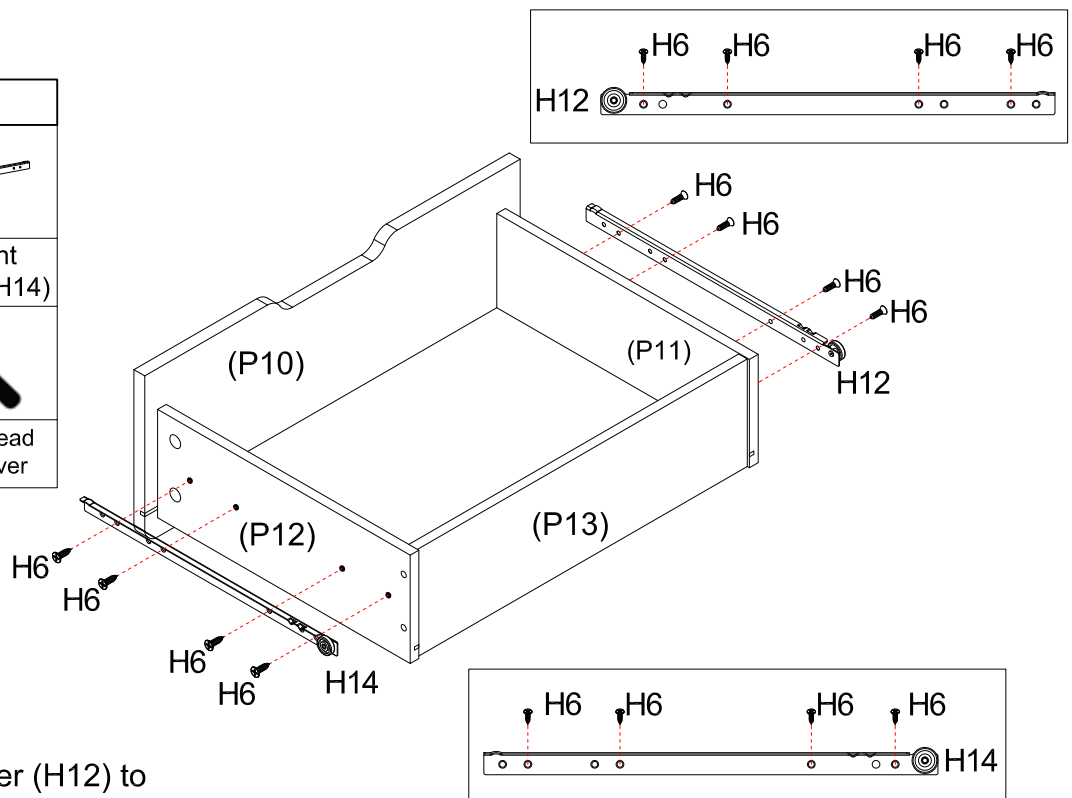

Attach 1 x Left Runner (H12) to Drawer Left Side Panel (P11) with 4 x Screws (H6).


Attach 1 x Right Runner (H14) to Drawer Right Side Panel (P12) with 4 x Screws (H6).

Step 23

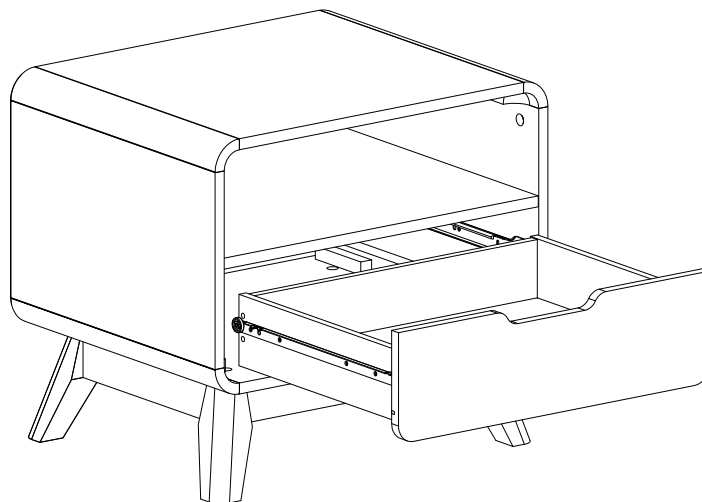

Slide the Drawer into the Frame.

Step 24

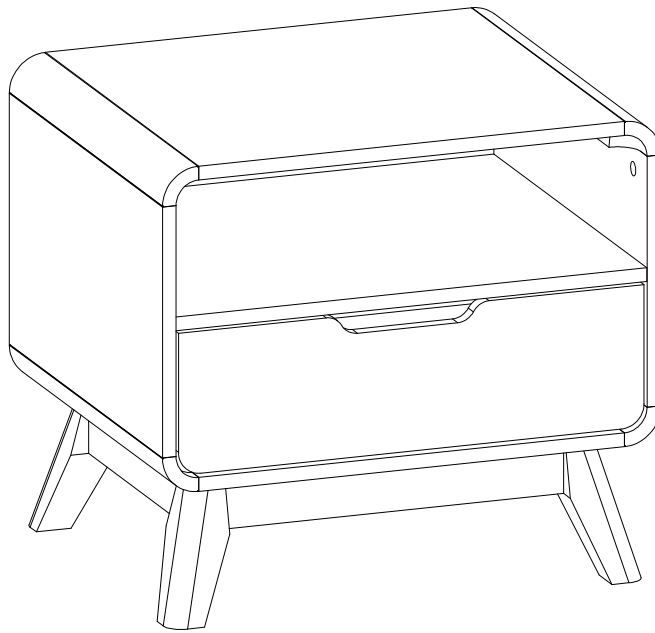


Job Complete !

In the interest of our environment please dispose of all packaging thoughtfully.



Version 1.0

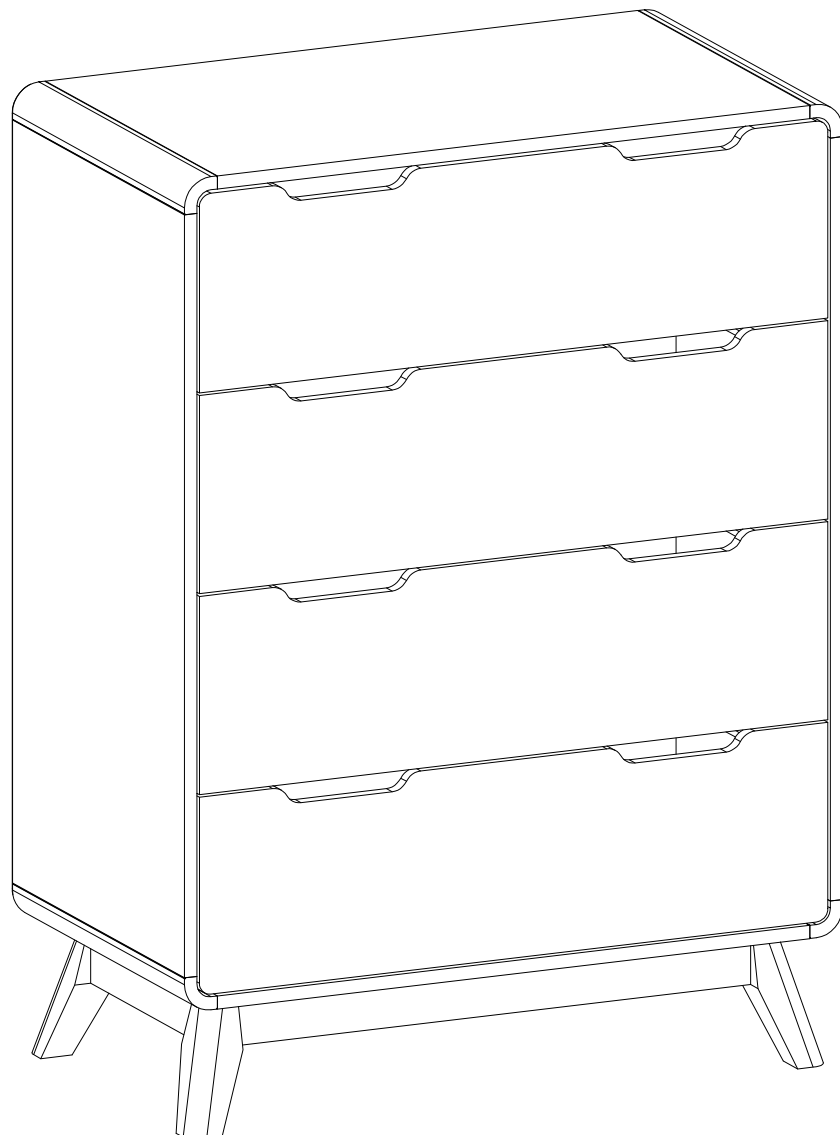

TWO PEOPLE



REQUIRED

NIVA

Tallboy 4 Drawer

www.fantasticfurniture.com.au



**WARNING: ENSURE THE WALL STRAP IS ATTACHED
TO AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Wall fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Enjoy
Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

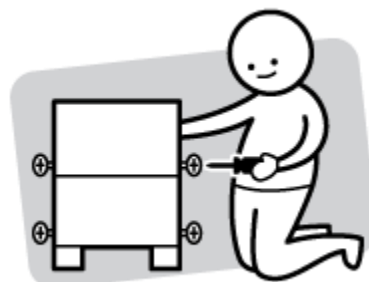

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information


- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product



DO NOT USE

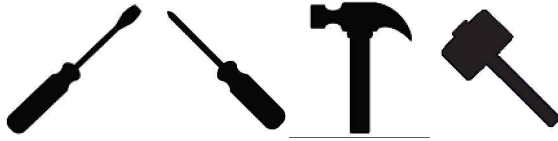




Other tools you need

Flat head screwdriver; Phillips head screwdriver; Hammer; Mallet


Part list

Box 1: Top panel (P1); Bottom Panel (P4); Leg (P5); Drawer Left Side (P11); Drawer Right Side (P12); Drawer Rail (P15); Hardware Pack.

Box 2: Left Side Panel (P2); Right Side Panel (P3); Short Rail (P6); Long Rail (P7); Metal Rail (P8); Front Rail (P9); Back Panel (P10); Drawer Back (P13); Drawer Base (P14); Drawer Front (P16); Drawer Front (P17); Drawer Front (P18); Back Rail (P19).

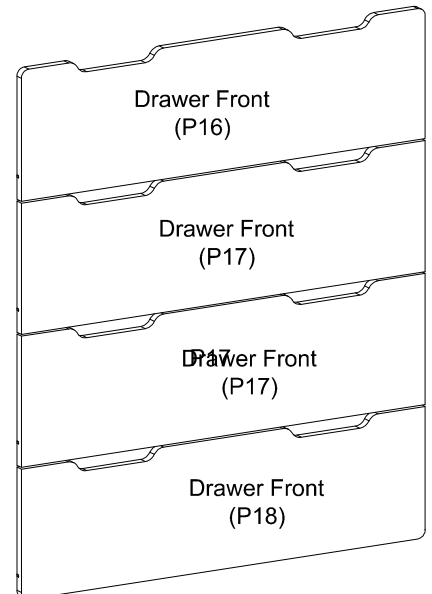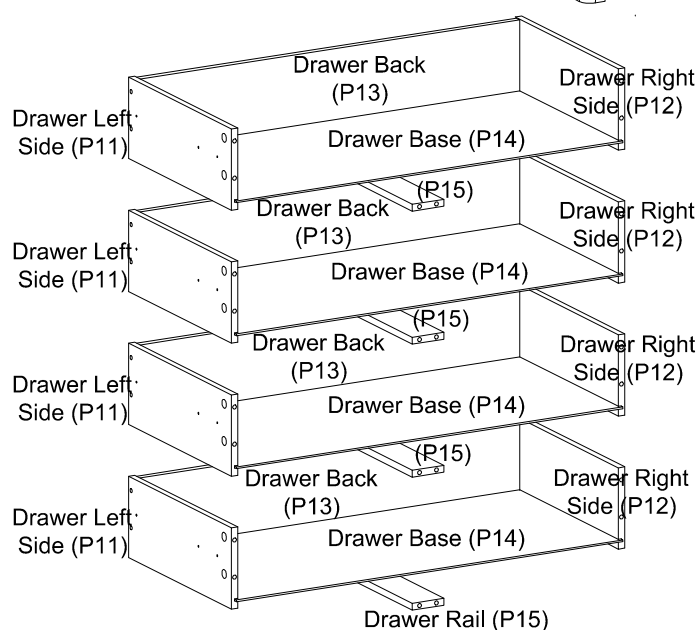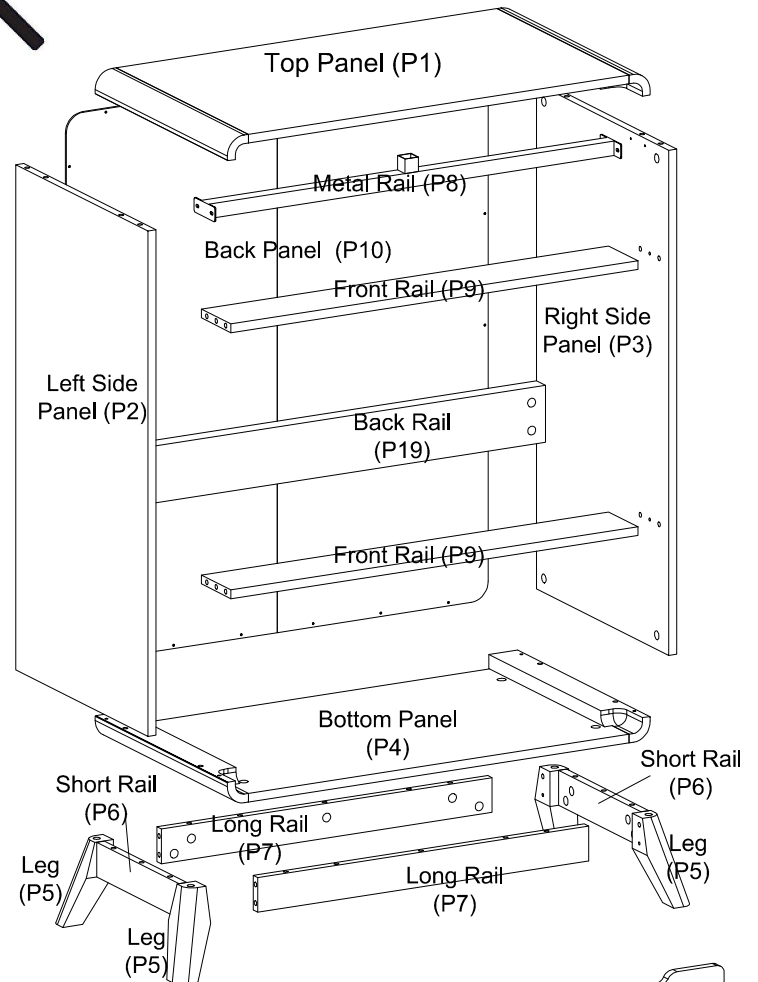

Hardware pack



58 x Cam Bolts
(H1)




34 x Big Cam
Nuts (H2)




30 x Wood Dowels
(H3)



24 x Small Cam
Nuts (H4)



4 x Screws
(H5)




25 x Nails
(H6)




4 x Felt Feet
(H7)




48 x Screws
(H8)



4 x Left Runner
Tracks (H9)




4 x Left Runners
(H10)



4 x Right Runner
Tracks (H11)



4 x Right Runners
(H12)




1 x Screws
(H13)



1 x Wall Strap
(H14)



2 x Flat Washers
(H15)






24 x Screws
(H17)



4 x Screws
(H18)

Step 1


You will need	
	
10 x Cam Bolts (H1)	Phillips head screwdriver

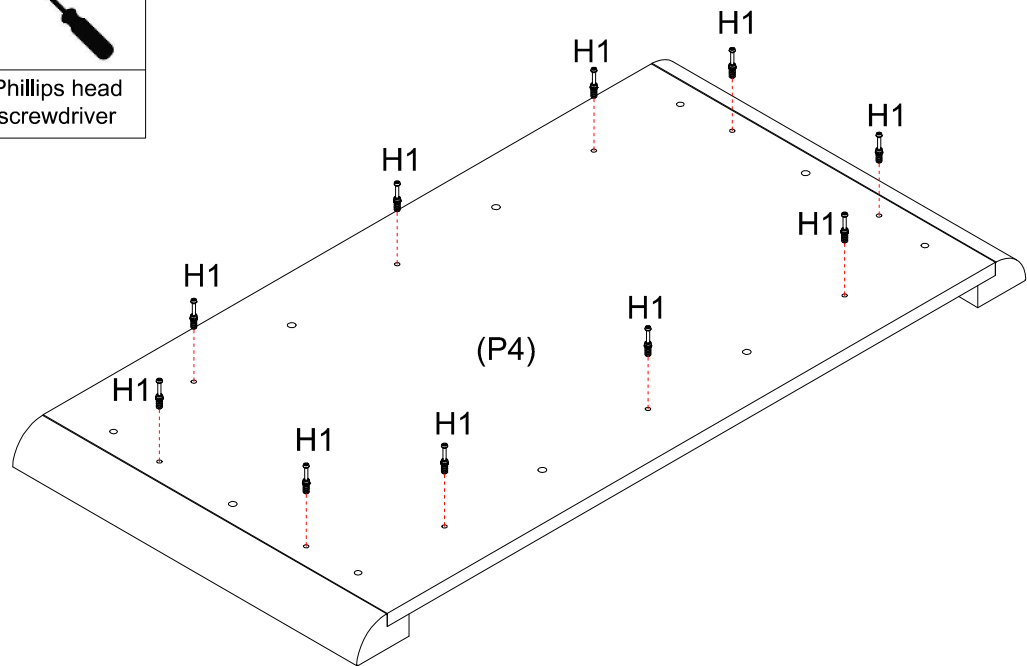

Screw 10 x Cam Bolts (H1) into Bottom Panel (P4) as shown.

Step 2


You will need	
	
14 x Wood Dowels (H3)	Mallet

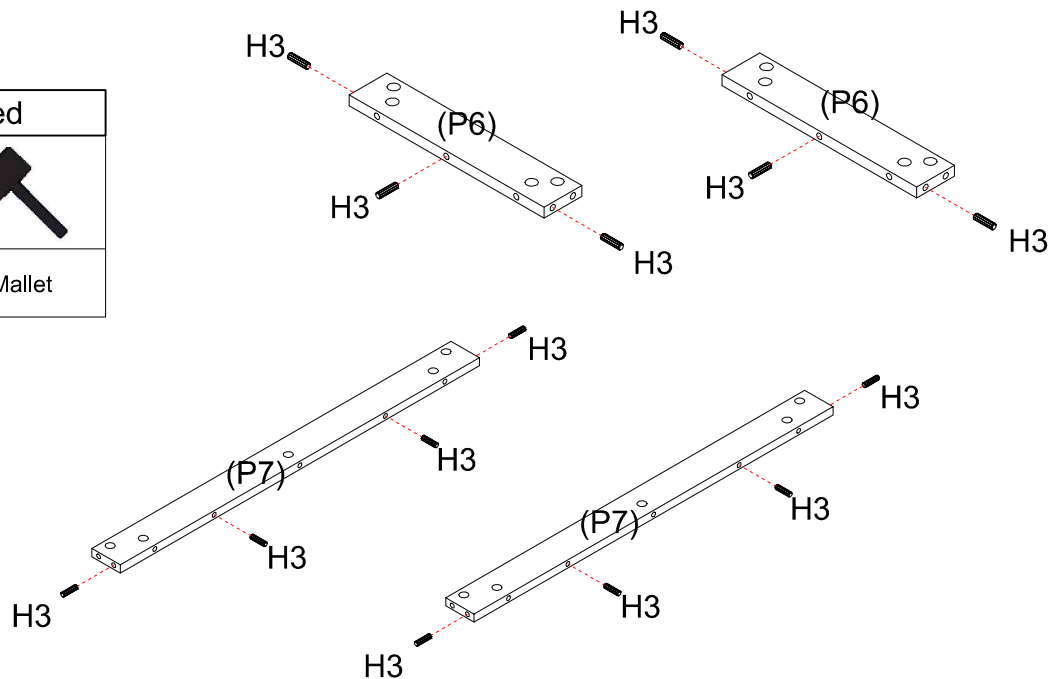

Insert each 3 x Wood Dowels (H3) into Short Rail (P6) and each 4 x Wood Dowels (H3) into Long Rail (P7).

Step 3


You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver
	
4 x Felt Feet (H7)	

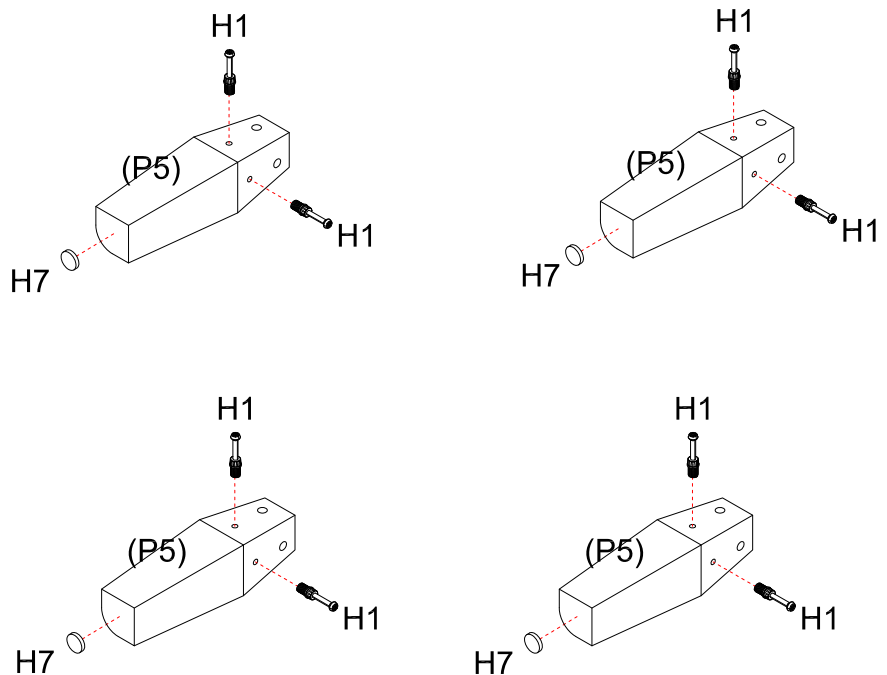


Screw each 2 x Cam Bolts (H1) into Leg (P5) using a phillips head screwdriver.
Attached 4 x Felt Feet (H7) to Legs (P5).

Step 4

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

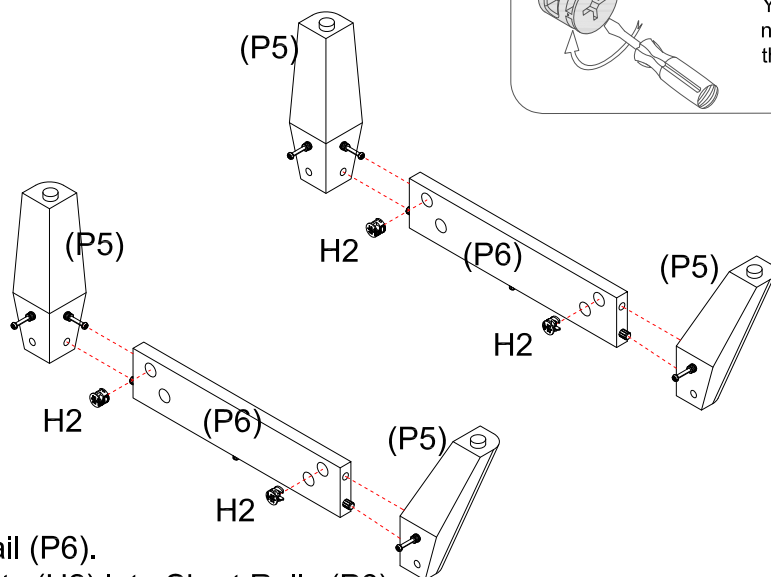



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.


Attach Leg (P5) to Short Rail (P6).
Insert each 2 x Big Cam Nuts (H2) into Short Rails (P6).
Rotate the cam nuts so the arrows point towards the incoming cam bolt.
Push Leg (P5) into place and tighten the cam nuts.

Step 5

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

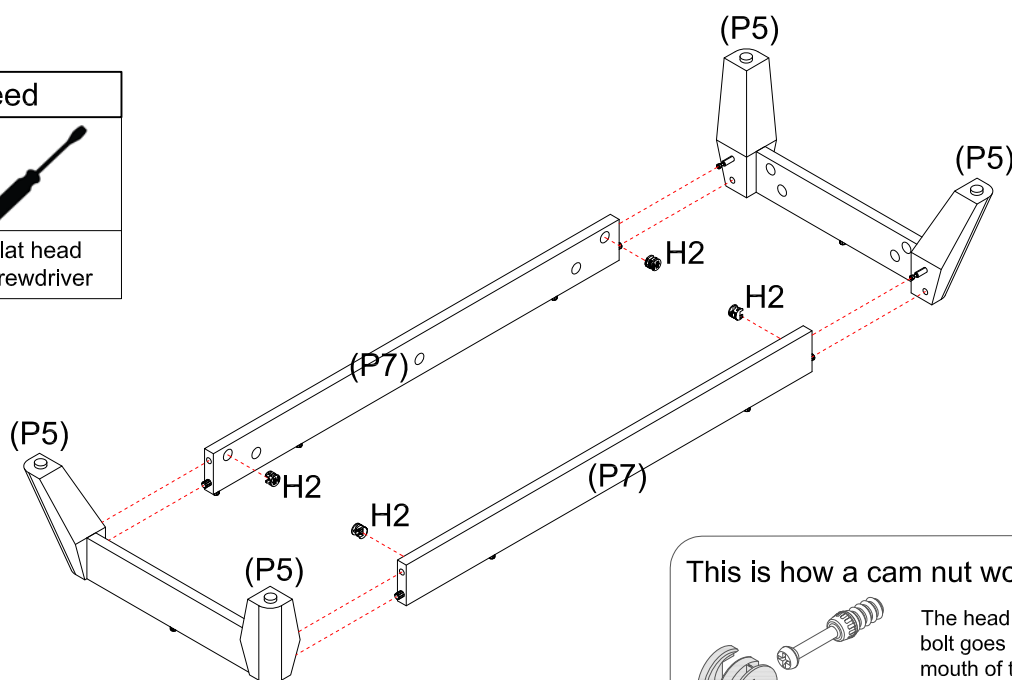



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Leg (P5) to Long Rail (P7).
Insert 4 x Big Cam Nuts (H2) into Long Rails (P7) and turn clockwise to lock.

Step 6

You will need	
	
10 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

TWO PEOPLE




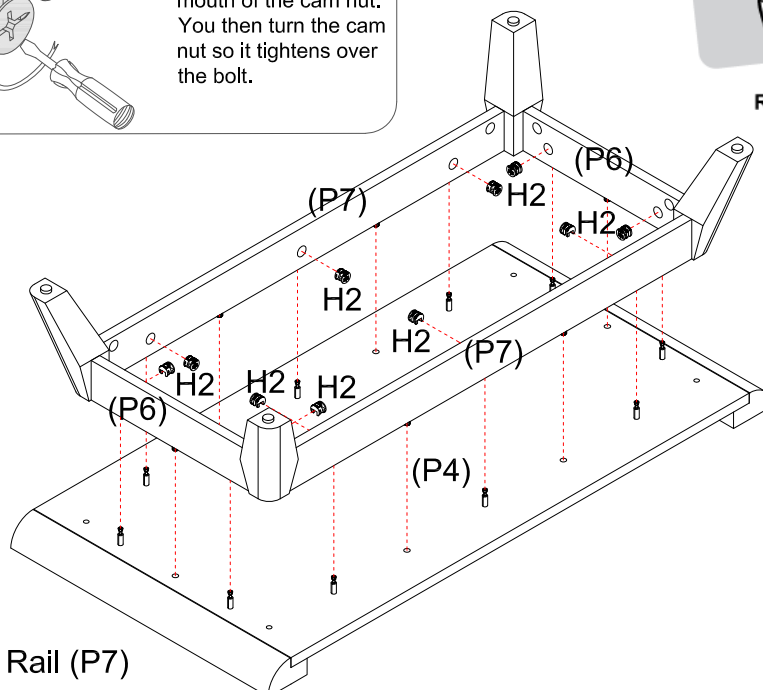


REQUIRED



Attach Short Rail (P6) and Long Rail (P7) to Bottom Panel (P4).
Insert 10 x Big Cam Nuts (H2) into Short Rails (P6) and Long Rails (P7), and turn clockwise to lock.

Step 7


You will need	
	
4 x Cam Bolts (H1)	4 x Screws (H5)
	
Phillips head screwdriver	

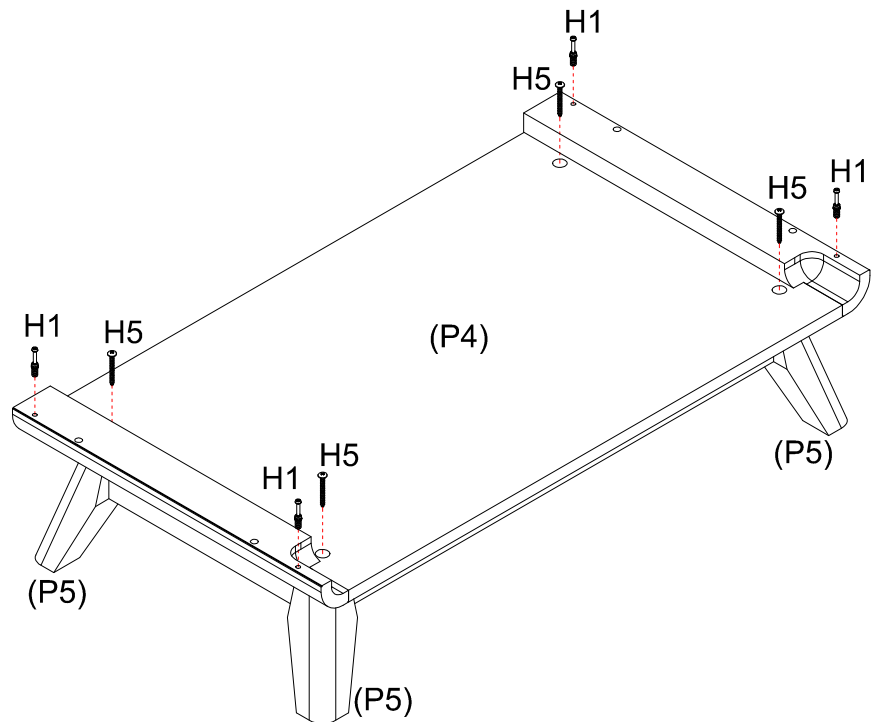

Screw 4 x Cam Bolts (H1) into Bottom Panel (P4) as shown.
Use 4 x Screws (H5) through Bottom Panel (P4) to connect Legs (P5).





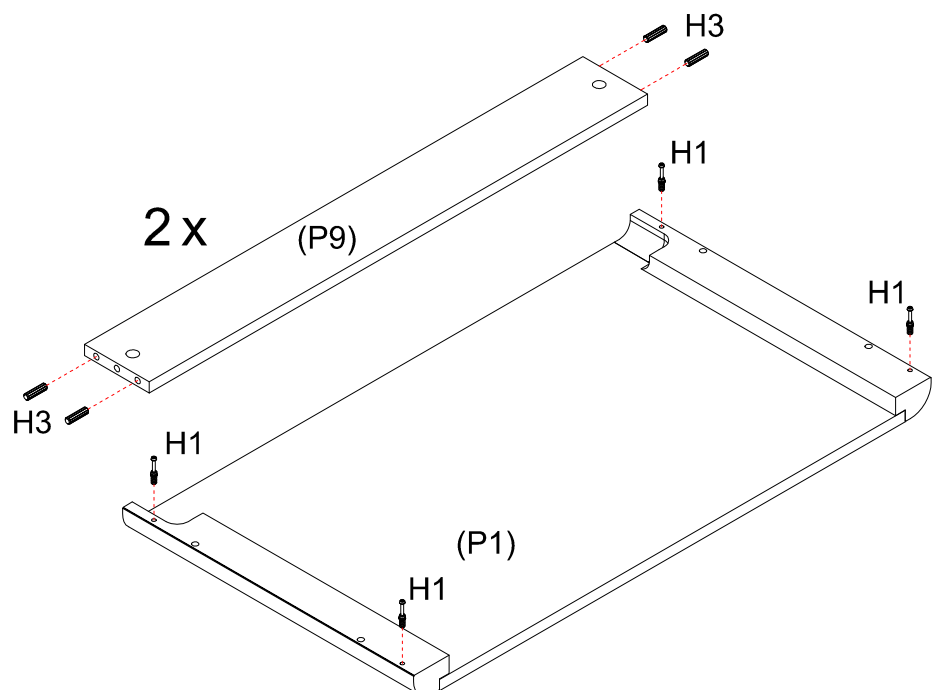

Step 8


You will need	
	
4 x Cam Bolts (H1)	8 x Wood Dowels (H3)
	
Phillips head screwdriver	Mallet



Insert each 4 x Wood Dowels (H3) into Front Rail (P9).
Screw 4 x Cam Bolts (H1) into Top Panel (P1) as shown.

Step 9

You will need	
	
4 x Cam Bolts (H1)	4 x Wood Dowels (H3)
	
12 x Screws (H8)	4 x Left Runner Tracks (H9)
	
Phillips head screwdriver	Mallet

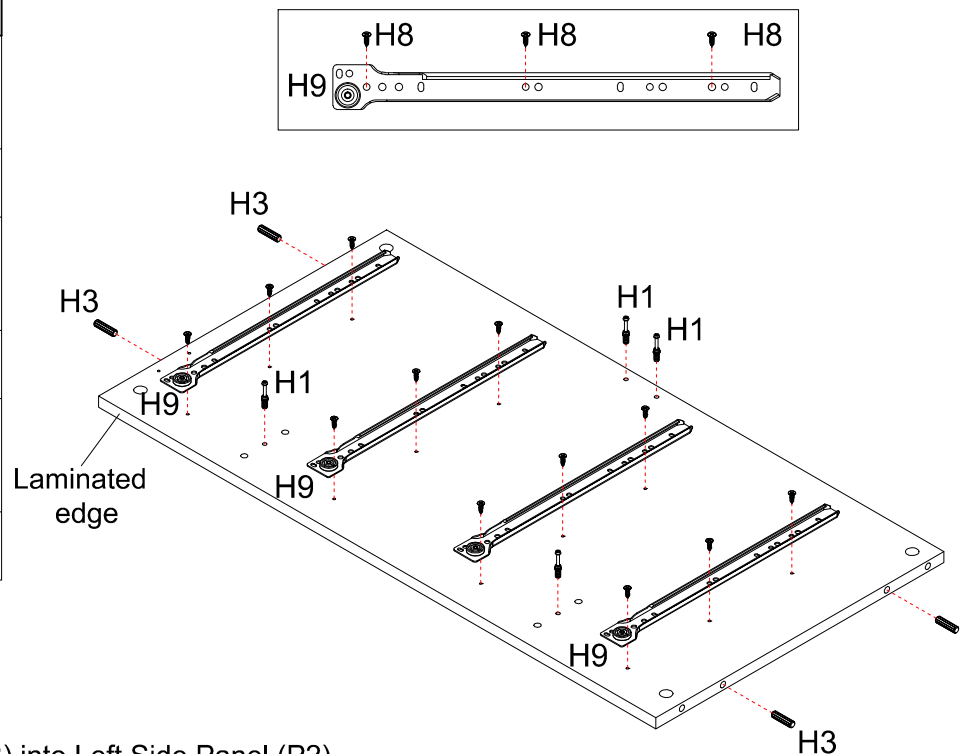








Insert 4 x Wood Dowels (H3) into Left Side Panel (P2).

Screw 4 x Cam Bolts (H1) into Left Side Panel (P2) as shown.

Attach 4 x Left Runner Tracks (H9) to Left Side Panel (P2) with 12 x Screws (H8).

Step 10

You will need	
	
4 x Cam Bolts (H1)	4 x Wood Dowels (H3)
	
12 x Screws (H8)	4 x Right Runner Tracks (H11)
	
Phillips head screwdriver	Mallet

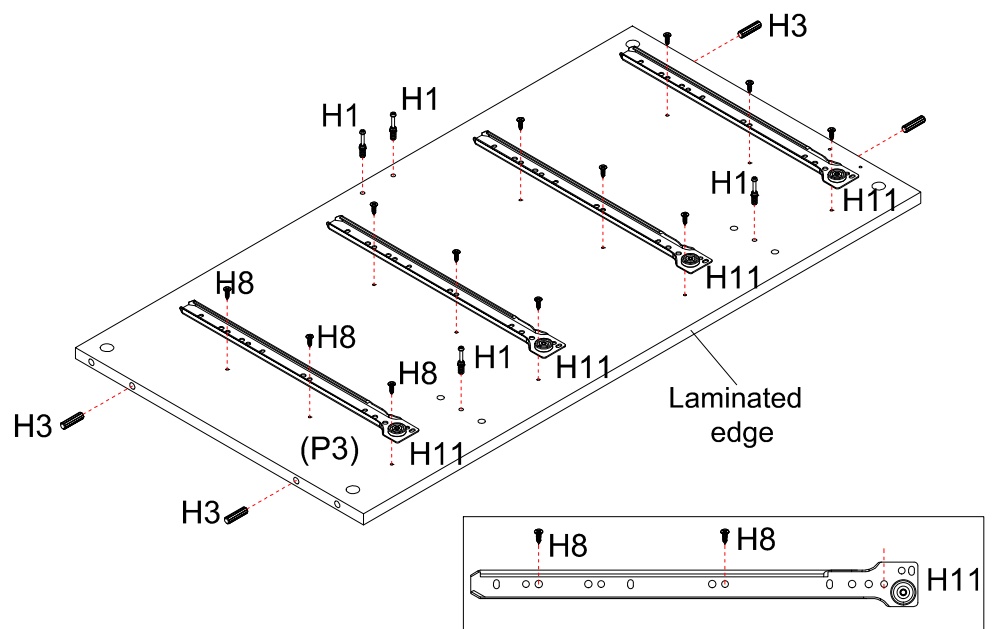

Insert 4 x Wood Dowels (H3) into Right Side Panel (P3).

Screw 4 x Cam Bolts (H1) into Right Side Panel (P3) as shown.

Attach 4 x Right Runner Tracks (H11) to Right Side Panel (P3) with 12 x Screws (H8).

Step 11


TWO PEOPLE




REQUIRED

You will need	
4 x Big Cam Nuts (H2)	2 x Screws (H18)
Phillips head screwdriver	Flat head screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

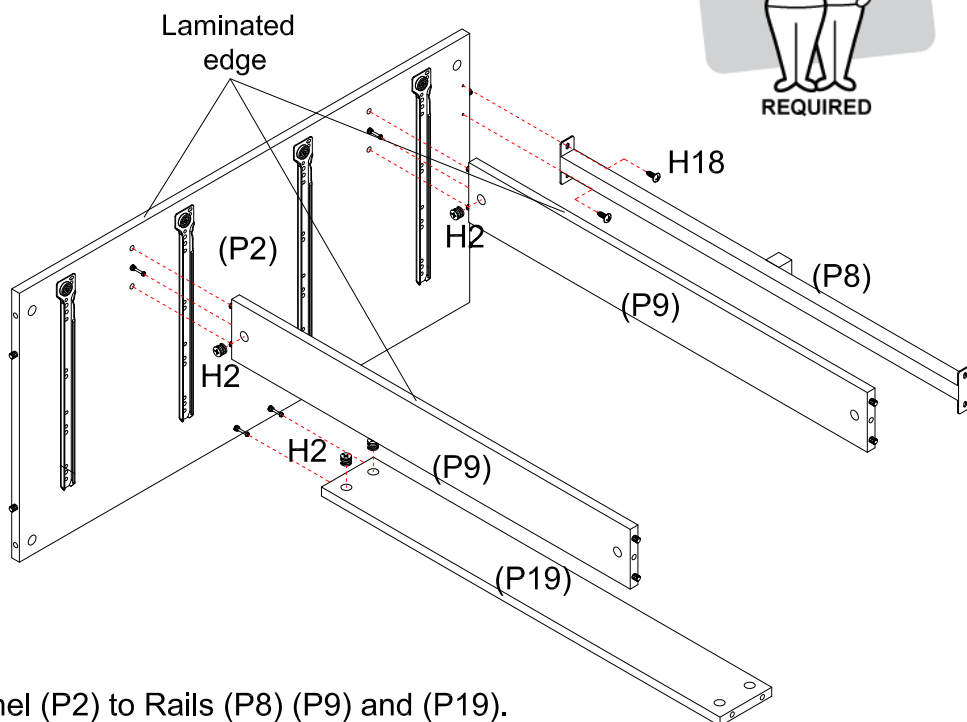

Move and align Left Side Panel (P2) to Rails (P8) (P9) and (P19).
Insert 4 x Big Cam Nuts (H2) into Rails (P9) (P19) and turn clockwise to lock.
Use 2 x Screws (H18) to connect Metal Rail (P8) and Left Side Panel (P2).


Step 12

TWO PEOPLE




REQUIRED

You will need	
4 x Big Cam Nuts (H2)	2 x Screws (H18)
Phillips head screwdriver	Flat head screwdriver

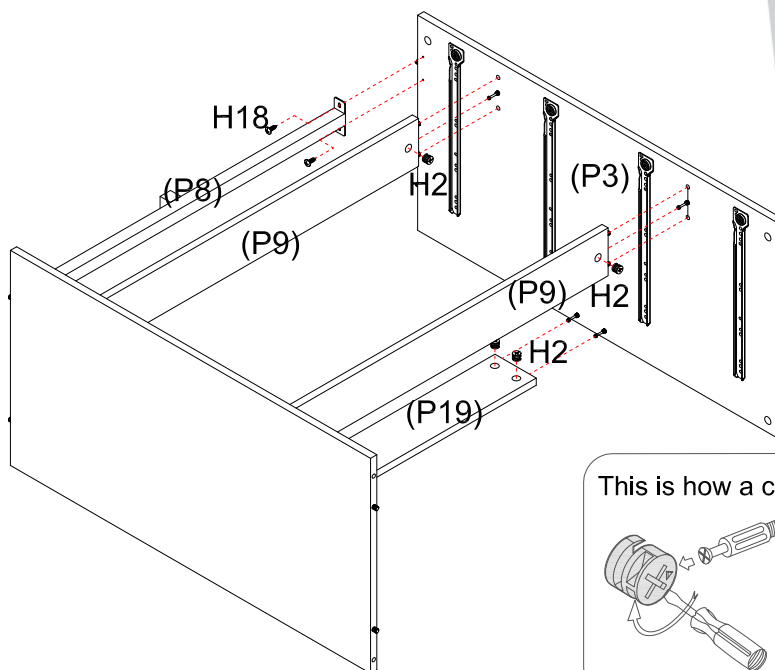



This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Move and align Right Side Panel (P3) to Rails (P8) (P9) and (P19).
Insert 4 x Big Cam Nuts (H2) into Rails (P9) (P19) and turn clockwise to lock.
Use 2 x Screws (H18) to connect Metal Rail (P8) and Right Side Panel (P3).

Step 13

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

TWO PEOPLE



REQUIRED

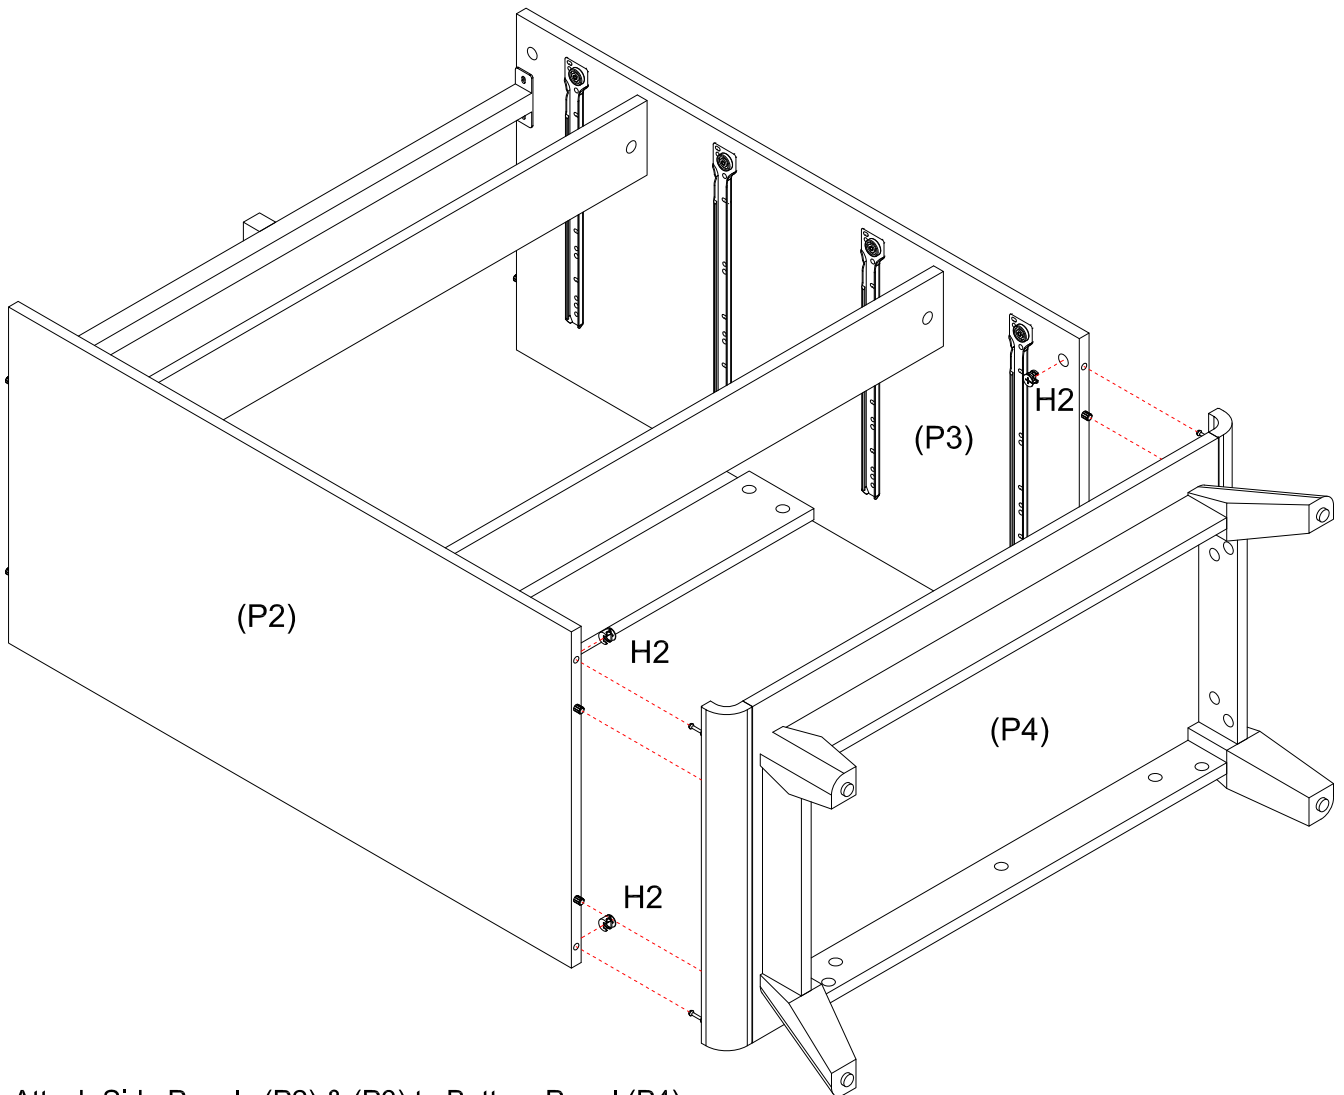

Attach Side Panels (P2) & (P3) to Bottom Panel (P4).
Insert 4 x Big Cam Nuts (H2) into Side Panels (P2) & (P3) and turn clockwise to lock.


Step 14

TWO PEOPLE




You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver
	
Phillips head screwdriver	

This is how a cam nut works.....



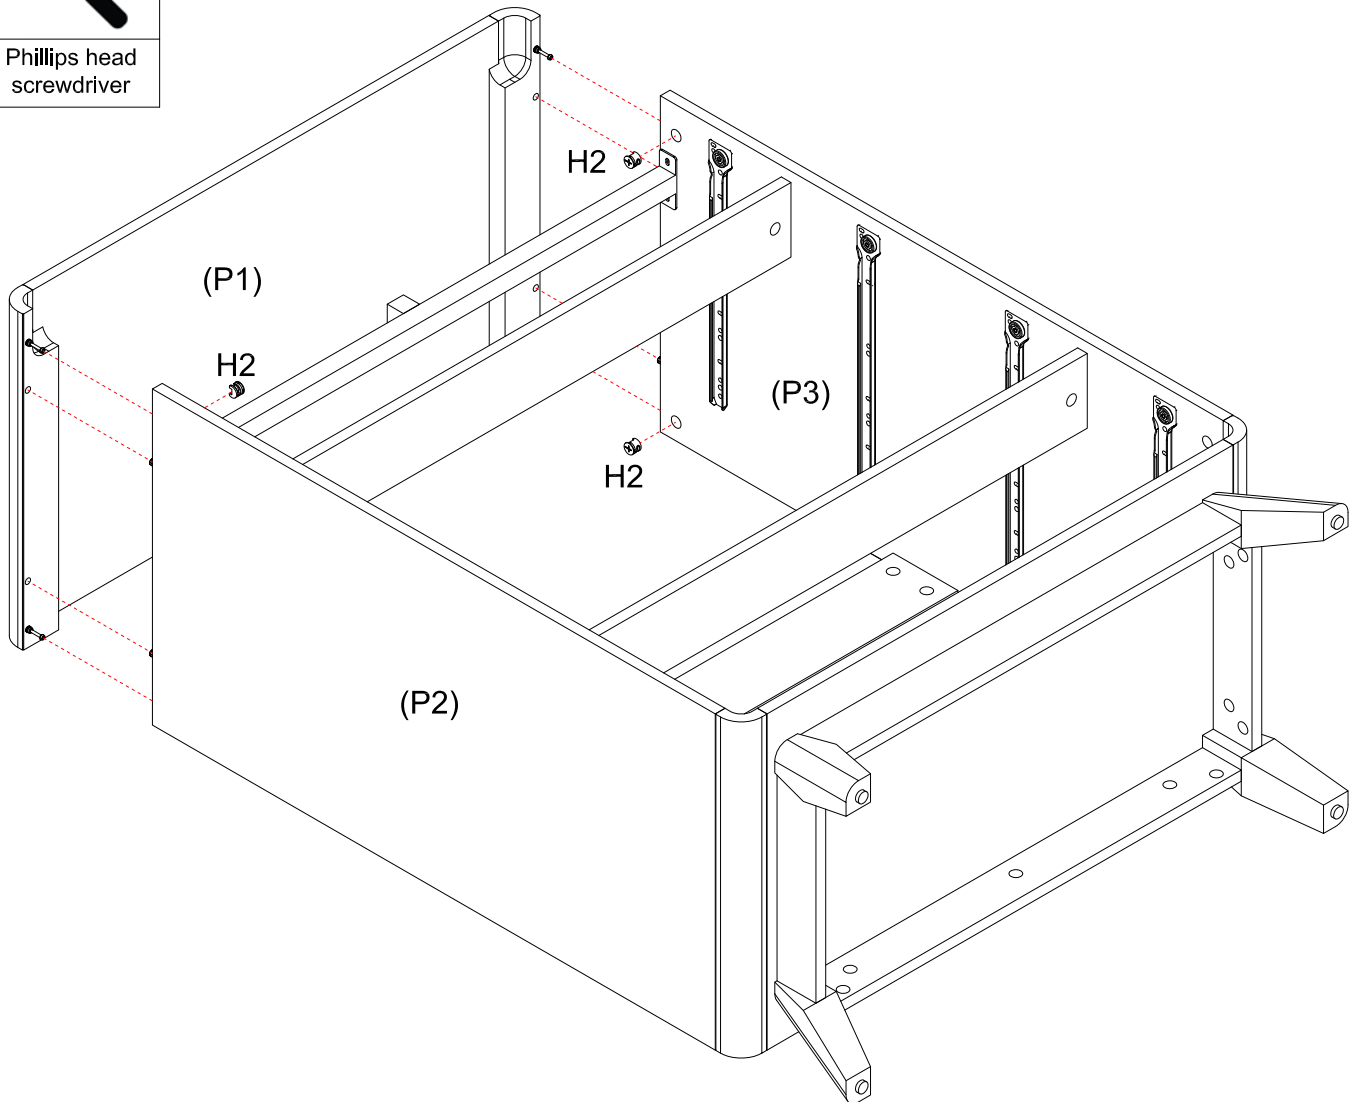

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.




Attach Top Panel (P1) to Side Panels (P2) & (P3) and Metal Rail (P8).
Insert 4 x Big Cam Nuts (H2) into Side Panels (P2) & (P3) and turn clockwise to lock.

Step 15




You will need	
	
25 x Nails (H6)	Hammer

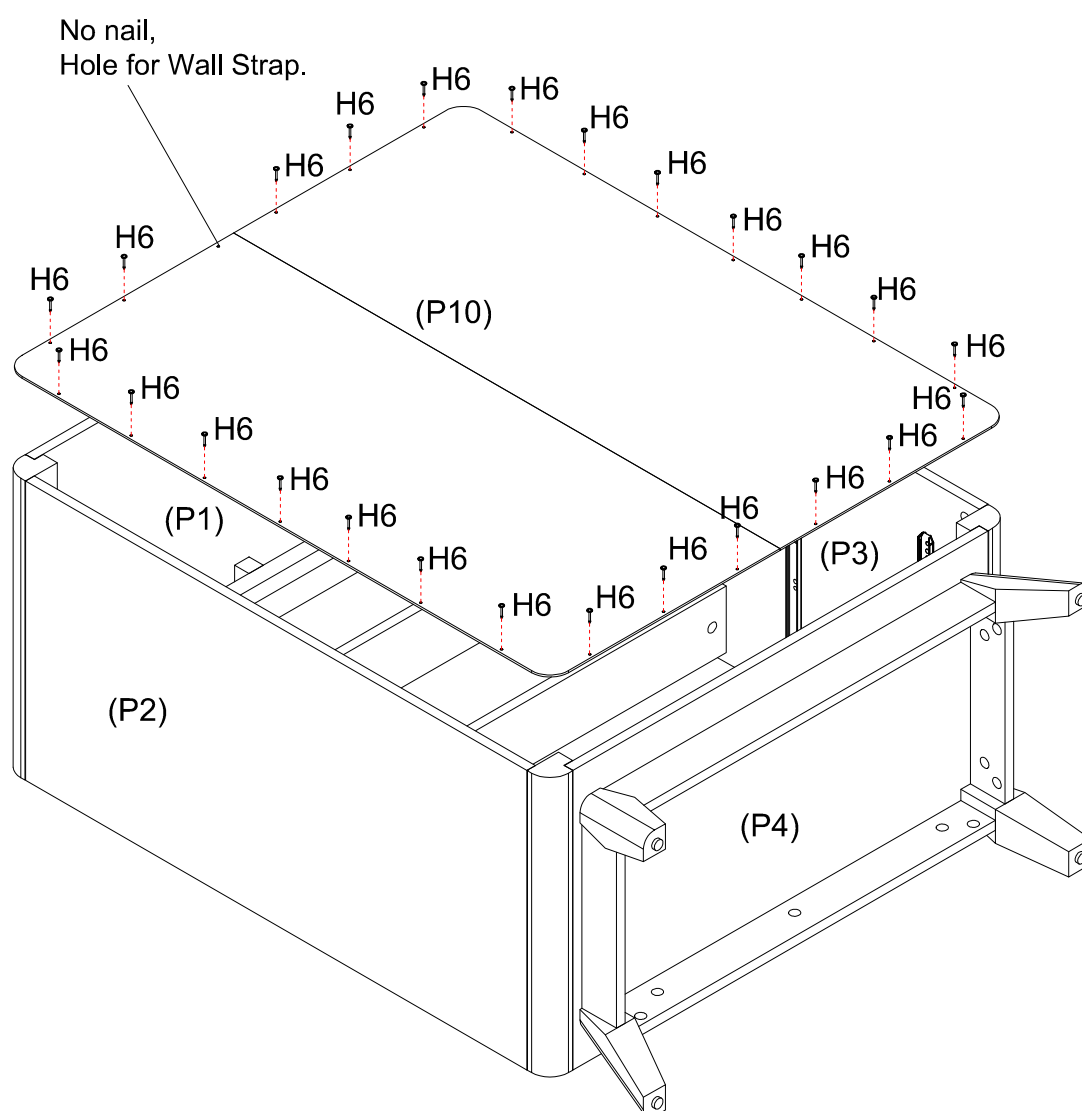

Attach Back Panel (P10) to Panels (P1) (P2) (P3) and (P4) with 25 x Nails (H6).

Step 16


You will need	
4 x Left Runners (H10)	4 x Right Runners (H12)
24 x Screws (H8)	Phillips head screwdriver

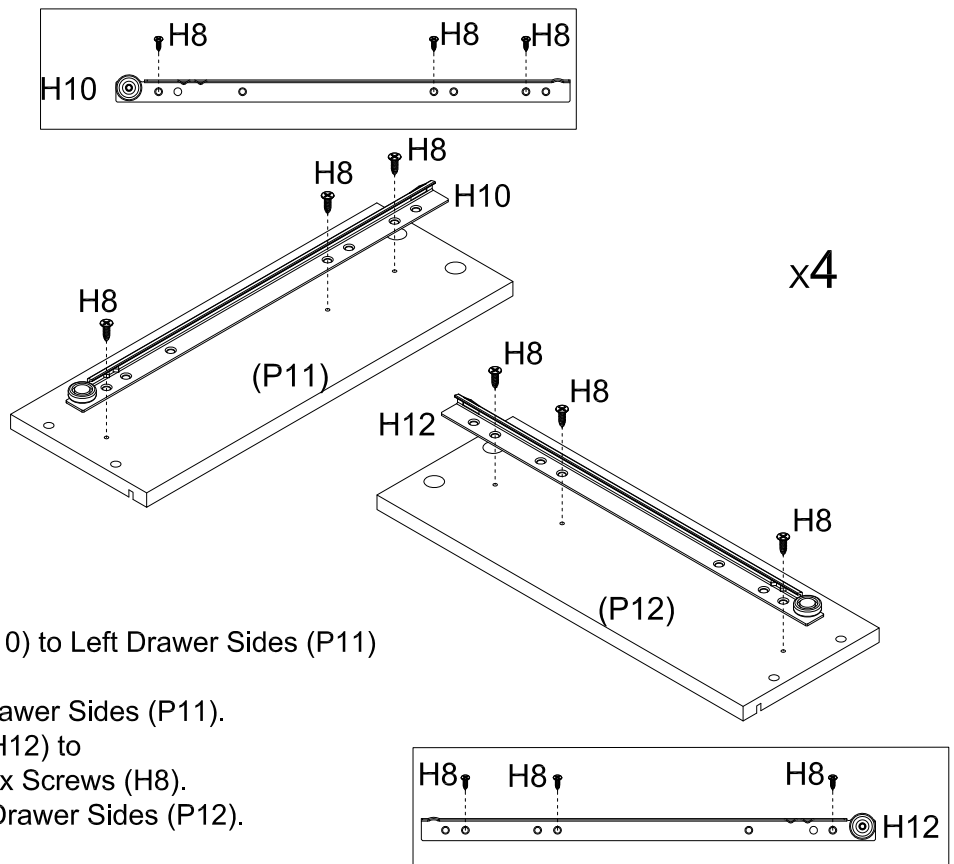

Attach each one Left Runner (H10) to Left Drawer Sides (P11) with 3 x Screws (H8).
 Repeat three times for all Left Drawer Sides (P11).
 Attach each one Right Runner (H12) to Right Drawer Sides (P12) with 3 x Screws (H8).
 Repeat three times for all Right Drawer Sides (P12).



Step 17

You will need	
24 x Cam Bolts (H1)	Phillips head screwdriver

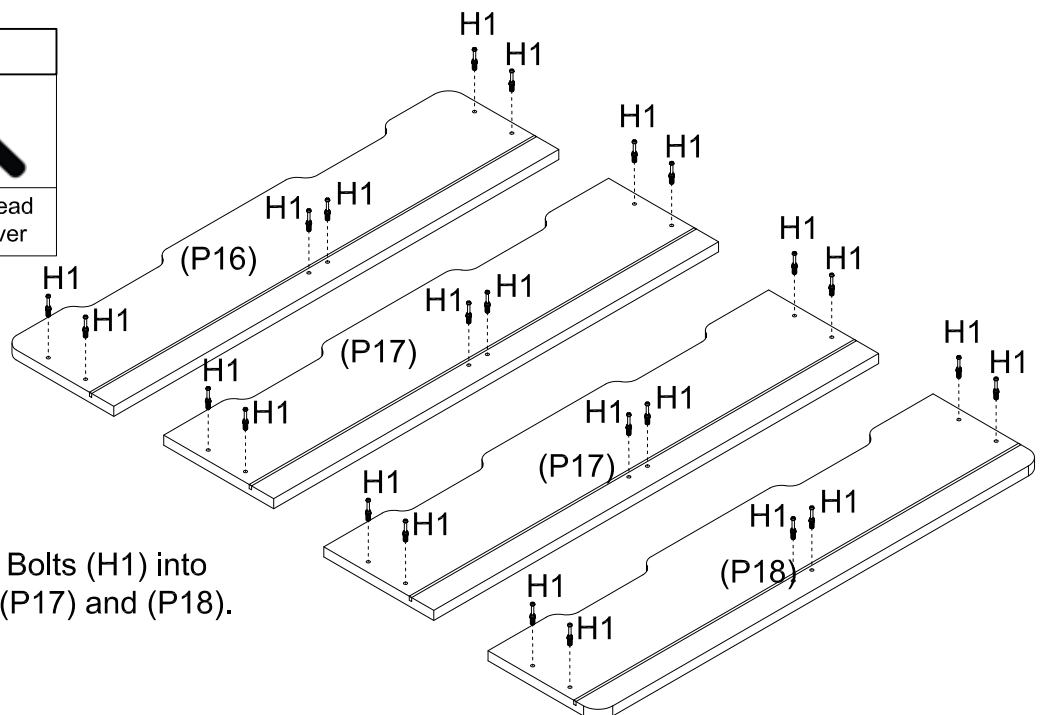


Screw each 6 x Cam Bolts (H1) into Drawer Fronts (P16) (P17) and (P18).

Step 18



You will need	
	
24 x Small Cam Nuts (H4)	Flat head screwdriver

Attach Drawer Sides (P11) & (P12) to Drawer Fronts (P16) (P17) and (P18). Attach Drawer Rails (P15) to Drawer Fronts (P16) (P17) and (P18). Insert 24 x Small Cam Nuts (H4) into Drawer Sides (P11) (P12) and Drawer Rails (P15), turn clockwise to lock.

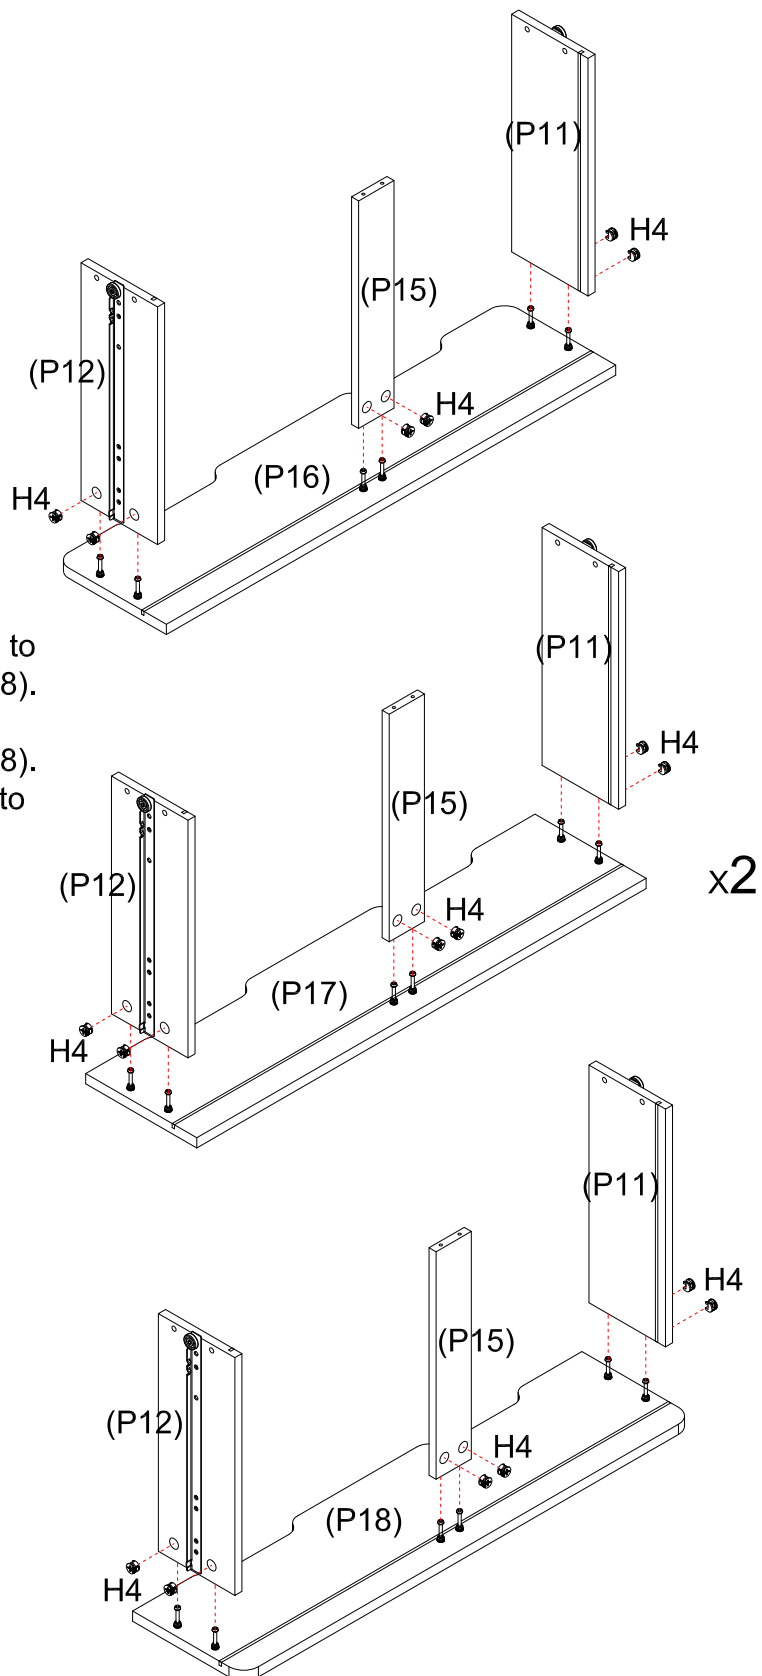


Step 19



Slide each Drawer Base (P14) into the groove in the Drawer Panels (P11), (P12) and Drawer Fronts (P16) (P17) (P18). Repeat with all Drawer Bases (P14).

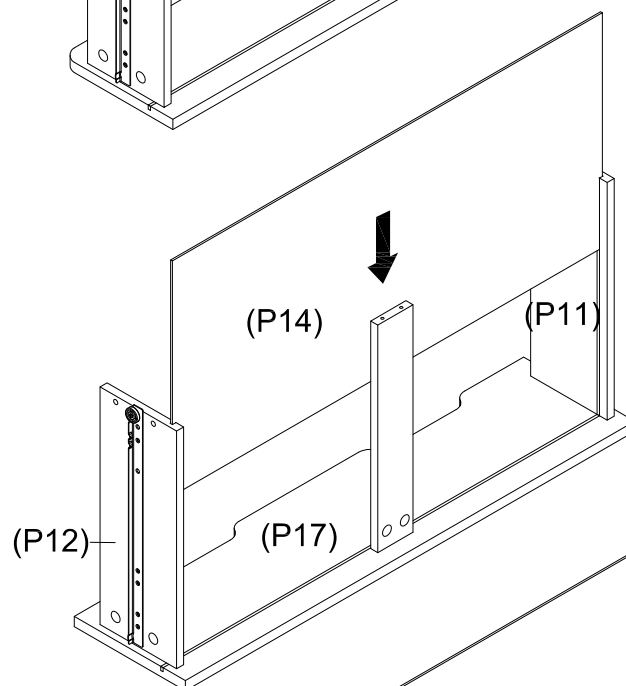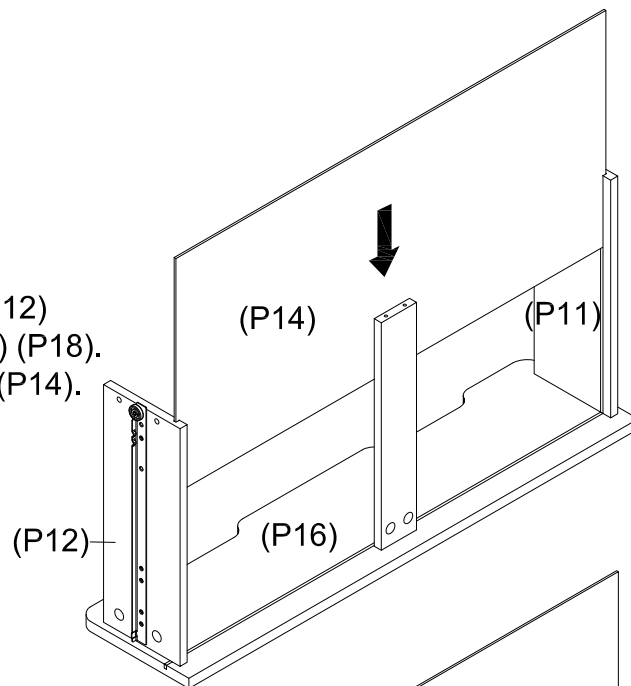


x2

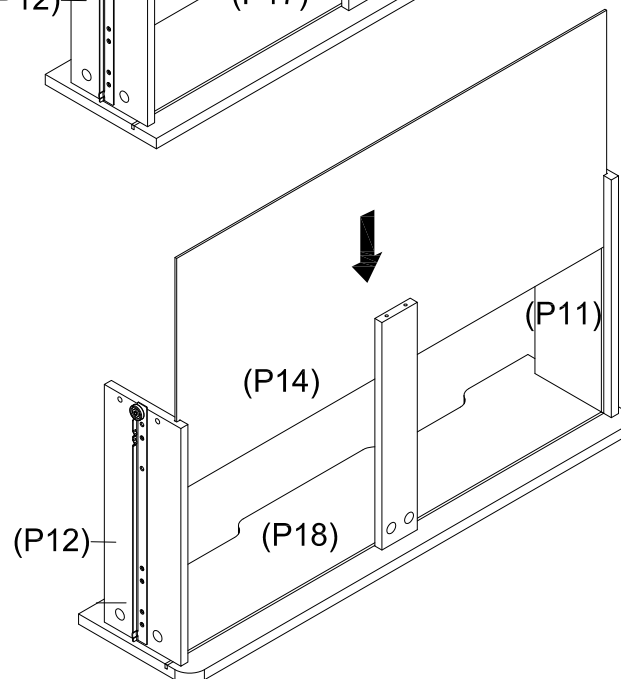

Step 20

You will need	
	
24 x Screws (H17)	Phillips head screwdriver

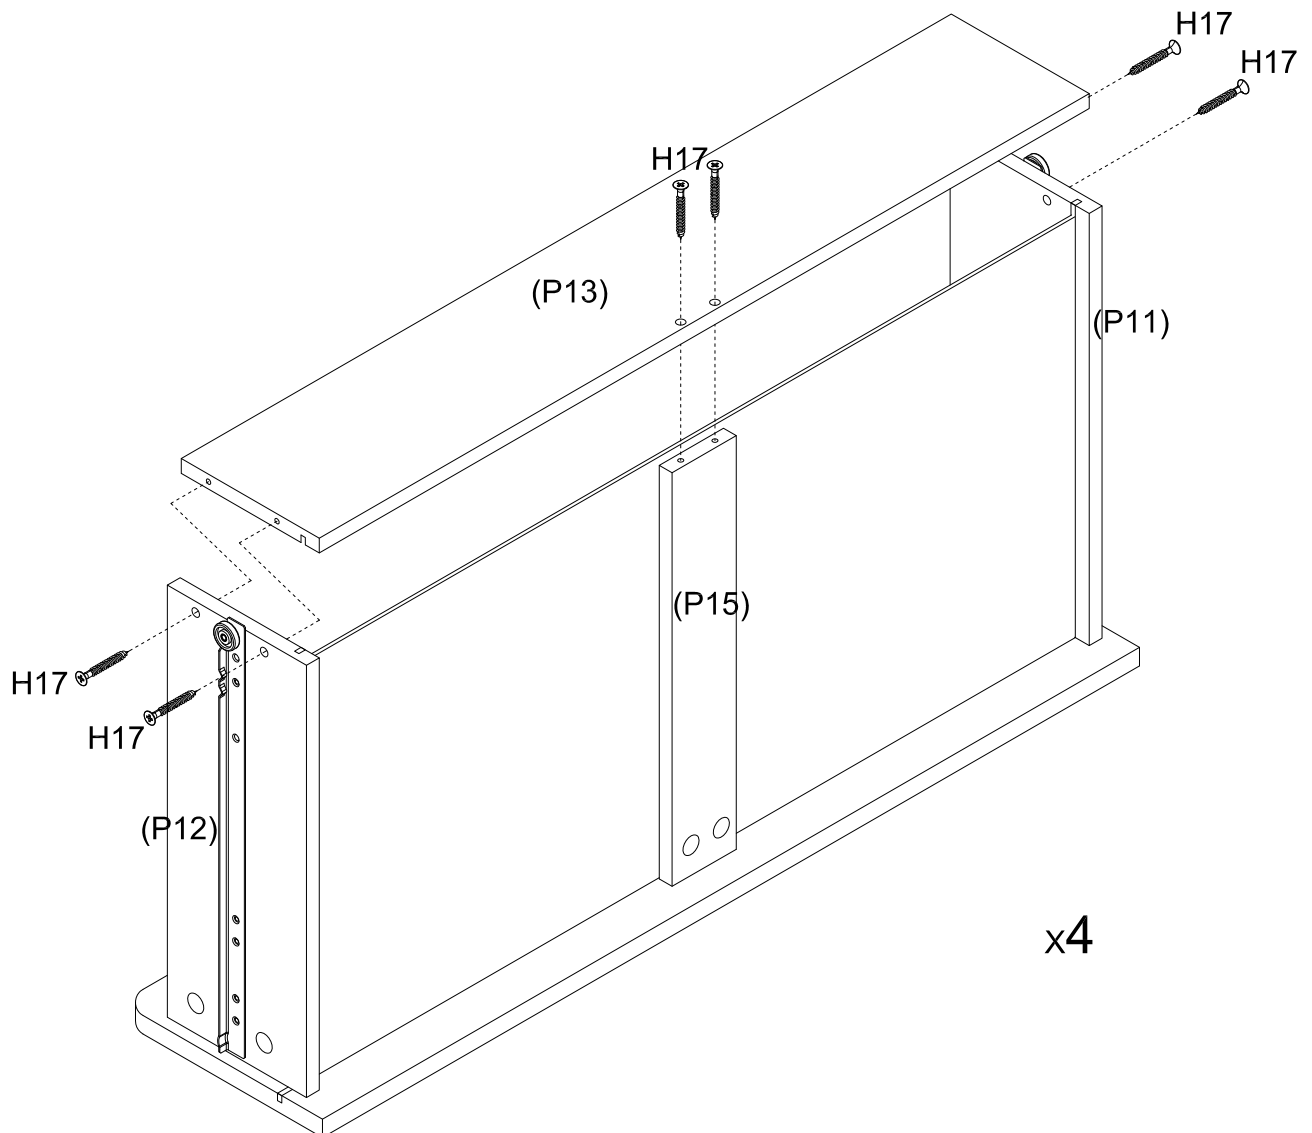


Attach each Drawer Back (P13) to Drawer Sides (P11) & (P12) and Drawer Rail (P15) with 6 x Screws (H17).
Repeat for all Drawer Backs (P13).

Step 21

Insert drawers into cabinet carefully as shown.
Slide drawers runners into position gently to avoid
damaging runners.



Note: Follow the correct order of these
four drawers as shown.

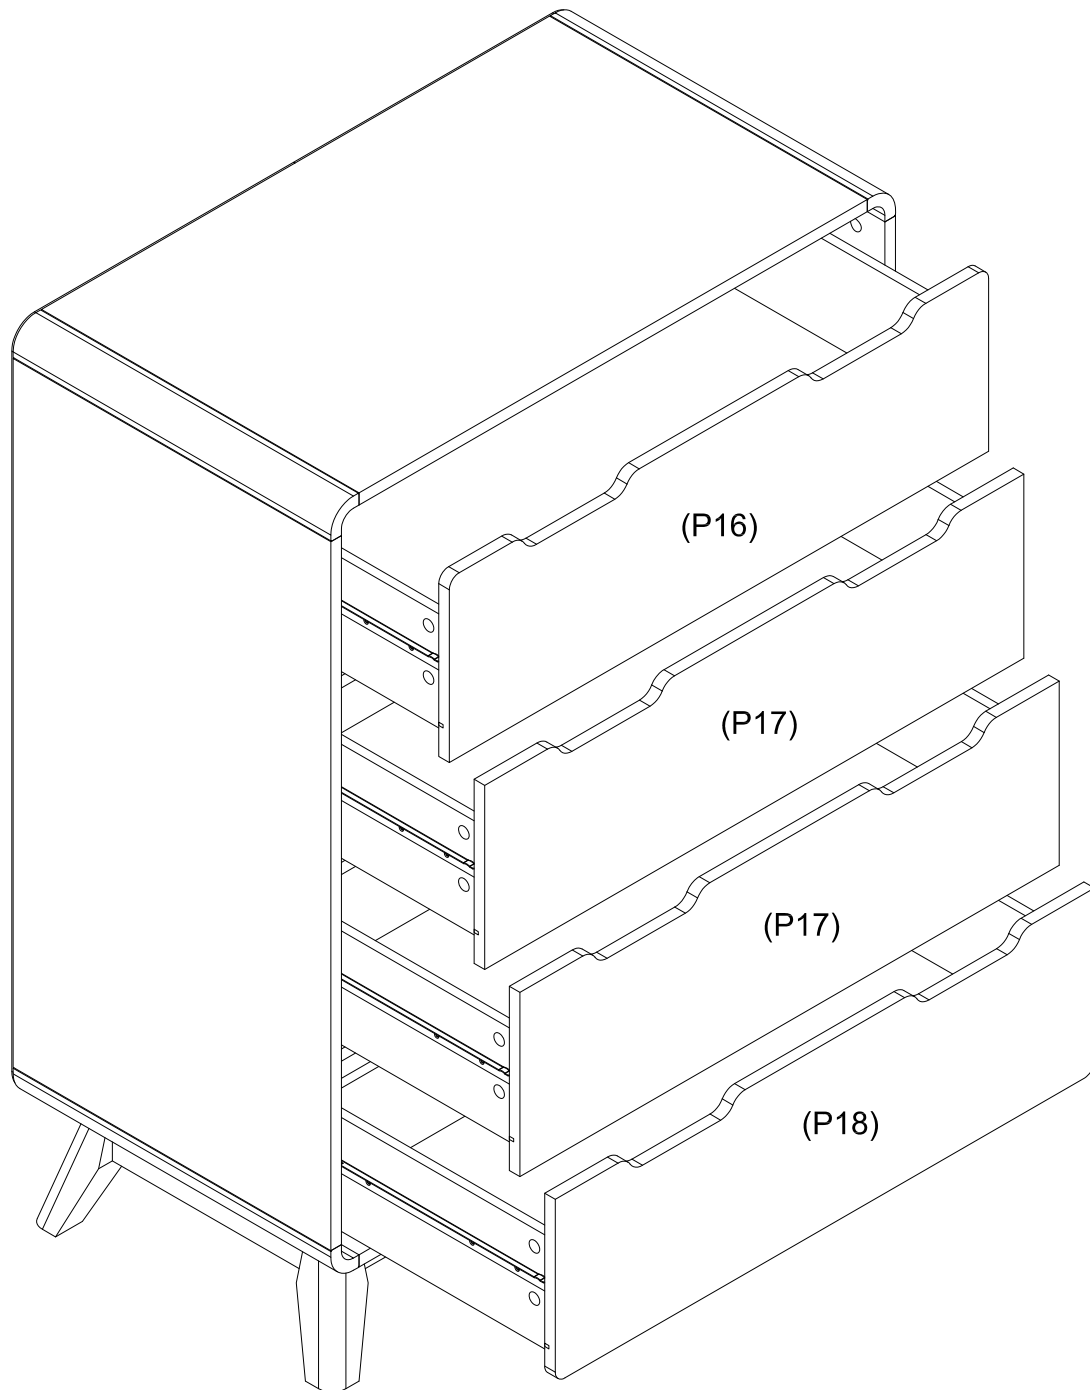

Step 22



You will need	
	
1 x Flat Washer (H15)	1 x Screw (H13)
	
1 x Wall strap (H14)	Phillips head screwdriver

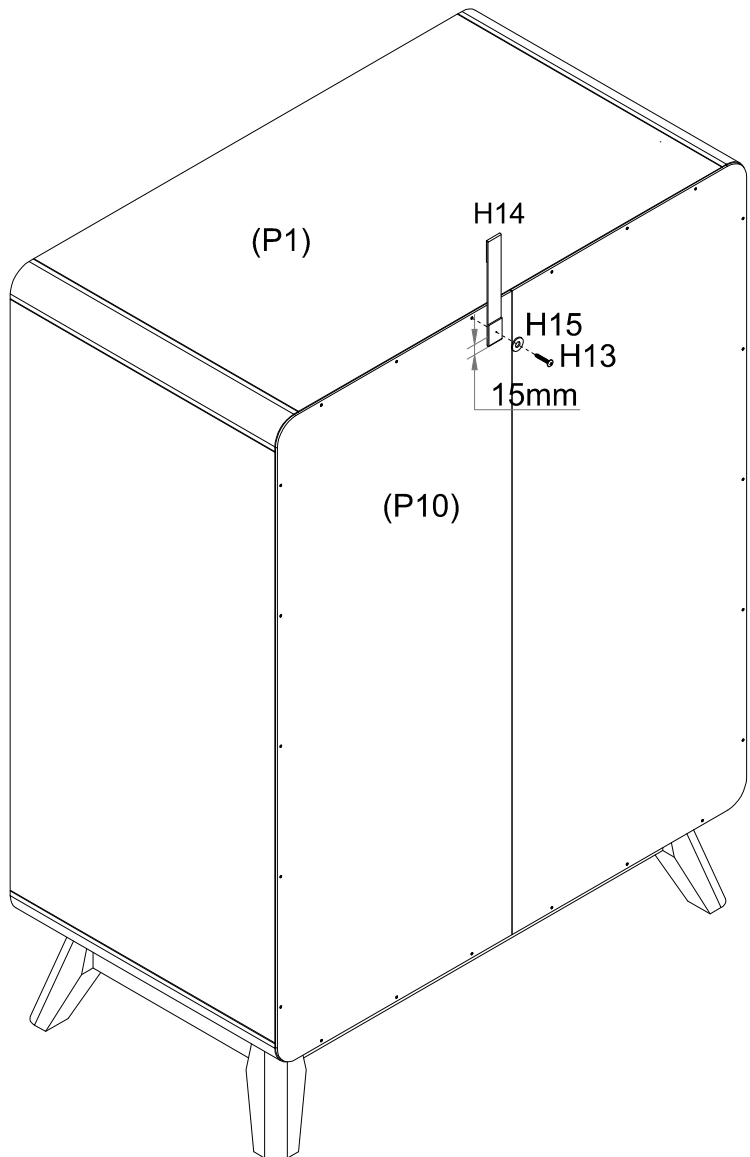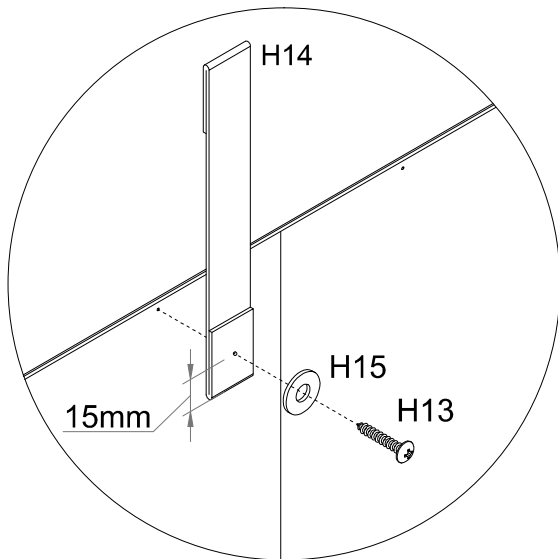We strongly advise that you use the wall safety strap provided to prevent the unit toppling.



Use Screw (H13) to connect Wall Strap (H14) on Top Panel (P1).



Step 23

You will need	
	
1 x Flat Washer (H15)	Phillips head screwdriver


Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

Screw and Wall Plug which are not provided. Please use appropriate fixtures for your wall.

Move the Tallboy to the final position. Attach the safety strap to the wall. Make sure it is firmly attached and a snug fit.

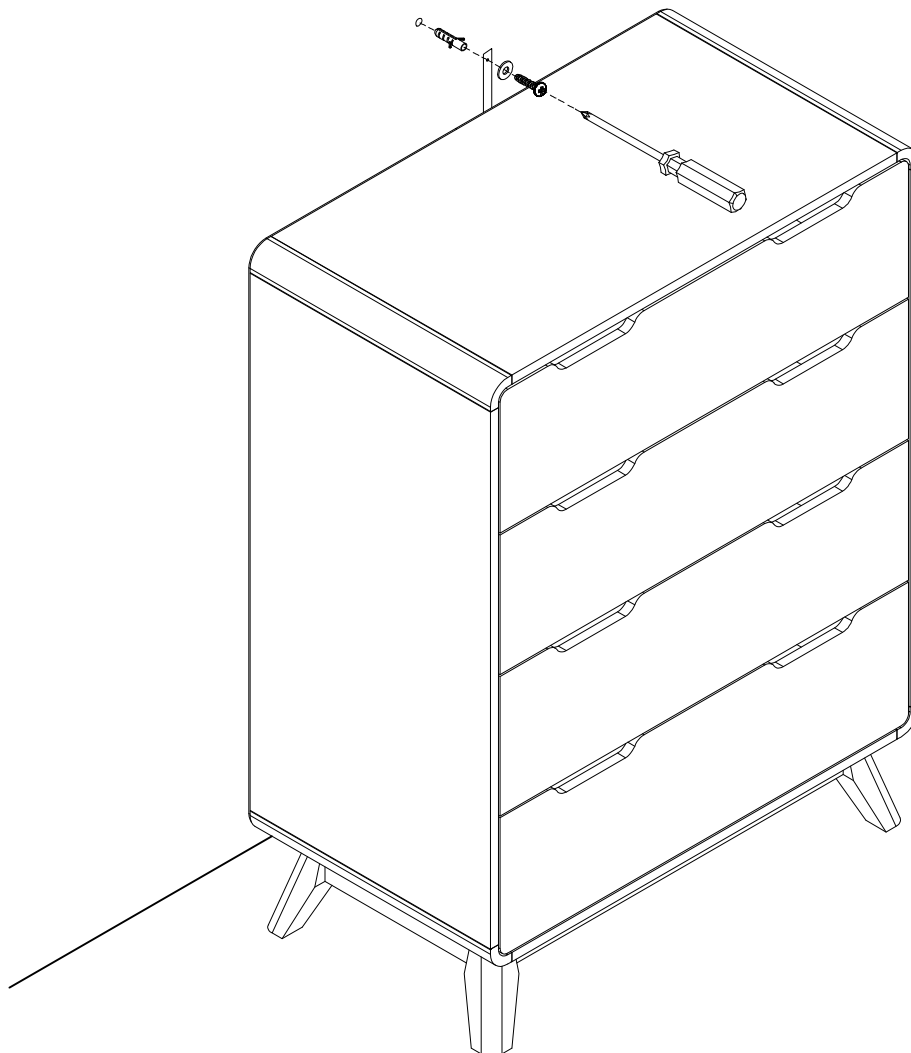

Step 24

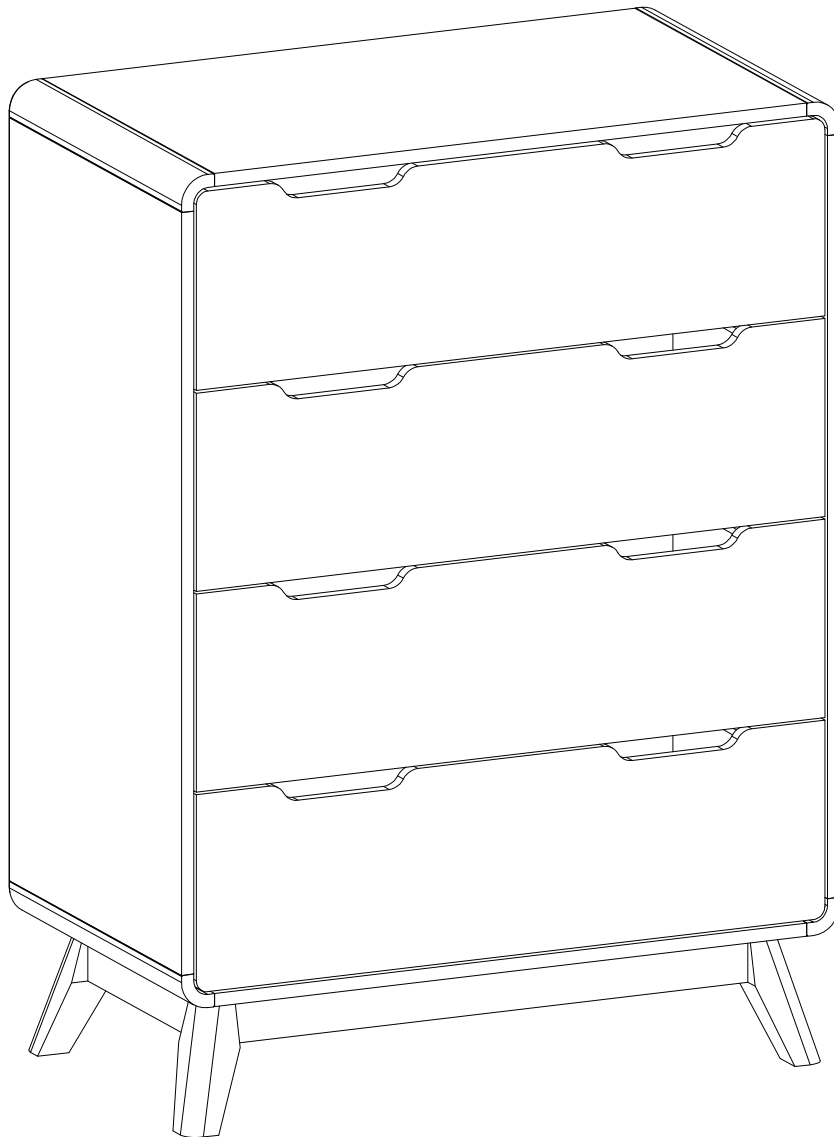


Job Complete !

In the interest of our environment please dispose of all packaging thoughtfully.



Version 1.0

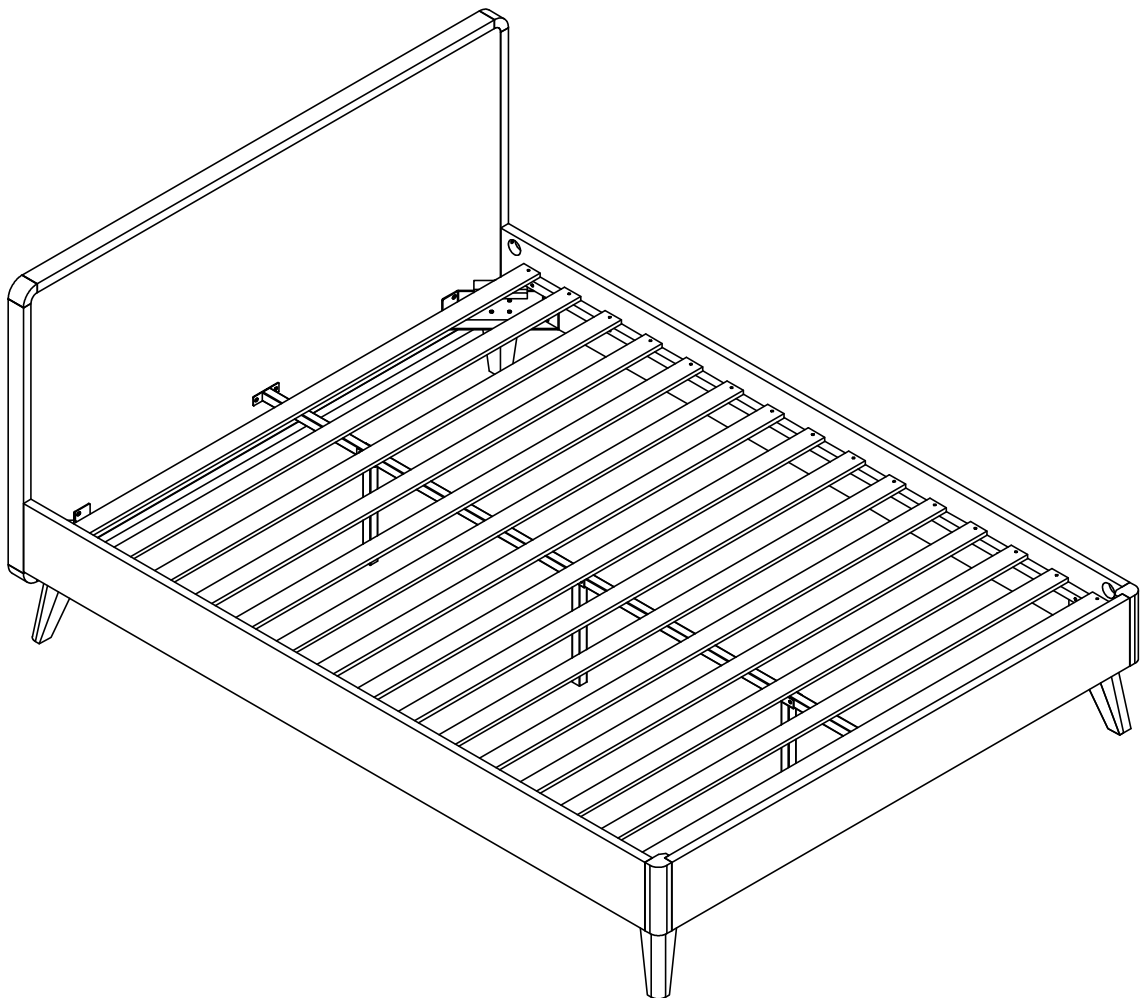

TWO PEOPLE



REQUIRED

RETRO
Bed Queen

www.fantasticfurniture.com.au

Enjoy
Your purchase from
Australia's Best Value Furniture Store




Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

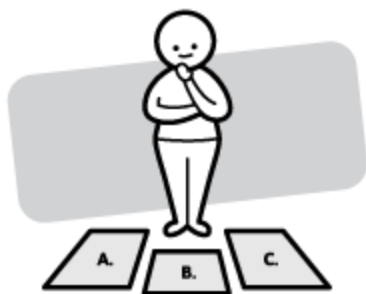

Identify and lay out all of the components before you begin assembly.

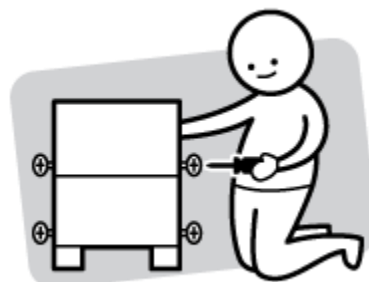

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.


What you need

to assemble the product



Other tools you need

Phillips head screwdriver; Mallet

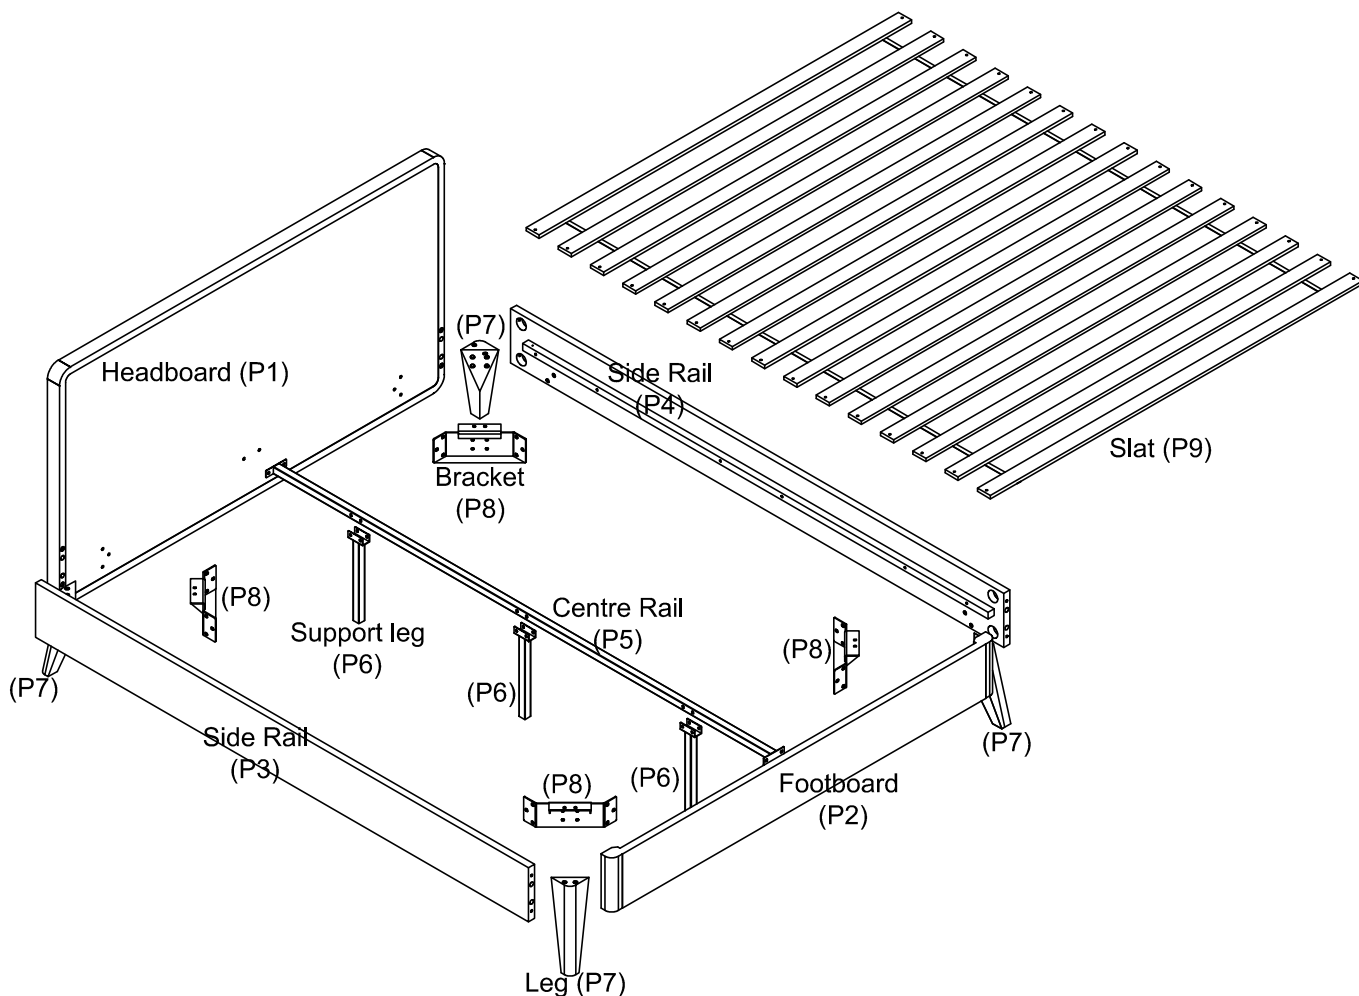

Part list

Box 1: Footboard (P2); Side Rail (P3); Side Rail (P4); Centre Rail (P5); 3 x Support Leg (P6); 4 x Leg (P7); 4 x Bracket (P8); Hardware Pack.

Box 2: Headboard (P1); Slat (P9).


Hardware pack



6 x Bolts
(H1)




52 x Small Bolts
(H2)




8 x Dowels
(H3)



4 x Felt Feet
(H4)



8 x Big Bolts
(H5)



1 x Wrench
(H6)



8 x Half Moon
Washers (H7)




8 x Spring Washers
(H8)




8 x Nuts
(H9)




1 x Allen Key
(H10)



30 x Screws
(H11)



6 x Flat Washers
(H12)



1 x Small Wrench
(H13)









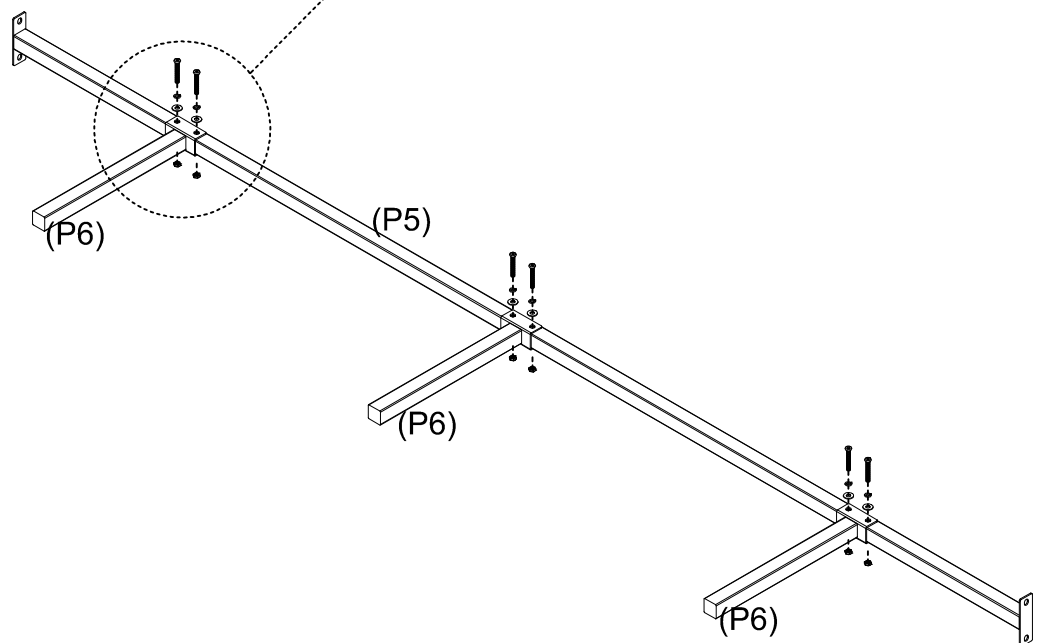
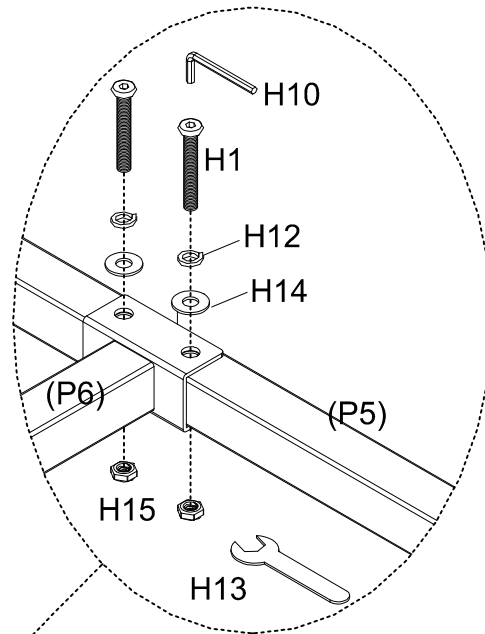
6 x Small Spring
Washers (H14)



6 x Small Nuts
(H15)



Step 1


You will need	
	
6 x Bolts (H1)	1 x Allen Key (H10)
	
6 x Flat Washers (H12)	1 x Small Wrench (H13)
	
6 x Small Spring Washers (H14)	6 x Small Nuts (H15)



Attach each support leg (P6) onto centre rail (P5) with 2 x bolts (H1), 2 x small spring washers (H14), 2 x flat washers (H12) and 2 x small nuts (H15) as shown, then tighten with Allen Key (H10) and Small Wrench (H13).


Step 2


You will need	
	
8 x Dowels (H3)	Mallet

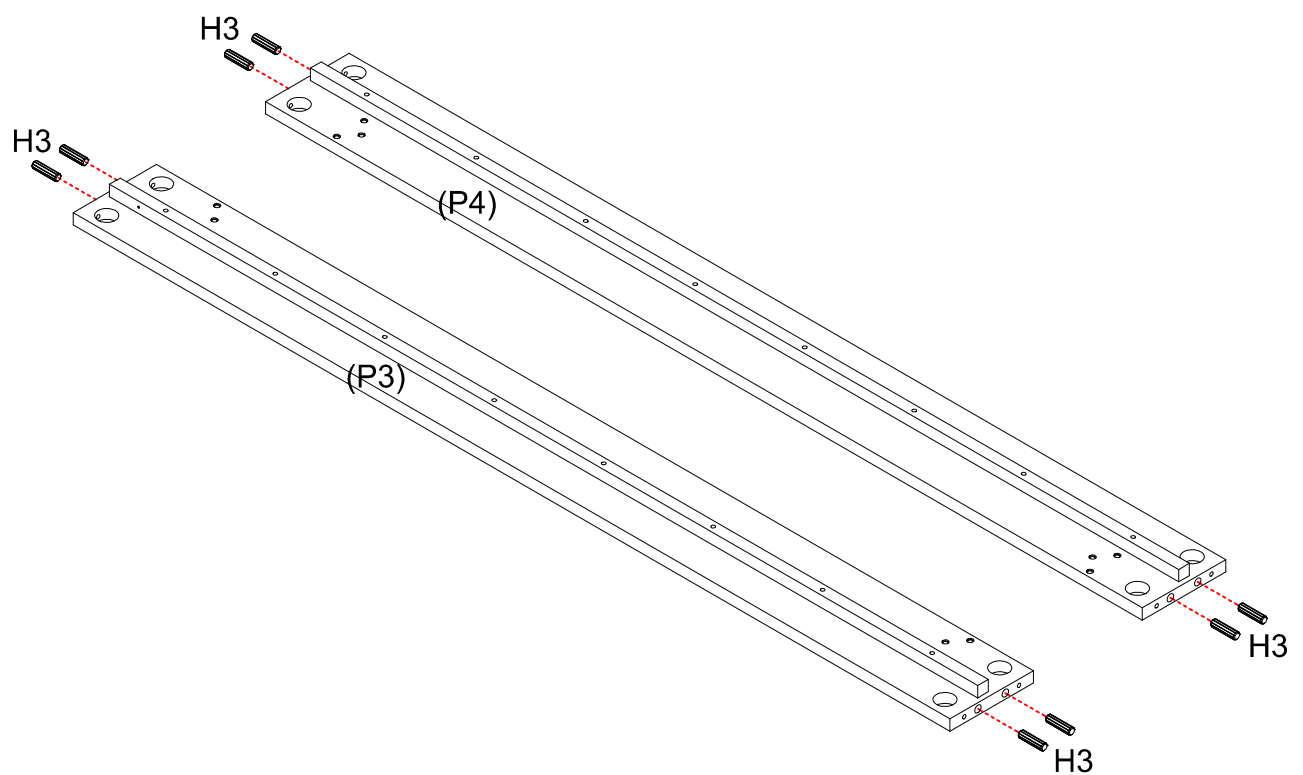

Insert each 4 x dowels (H3) into side rails (P3) & (P4).
Use a mallet to gently tap the dowels into place if needed.

Step 3

You will need	
	
8 x Big Bolts (H5)	

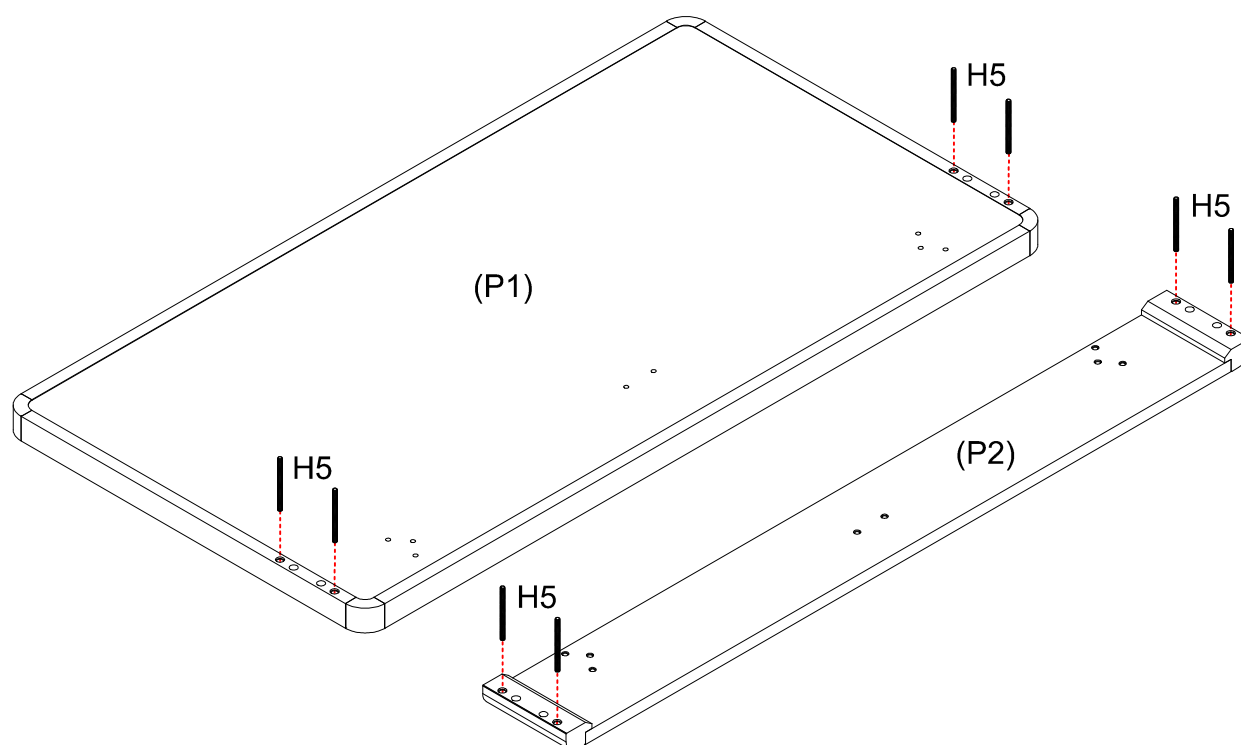


Screw 4 x big bolts (H5) into headboard (P1) as shown.
Screw 4 x big bolts (H5) into footboard (P2) as shown.

Step 4

TWO PEOPLE



You will need	
4 x Half Moon Washers (H7)	4 x Spring Washers (H8)
4 x Nuts (H9)	1 x Wrench (H6)

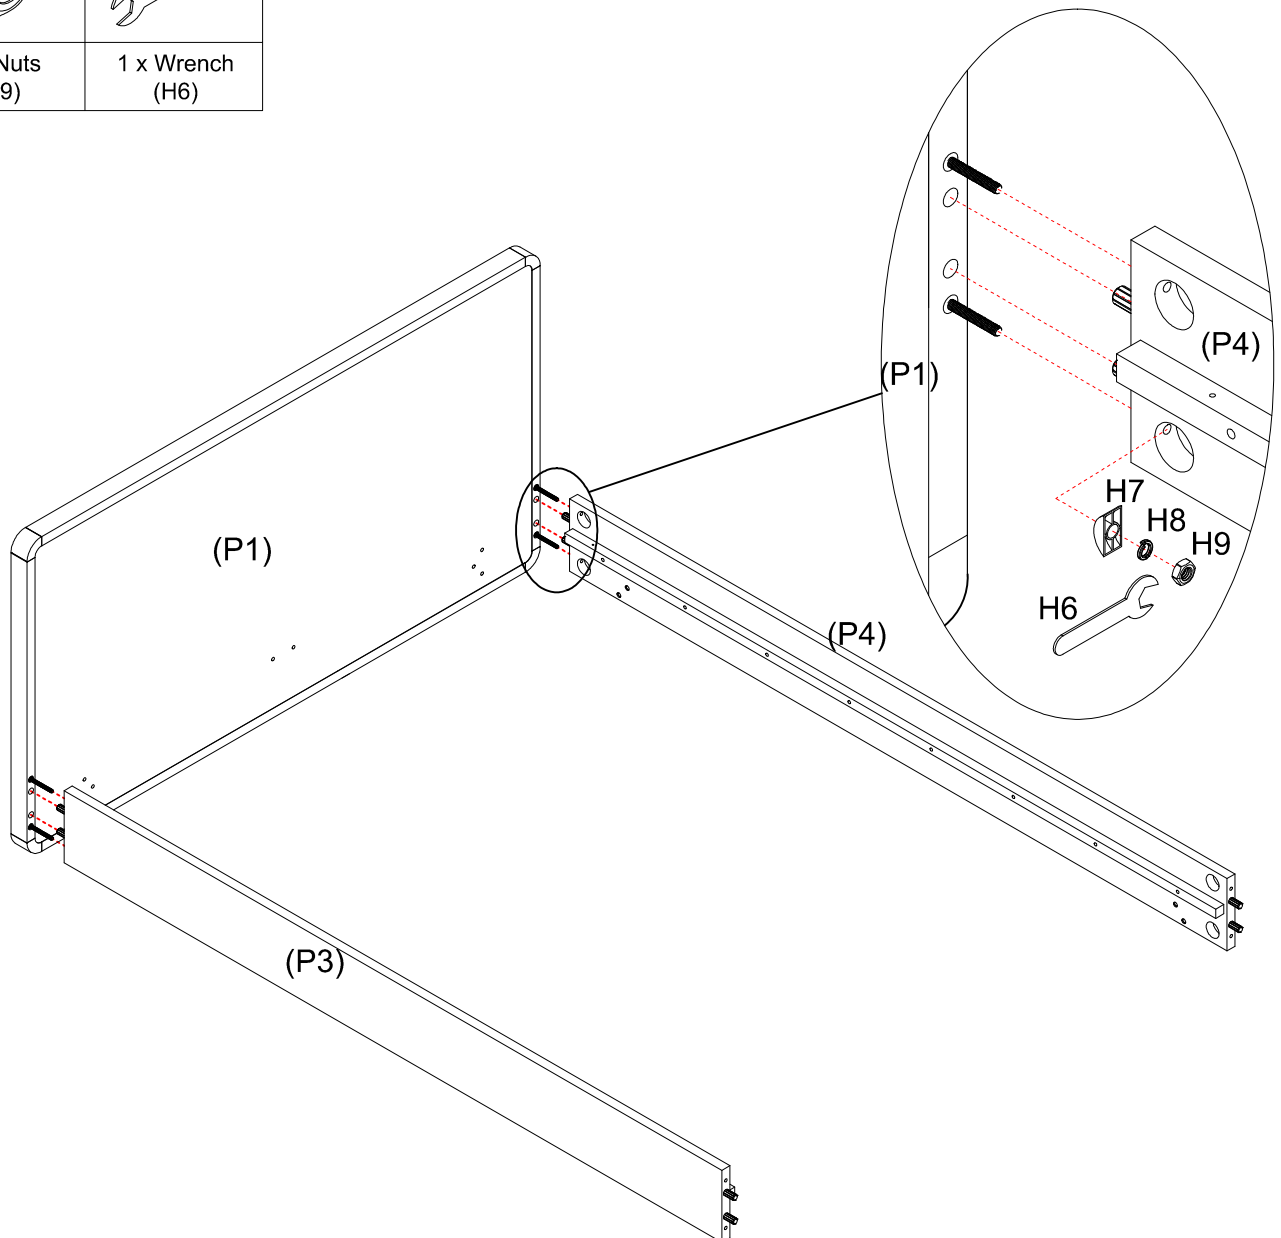


Attach side rails (P3) & (P4) onto headboard (P1) each with 2 x half moon washers (H7), 2 x spring washers (H8) and 2 x nuts (H9) as shown.

Step 5

TWO PEOPLE



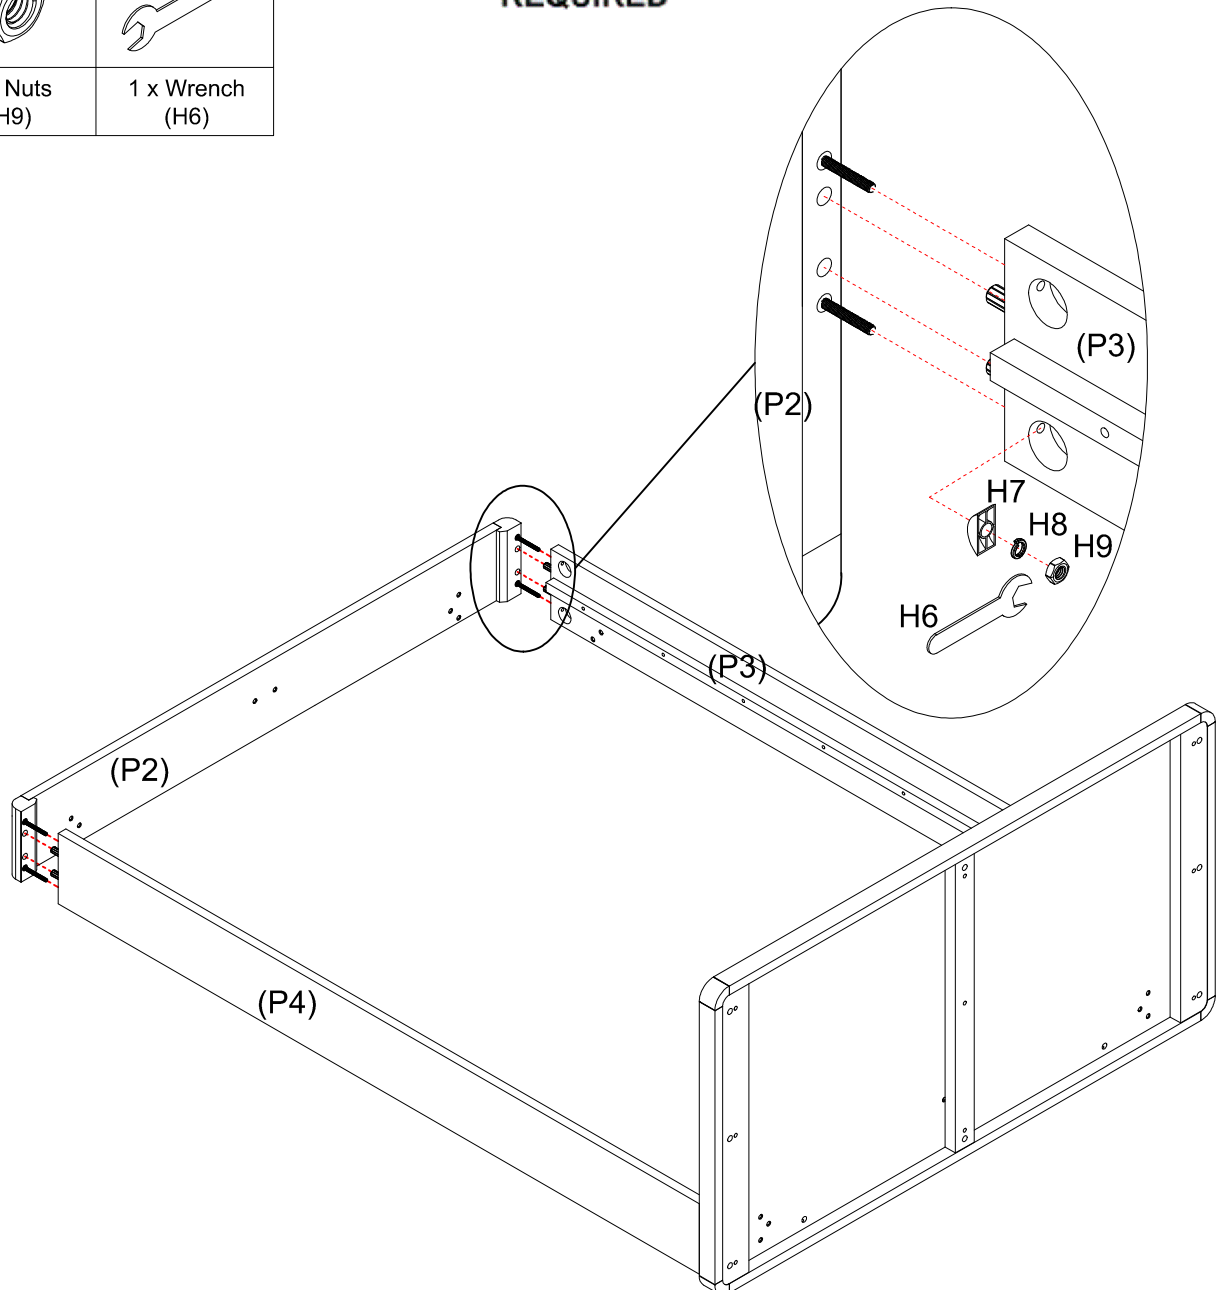


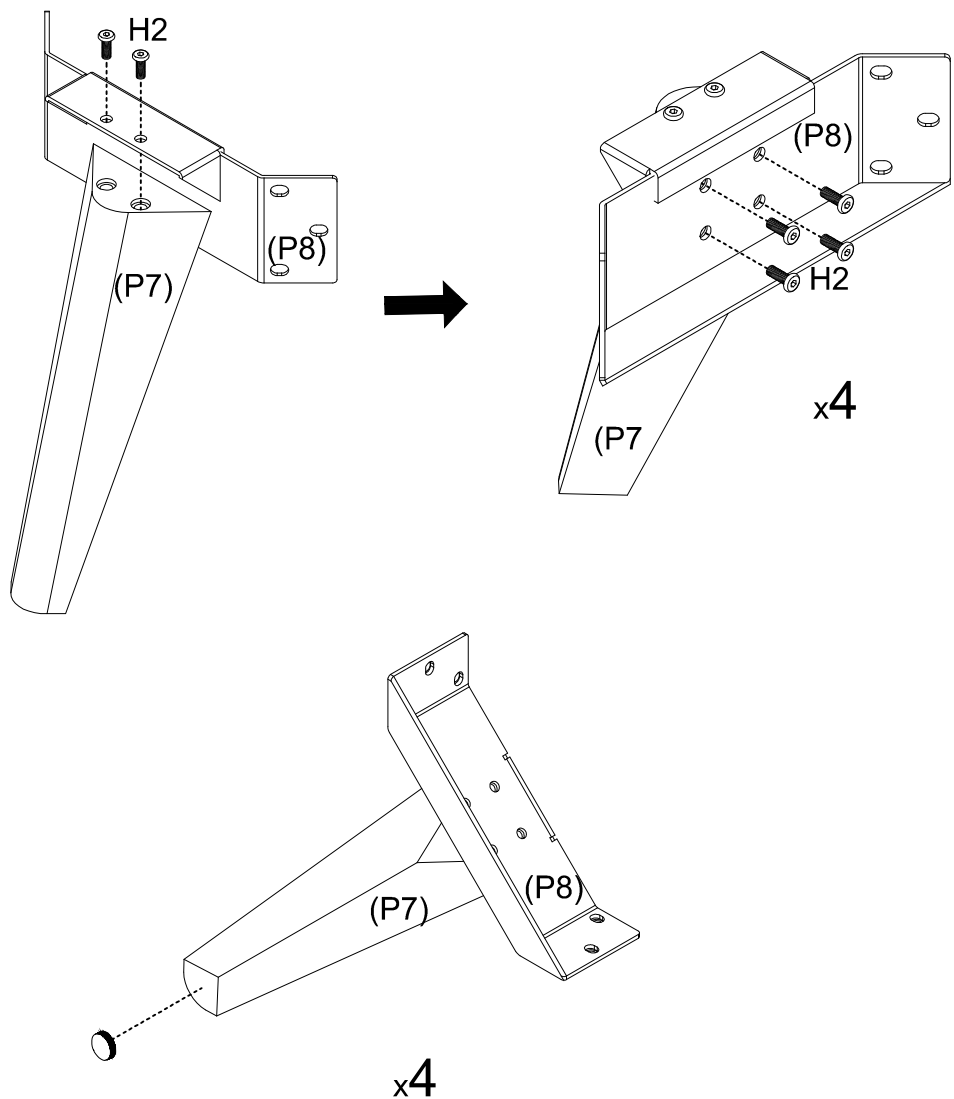
You will need	
4 x Half Moon Washers (H7)	4 x Spring Washers (H8)
4 x Nuts (H9)	1 x Wrench (H6)



Attach side rails (P3) & (P4) onto footboard (P2) each with 2 x half moon washers (H7), 2 x spring washers (H8) and 2 x nuts (H9) as shown.

Step 6



You will need	
	
24 x Small Bolts (H2)	1 x Allen Key (H10)
	
4 x Felt Feet (H4)	




Attach bracket (P8) onto each leg (P7) with 6 x small bolts (H2) as shown, then tighten with Allen Key (H10).

Attach each felt foot (H4) onto leg (P7) as shown.

Step 7

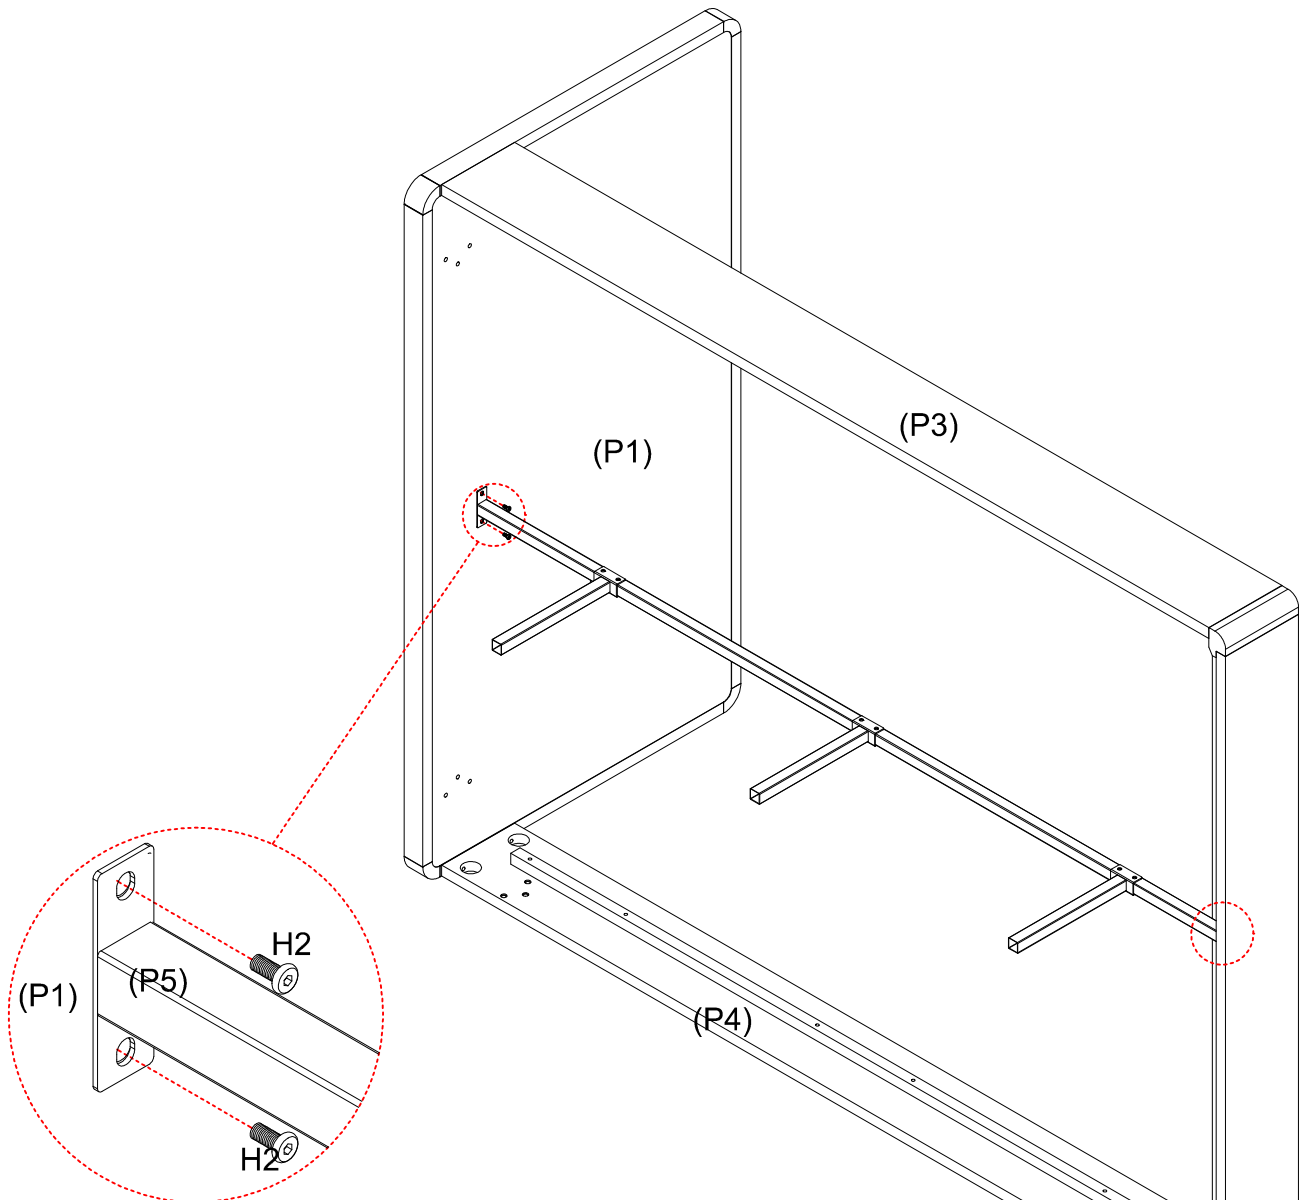

You will need	
	
4 x Small Bolts (H2)	1 x Allen Key (H10)




Carefully turn over the bed frame.

Attach centre rail (P5) onto headboard (P1) and footboard (P2), with 4 x small bolts (H2) as shown.


Step 8

You will need	
	
24 x Small Bolts (H2)	1 x Allen Key (H10)

TWO PEOPLE





REQUIRED

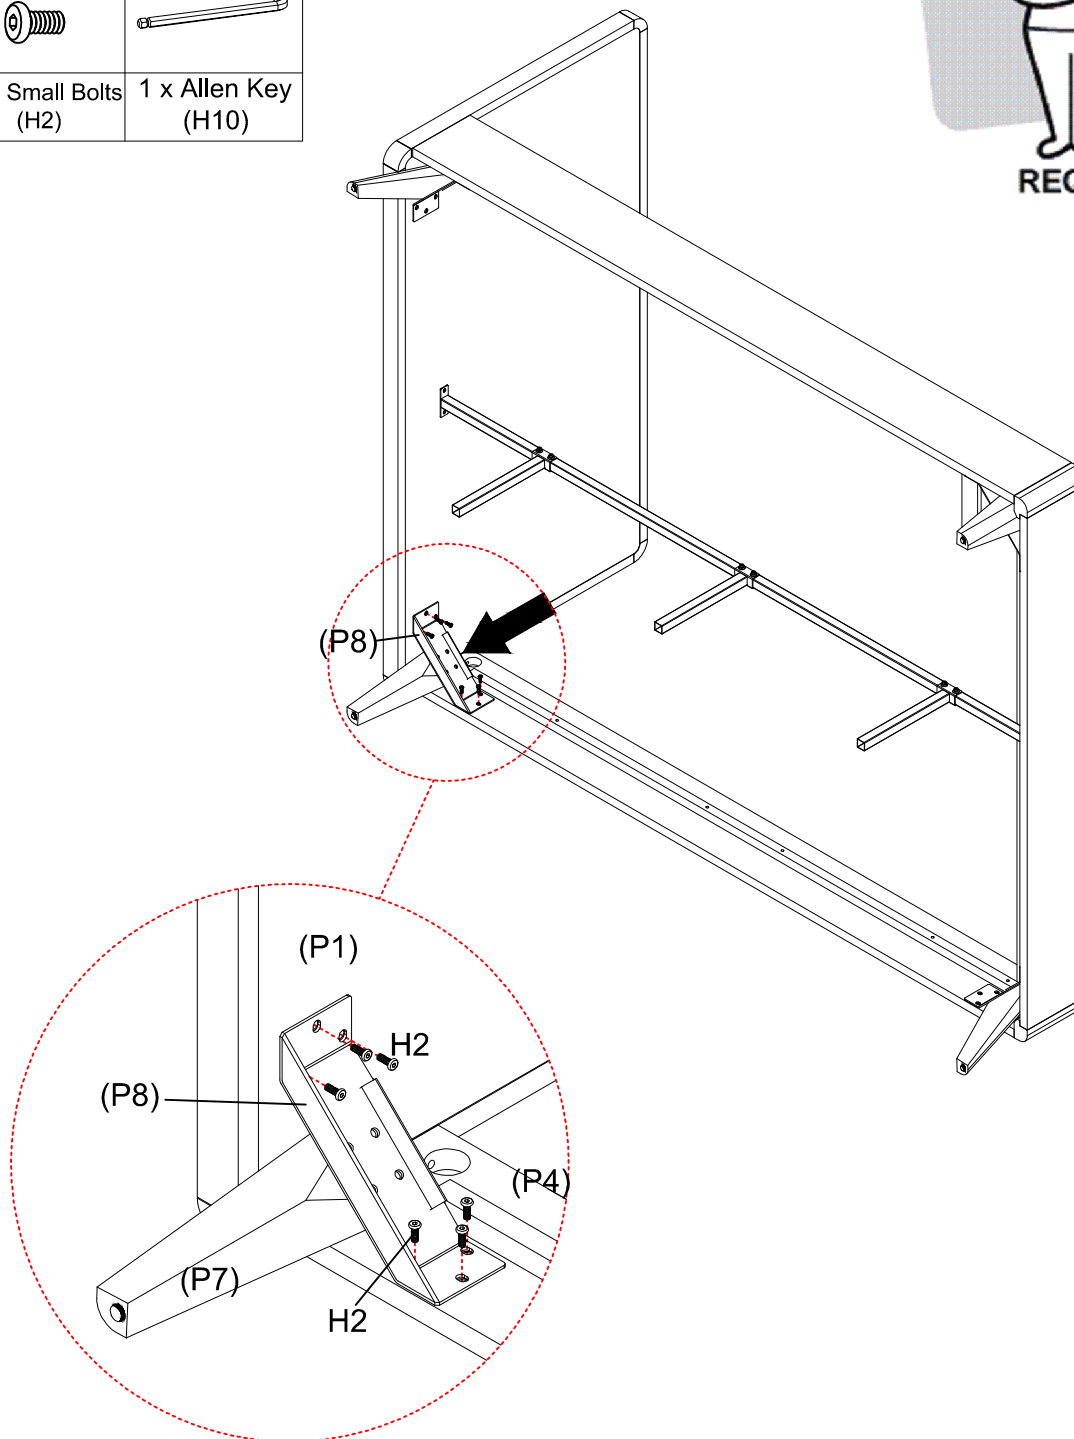


Attach each bracket (P8) onto bed frame with 6 x small bolts (H2) as shown, then tighten with allen key (H10).

Step 9


You will need	
	
30 x Screws (H11)	Phillips head screwdriver

TWO PEOPLE

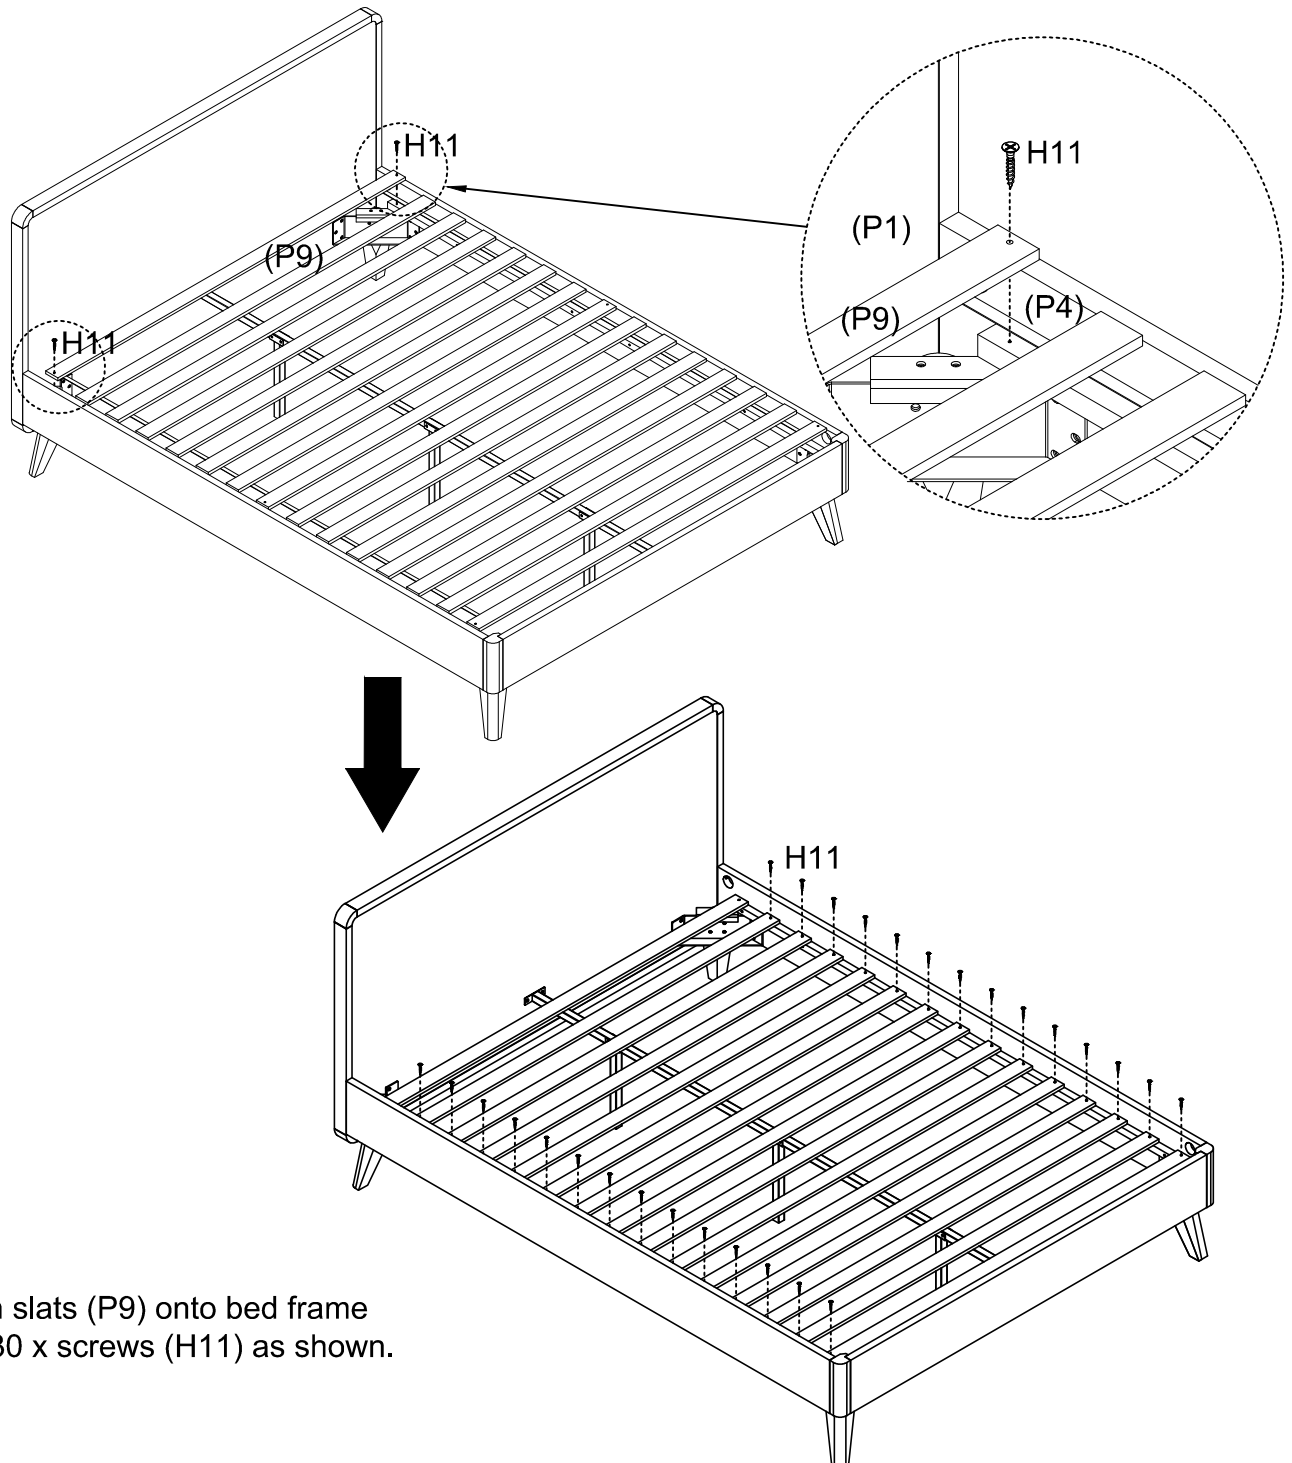

Attach slats (P9) onto bed frame with 30 x screws (H11) as shown.

Step 10

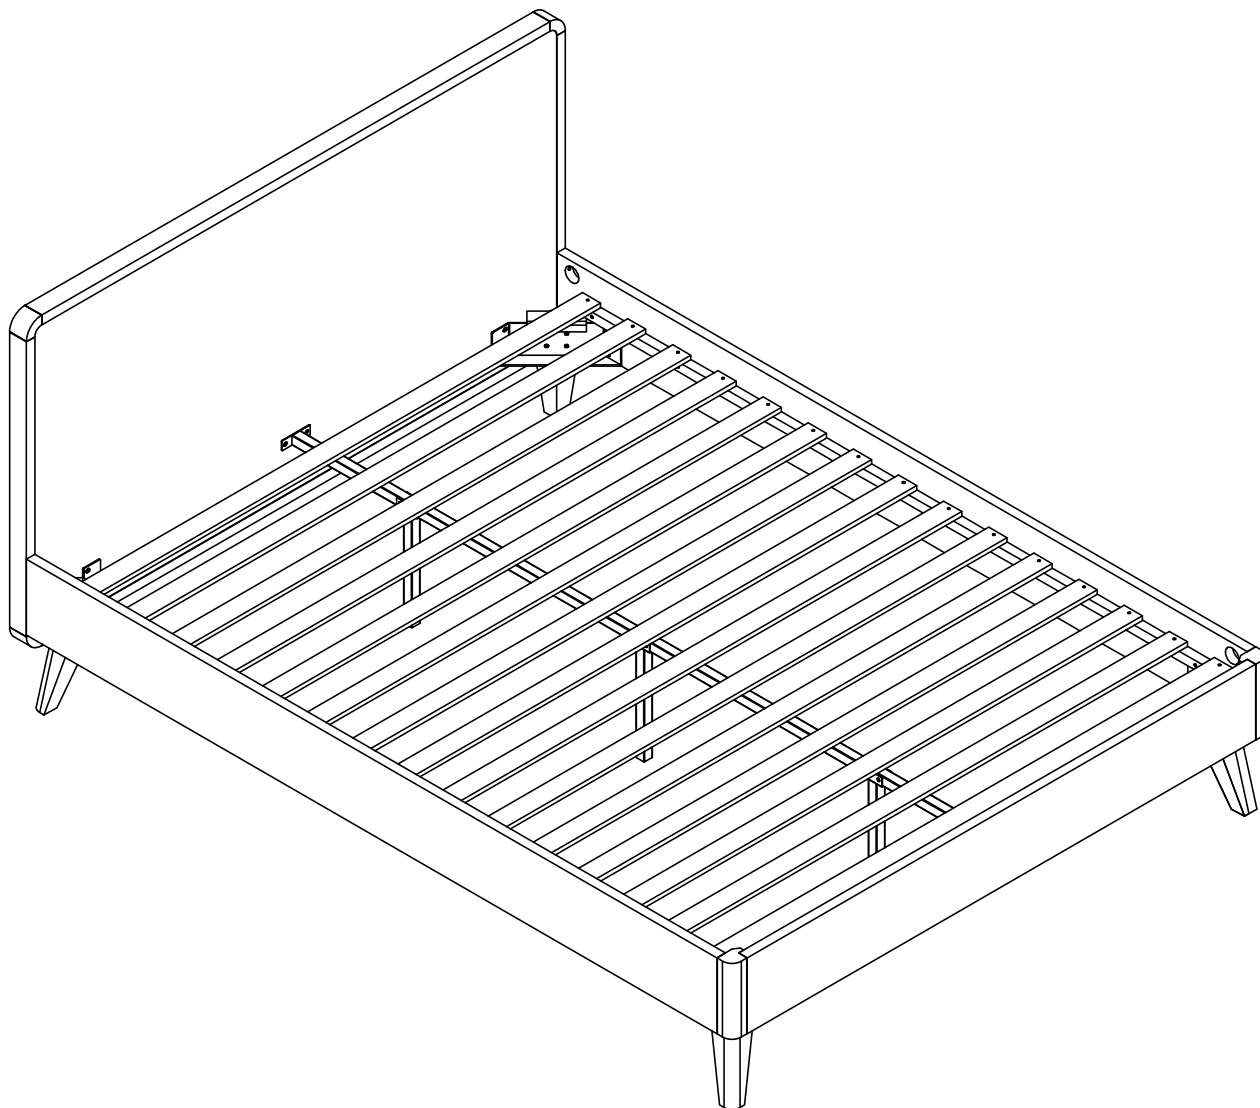

Job Complete !

In the interest of our environment please dispose of all packaging thoughtfully.