




**Fantastic  
Furniture**

Version 1.0

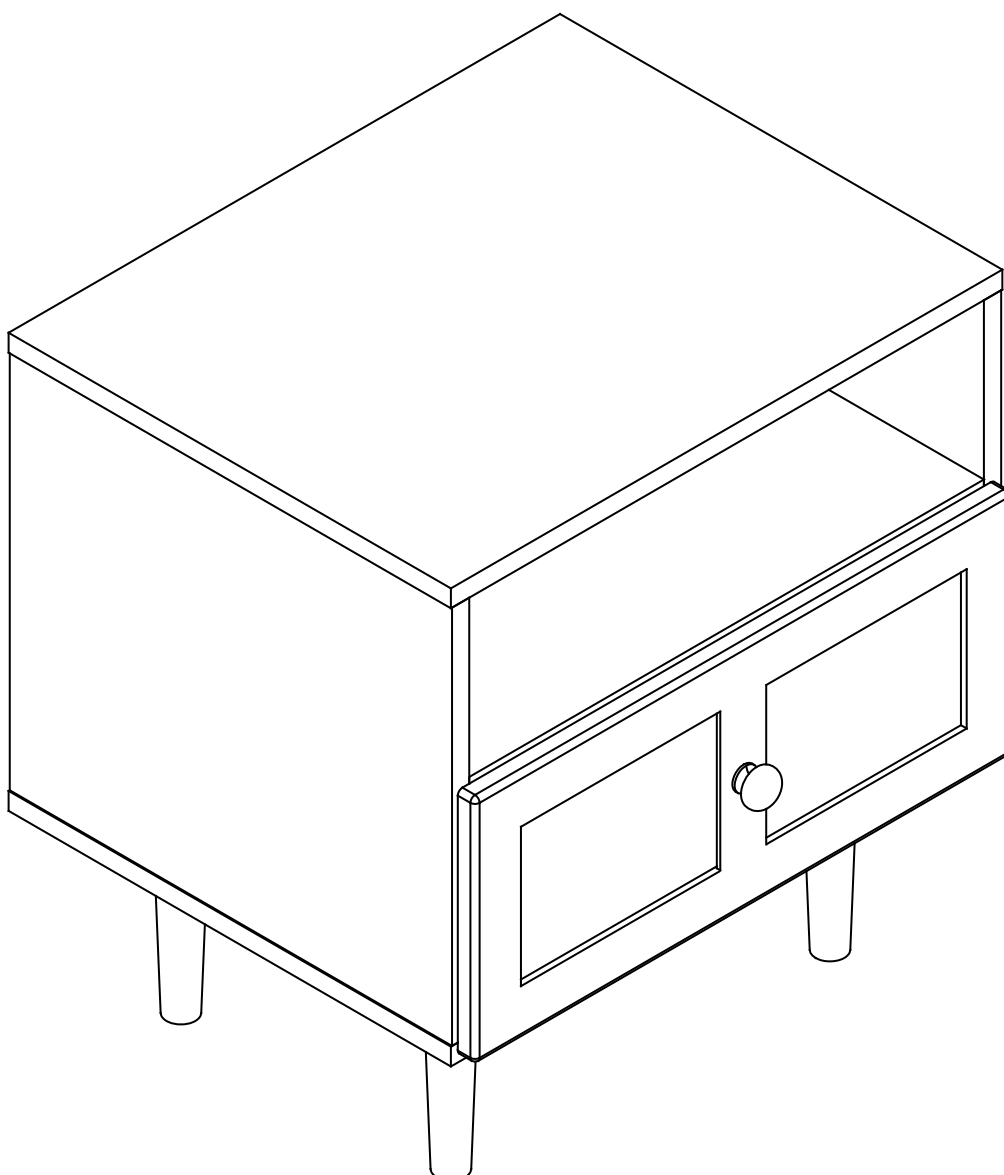

# Twilight

Bedside 1 Drawer

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

# Secure it!

Reduce the risk of furniture tip-over accidents



## WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments.

Please seek professional advice if you are in doubt of what fixing device to use.

**Recommended Weight Capacity :10kg/drawer**

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

## Wall attachment guide




**For plasterboard**  
(without available wood stud)

**Securing method:**  
Self drilling plasterboard anchor.



**For plasterboard**  
(with available wood stud)

**Securing method:**  
Screw inserted directly into stud.



**For masonry wall**

**Securing method:**  
Solid wall: Plug with screw  
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



# Fantastic Furniture

## Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.

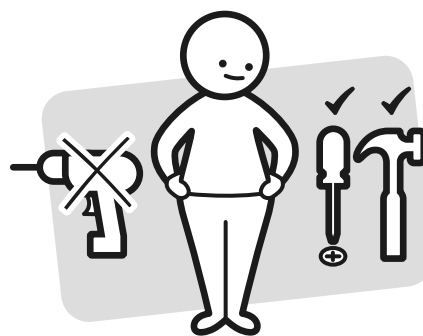

Make sure you have all the required tools. Never use power tools unless instructed.

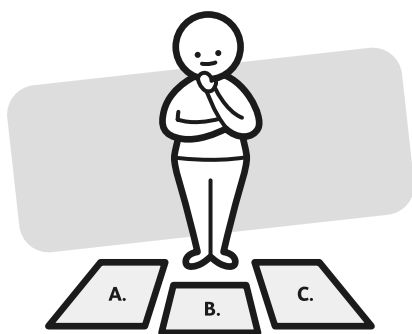

Identify and lay out all of the components before you begin assembly.

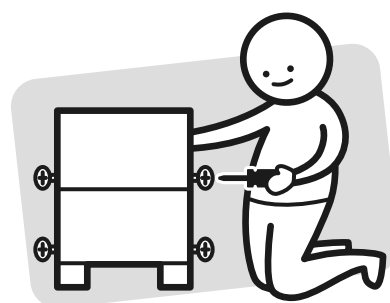

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need

## to assemble the product




DO NOT USE




### Other tools you need:

Phillips head screwdriver;  
Hammer

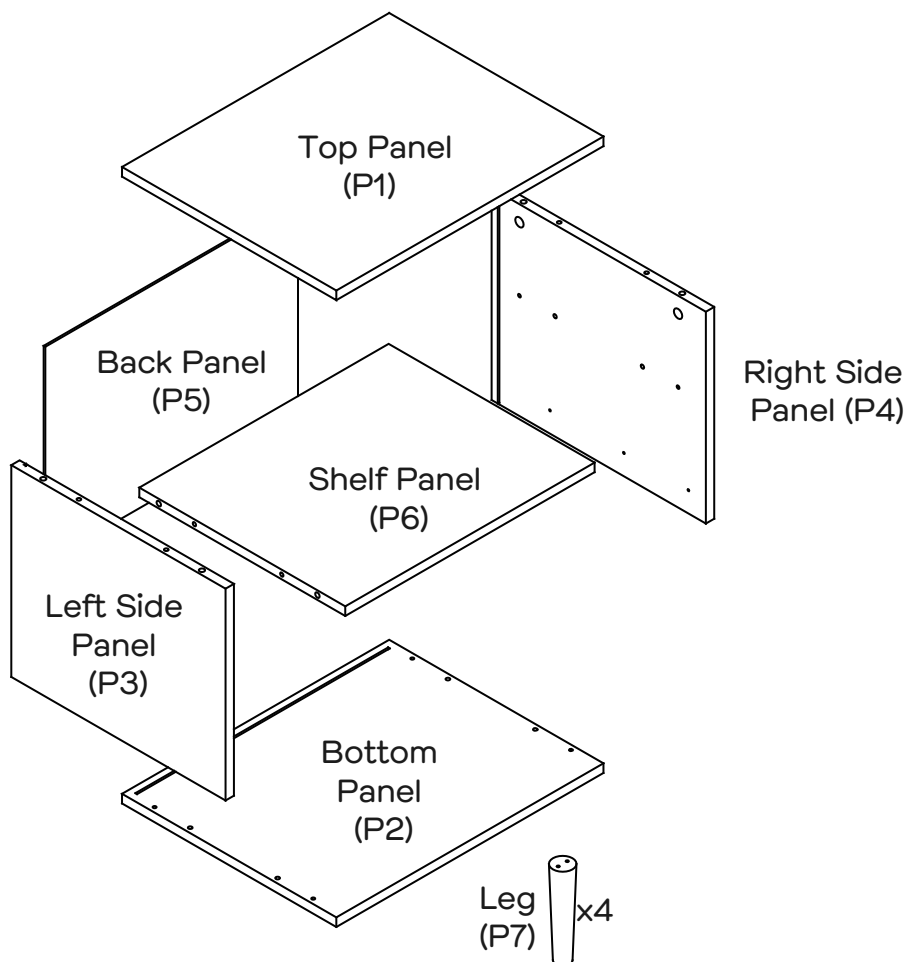


### Parts list



Top Panel (P1);  
Bottom Panel (P2)  
Left Side Panel (P3);  
Right Side Panel (P4);  
Back Panel (P5);  
Shelf Panel (P6);  
Drawer Front (P8);  
Left Drawer Side (P9);  
Right Drawer Side (P10);  
Drawer Base (P11);  
Drawer Back (P12);

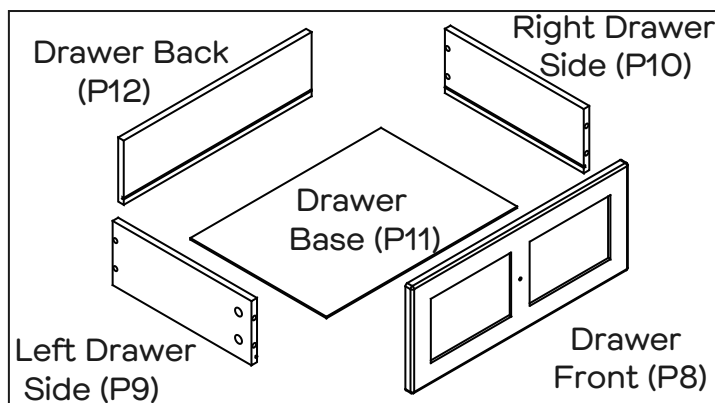


### Hardware pack

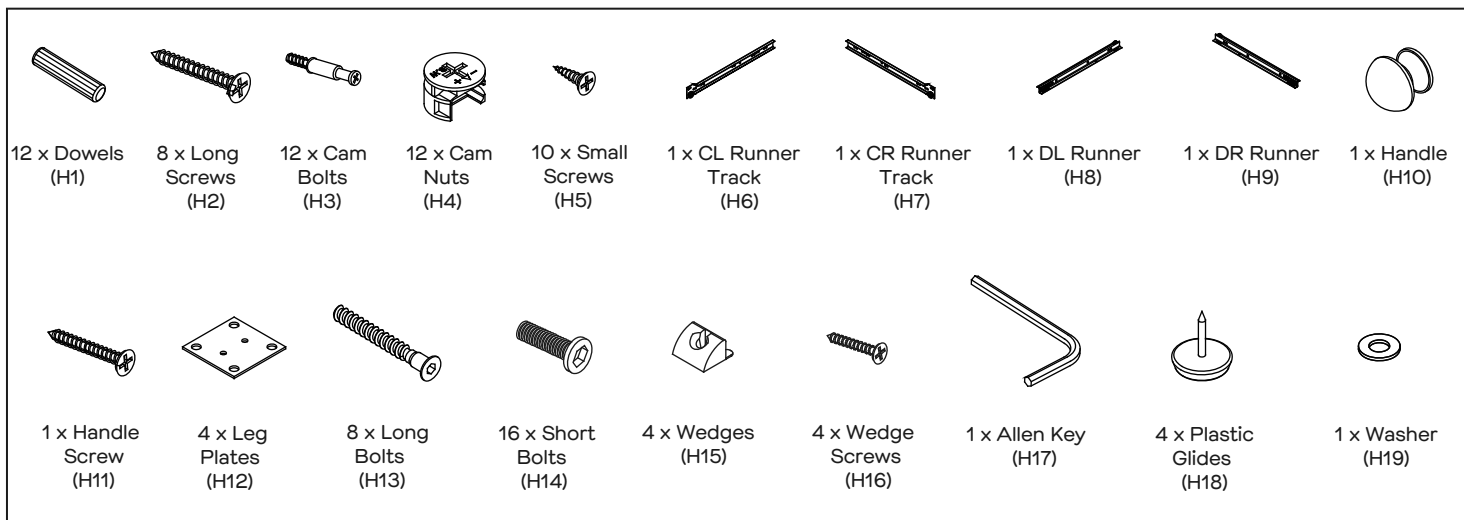





# Step 1





You will need	
	
4 x Cam Bolts (H3)	Phillips Head Screwdriver

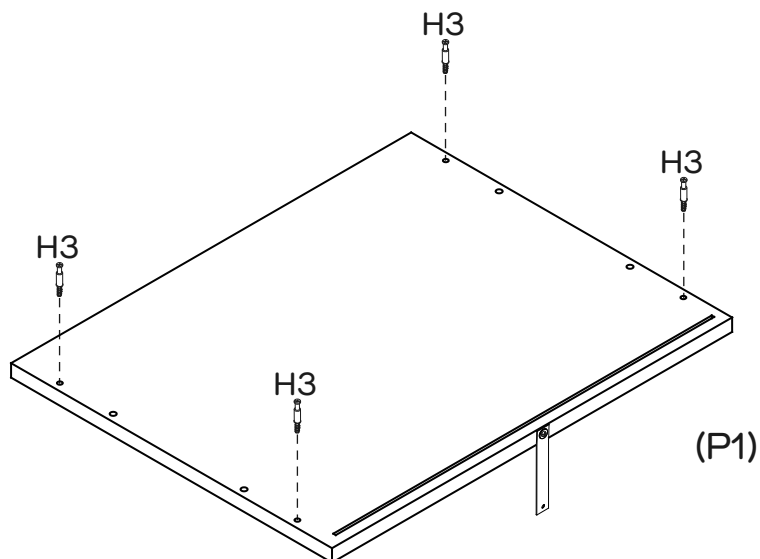

Attach 4 x Cam Bolts (H3) to Top Panel (P1) by tightening with the Phillips Head Screwdriver.



# Step 2


You will need	
	
6 x Small Screws (H5)	1 x CL Runner Track (H6)
	
1 x CR Runner Track (H7)	Phillips Head Screwdriver

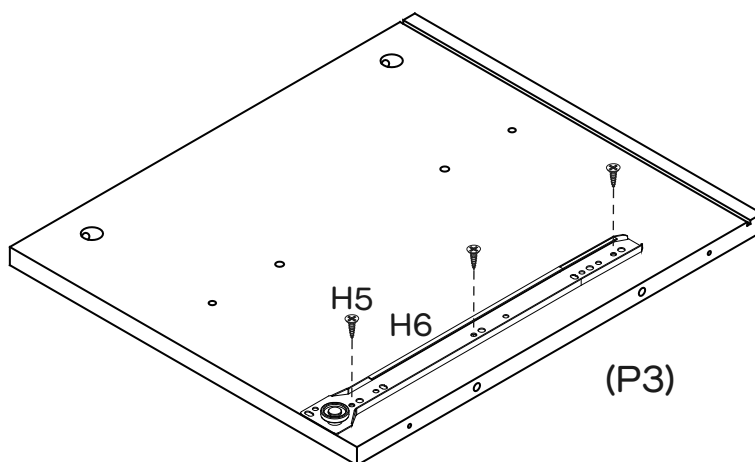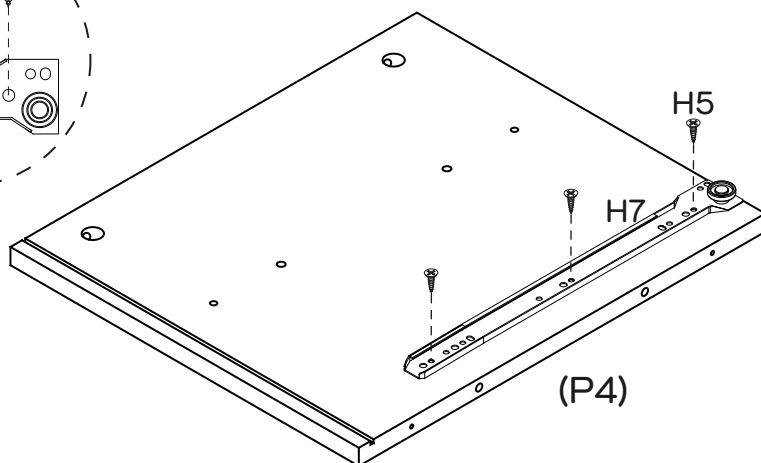

Attach 1 x CL Runner Track (H6) and 1 x CR Runner Track (H7) to Left & Right Side Panels (P3 & P4) with 6 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.




## Step 3

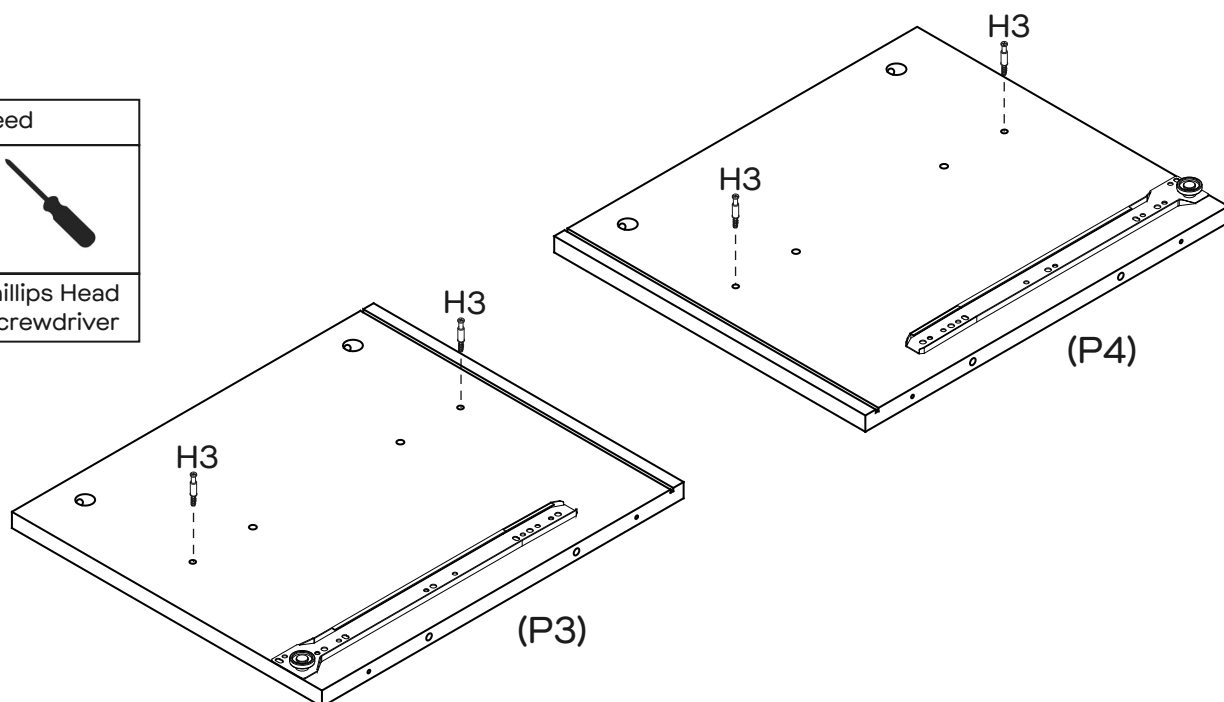
You will need	
	
4 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 4 x Cam Bolts (H3) to Left & Right Side Panels (P3 & P4) by tightening with the Phillips Head Screwdriver.


## Step 4

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

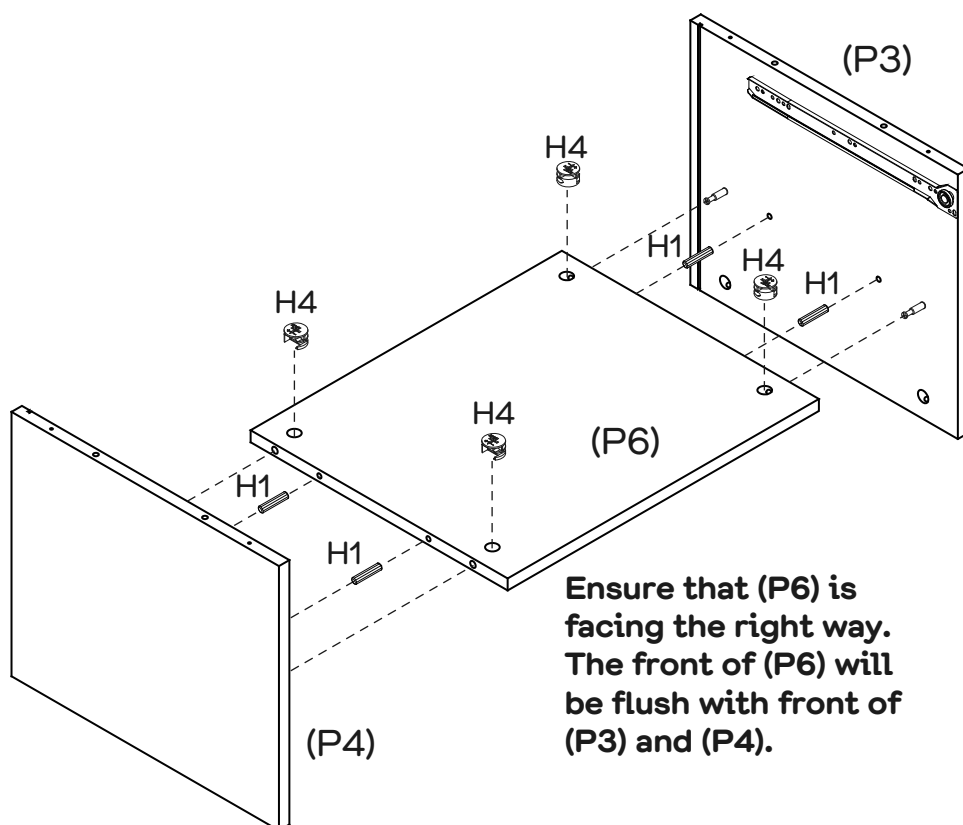

**Ensure that (P6) is facing the right way. The front of (P6) will be flush with front of (P3) and (P4).**




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 4 x Cam Nuts (H4) and 4 x Dowels (H1) into Shelf Panel (P6) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Left & Right Side Panels (P3 & P4) to Shelf Panel (P6) by tightening all cam nuts with the Phillips Head Screwdriver.


## Step 5

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

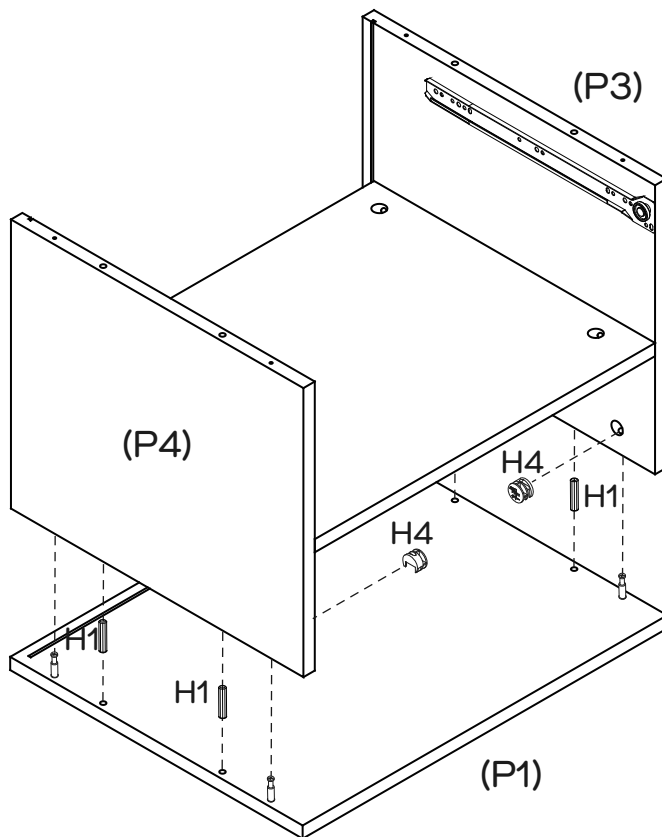

Insert 4 x Dowels (H1) into Top Panel (P1). Insert 4 x Cam Nuts (H4) into Left & Right Side Panels (P3 & P4) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to Left & Right Side Panels (P3 & P4) by tightening all cam nuts with the Phillips Head Screwdriver.

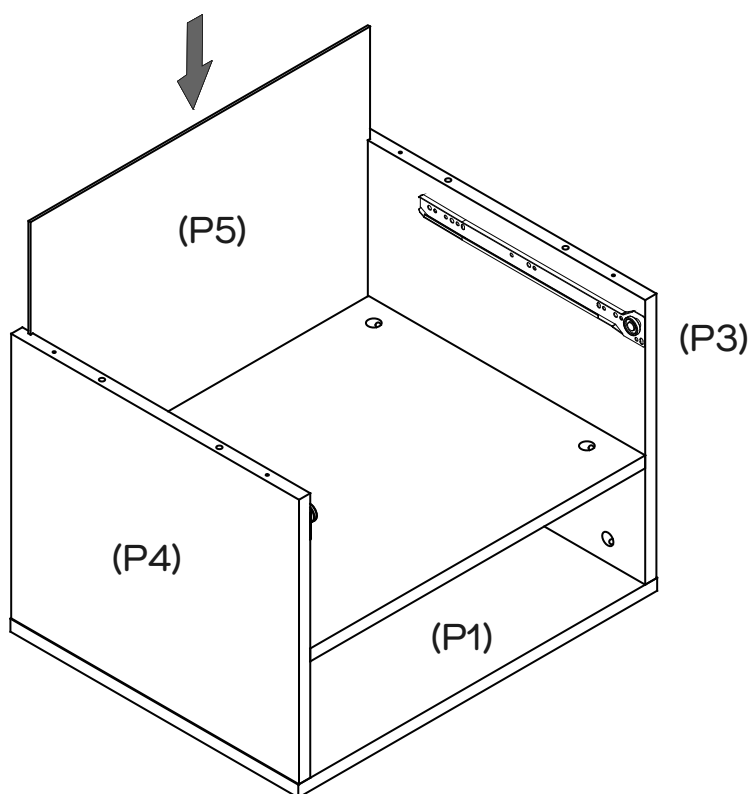


## Step 6




Slide Back Panel (P5) into the grooves of Left & Right Side Panel (P3 & P4) and Top panel (P1).



## Step 7

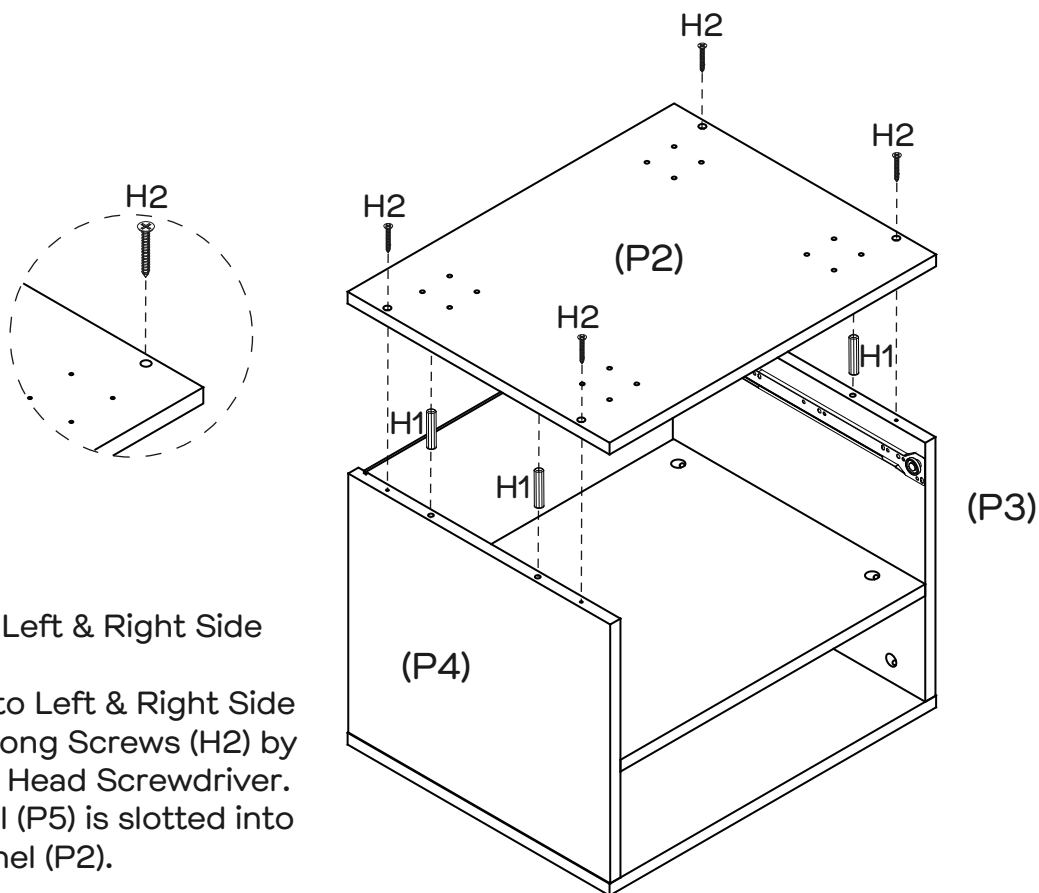






You will need	
	
4 x Dowels (H1)	4 x Long Screws (H2)
	
Phillips Head Screwdriver	




Insert 4 x Dowels (H1) into Left & Right Side Panels (P3 & P4).


Attach Bottom Panel (P2) to Left & Right Side Panels (P3 & P4) with 4 x Long Screws (H2) by tightening with the Phillips Head Screwdriver. Ensure that the Back Panel (P5) is slotted into the grooves of Bottom Panel (P2).

## Step 8

You will need	
	
4 x Leg Plates (H12)	8 x Long Bolts (H13)
	
16 x Short Bolts (H14)	4 x Plastic Glides (H18)
	
1 x Allen Key (H17)	Hammer
	
Phillips Head Screwdriver	

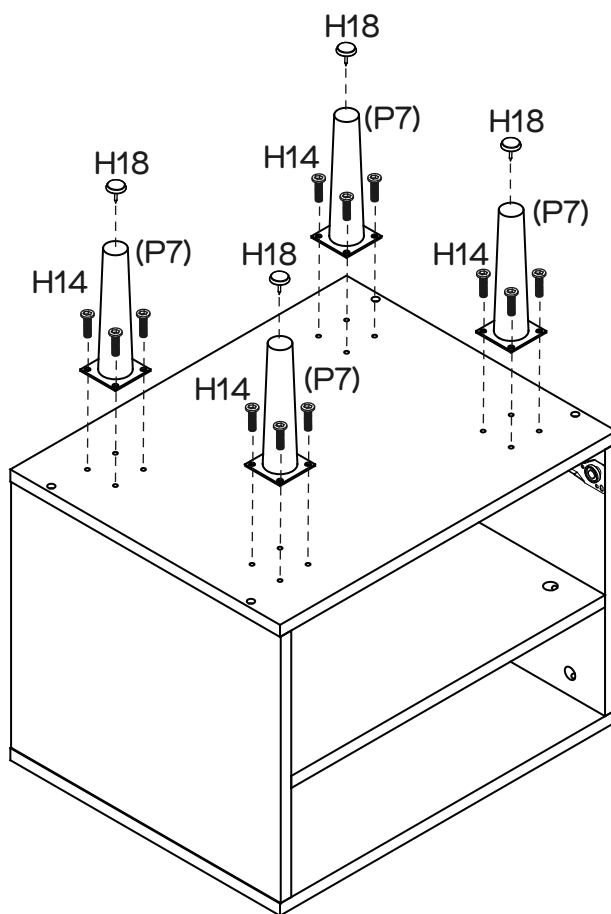

Ensure the countersunk holes on the Leg Plate are facing up, so that the Screws sit flush with the top of the Leg Plate once attached.

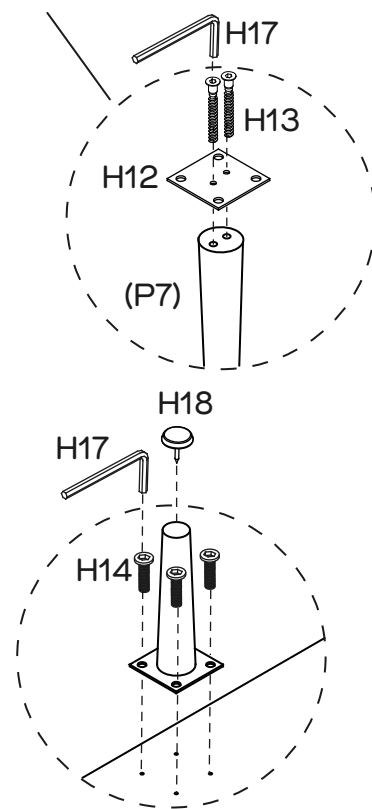



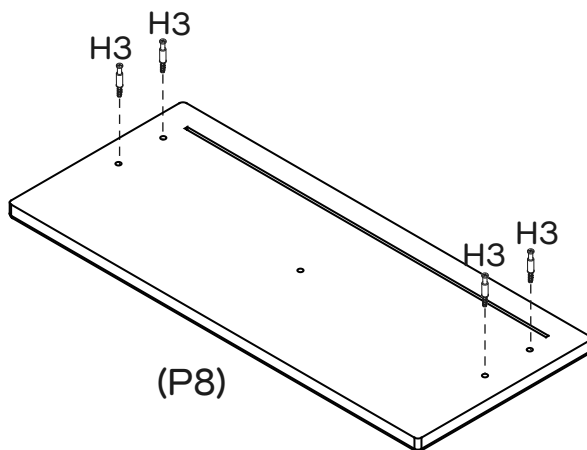
Secure 4 x Leg Plates (H12) to 4 x Legs (P7) with 8 x Long Bolts (H13) by tightening with an Allen Key (H17).

Attach 4 x Legs (P7) to Bottom Panel (P2) with 16 x Short Bolts (H14) by tightening with an Allen Key (H17).

Hammer 4 x Plastic Glides (H18) onto the bottom of Legs (P7).


## Step 9


You will need	
	
4 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 4 x Cam Bolts (H3) to Drawer Front Panel (P8) by tightening with the Phillips Head Screwdriver.


## Step 10

You will need	
	
4 x Long Screws (H2)	Phillips Head Screwdriver

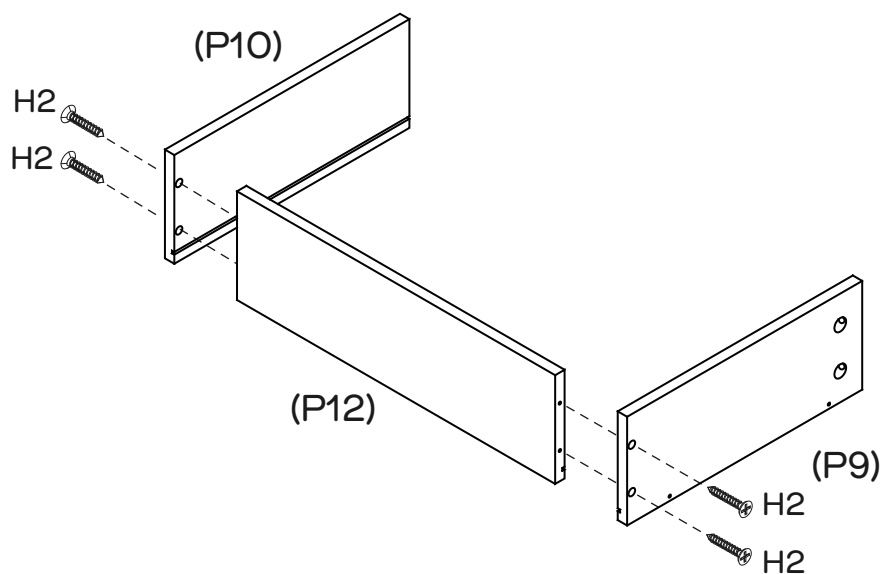



Attach Drawer Back (P12) to Left & Right Drawer Side (P9 & P10) with 4 x Long Screws (H2) by tightening with the Phillips Head Screwdriver.
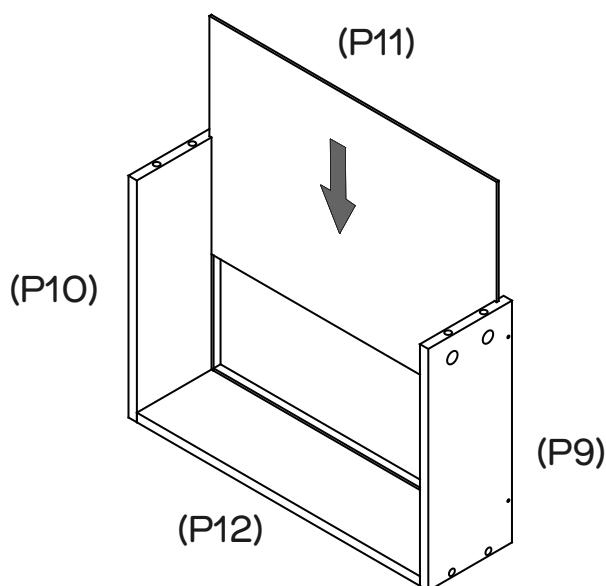
## Step 11




Slide the Drawer Base (P11) into the grooves of Left & Right Drawer Side (P9 & P10) and Drawer Back (P12) as shown.


## Step 12

You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

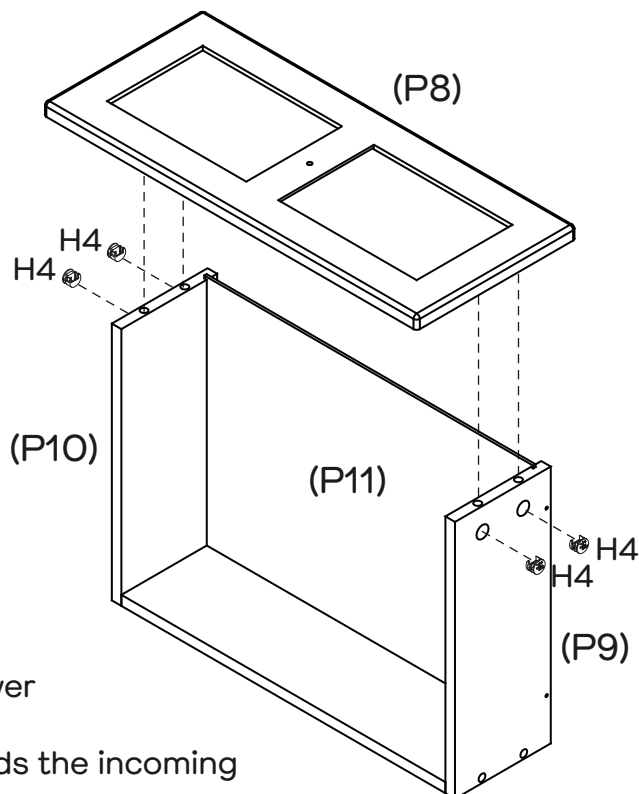





Insert 4 x Cam Nuts (H4) into Left & Right Drawer Side (P9 & P10) as shown.


Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Attach Drawer Front (P8) to Left & Right Drawer Side (P9 & P10) by tightening all cam nuts with the Phillips Head Screwdriver.

Ensure that the Drawer Base (P11) is slotted into the grooves of Drawer Front (P8).




## Step 13

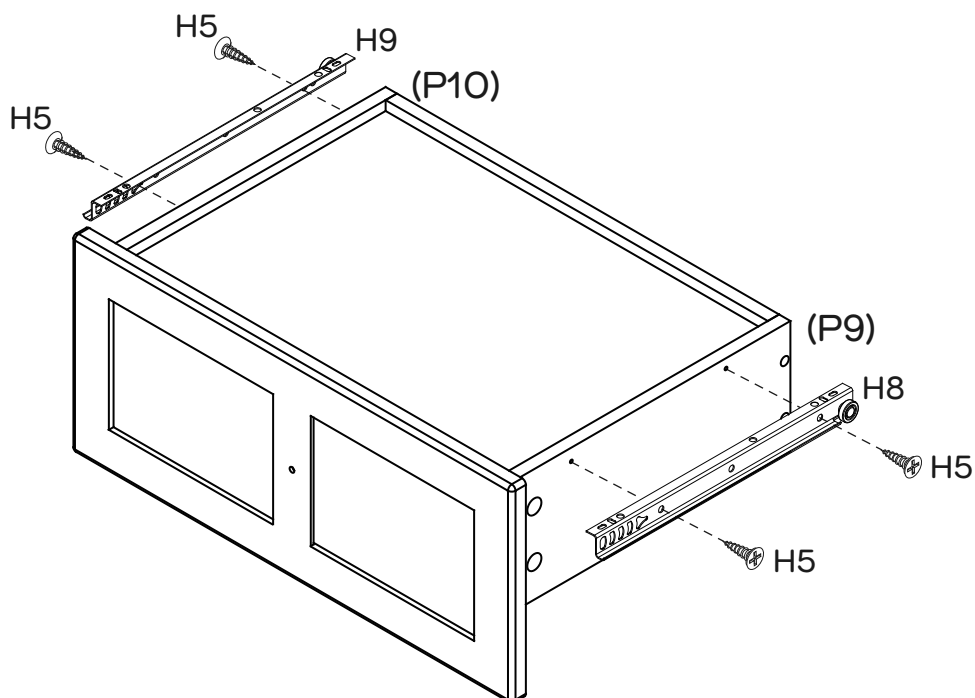
You will need	
	
1 x DL Runner (H8)	1 x DR Runner (H9)
	
4 x Small Screws (H5)	Phillips Head Screwdriver



Attach 1 x DL Runner (H8) to the bottom of Left Drawer Side (P9) and 1 x DR Runner (H9) to the bottom of Right Drawer Side (P10) with 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.


## Step 14

You will need	
	
1 x Handle Screw (H11)	1 x Handle (H10)
	
Phillips Head Screwdriver	

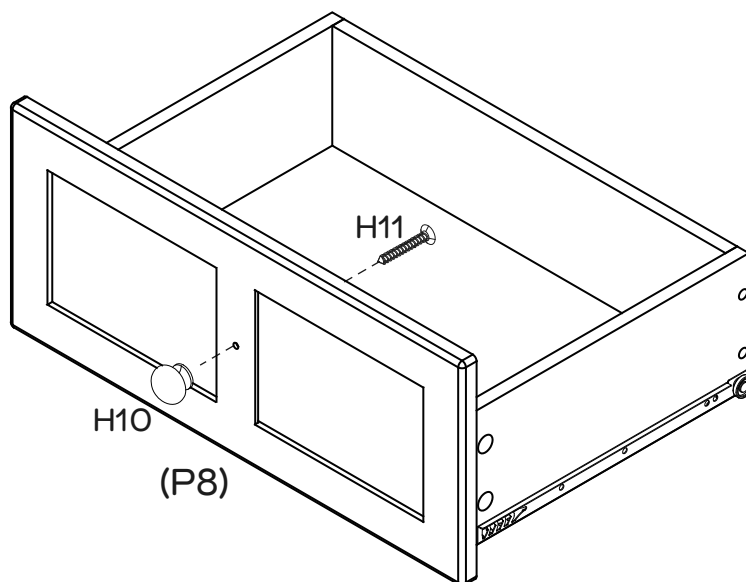




Attach 1 x Handle (H10) to Drawer Front (P8) with 1 x Handle Screw (H11) by tightening with the Phillips Head Screwdriver.


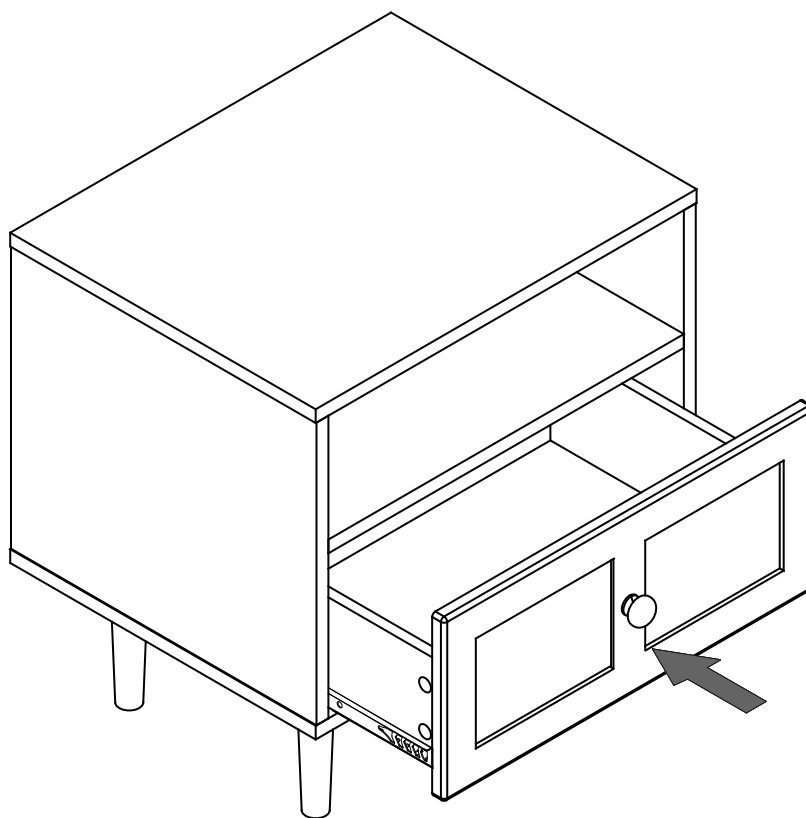
## Step 15



Insert the assembled drawer into the corresponding compartment as shown. Ensure the drawer slide easily along the rails.



## Step 16

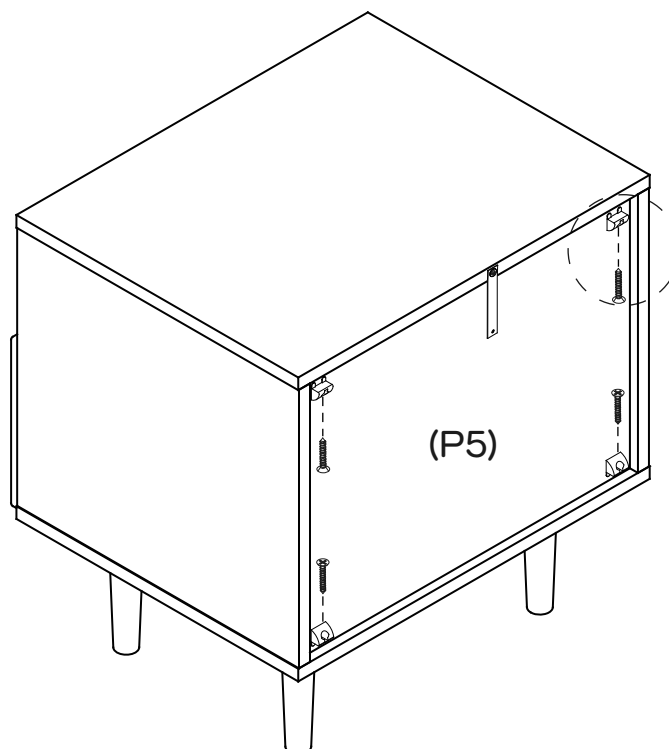You will need	
	
4 x Wedges (H15)	4 x Wedge Screws (H16)
	
Phillips Head Screwdriver	





Secure Back Panel (P5) in place with 4 x Wedges (H15) using 4 x Wedge Screws (H16) by tightening with the Phillips Head Screwdriver.

## Step 17

You will need	
	
1 x Washer (H19)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

**Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.**

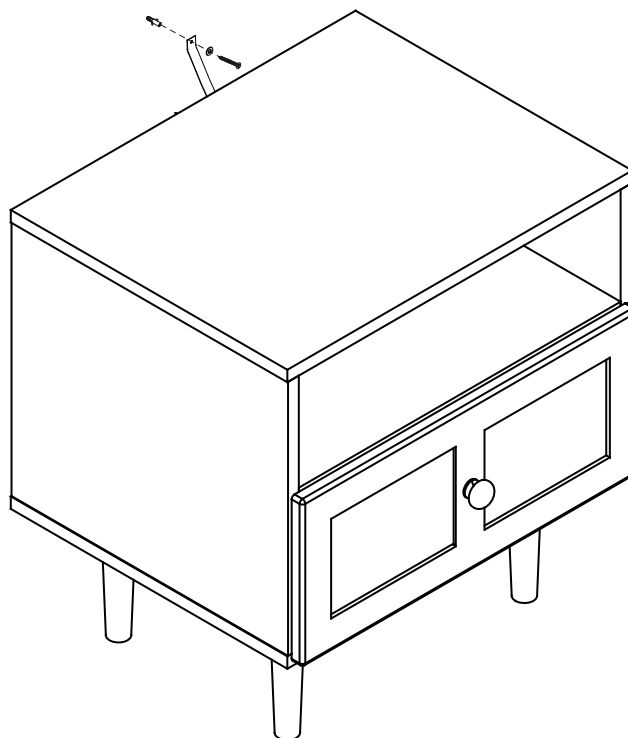

Move the unit to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

## Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.