




**Fantastic
Furniture**

Version 1.0

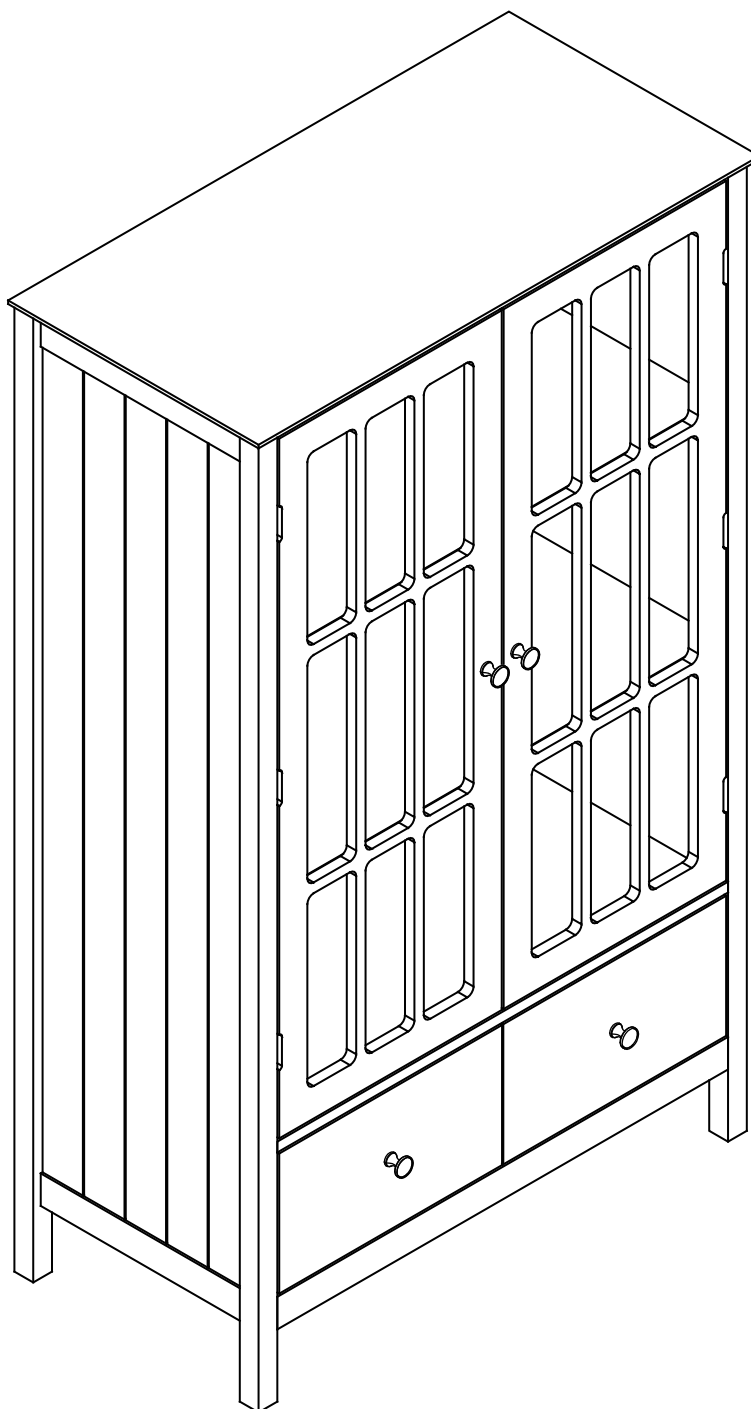

Two People



Required


Hamilton

Display Cabinet 1 Drawer

fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Recommended Weight Capacity :20kg/shelf

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.



For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.



Glass should always be handled with care.

cause glass to break. This glass is designed to break into small, relatively harmless pieces and not sharp fragments. Avoid placing hot or cold items directly onto the table unless using a thick insulation material such as placemats or coasters.

Avoid dropping objects onto the glass.

Do not allow hard or pointed objects to come into contact with the glass. Never use the top area as a chopping surface.

Do not sit or stand on the glass surface.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

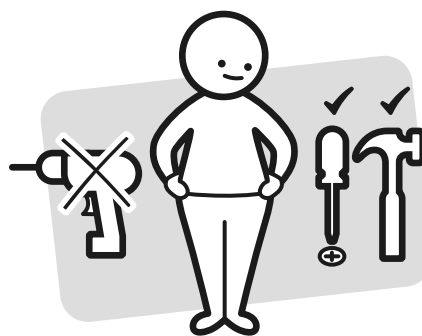

Make sure you have all the required tools. Never use power tools unless instructed.

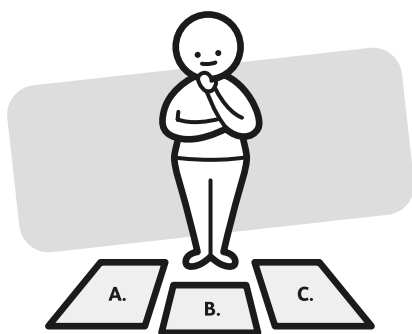

Identify and lay out all of the components before you begin assembly.

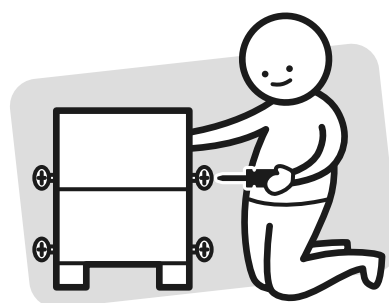

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE




Other tools you need:
Phillips head screwdriver;


Parts list

Top Panel (P1);
Left Side Panel (P2);
Right Side Panel (P3);
2 x Shelf Panels (P4);
Bottom Shelf Panel (P5);
3 x Back Panels (P6);
Drawer Back Panel (P7);
Rail (P8); Rail (P9);
Left Door (P10);
Right Door (P11);
Drawer Front (P12);
Left Drawer Side (P13);
Right Drawer Side (P14);
Drawer Back (P15);
Drawer Base (P16);
Rail (P17);
Iron Bar (P18);






Left Side
Panel (P2)

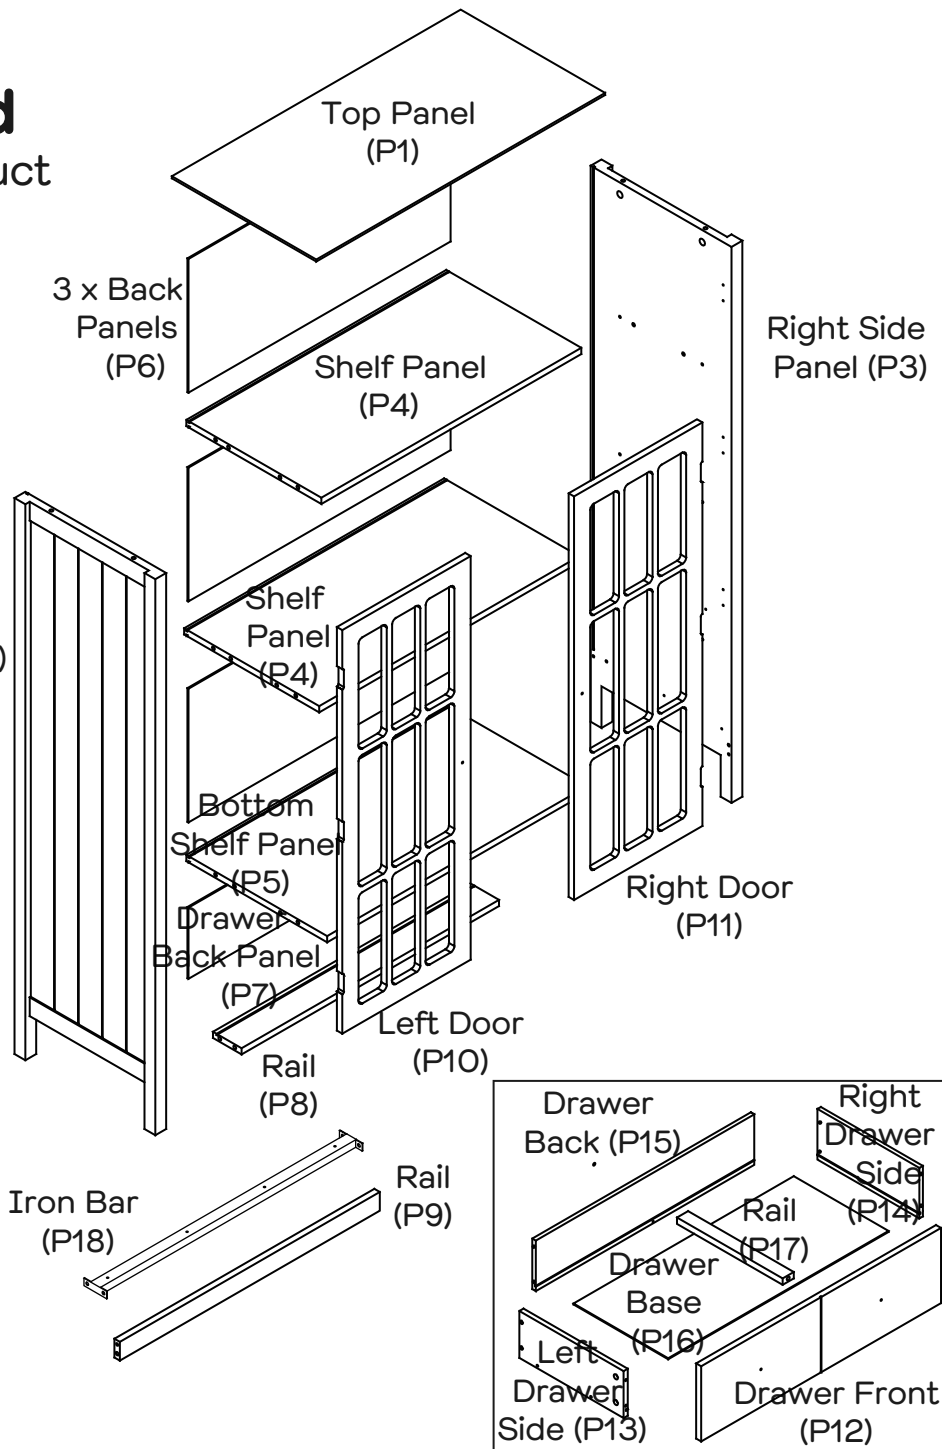


Hardware pack

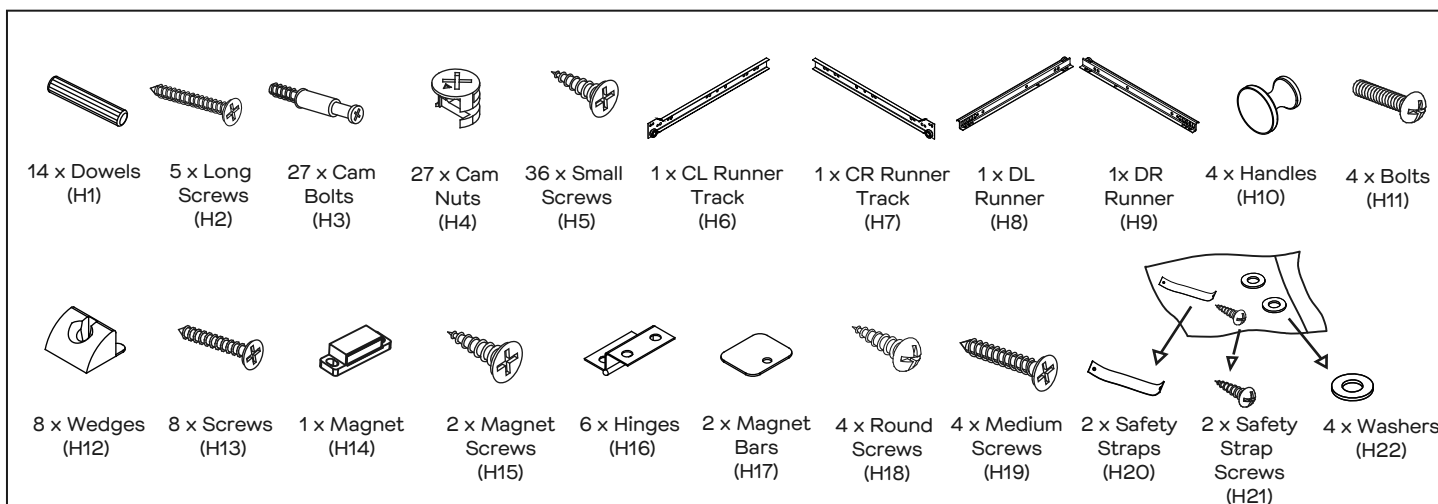



Step 1


You will need	
	
18 x Cam Bolts (H3)	6 x Small Screws (H5)
	
1 x CL Runner Track (H6)	1 x CR Runner Track (H7)
	
Phillips Head Screwdriver	

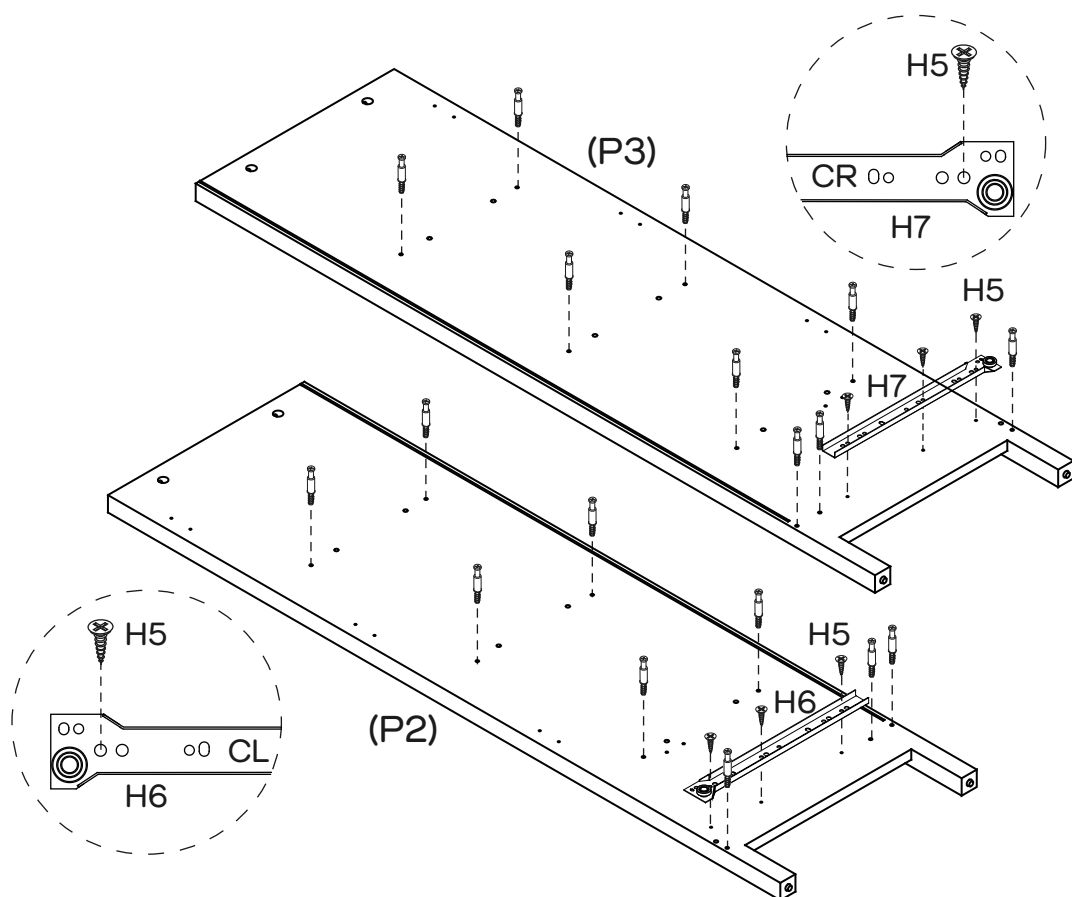

Attach 18 x Cam Bolts (H3) to Left & Right Side Panels (P2 & P3) as shown by tightening with the Phillips Head Screwdriver. Attach 1 x CL Runner Track (H6) to Left Side Panel (P2) with 3 x Small Screws (H5). Attach 1 x CR Runner Track (H7) to Right Side Panel (P3) with 3 x Small Screws (H5).





Step 2

You will need	
	
4 x Medium Screws (H19)	Phillips Head Screwdriver

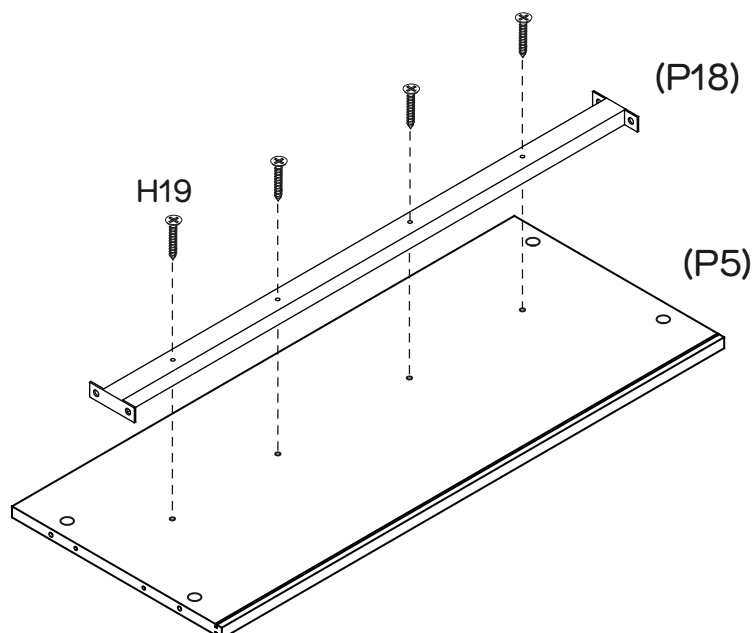


Attach Iron Bar (P18) to Bottom Shelf Panel (P5) with 4 x Medium Screws (H19) by tightening with the Phillips Head Screwdriver.


Step 3

You will need	
	
7 x Dowels (H1)	9 x Cam Nuts (H4)
	
2 x Round Screws (H18)	Phillips Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

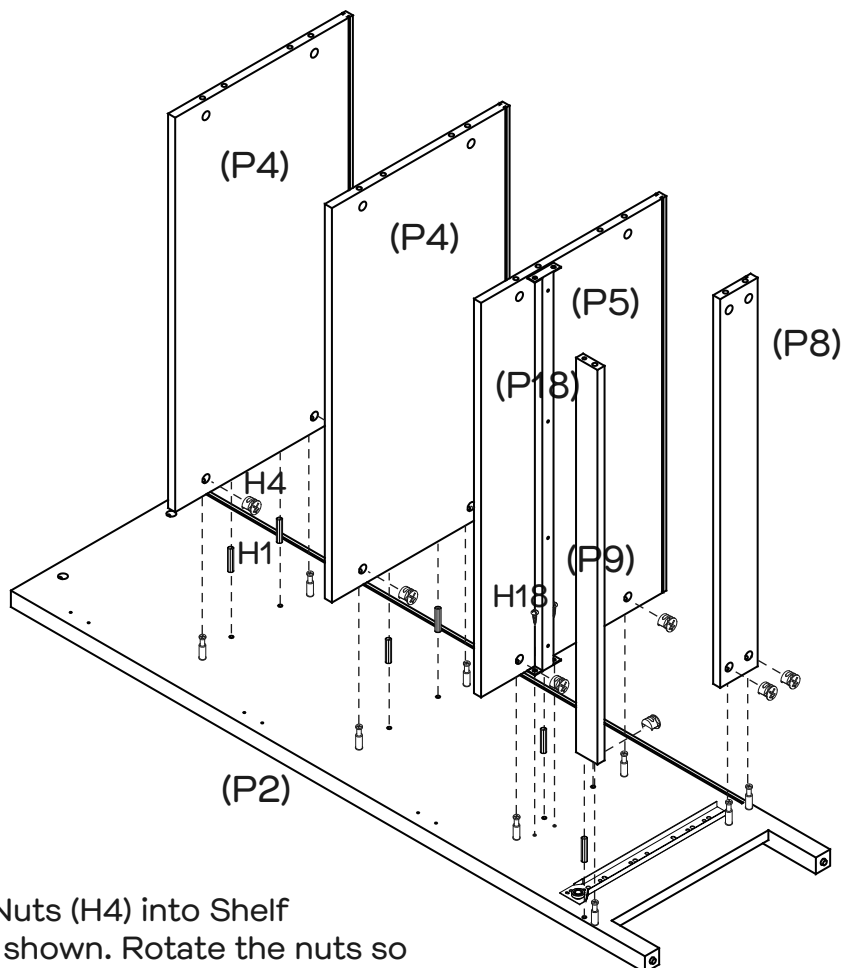





Insert 7 x Dowels (H1) and 9 x Cam Nuts (H4) into Shelf Panels & Rails (P4x2, P5&P8, P9) as shown. Rotate the nuts so the arrows point towards the incoming bolts. Attach Shelf Panels & Rails (P4x2,P5&P8, P9) to Left Side Panel (P2) by tightening all nuts with the Phillips Head Screwdriver. Attach the end of Iron Bar (P18) to Left Side Panel (P2) with 2 x Round Screws (H18).


Step 4

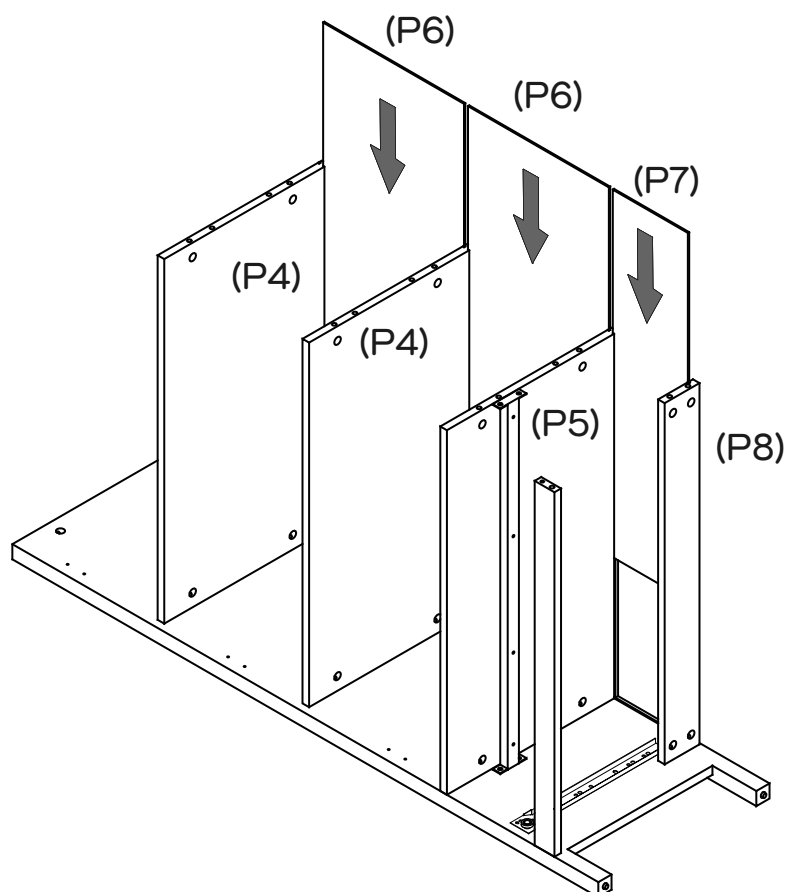

Slide Back Panels (P6x2, P7) into the grooves of Shelf Panels & Rail (P4x2, P5 & P8).


Step 5

You will need	
	
7 x Dowels (H1)	9 x Cam Nuts (H4)
	
2 x Round Screws (H18)	Phillips Head Screwdriver

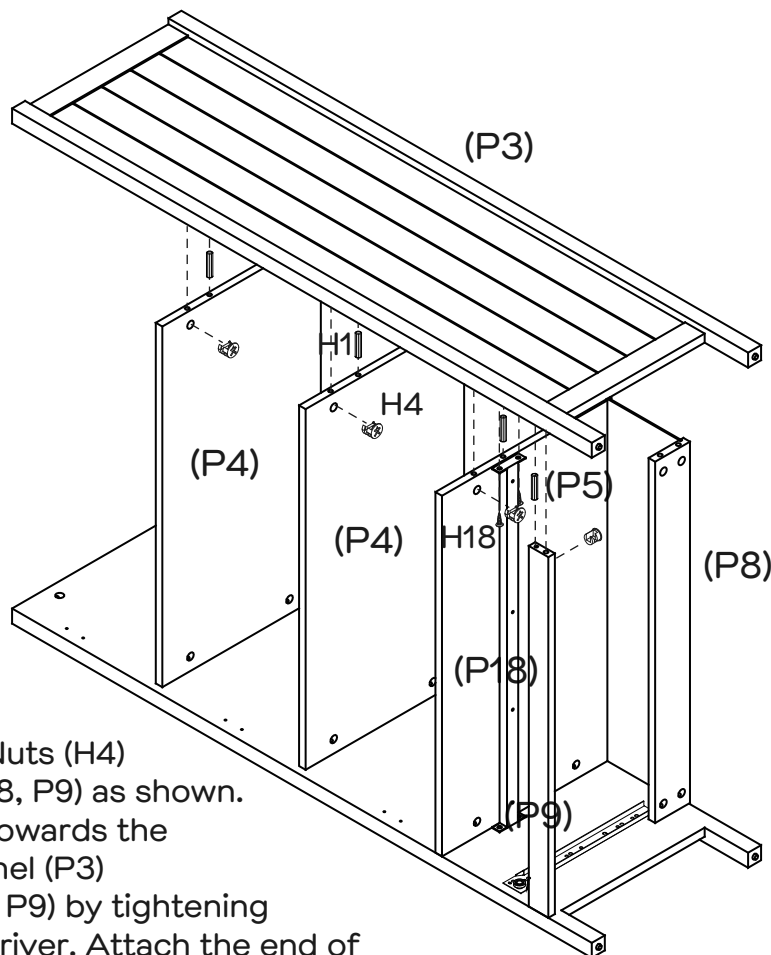





Insert 7 x Dowels (H1) and 10 x Cam Nuts (H4) into Shelf Panels & Rails (P4x2, P5&P8, P9) as shown. Rotate the nuts so the arrows point towards the incoming bolts. Attach Right Side Panel (P3) to Shelf Panels & Rails (P4x2, P5&P8, P9) by tightening all nuts with the Phillips Head Screwdriver. Attach the end of Iron Bar (P18) to Right Side Panel (P3) with 2 x Round Screws (H18).


Step 6

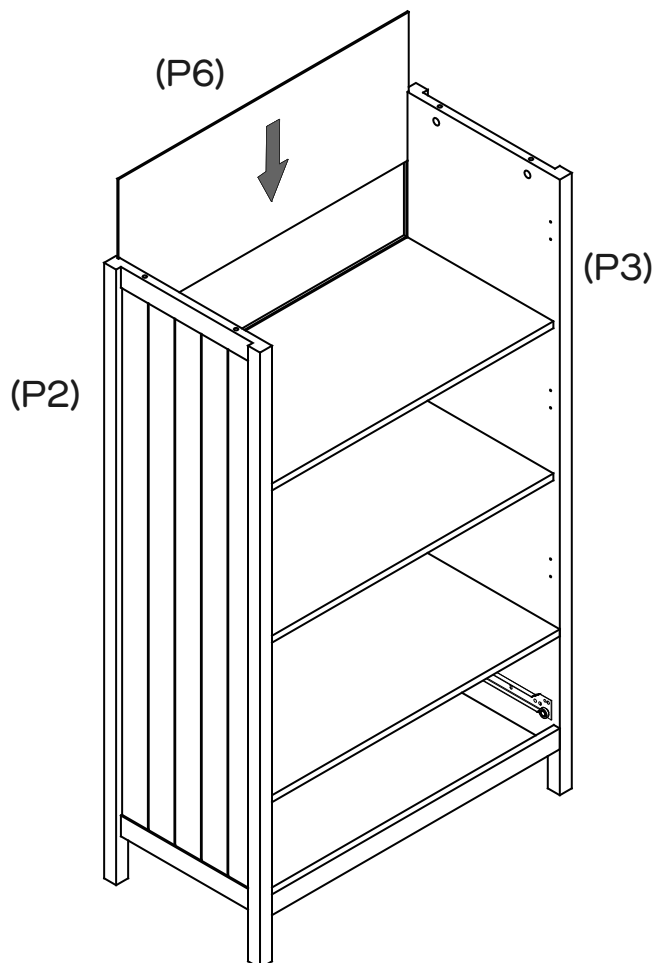

Gently stand the unit upright. Slide Back Panel (P6) into the grooves of Left&Right Side Panels (P2&P3).



Step 7

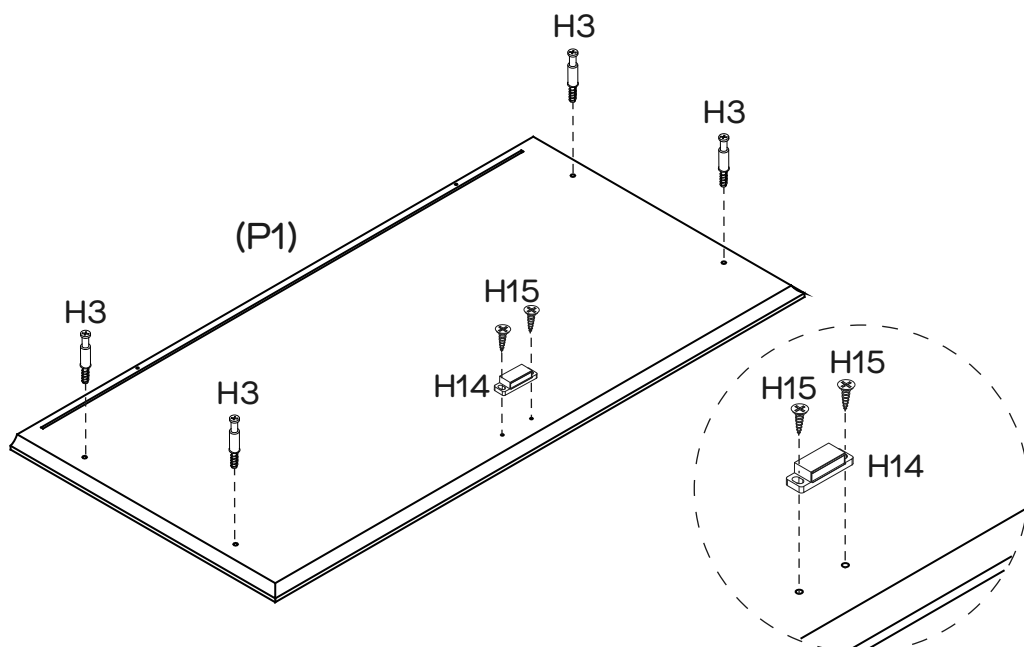
You will need	
	
4 x Cam Bolts (H3)	1 x Magnet (H14)
	
2 x Magnet Screws (H15)	Phillips Head Screwdriver



Attach 4 x Cam Bolts (H3) to Top Panel (P1) by tightening with the Phillips Head Screwdriver. Attach 1 x Magnet (H14) to Top Panel (P1) with 2 x Magnet Screws (H15).





Step 8

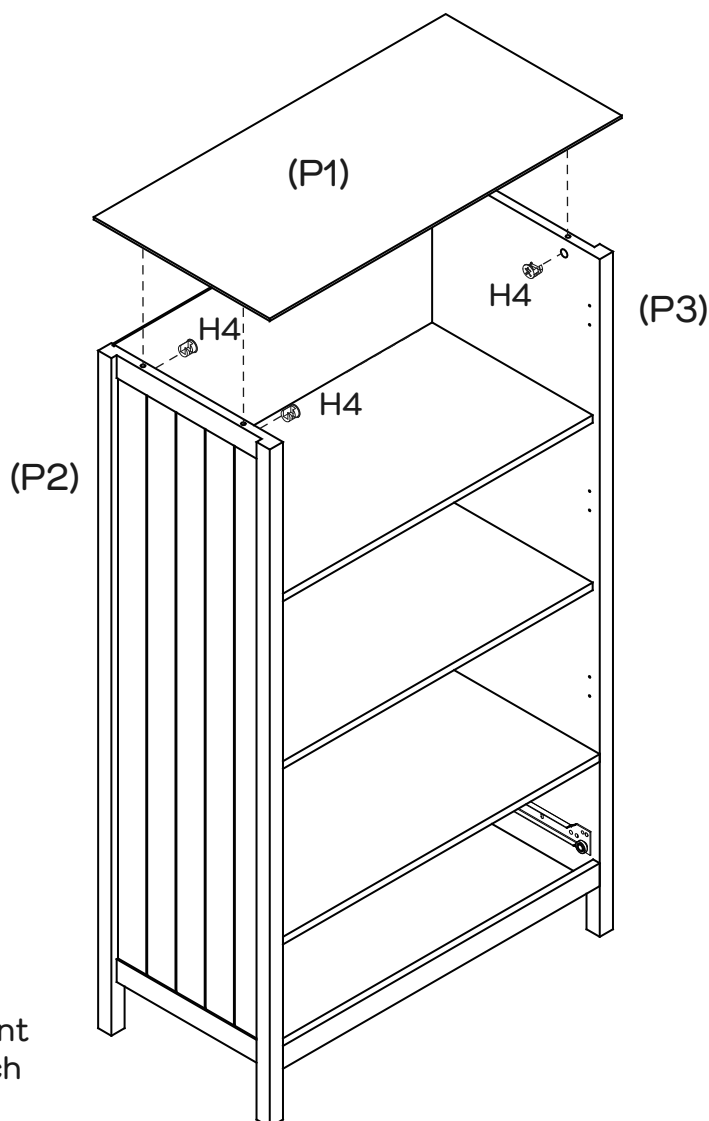
You will need	
	
4 x Cam Nuts (H4)	Phillips Head Screwdriver



Insert 4 x Cam Nuts (H4) into Left&Right Side Panels (P2&P3). Rotate the nuts so the arrows point towards the incoming bolts. Attach Top Panel (P1) to Left&Right Side Panels (P2&P3) by tightening all nuts with the Phillips Head Screwdriver.





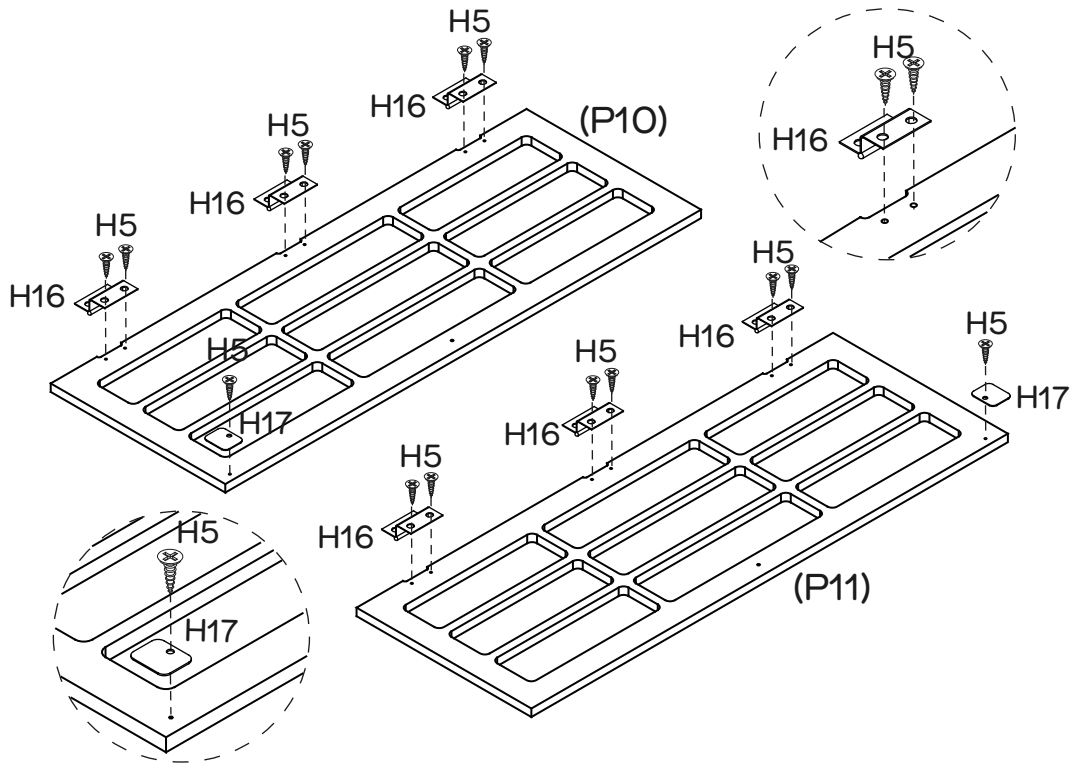Step 9


You will need	
	
14 x Small Screws (H5)	2 x Magnet Bars (H17)
	
6 x Hinges (H16)	Phillips Head Screwdriver



Attach 6 x Hinges (H16) and 2 x Magnet Bars (H17) to Doors (P10, P11) as shown with 14 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.

Step 10

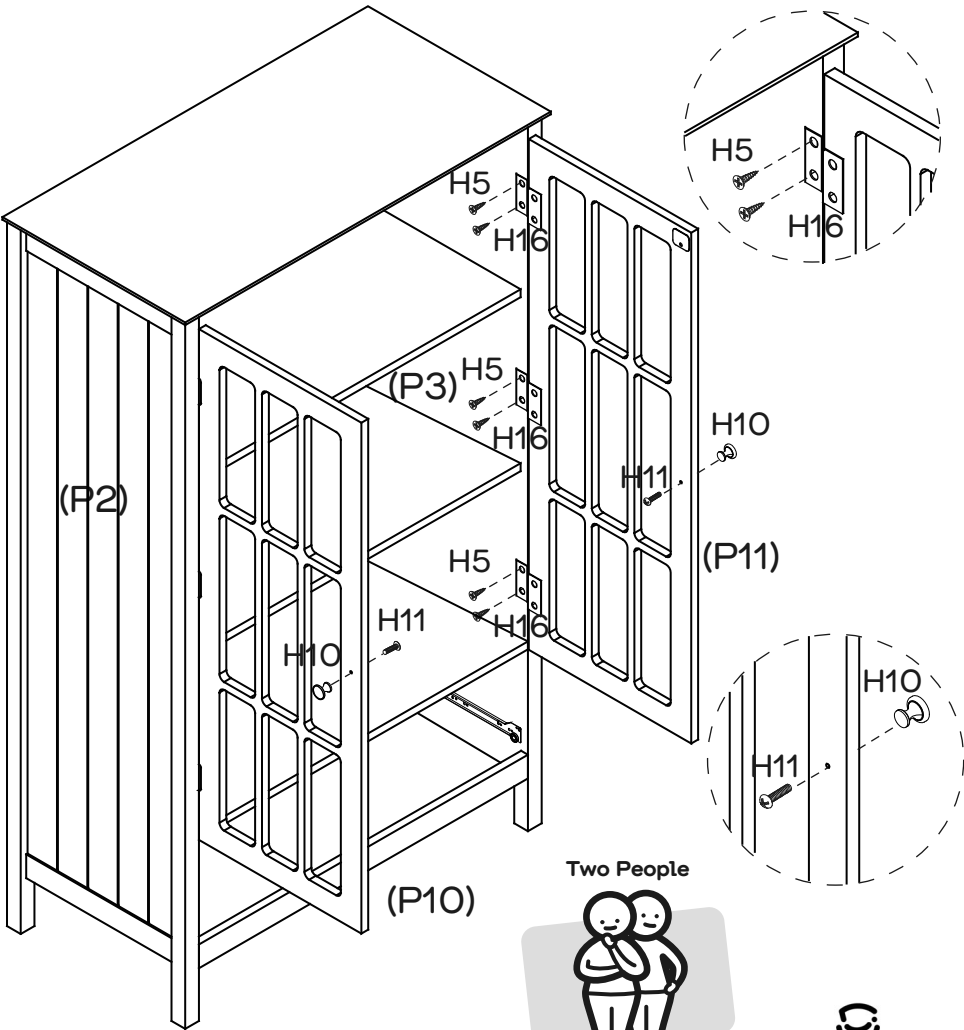

You will need	
	
12 x Small Screws (H5)	2 x Handles (H10)
	
2 x Bolts (H11)	Phillips Head Screwdriver




Attach Left Door (P10) to Left Side Panel (P2) and Right Door (P11) to Right Side Panel (P3) with 6 x Hinges (H16) and 12 x Small Screws (H5) by tightening with the Phillips Head Screwdriver. Attach 2 x Handles (H10) to Doors (P10, P11) with 2 x Bolts (H11) by tightening with the Phillips Head Screwdriver.



Step 11


You will need	
	
5 x Cam Bolts (H3)	Phillips Head Screwdriver

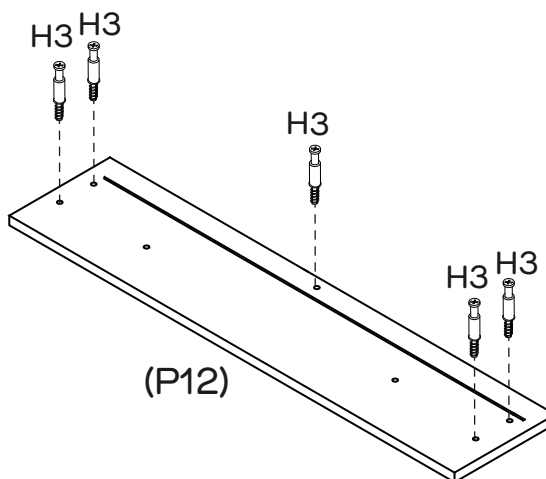

Attach 5 x Cam Bolts (H3) to Drawer Front (P12) by tightening with the Phillips Head Screwdriver.


Step 12

You will need	
	
5 x Cam Nuts (H4)	Phillips Head Screwdriver

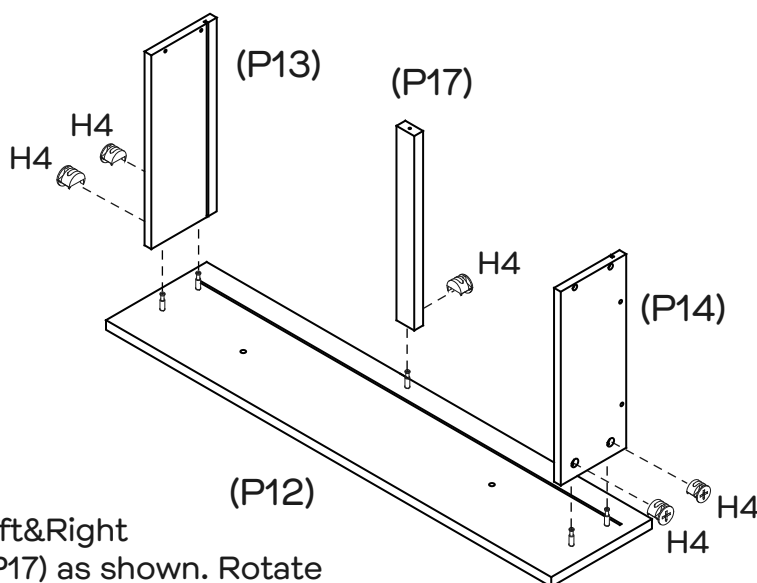

Insert 5 x Cam Nuts (H4) into Left&Right Drawer Sides & Rail (P13&P14&P17) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Drawer Front (P12) to Left & Right Drawer Sides & Rail (P13&P14&P17) by tightening all cam nuts with the Phillips Head Screwdriver.


Step 13

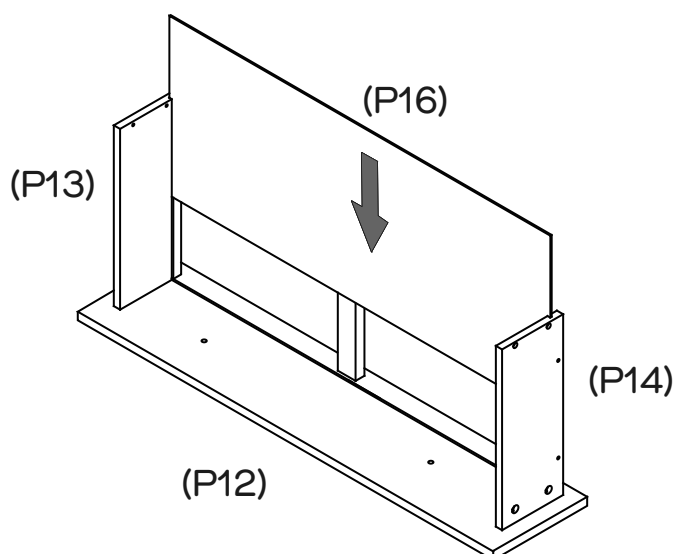

Slide Drawer Base (P16) into the grooves of Drawer Sides (P13) and (P14) and Drawer front (P12).





Step 14

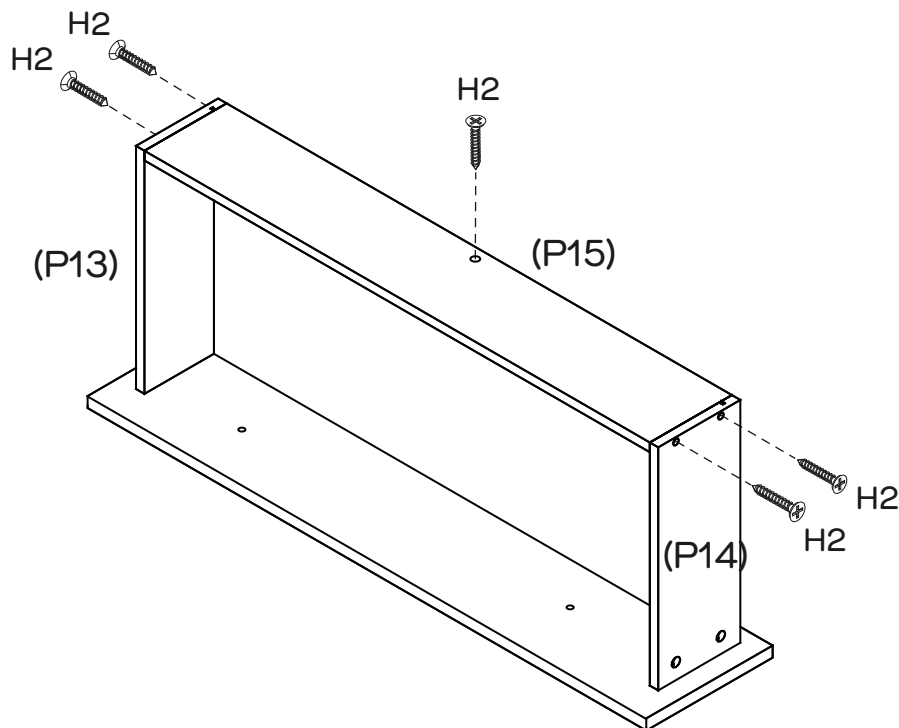
You will need	
	
5 x Long Screws (H2)	Phillips Head Screwdriver



Attach Drawer Back (P15) to Left & Right Drawer Sides & Rail (P13&P14&P17) with 5 x Long Screws (H2) by tightening with the Phillips Head Screwdriver. Make sure that the grooves line up the whole way around the drawer base.




Step 15

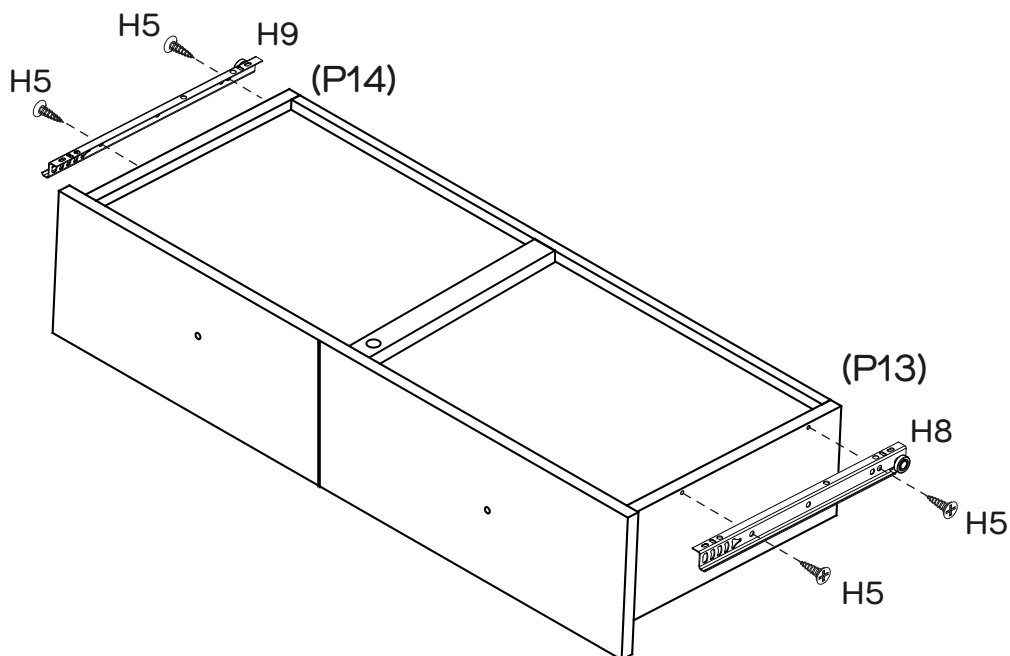
You will need	
	
1 x DL Runner (H8)	1 x DR Runner (H9)
	
4 x Small Screws (H5)	Phillips Head Screwdriver



Attach 1 x DL Runner (H8) to Left Drawer Side (P13) and 1 x DR Runner (H9) to Right Drawer Side (P14) with 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.







Step 16



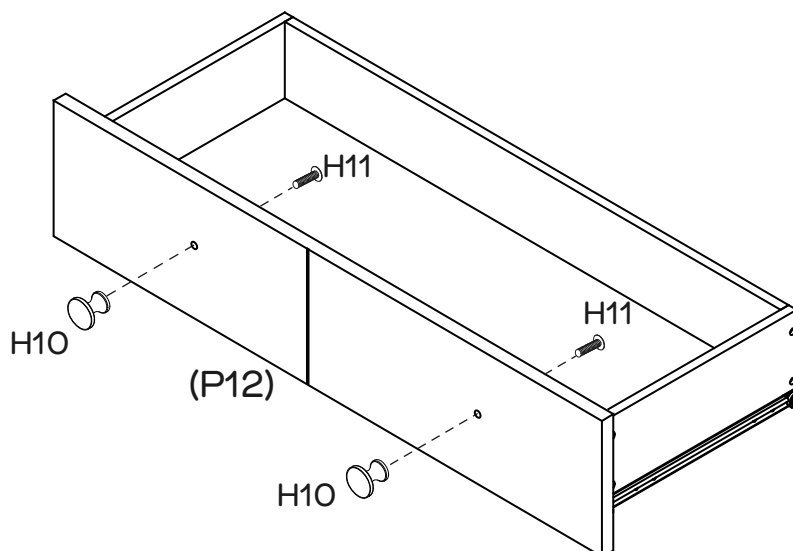
You will need	
	
2 x Handles (H10)	2 x Bolts (H11)
	
Phillips head screwdriver	



Attach 2 x Handles (H10) to Drawer Front (P12) with 2 x Bolts (H11) by tightening with the Phillips Head Screwdriver.



Step 17

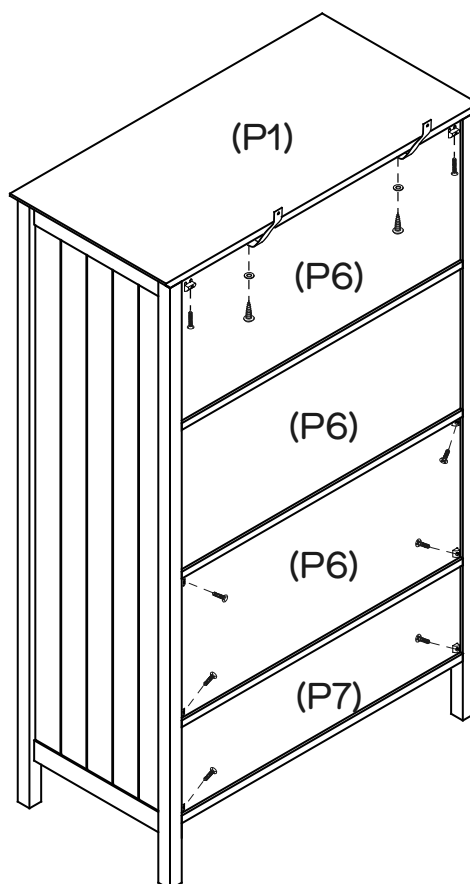You will need	
	
8 x Wedges (H12)	8 x Wedge Screws (H13)
	
2 x Safety Straps (H20)	2 x Safety Strap Screws (H21)
	
2 x Washers (H22)	Phillips head screwdriver





Secure Back Panels (P6 x 3) and Back Panel (P7) in place with 8 x Wedges (H12) using 8 x Wedge Screws (H13) by tightening with the Phillips Head Screwdriver. Use 2 x Safety Strap Screws (H21) and 2 x Washers (H22) to connect 2 x Safety Straps (H20) to Top Panel (P1).


Step 18

You will need	
	
2 x Washers (H22)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

Move the cabinet to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

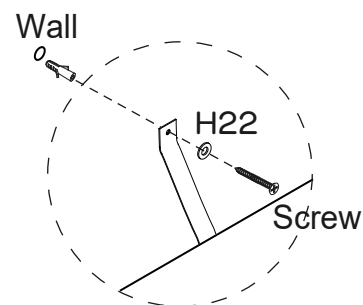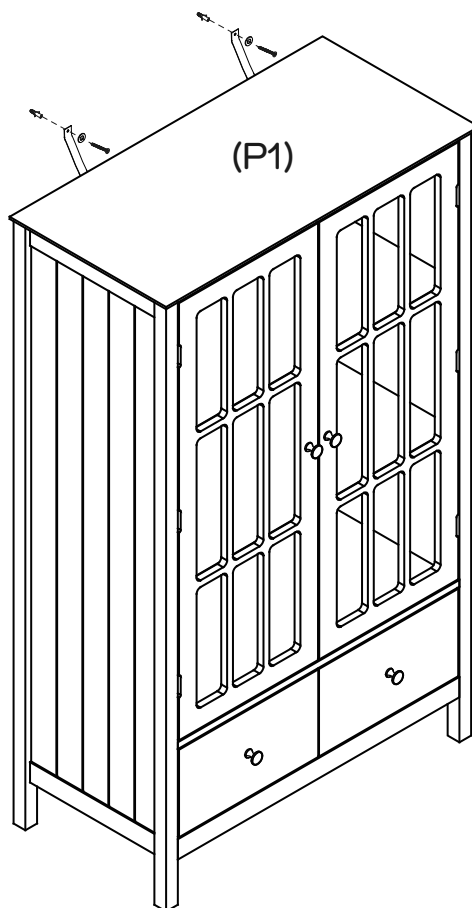

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

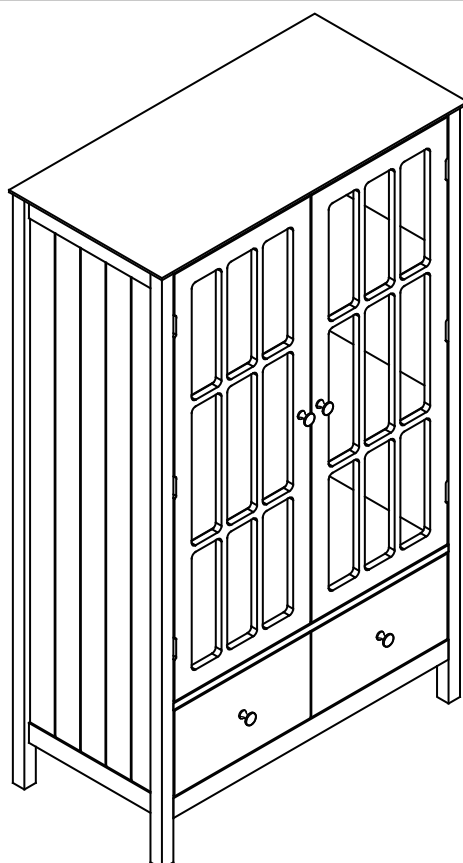

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.