




**Fantastic
Furniture**

Version 1.1

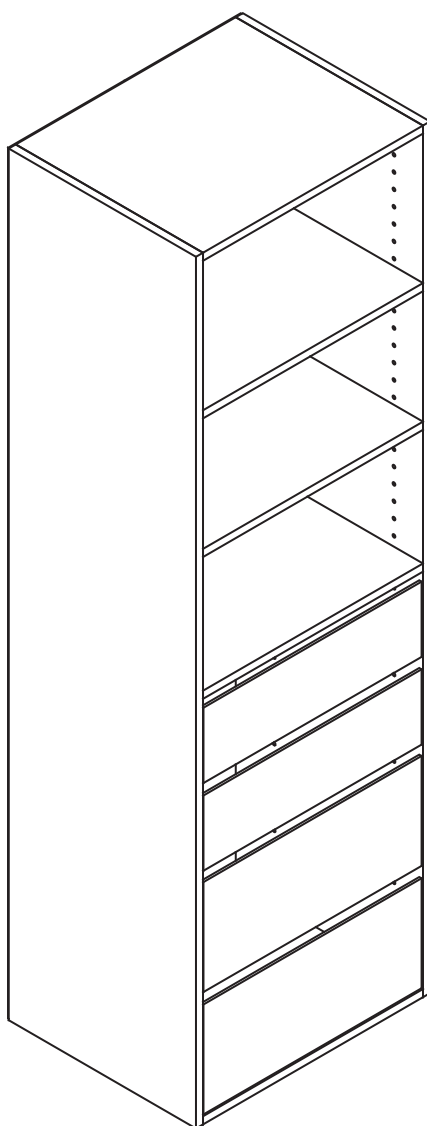

Tailor

Utility 4 Drawer 3 Shelf

fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Recommended Weight Capacity :15kg/shelf

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.



For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

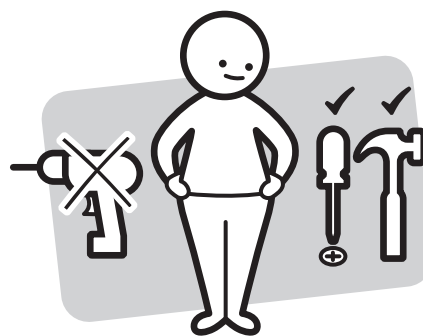

Make sure you have all the required tools. Never use power tools unless instructed.

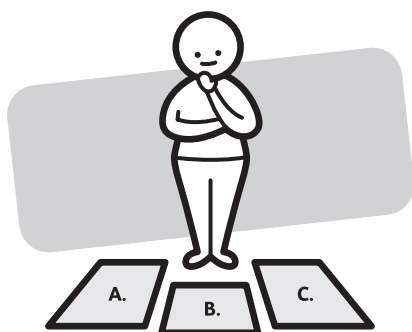

Identify and lay out all of the components before you begin assembly.

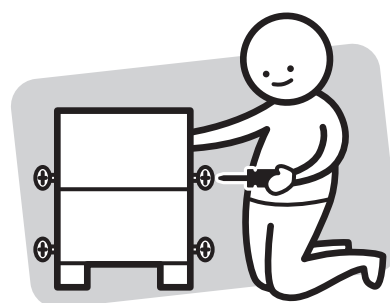

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE



Other tools you need:

Phillips head screwdriver;

Hammer; Tape

Left Side
Panel
(P2)

Back Panel
(P6)

Top/Bottom Panel
(P1)

Right Side
Panel
(P3)

Adjustable
Shelf Panel
(P4)

Adjustable
Shelf Panel
(P4)

Shelf Panel
(P5)

Top/Bottom Panel
(P1)

Parts list

2 x Top/Bottom Panels (P1);

Left Side Panel (P2);

Right Side Panel (P3);

2 x Adjustable Shelf Panels (P4);

Shelf Panel (P5);

Back Panel (P6);

Small Drawer Front (P7);

Small Left Drawer Side (P8);

Small Right Drawer Side (P9);

Drawer Base (P10);



Small Drawer Back (P11);

Drawer Front (P12);


Left Drawer Side (P13);

Right Drawer Side (P14);

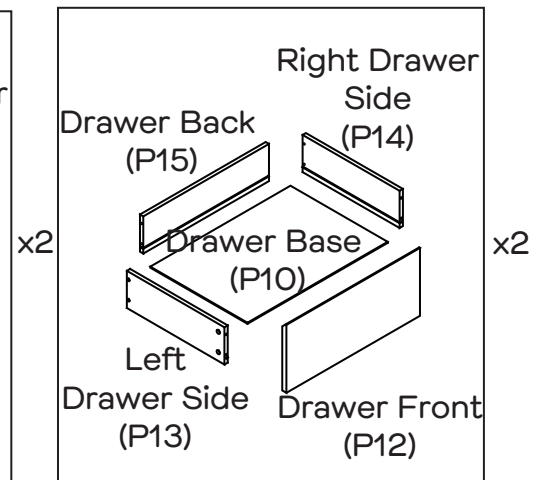
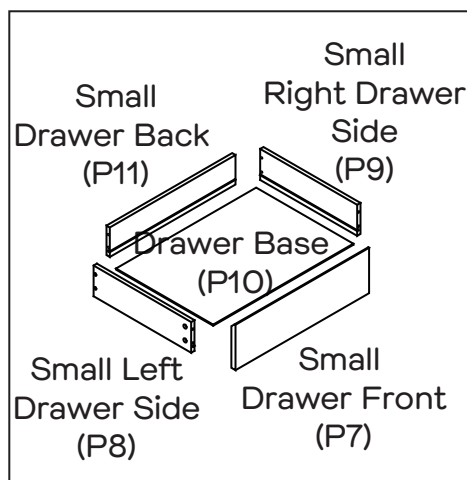


Drawer Back (P15);


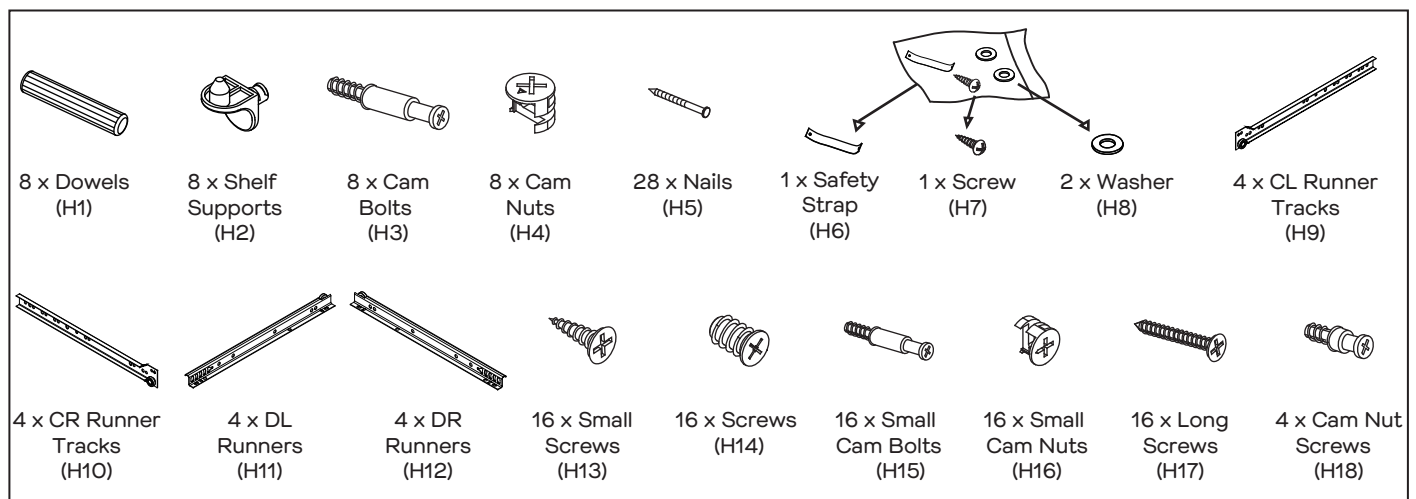


Hardware pack






Step 1

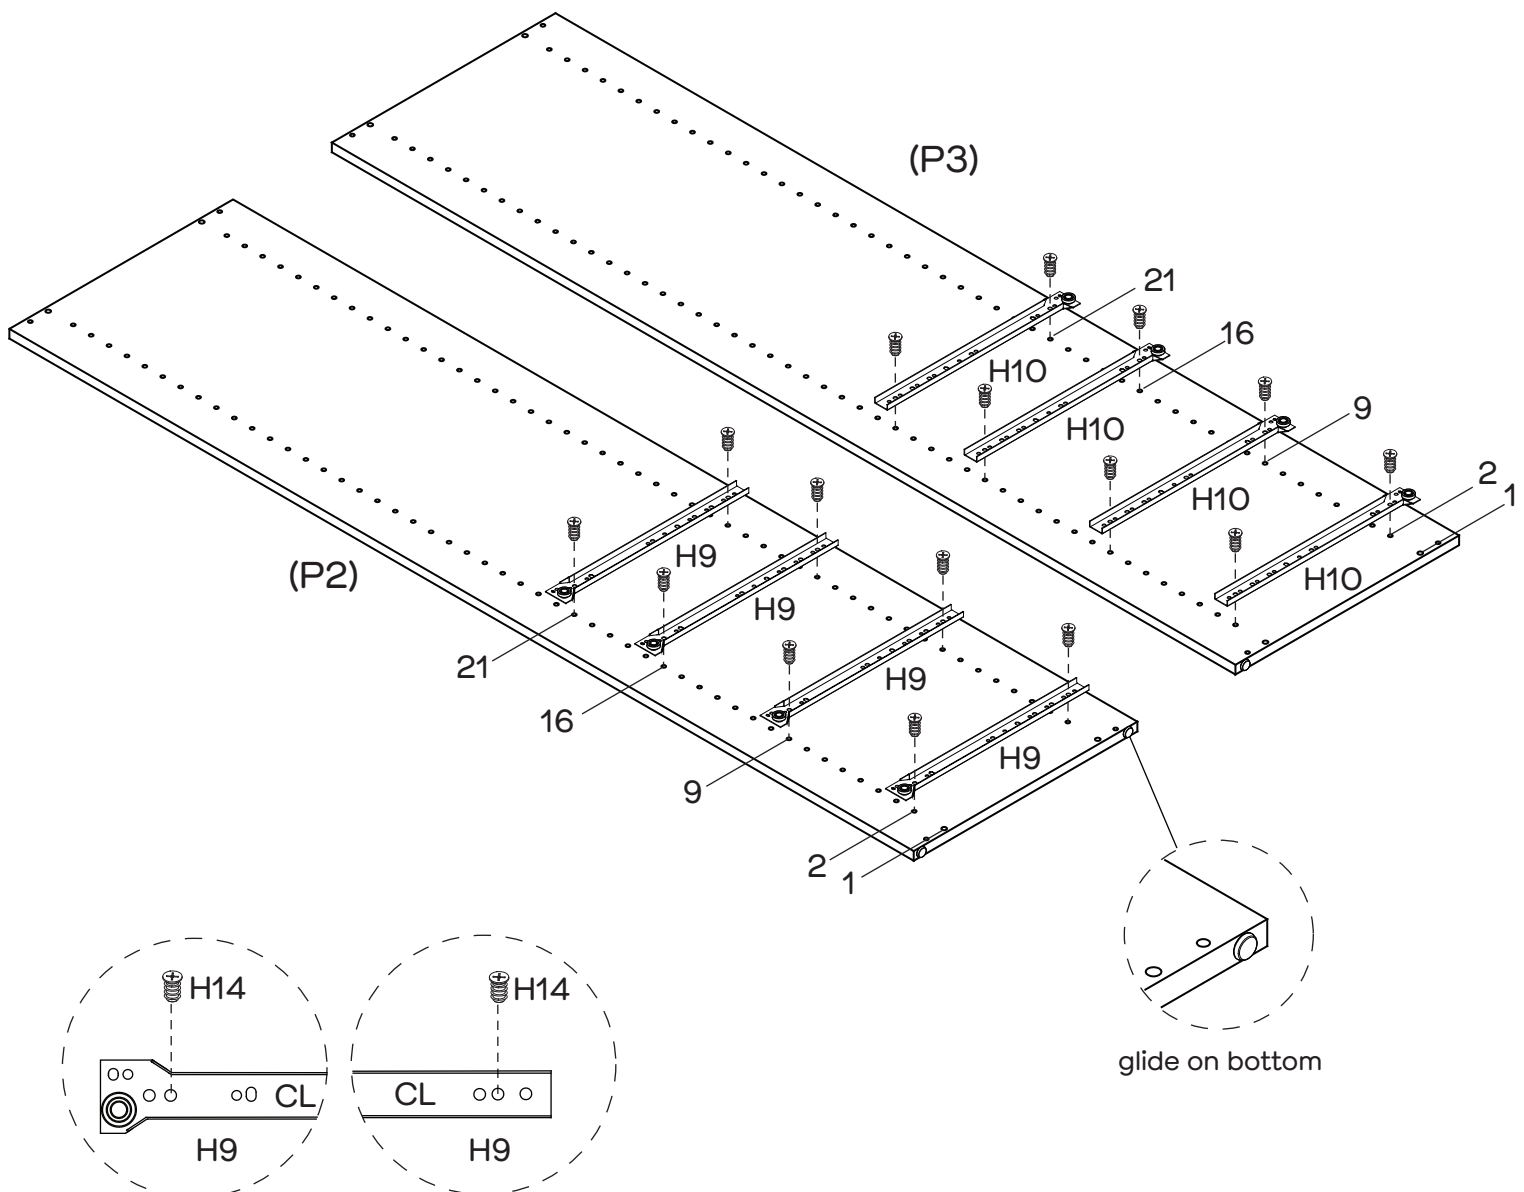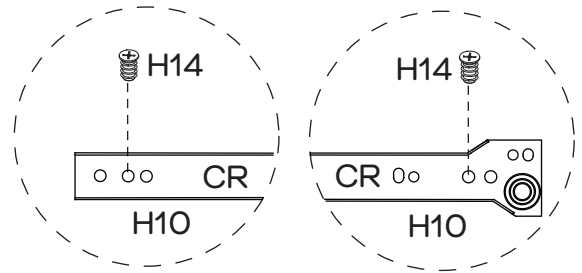
You will need	
	
4 x CL Runner Tracks (H9)	4 x CR Runner Tracks (H10)
	
16 x Screws (H14)	Phillips head screwdriver



Attach 4 x CL Runner Tracks (H9) to Left Side Panel (P2) with 8 x Screws (H14).
Attach 4 x CR Runner Tracks (H10) to Right Side Panel (P3) with 8 x Screws (H14).




Step 2

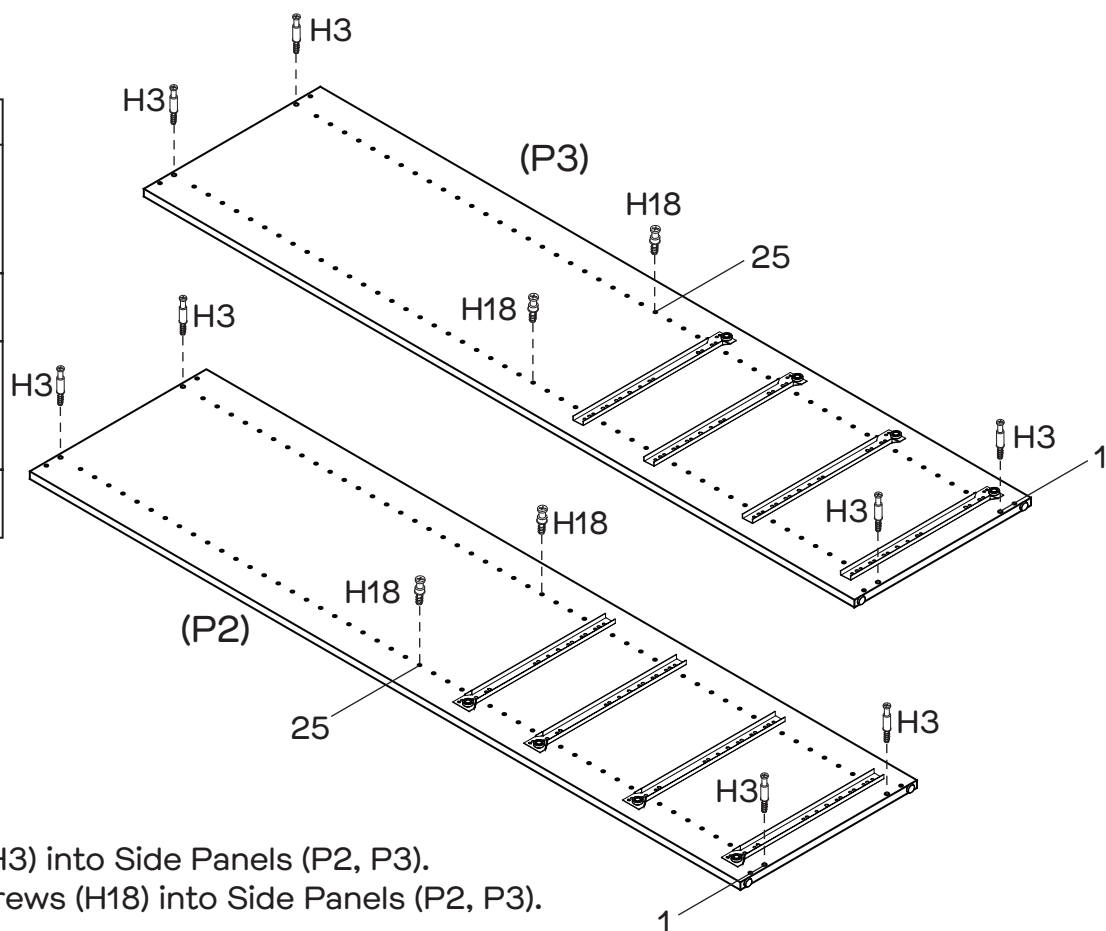You will need	
	
8 x Cam Bolts (H3)	4 x Cam Nut Screws (H18)
	
Phillips head screwdriver	




Attach 8 x Cam Bolts (H3) into Side Panels (P2, P3).
Attach 4 x Cam Nut Screws (H18) into Side Panels (P2, P3).


Step 3

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

Make sure raw edge is facing up.

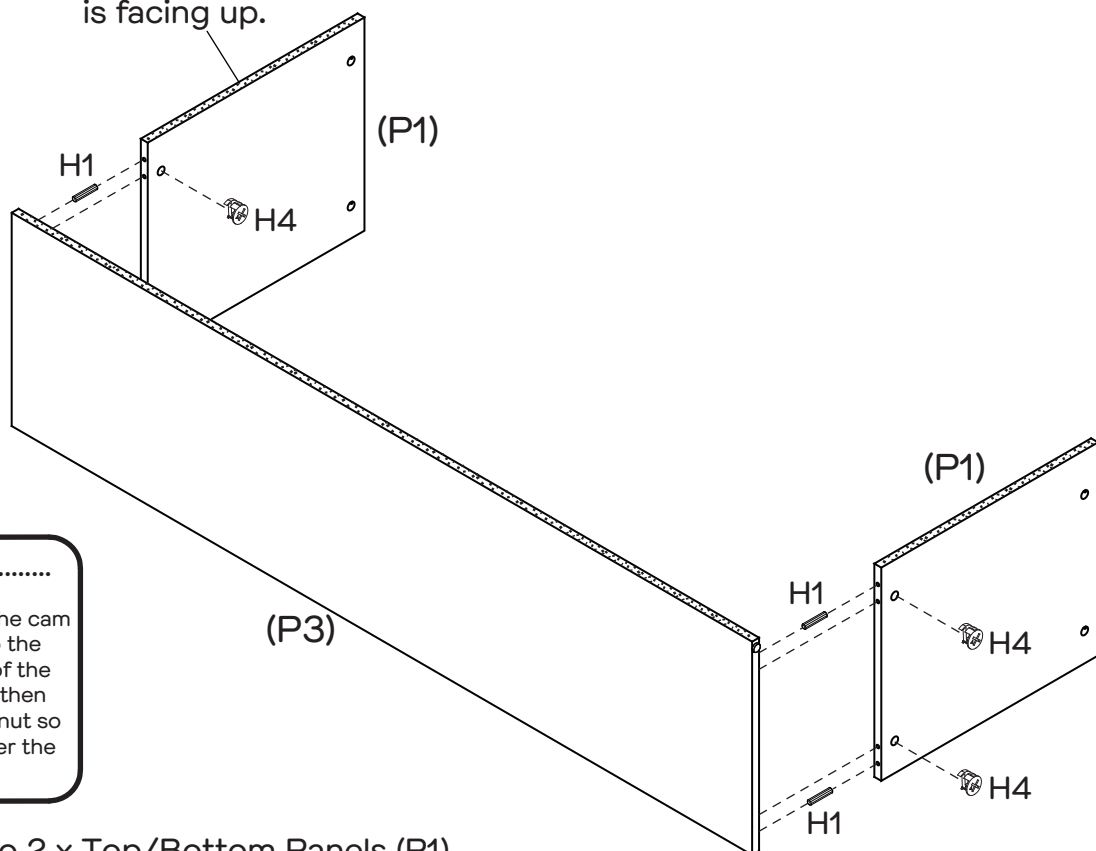




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 4 x Dowels (H1) into 2 x Top/Bottom Panels (P1).
Insert 4 x Cam Nuts (H4) into the holes of 2 x Top/Bottom Panels (P1).
Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Attach 2 x Top/Bottom Panels (P1) to Right Side Panel (P3), then tighten the cam nuts.

Step 4


You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

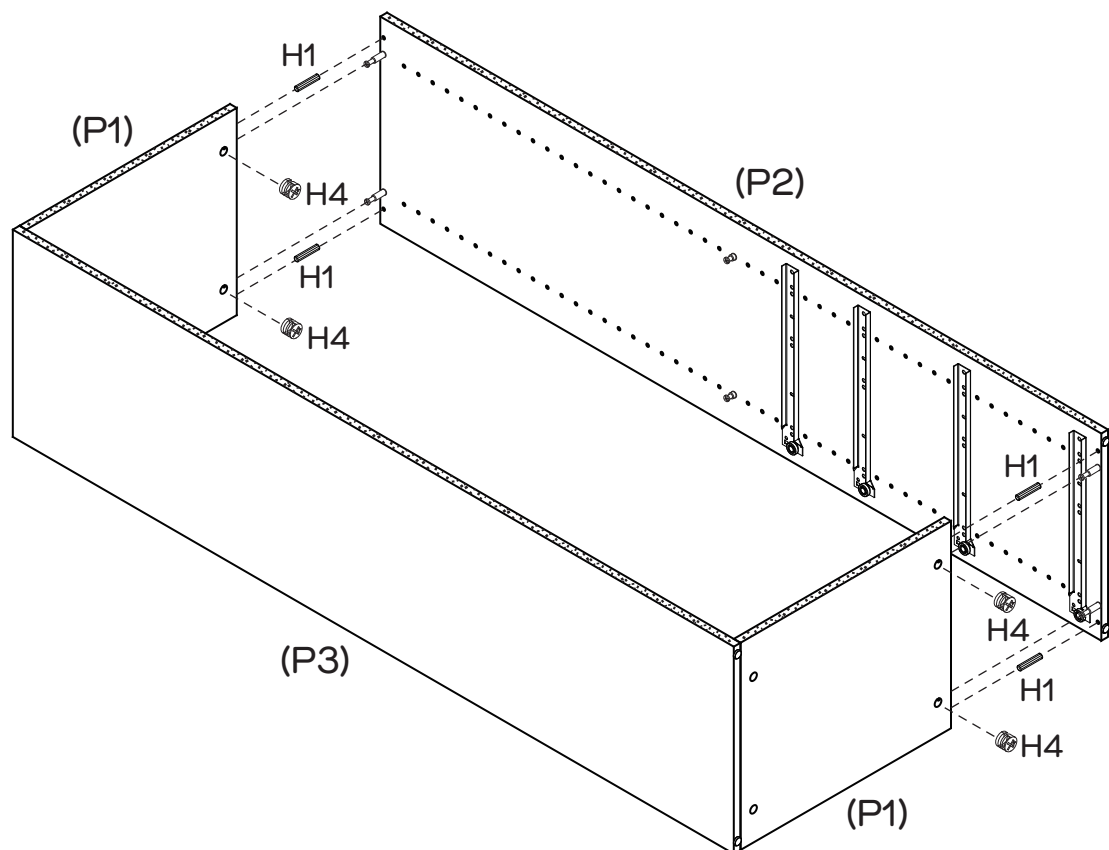


Insert 4 x Dowels (H1) into 2 x Top/Bottom Panels (P1).
 Insert 4 x Cam Nuts (H4) into the holes of 2 x Top/Bottom Panels (P1).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Push Left Side Panel (P2) into place and tighten the cam nuts.

Step 5


You will need	
	
Phillips Head Screwdriver	

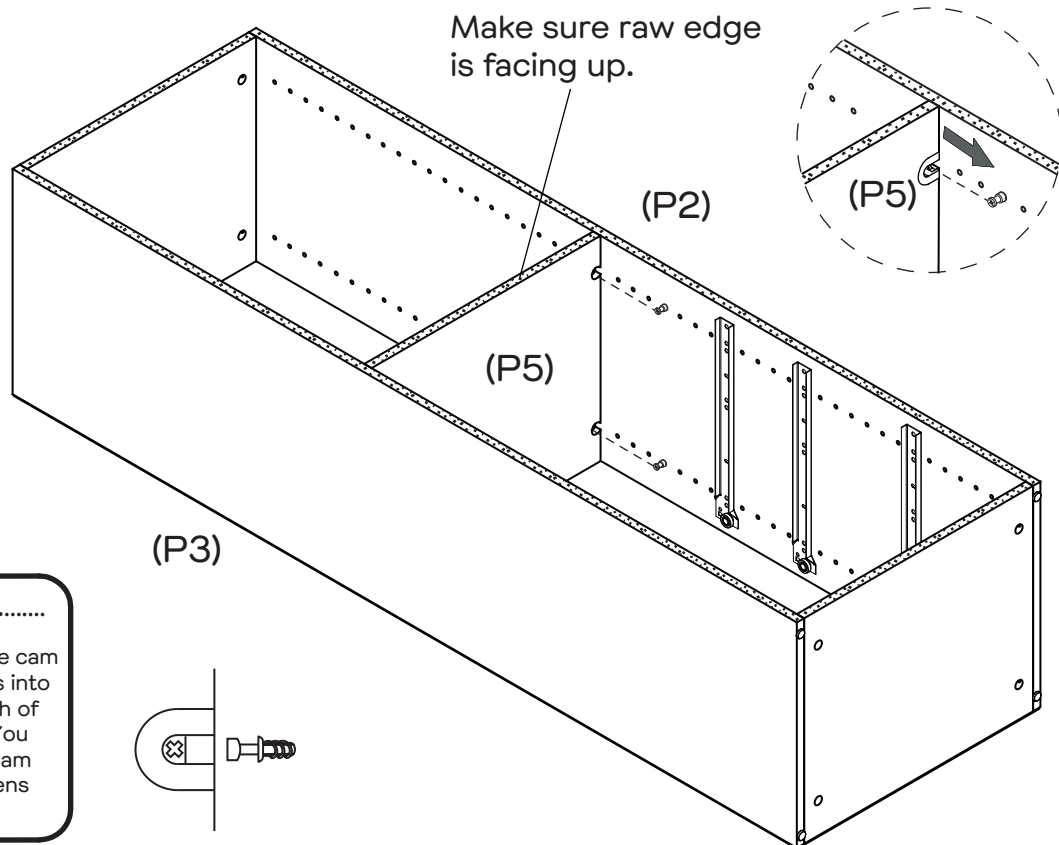

This is how a cam lock works.....








The head of the cam nut screw goes into the open mouth of the cam lock. You then turn the cam lock so it tightens



Adjust the opening of cam locks is facing the cam nut screws,
 then push Shelf Panel (P5) into place and tighten the cam locks.

Step 6

You will need	
	
28 x Nails (H5)	Hammer
	
Tape	







Make sure the edge of back panel is well aligned with side, top and bottom panels before nailing the back panel.

Attach Back Panel (P6) to the cabinet with 28 x Nails (H5) using hammer. Please measure with a tape to ensure that the spacing of the nails is consistent, and make sure the tip of the nails are vertically centered on the edge of the Side Panels (P2, P3) and Top/Bottom Panels (P1).

Ensure the diagonal of section A is equal to the section B.





Step 7

You will need	
	
1 x Safety Strap (H6)	1 x Screw (H7)
	
1 x Washer (H8)	Phillips head screwdriver


We strongly advise that you use the wall safety strap provided to prevent the unit toppling


Use Screw (H7) and Washer (H8) to connect Safety Strap (H6) on Top Panel (P1) through the gap of Back Panel (P6).

Please make sure the tip of the screw is vertically centered on the edge of the Top Panel (P1).

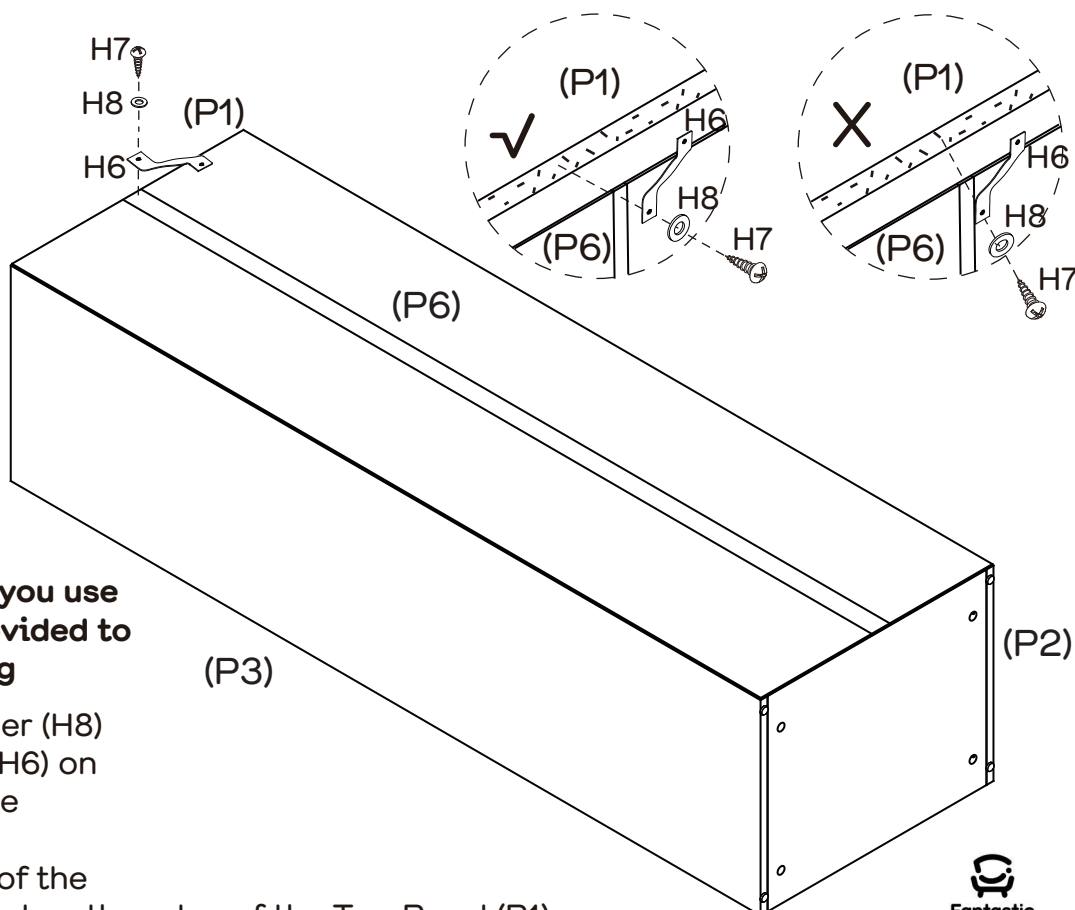


Step 8

You will need	
	
8 x Shelf Supports (H2)	





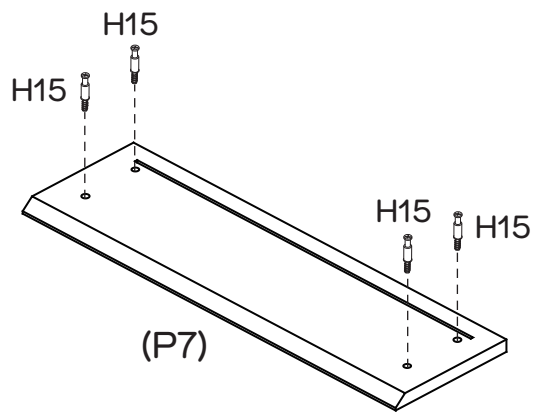
Align the Shelf Support to the hole of Adjustable Shelf Panel.

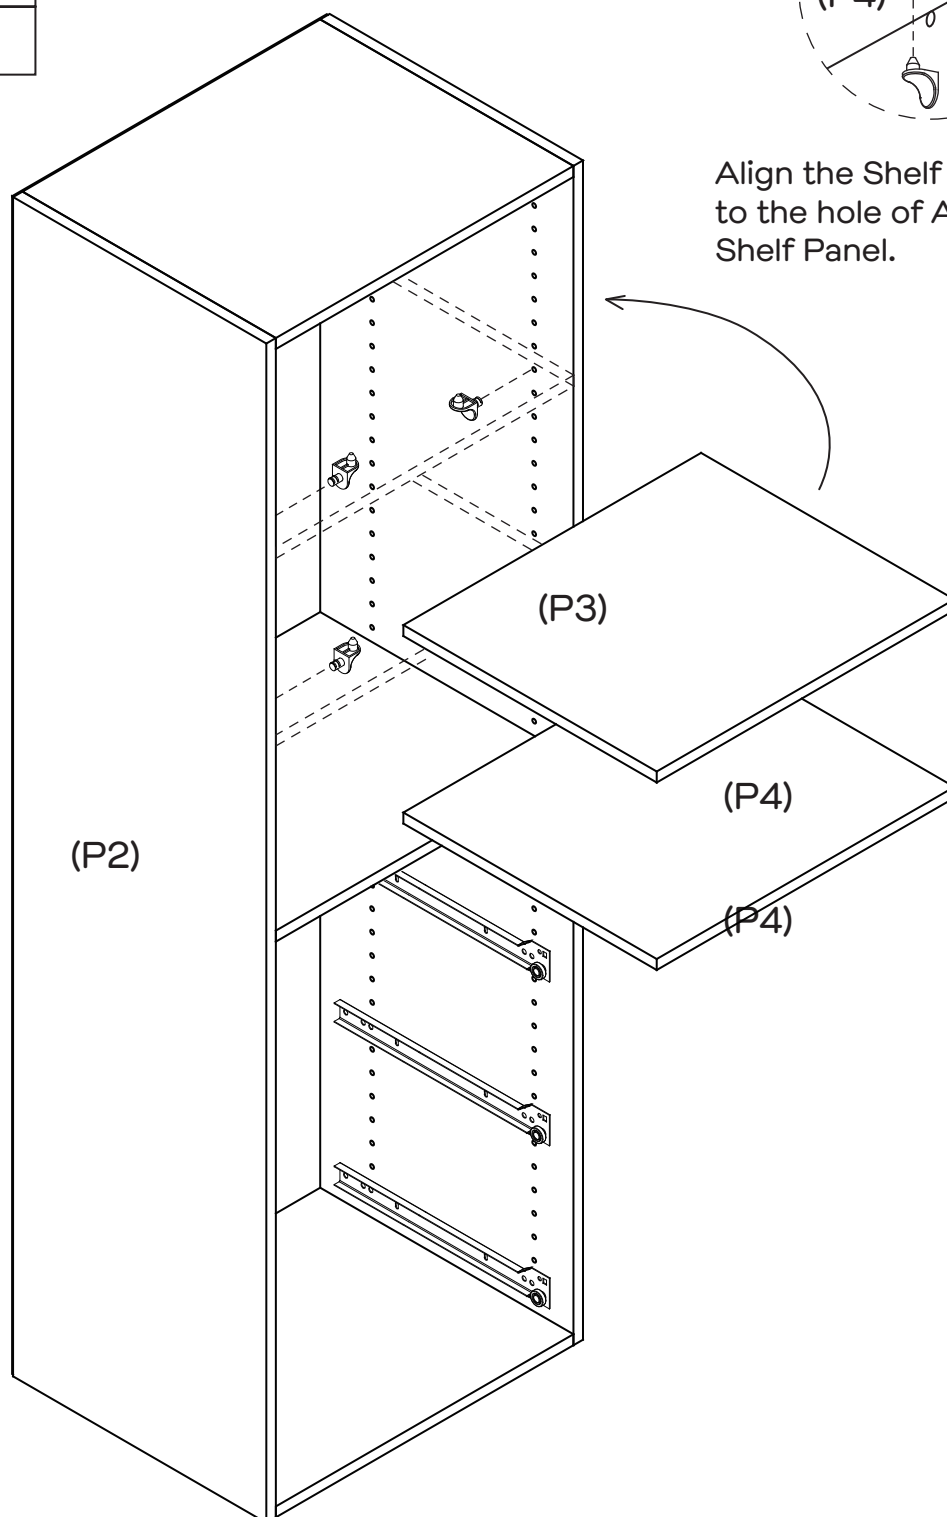

Insert 8x Shelf Supports (H2) into the holes of Side Panels (P2, P3) as shown.
Insert 2 x Adjustable Shelf Panels (P4) into the cabinet.



Step 9


You will need	
	
4 x Small Cam Bolts (H15)	Phillips head screwdriver



Attach 4 x Small Cam Bolts (H15) into Small Drawer Front (P7).


Step 10

You will need	
	
4 x Small Cam Nuts (H16)	Phillips head screwdriver

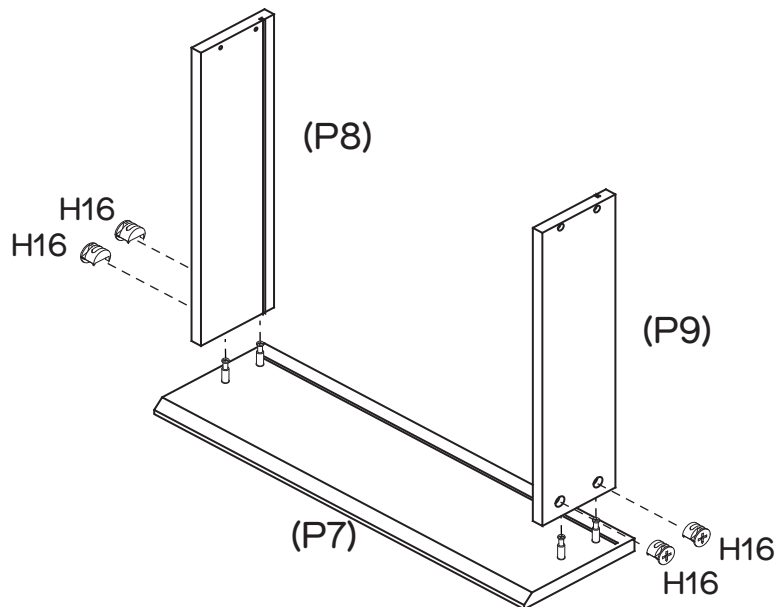



Insert 4 x Small Cam Nuts (H16) into the holes of Small Drawer Sides (P8, P9). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Small Drawer Sides (P8, P9) into place and tighten the cam nuts.

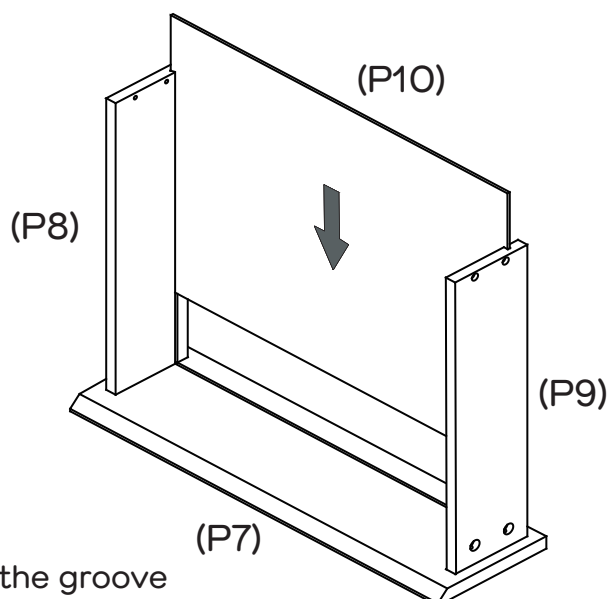
Step 11



Slide Small Drawer Base (P10) into the groove in Small Drawer Sides (P8, P9).





Step 12

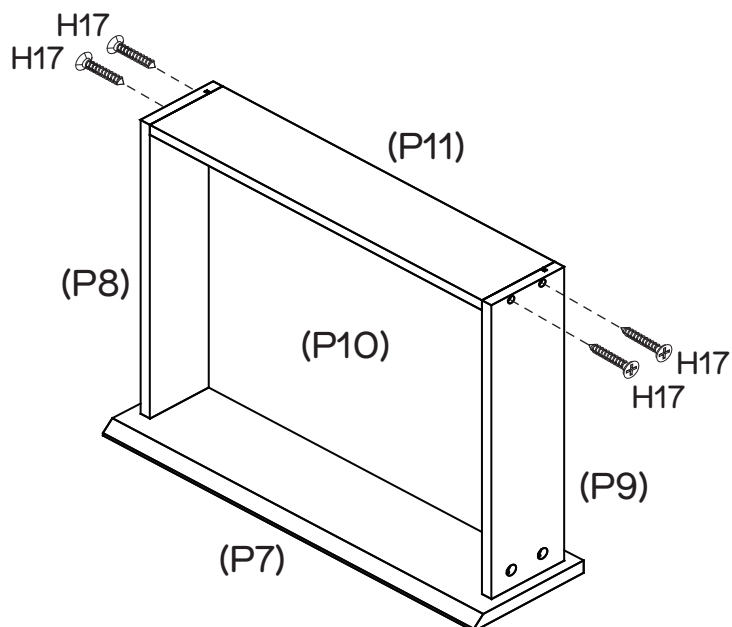
You will need	
	
4 x Long Screws (H17)	Phillips head screwdriver



Attach Drawer Back (P11) to Small Drawer Sides (P8, P9) with 4 x Long Screws (H17), make sure that the groove lines up the whole way around the drawer.


Step 13

You will need	
	
1 x DL Runner (H11)	1 x DR Runner (H12)
	
4 x Small Screws (H13)	Phillips head screwdriver

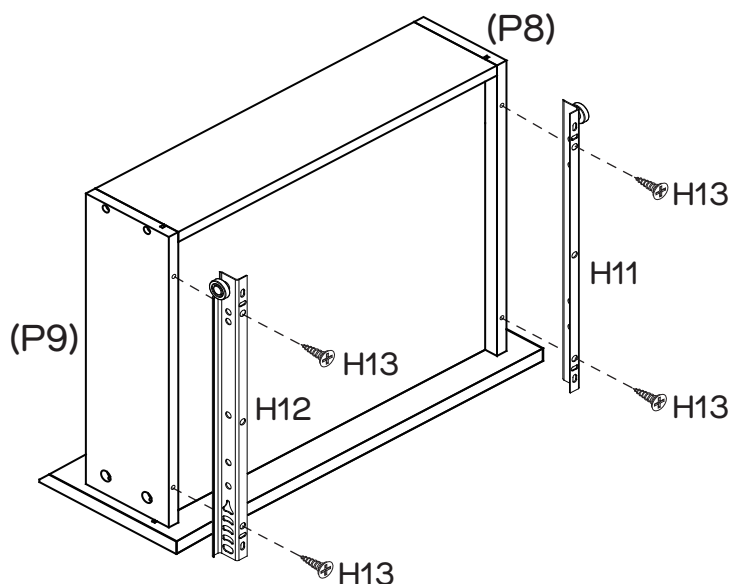



Attach 1 x DL Runner (H11) to the bottom of Left Drawer Side (P8) and 1 x DR Runner (H12) to the bottom of Right Drawer Side (P9) with 4 x Small Screws (H13).


Step 14

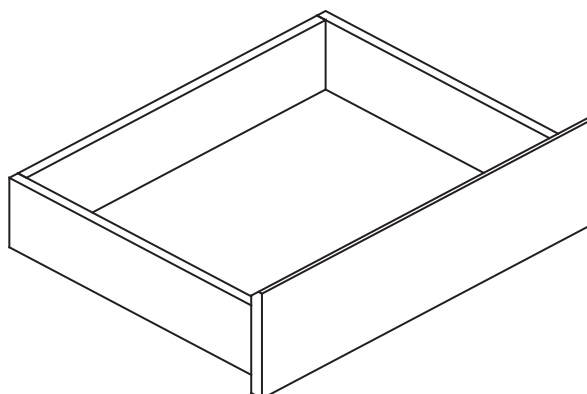

Repeat step 9 to step 13 to assemble the rest of Small Drawer.



Step 15

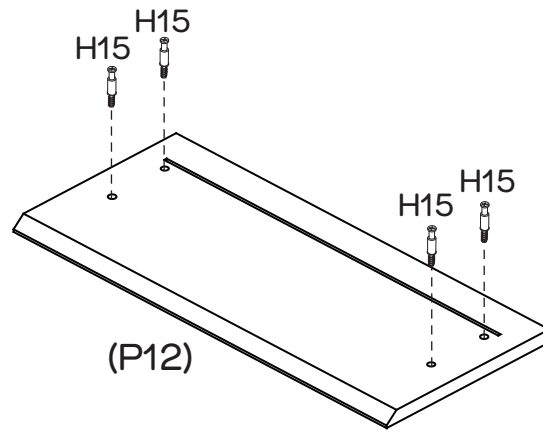
You will need	
	
4 x Small Cam Bolts (H15)	Phillips head screwdriver



Attach 4 x Small Cam Bolts (H15) into Drawer Front (P12).


Step 16

You will need	
	
4 x Small Cam Nuts (H16)	Phillips head screwdriver

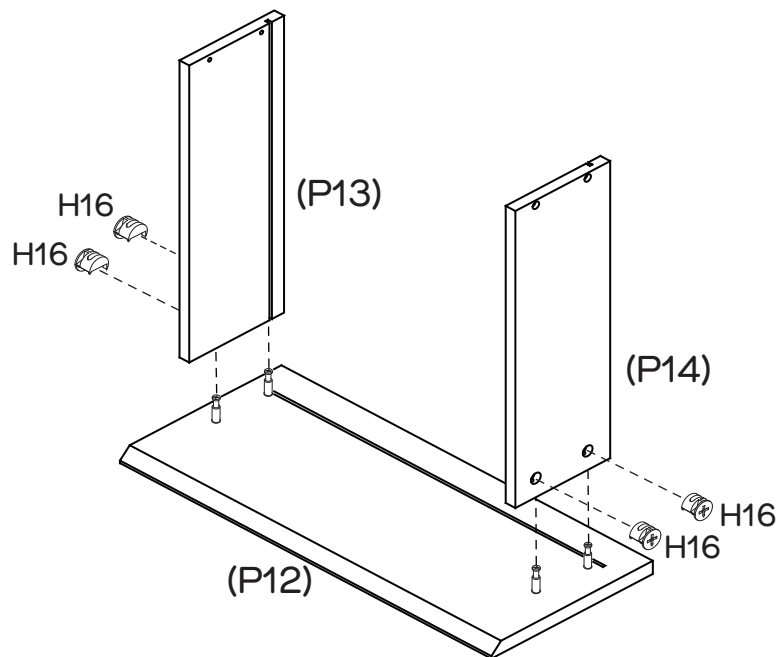



Insert 4 x Small Cam Nuts (H16) into the holes of Drawer Sides (P13, P14). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Drawer Sides (P13, P14) into place and tighten the cam nuts.

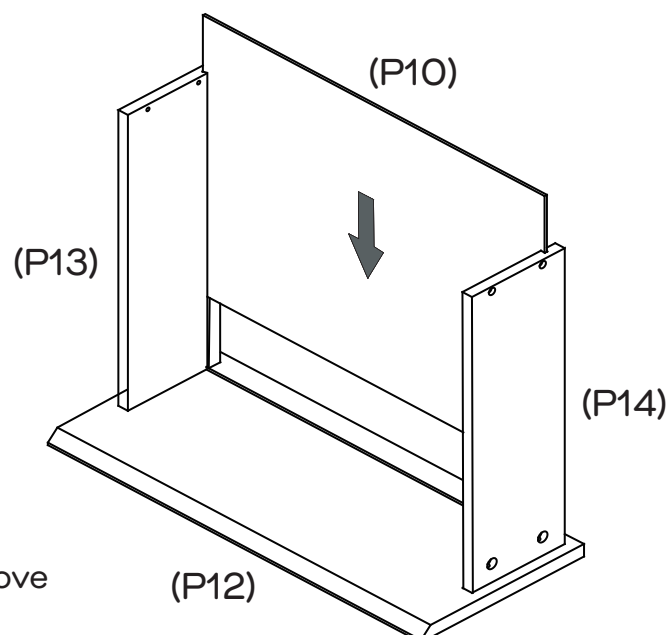
Step 17



Slide Drawer Base (P10) into the groove in Drawer Sides (P13, P14).





Step 18


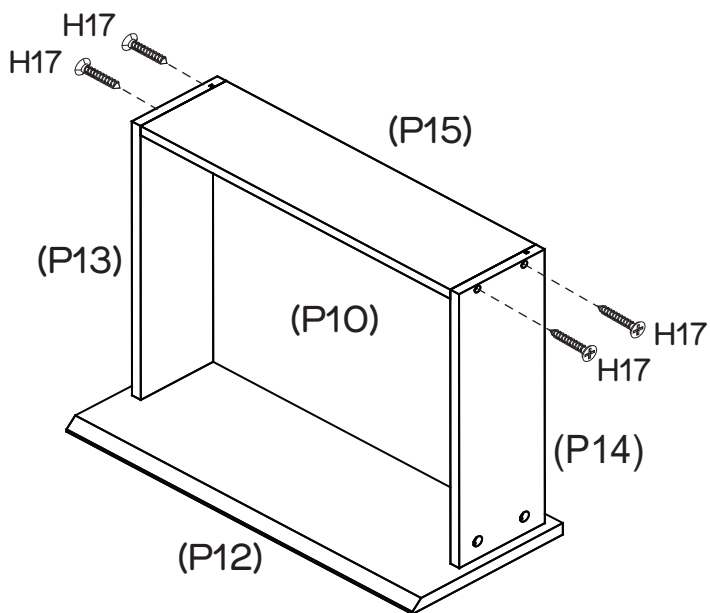
You will need	
	
4 x Long Screws (H17)	Phillips head screwdriver



Attach Drawer Back (P15) to Drawer Sides (P13, P14) with 4 x Long Screws (H17), make sure that the groove lines up the whole way around the drawer.


Step 19

You will need	
	
1 x DL Runner (H11)	1 x DR Runner (H12)
	
4 x Small Screws (H13)	Phillips head screwdriver

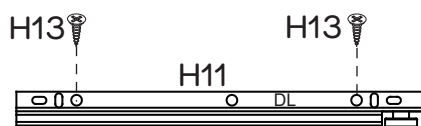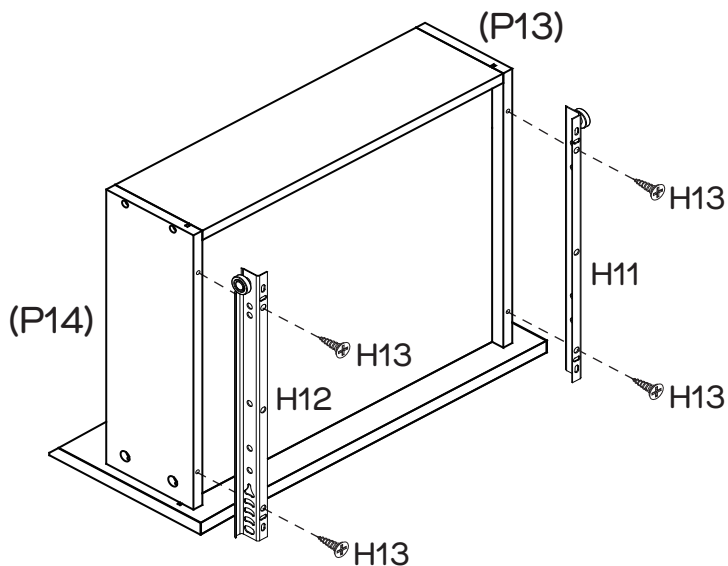


Attach 1 x DL Runner (H11) to the bottom of Left Drawer Side (P13) and 1 x DR Runner (H12) to the bottom of Right Drawer Side (P14) with 4 x Small Screws (H13).

Step 20

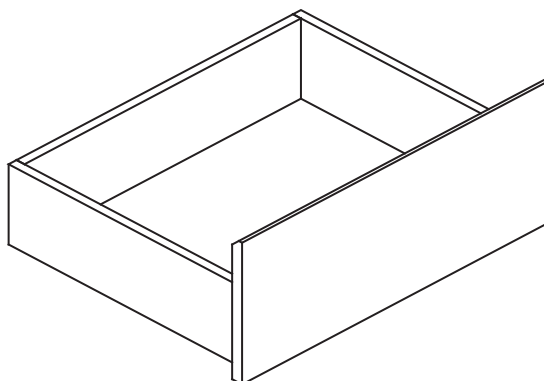



Repeat step 15 to step 19 to assemble the rest of Drawer.

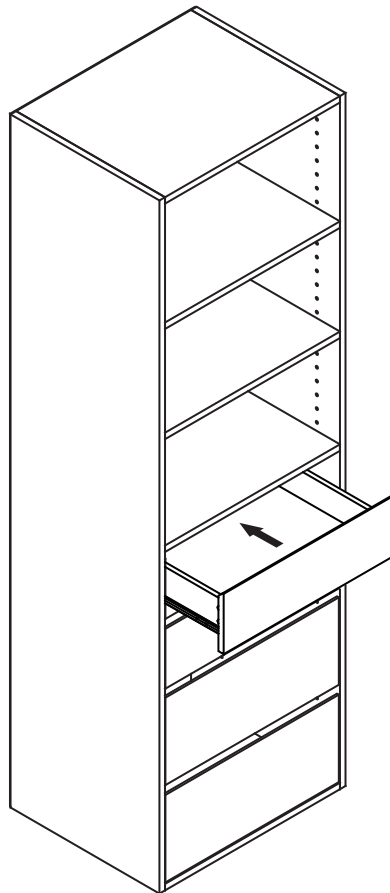
Step 21




Put the drawers into the cabinet.

Step 22


You will need	
	
1 x Washer (H8)	Phillips head screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

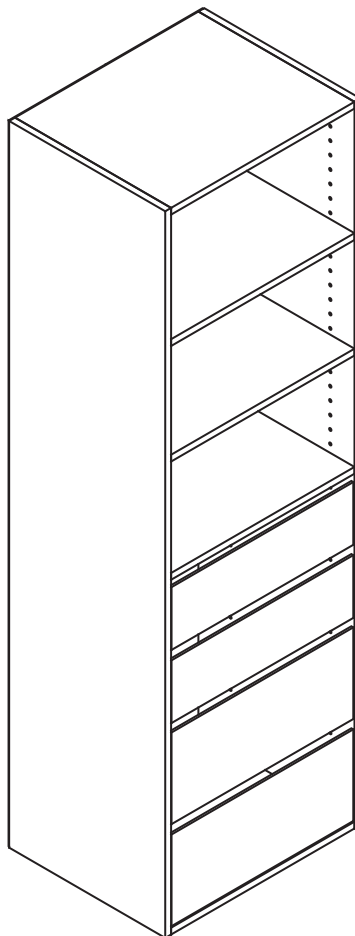

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.



Move the cabinet to the final position. Attach the safety strap to the wall. Make sure it is firmly attached and make sure it is a snug fit.

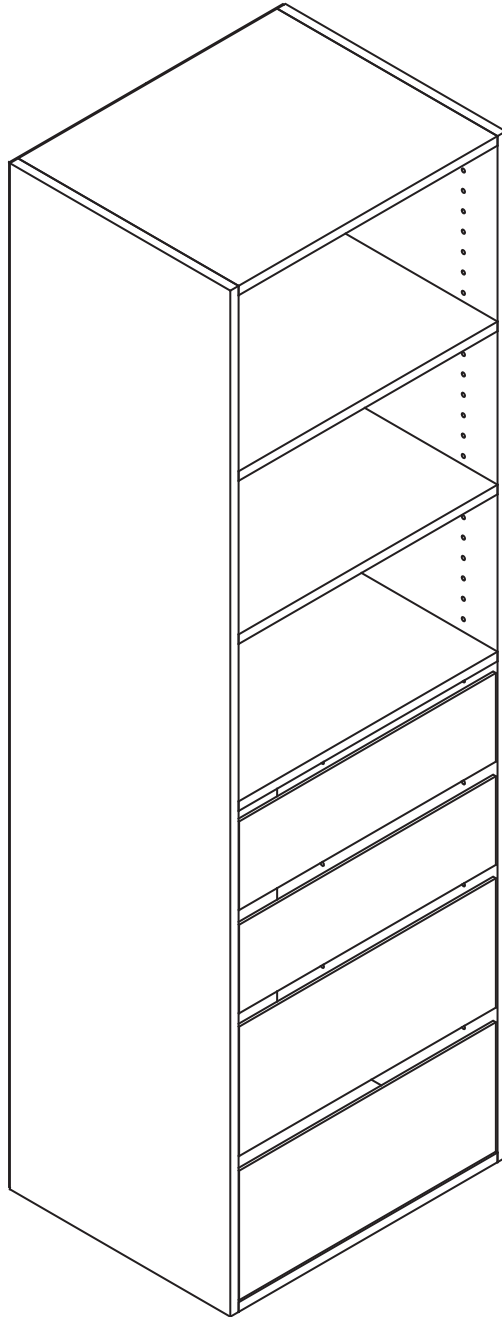

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.