




**Fantastic  
Furniture**

Version 1.1

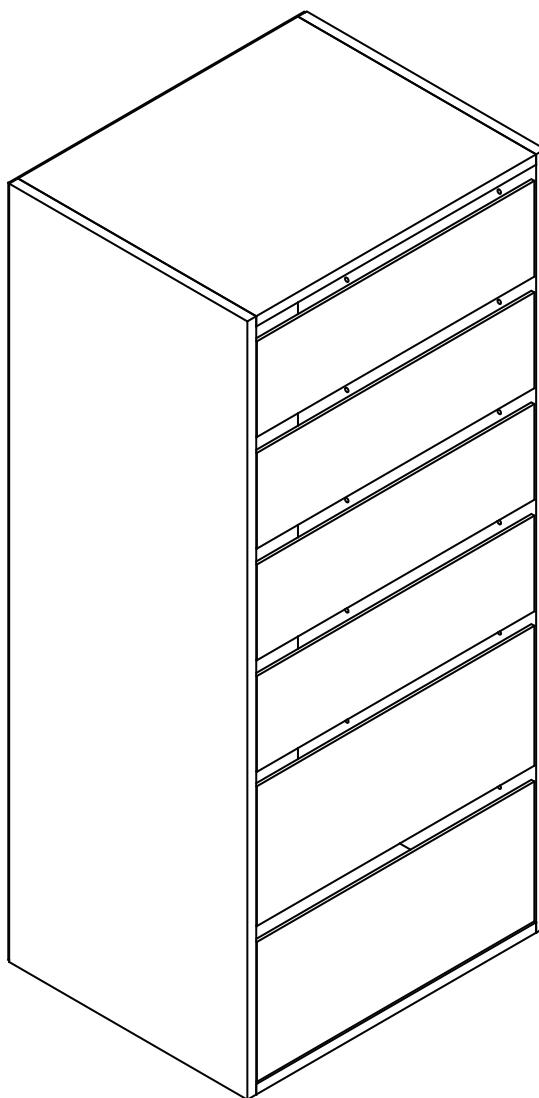

**Tailor**  
Utility 6 Drawer

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

# Secure it!

Reduce the risk of furniture tip-over accidents



## WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments.

Please seek professional advice if you are in doubt of what fixing device to use.

**Recommended Weight Capacity :10kg/Drawer**

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

## Wall attachment guide




**For plasterboard**  
(without available wood stud)

**Securing method:**  
Self drilling plasterboard anchor.



**For plasterboard**  
(with available wood stud)

**Securing method:**  
Screw inserted directly into stud.



**For masonry wall**

**Securing method:**  
Solid wall: Plug with screw  
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



# Fantastic Furniture

## Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.

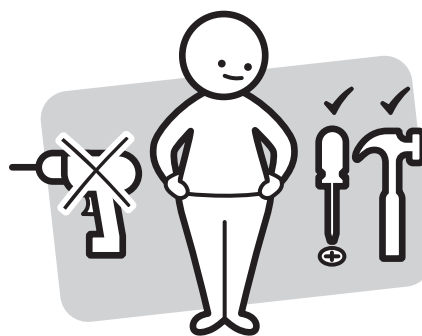

Make sure you have all the required tools. Never use power tools unless instructed.

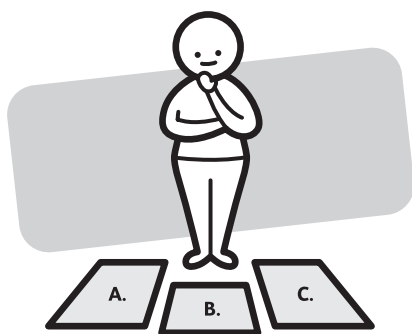

Identify and lay out all of the components before you begin assembly.

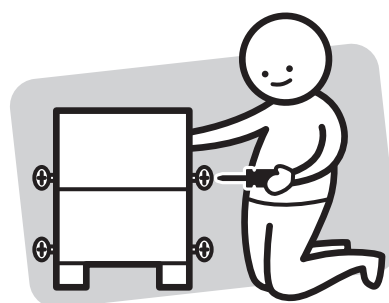

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need

## to assemble the product




DO NOT USE



### Other tools you need:

Phillips head screwdriver;

Hammer; Tape

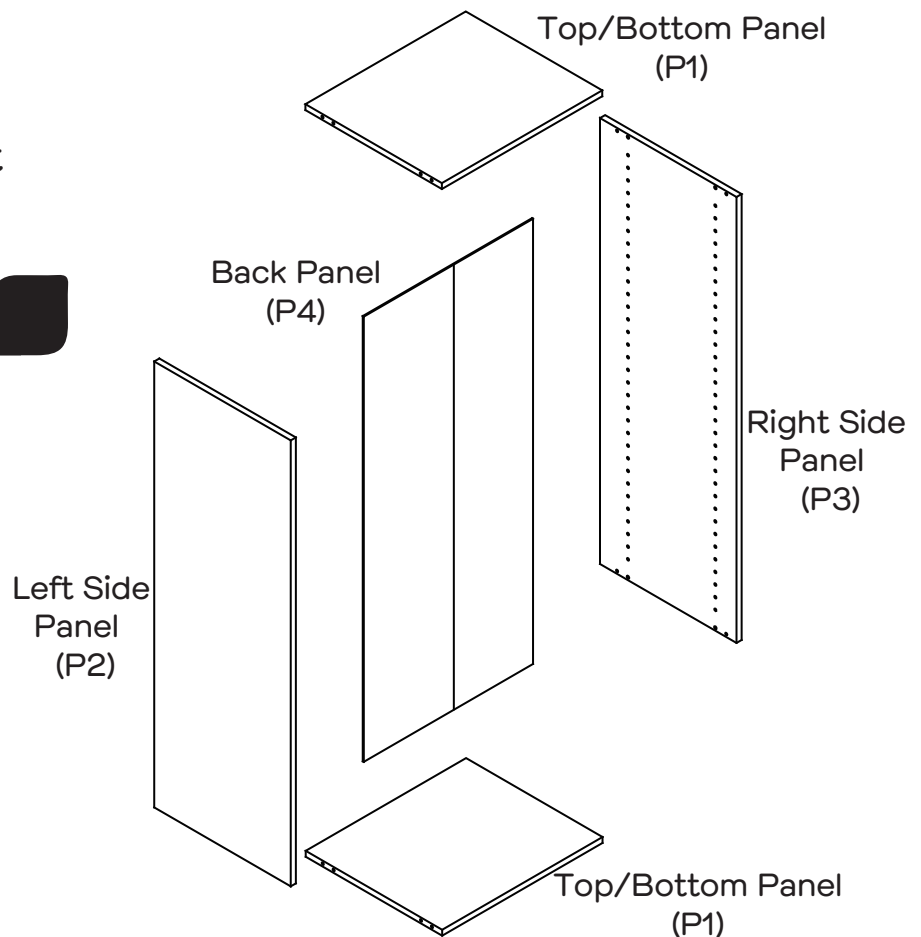

### Parts list

2 x Top/Bottom Panels (P1);

Left Side Panel (P2);

Right Side Panel (P3);

Back Panel (P4);

Small Drawer Front (P5);

Small Left Drawer Side (P6);

Small Right Drawer Side (P7);

Drawer Base (P8);


Small Drawer Back (P9);

Drawer Front (P10);


Left Drawer Side (P11);

Right Drawer Side (P12);

Drawer Back (P13);

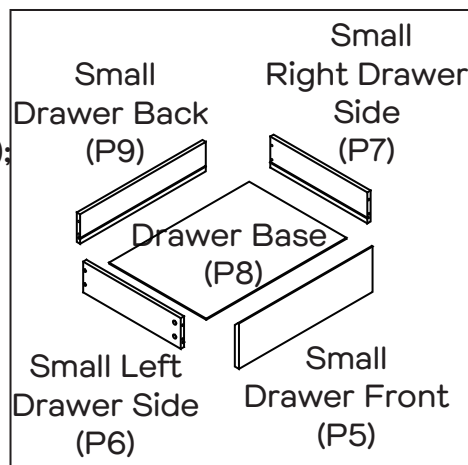


x4

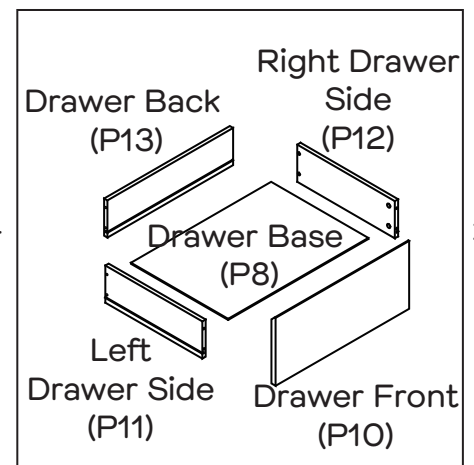

x2


### Hardware pack



8 x Dowels  
(H1)



24 x Long  
Screws  
(H2)




8 x Cam  
Bolts  
(H3)



8 x Cam  
Nuts  
(H4)



24 x Nails  
(H5)




1 x Safety  
Strap  
(H6)




1 x Screw  
(H7)




2 x Washer  
(H8)




6 x CL Runner  
Tracks  
(H9)



6 x CR Runner  
Tracks  
(H10)



6x DL Runners  
(H11)



6 x DR Runners  
(H12)



24 x Small  
Screws  
(H13)



26 x Screws  
(H14)



24 x Small  
Cam Bolts  
(H15)








24 x Small  
Cam Nuts  
(H16)



1 x Metal  
Bracket  
(H17)



# Step 1


You will need	
	
6 x CL Runner Tracks (H9)	6 x CR Runner Tracks (H10)
	
24 x Screws (H14)	Phillips head screwdriver

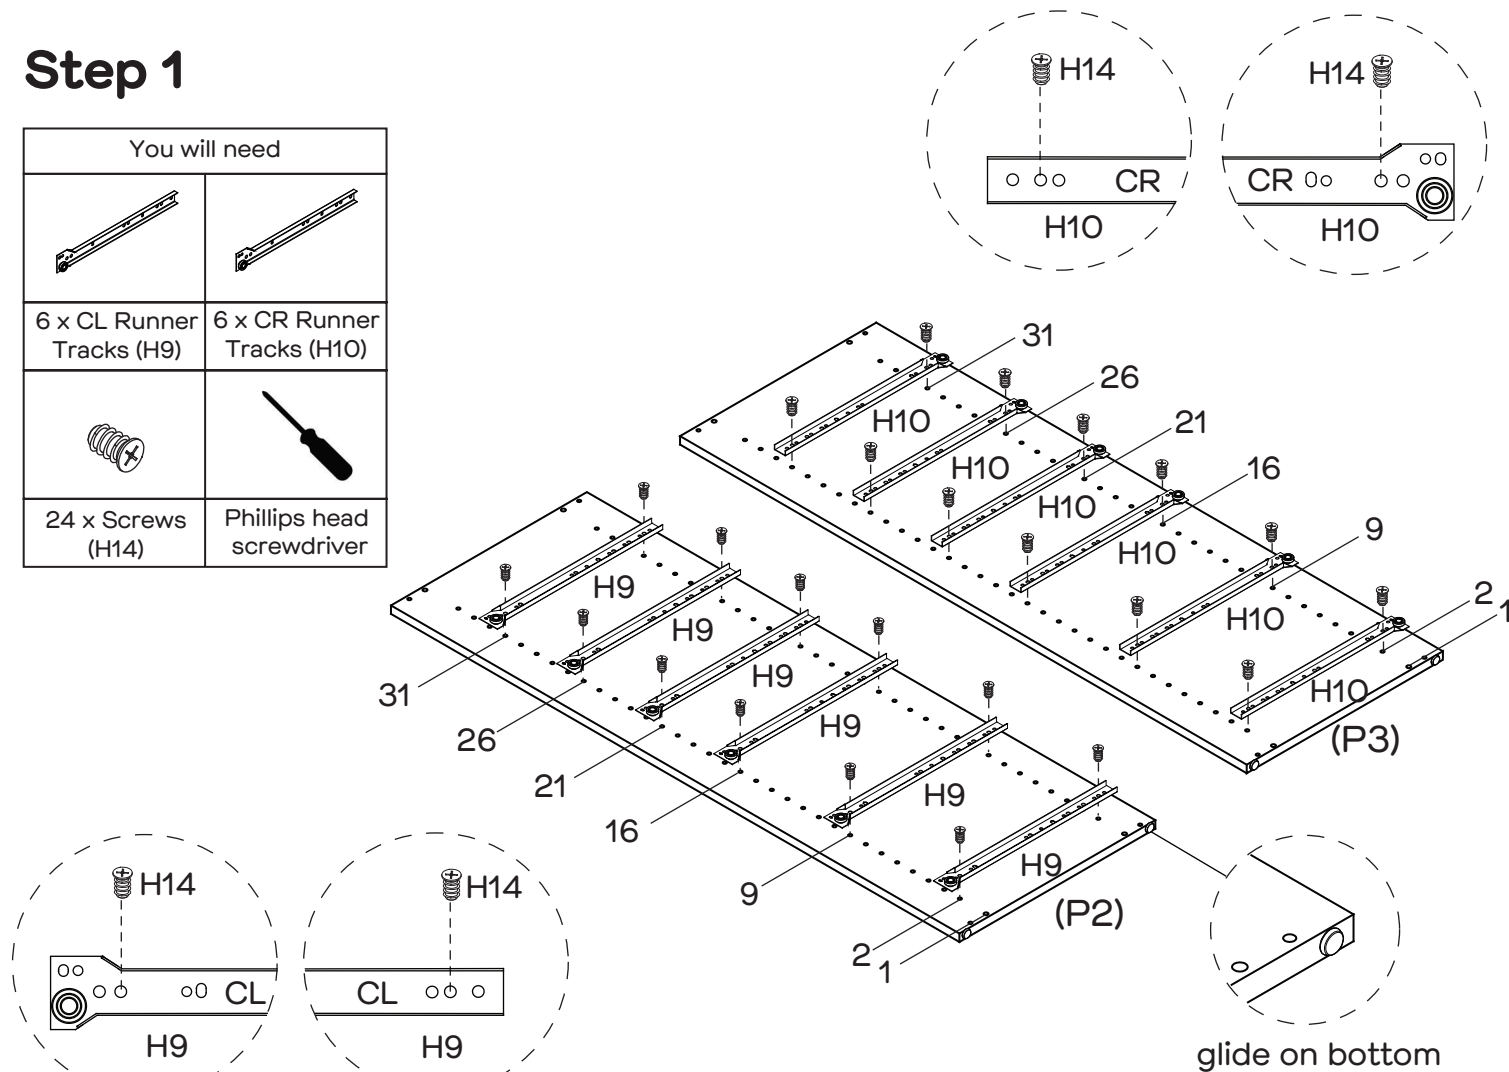

Attach 6 x CL Runner Tracks (H9) to Left Side Panel (P2) with 12 x Screws (H14).  
Attach 6 x CR Runner Tracks (H10) to Right Side Panel (P3) with 12 x Screws (H14).




# Step 2


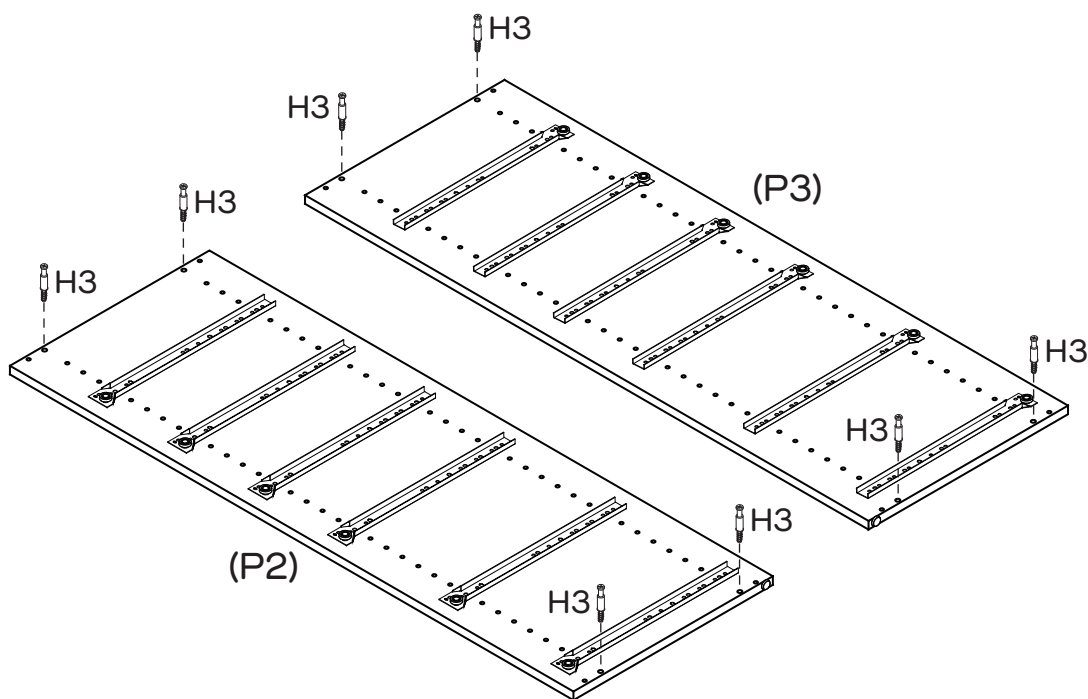
You will need	
	
8 x Cam Bolts (H3)	Phillips head screwdriver



Attach 8 x Cam Bolts (H3) into Side Panels (P2, P3).




## Step 3

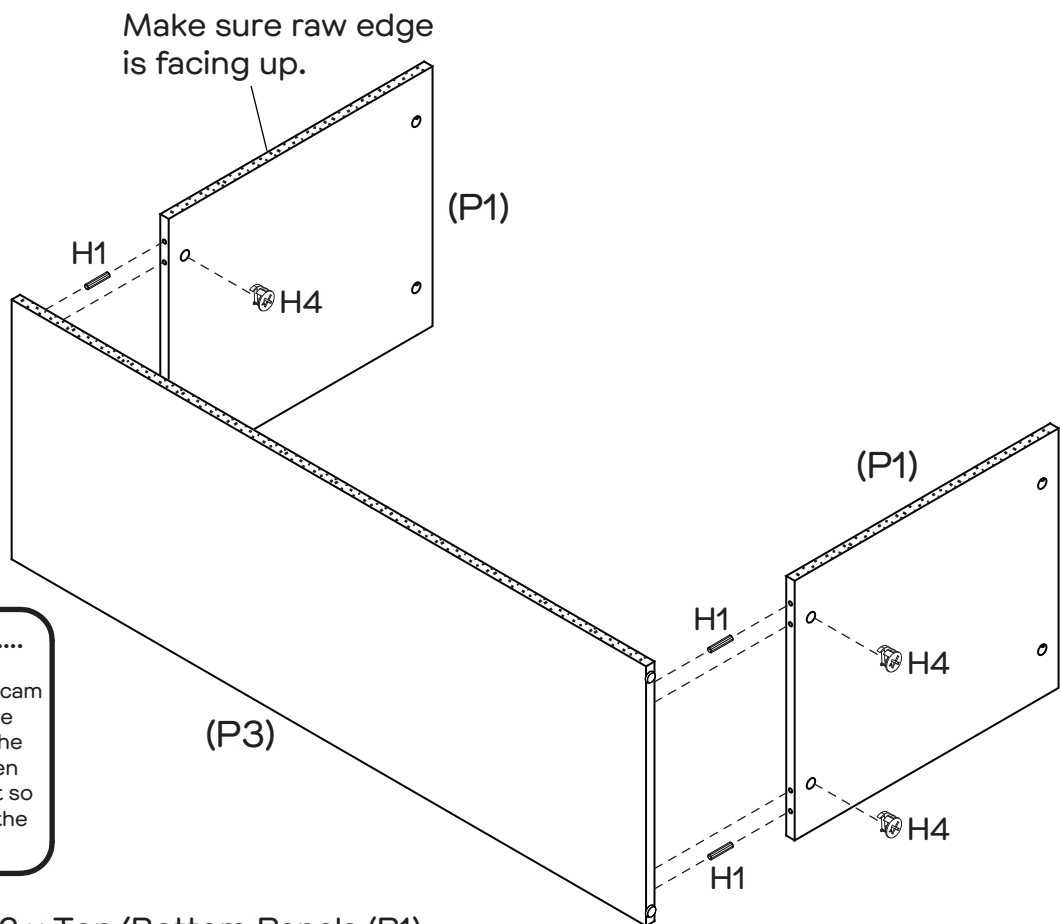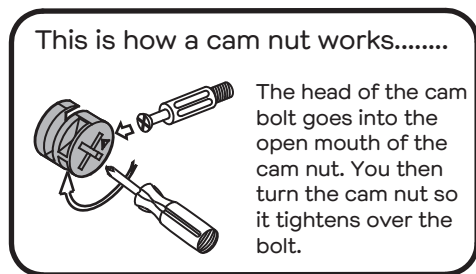
You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips head screwdriver	



Insert 4 x Dowels (H1) into 2 x Top/Bottom Panels (P1).  
 Insert 4 x Cam Nuts (H4) into the holes of 2 x Top/Bottom Panels (P1).  
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.  
 Attach 2 x Top/Bottom Panels (P1) to Right Side Panel (P3), then tighten the cam nuts.




## Step 4



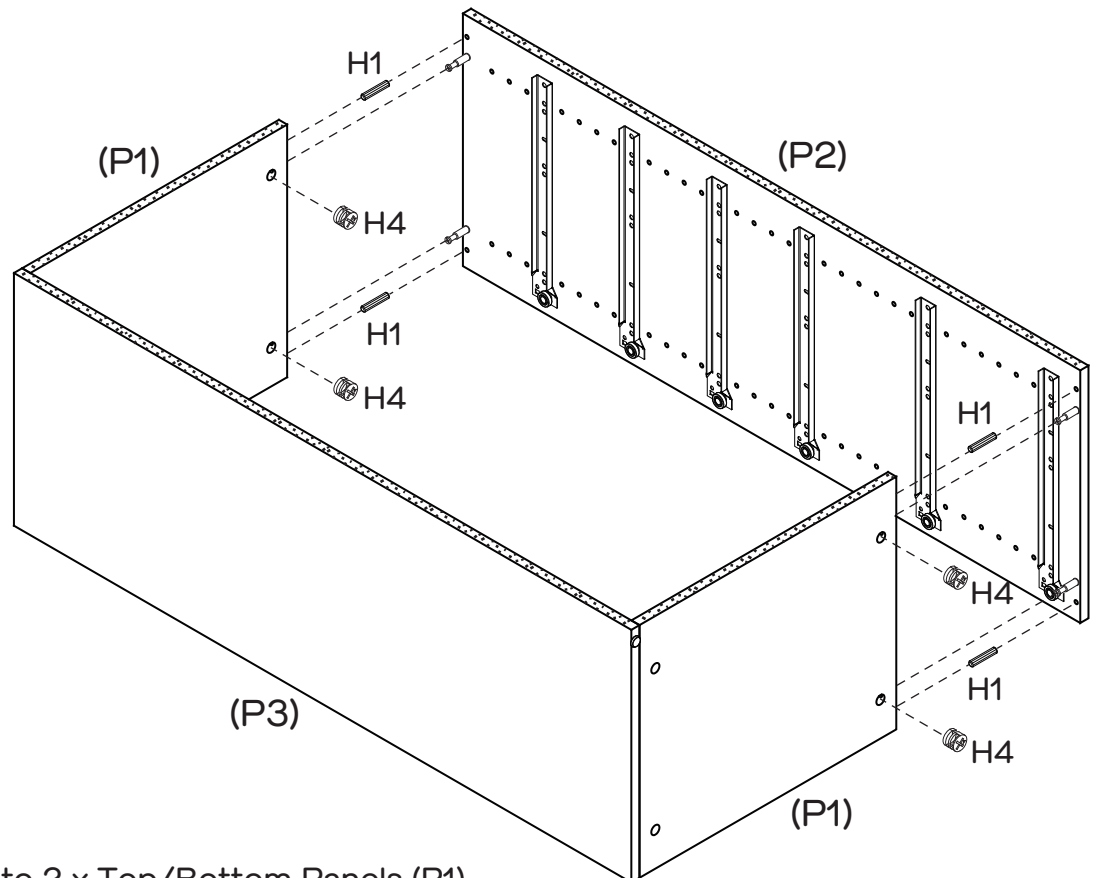
You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 4 x Dowels (H1) into 2 x Top/Bottom Panels (P1).  
 Insert 4 x Cam Nuts (H4) into the holes of 2 x Top/Bottom Panels (P1).  
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.  
 Push Left Side Panel (P2) into place and tighten the cam nuts.

## Step 5





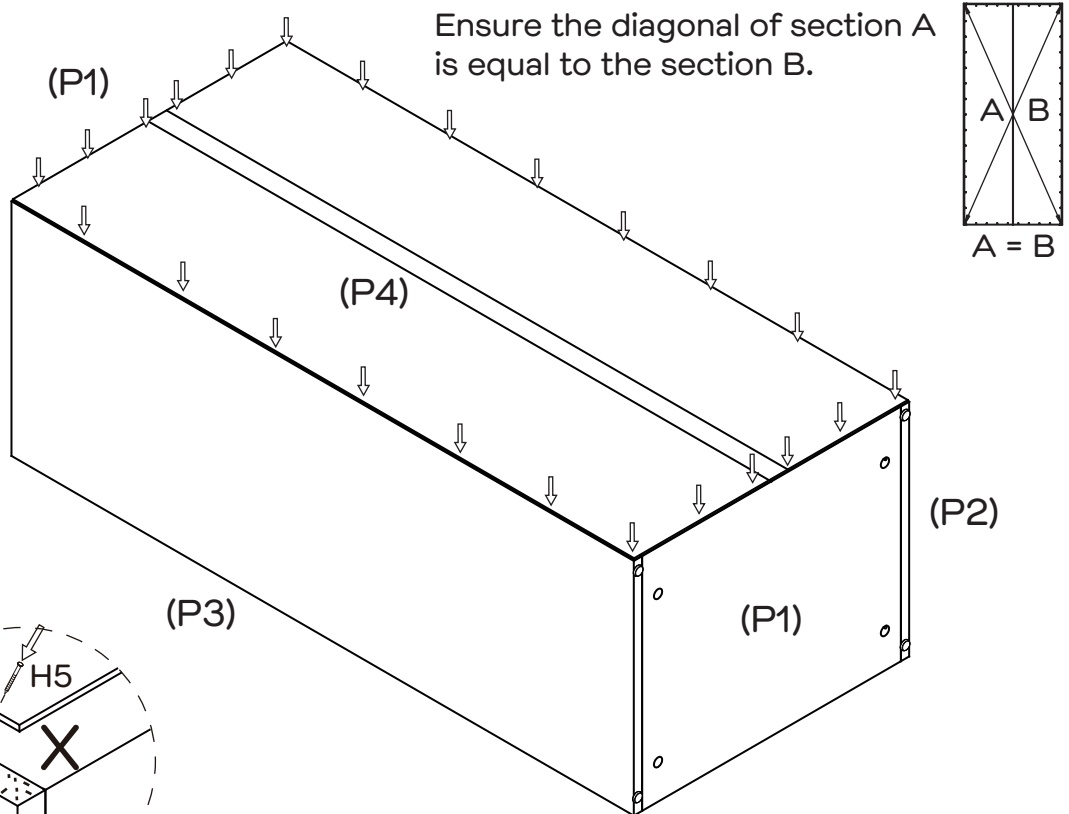You will need	
	
24 x Nails (H5)	Hammer
	
Tape	




Make sure the edge of back panel is well aligned with side, top and bottom panels before nailing the back panel.

Attach Back Panel (P4) to the cabinet with 24 x Nails (H5) using hammer. Please measure with a tape to ensure that the spacing of the nails is consistent, and make sure the tip of the nails are vertically centered on the edge of the Side Panels (P2, P3) and Top/Bottom Panels (P1).

## Step 6

You will need	
	
1 x Safety Strap (H6)	1 x Screw (H7)
	
1 x Washer (H8)	Phillips head screwdriver

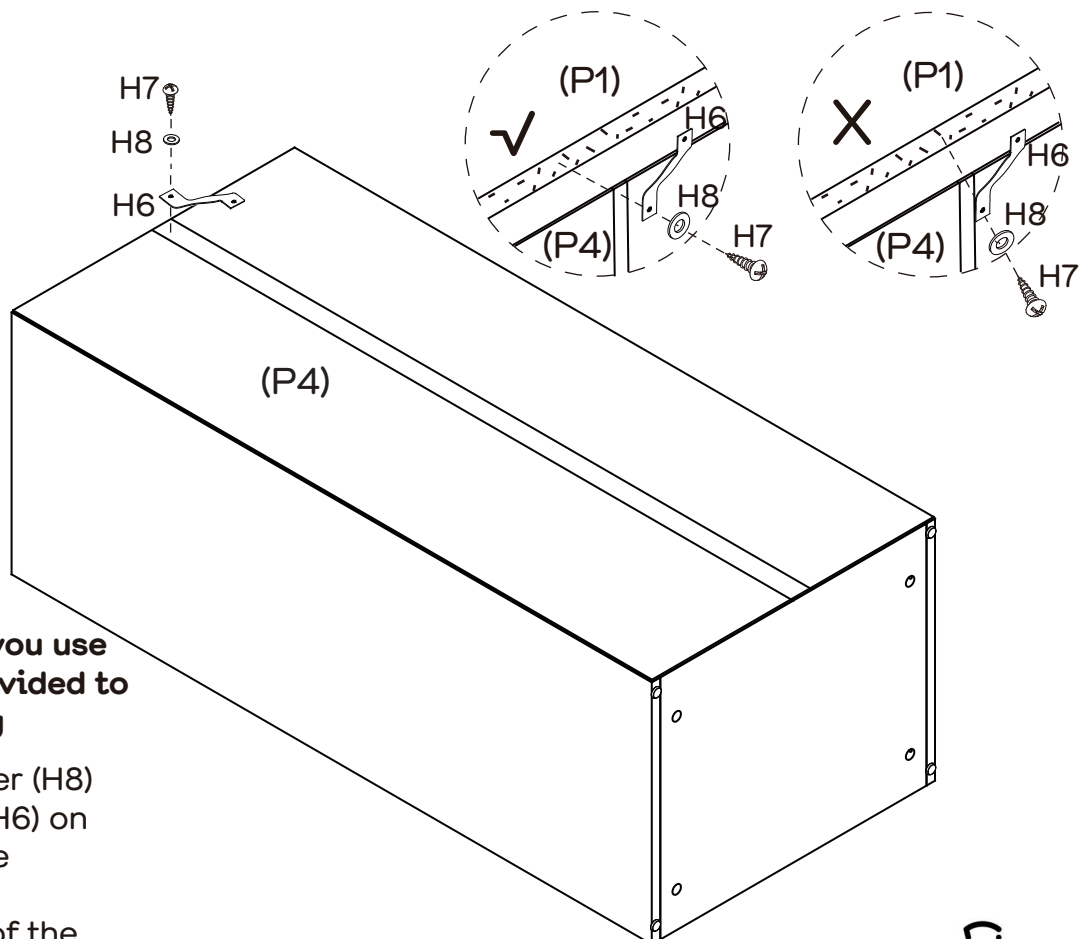




**We strongly advise that you use the wall safety strap provided to prevent the unit toppling**


Use Screw (H7) and Washer (H8) to connect Safety Strap (H6) on Top Panel (P1) through the gap of Back Panel (P4).

Please make sure the tip of the screw is vertically centered on the edge of the Top Panel (P1).





## Step 7


You will need	
	
1 x Metal Bracket (H17)	2 x Screws (H14)
	
Phillips head screwdriver	

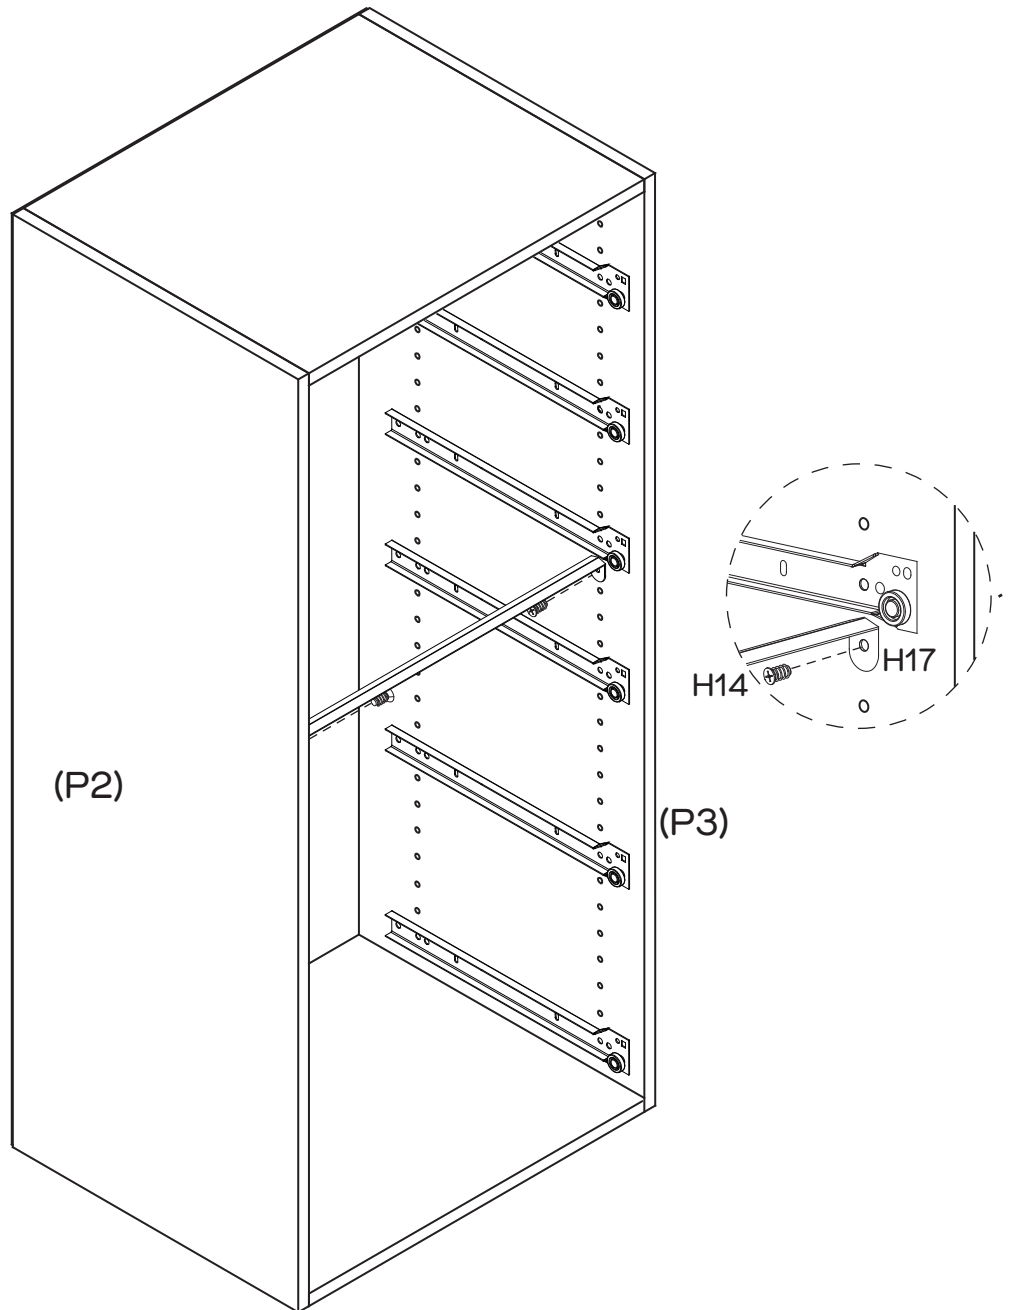

Attach Metal Bracket (H17) to Side Panels (P2, P3) with 2 x Screws (H14).



## Step 8

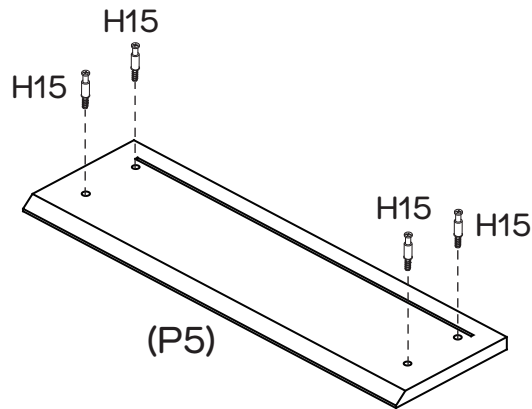
You will need	
	
4 x Small Cam Bolts (H15)	Phillips head screwdriver



Attach 4 x Small Cam Bolts (H15) into Small Drawer Front (P5).


## Step 9

You will need	
	
4 x Small Cam Nuts (H16)	Phillips head screwdriver

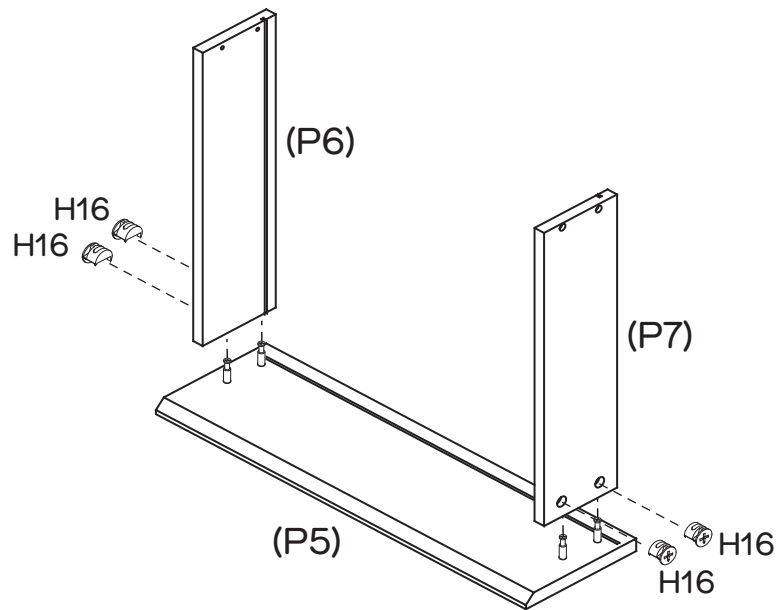



Insert 4 x Small Cam Nuts (H16) into the holes of Small Drawer Sides (P6, P7). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Small Drawer Sides (P6, P7) into place and tighten the cam nuts.

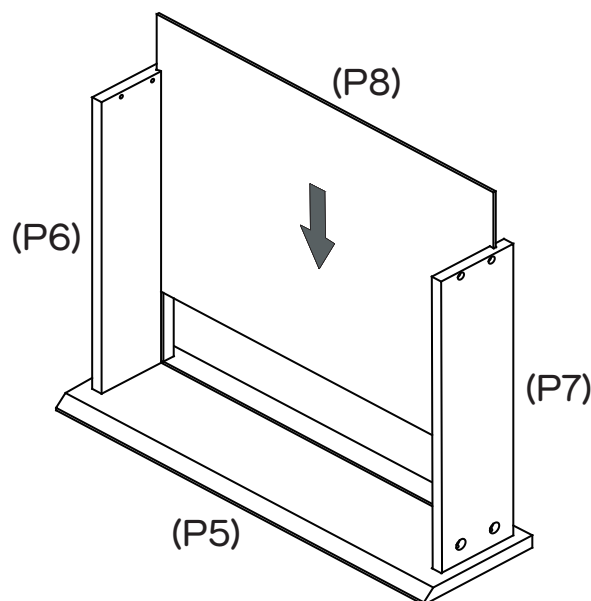
## Step 10



Slide Drawer Base (P8) into the groove in Small Drawer Sides (P6, P7).





## Step 11


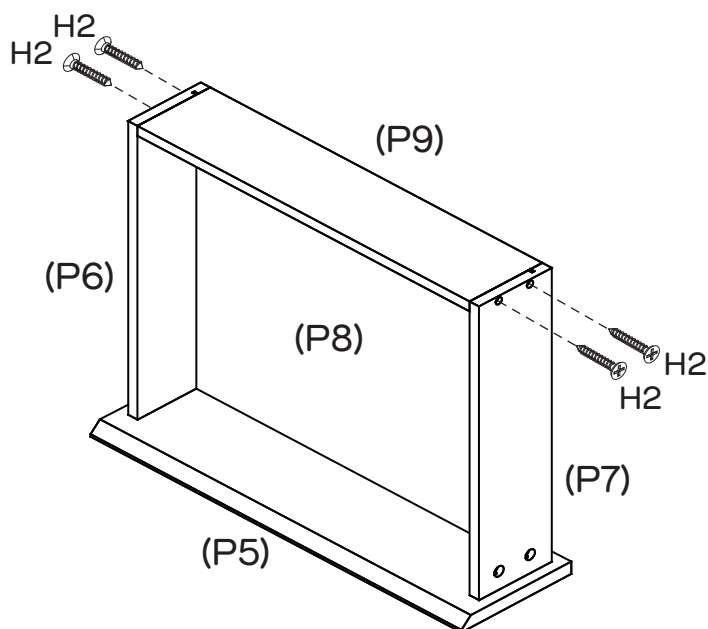
You will need	
	
4 x Long Screws (H2)	Phillips head screwdriver



Attach Small Drawer Back (P9) to Small Drawer Sides (P6, P7) with 4 x Long Screws (H2), make sure that the groove lines up the whole way around the drawer.


## Step 12

You will need	
	
1 x DL Runner (H11)	1 x DR Runner (H12)
	
4 x Small Screws (H13)	Phillips head screwdriver

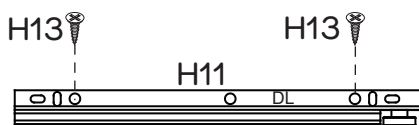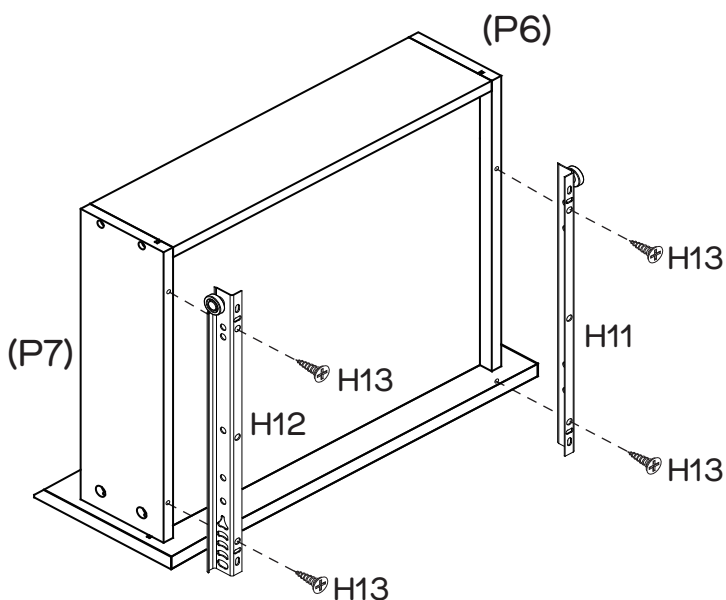



Attach 1 x DL Runner (H11) to the bottom of Small Left Drawer Side (P6) and 1 x DR Runner (H12) to the bottom of Small Right Drawer Side (P7) with 4 x Small Screws (H13).


## Step 13

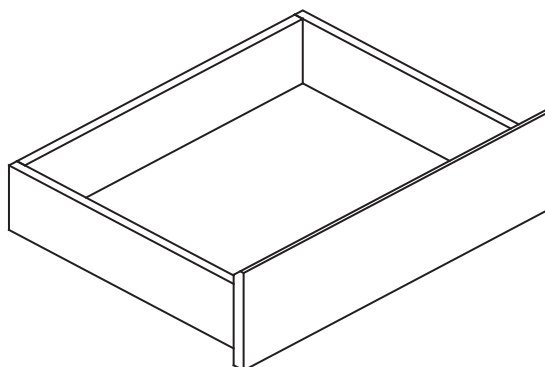

Repeat step 8 to step 12 to assemble the rest of 3 x Small Drawers.


## Step 14


You will need	
	
4 x Small Cam Bolts (H15)	Phillips head screwdriver

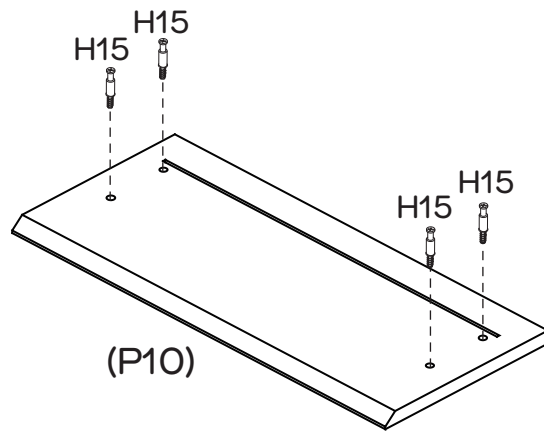

Attach 4 x Small Cam Bolts (H15) into Drawer Front (P10).


## Step 15

You will need	
	
4 x Small Cam Nuts (H16)	Phillips head screwdriver

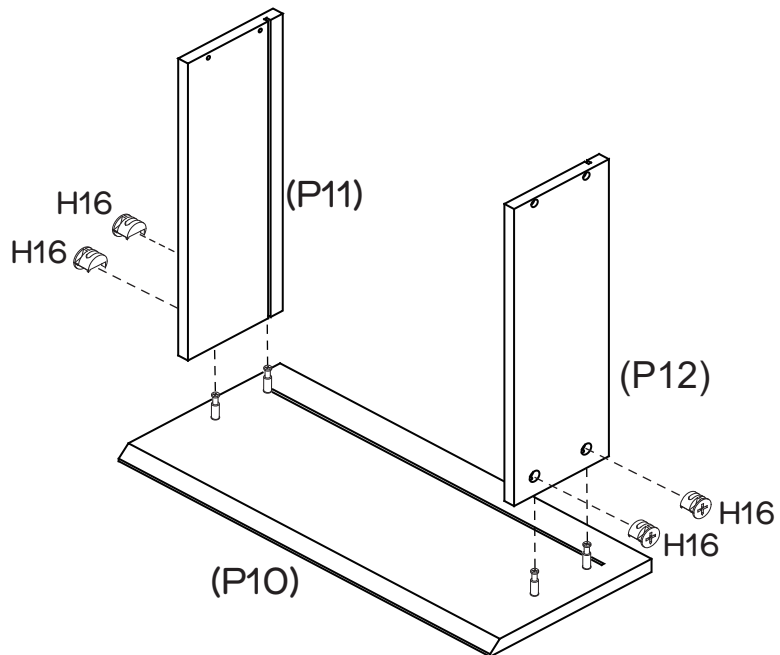



Insert 4 x Small Cam Nuts (H16) into the holes of Drawer Sides (P11, P12). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Drawer Sides (P11, P12) into place and tighten the cam nuts.

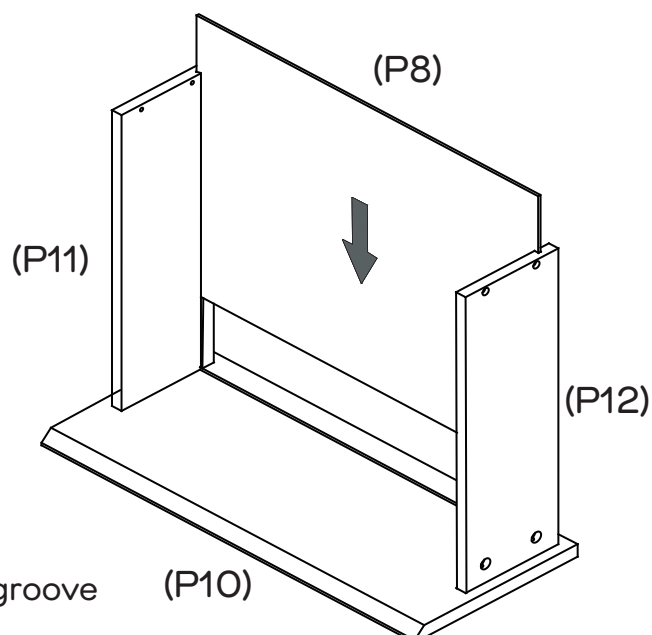
## Step 16



Slide Drawer Base (P8) into the groove in Drawer Sides (P11, P12).





## Step 17


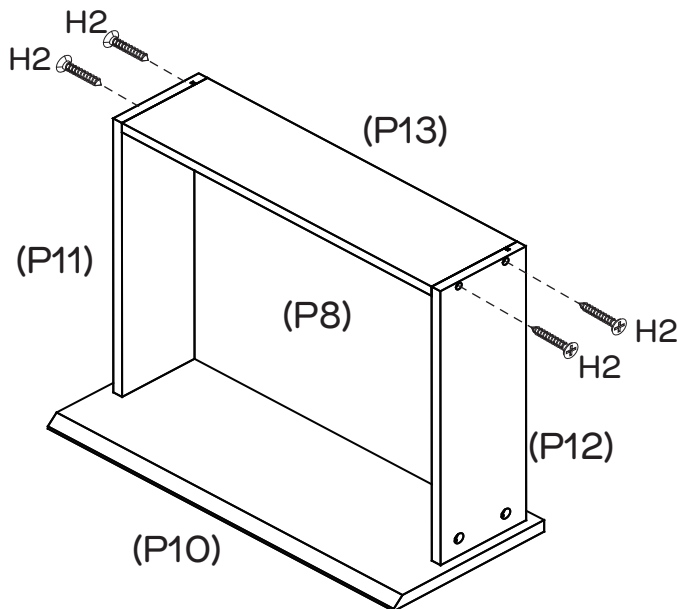
You will need	
	
4 x Long Screws (H2)	Phillips head screwdriver



Attach Drawer Back (P13) to Drawer Sides (P11, P12) with 4 x Long Screws (H2), make sure that the groove lines up the whole way around the drawer.


## Step 18

You will need	
	
1 x DL Runner (H11)	1 x DR Runner (H12)
	
4 x Small Screws (H13)	Phillips head screwdriver

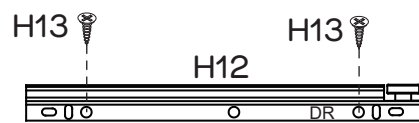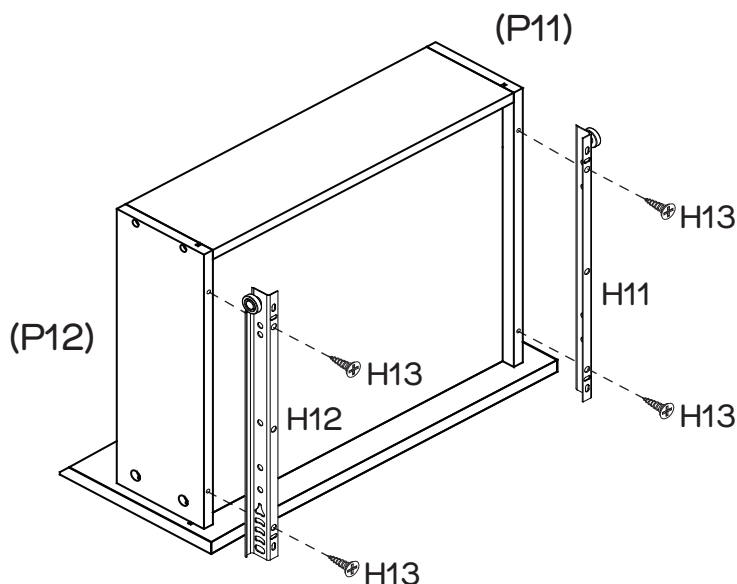


Attach 1 x DL Runner (H11) to the bottom of Left Drawer Side (P11) and 1 x DR Runner (H12) to the bottom of Right Drawer Side (P12) with 4 x Small Screws (H13).

## Step 19

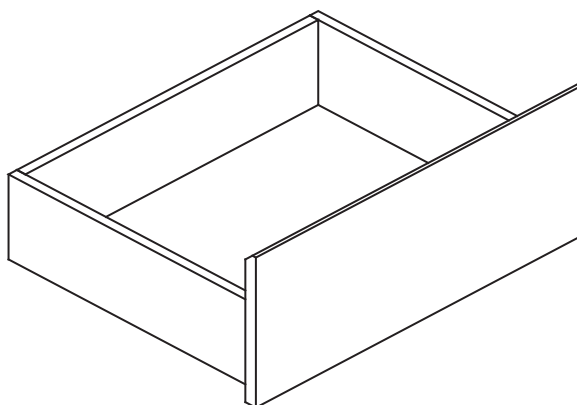



Repeat step 14 to step 18 to assemble the rest of Drawer.

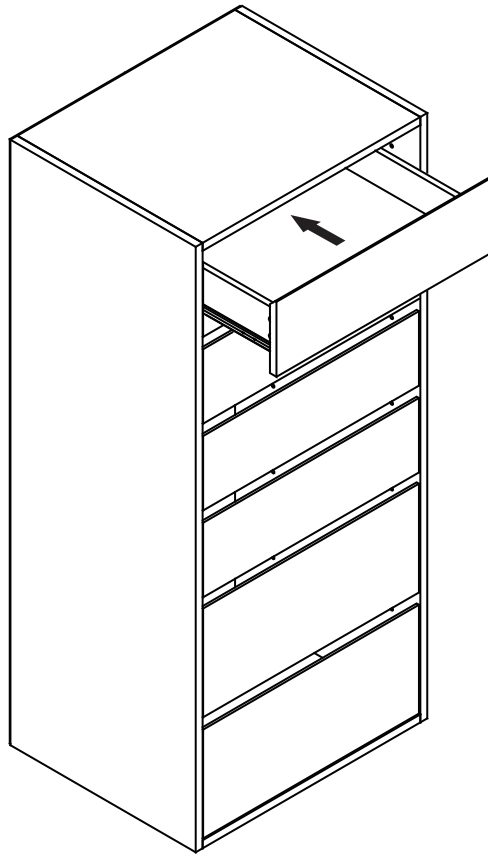
## Step 20




Put the drawers into the cabinet.

## Step 21


You will need	
	
1 x Washer (H8)	Phillips head screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

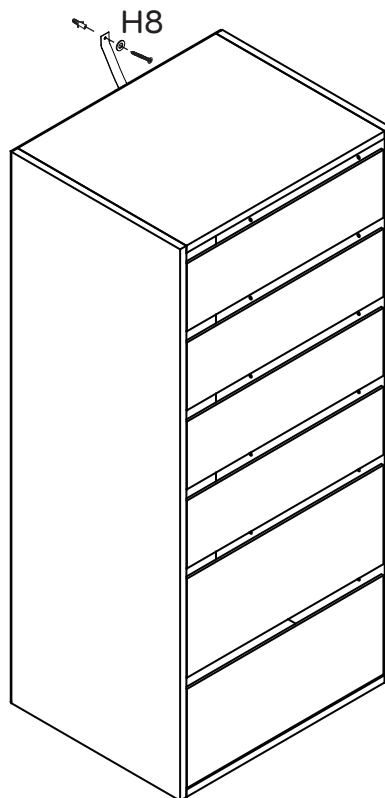

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.



Move the cabinet to the final position. Attach the safety strap to the wall. Make sure it is firmly attached and make sure it is a snug fit.

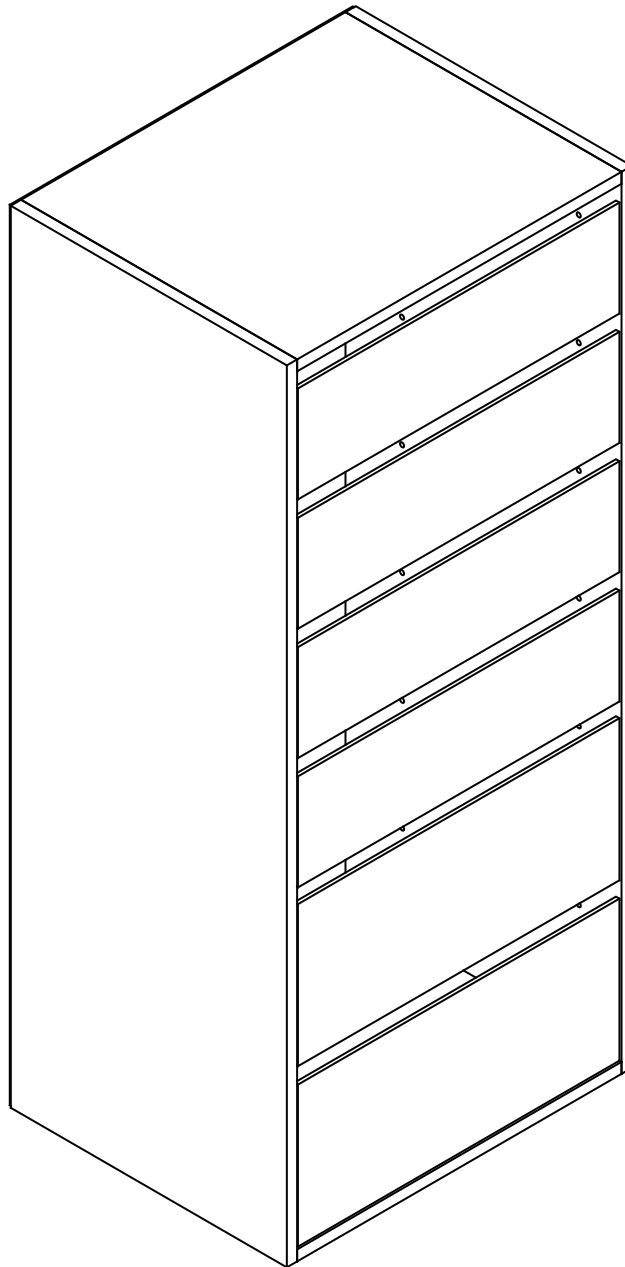

## Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.