





**Fantastic  
Furniture**

Version 1.0

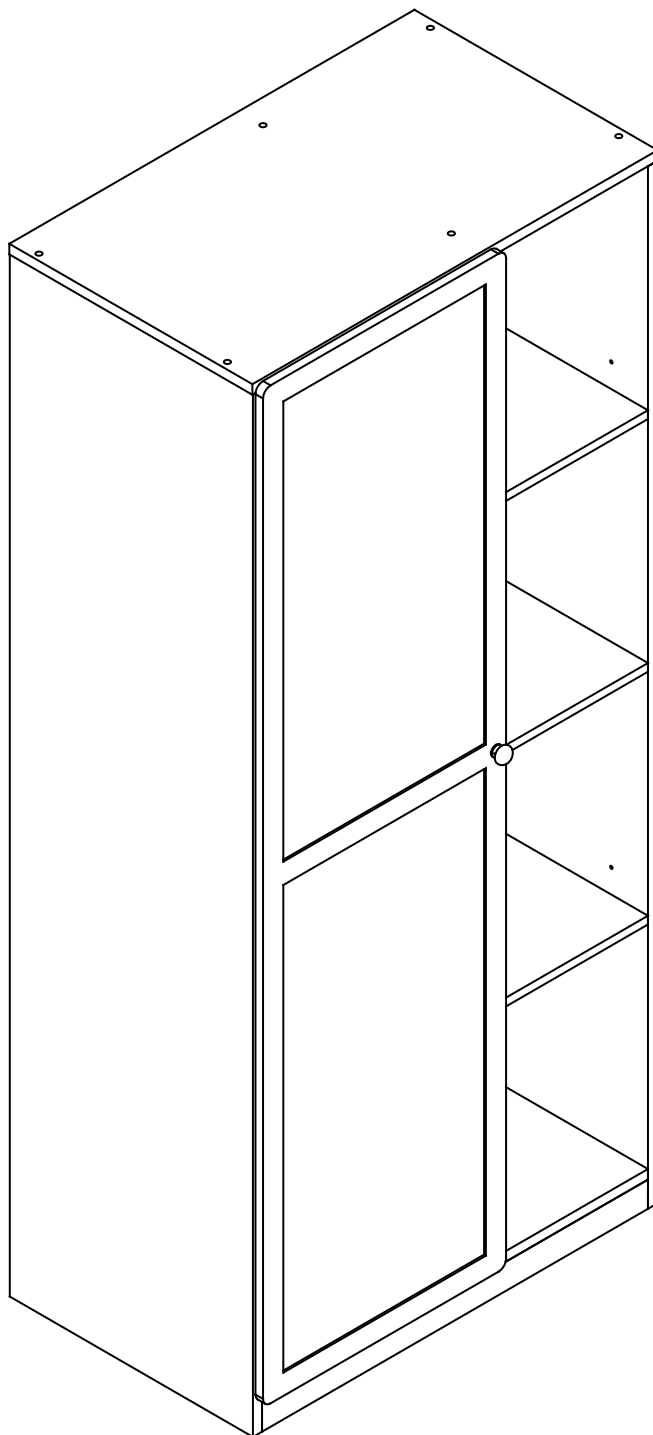

**Two People**



**Required**


# Twilight

Robe 1 Door

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

# Secure it!

Reduce the risk of furniture tip-over accidents



## WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments.

Please seek professional advice if you are in doubt of what fixing device to use.

**Recommended Weight Capacity :15kg/hanging rail, 10kg/shelf**

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

## Wall attachment guide




**For plasterboard**  
(without available wood stud)

**Securing method:**  
Self drilling plasterboard anchor.



**For plasterboard**  
(with available wood stud)

**Securing method:**  
Screw inserted directly into stud.



**For masonry wall**

**Securing method:**  
Solid wall: Plug with screw  
Hollow wall: Spring toggle

**Please seek professional advice if you are in doubt of what fixing device to use.**

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



# Fantastic Furniture

## Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.

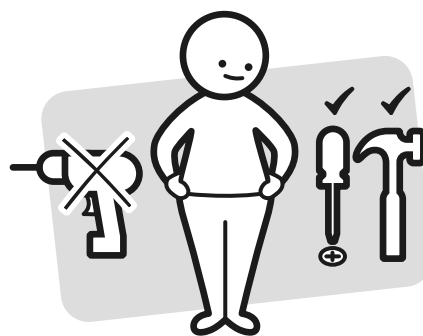

Make sure you have all the required tools. Never use power tools unless instructed.

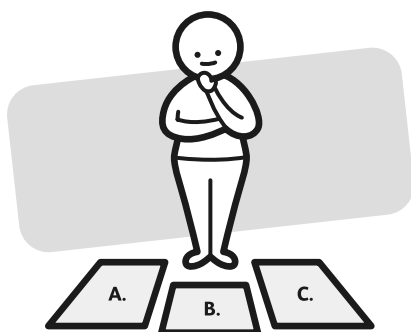

Identify and lay out all of the components before you begin assembly.

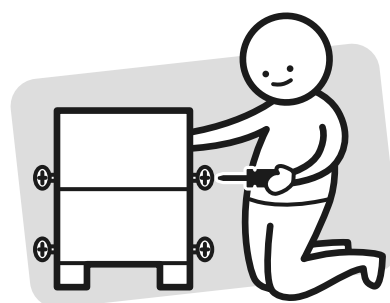

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need

## to assemble the product



DO NOT USE




### Other tools you need:









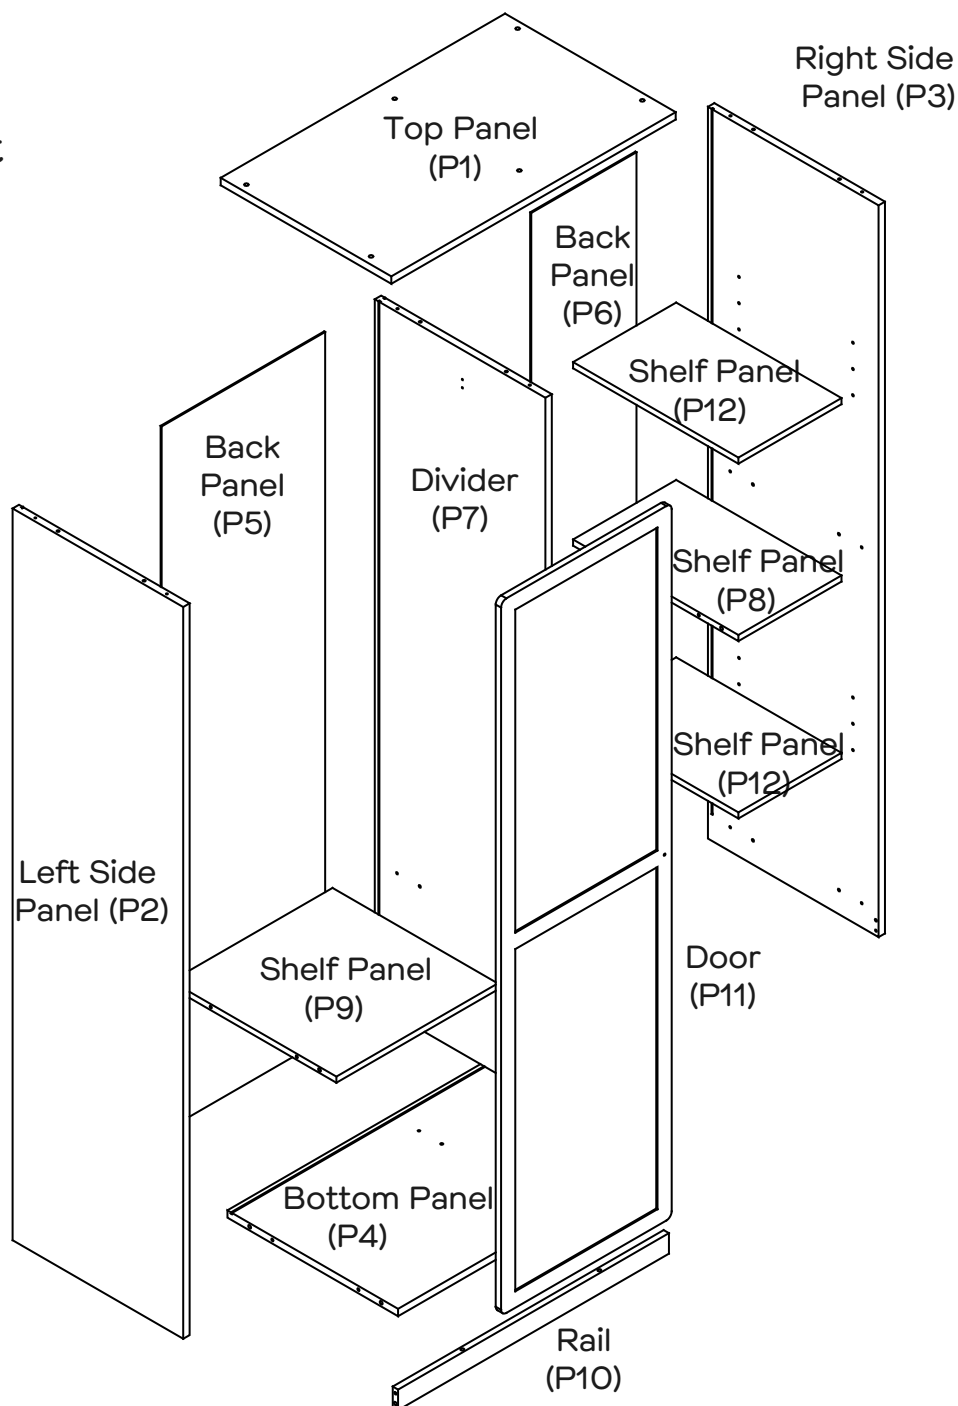









Phillips head screwdriver;  
Hammer

### Parts list



Top Panel (P1);  
Left Side Panel (P2);  
Right Side Panel (P3);  
Bottom Panel (P4);  
Back Panel (P5);  
Back Panel (P6);  
Divider (P7);  
Shelf Panel (P8);  
Shelf Panel (P9);  
Rail (P10);  
Door (P11);  
2 x Shelf Panel (P12)




### Hardware pack

								
22 x Dowels (H1)	8 x Long Screws (H2)	16 x Cam Bolts (H3)	16 x Cam Nuts (H4)	18 x Screws (H5)	2 x Magnetics (H6)	2 x Magnetics Bars (H7)	8 x Shelf Supports (H8)	3 x Hinges (H9)
								
2 x Hanging Rail Supports (H10)	1 x Hanging Rail (H11)	4 x Plastic Glides (H12)	10 x Wedges (H13)	14 x Wedge Screws (H14)	1 x Handle (H15)	1 x Handle Screw (H16)	1 x Washer (H17)	8 x Small Screws (H18)





# Step 1

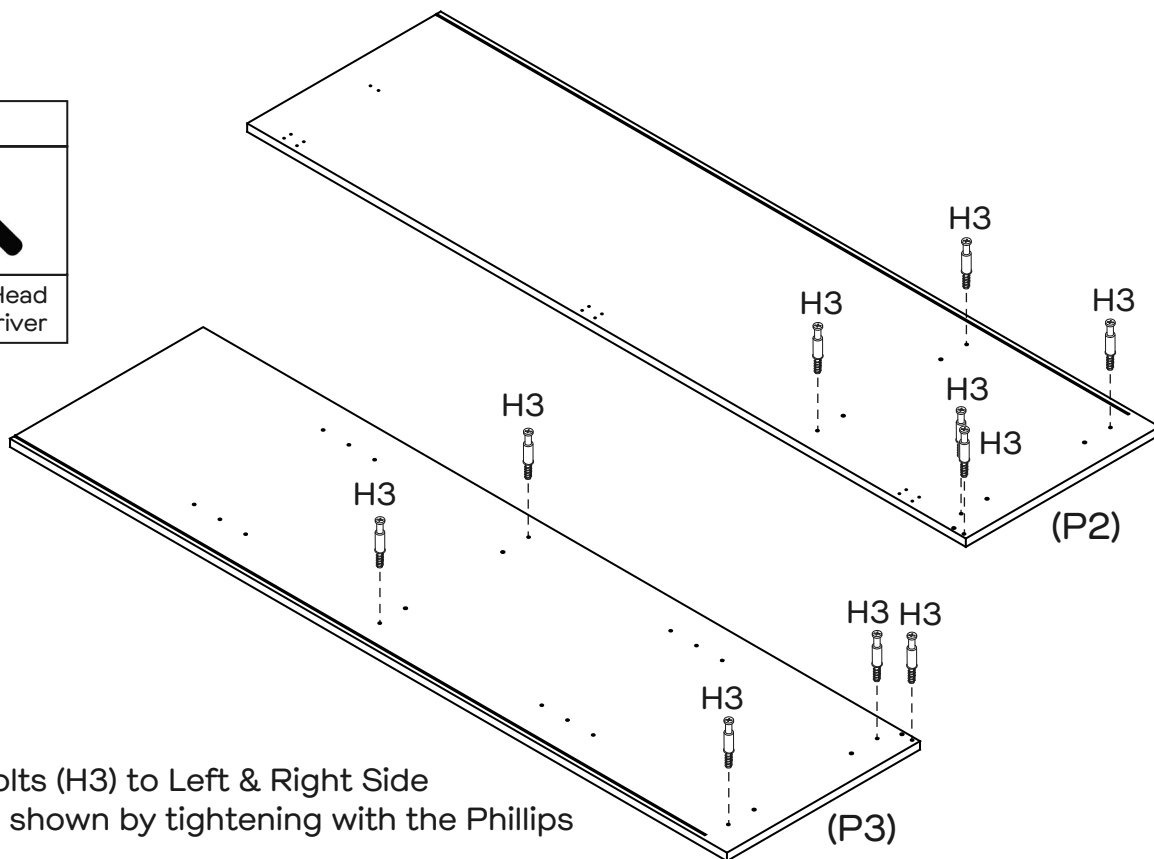
You will need	
	
10 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 10 x Cam Bolts (H3) to Left & Right Side Panels (P2 & P3) as shown by tightening with the Phillips Head Screwdriver.




# Step 2


You will need	
	
4 x Cam Bolts (H3)	1 x Magnetic (H6)
	
2 x Wedge Screws (H14)	Phillips Head Screwdriver

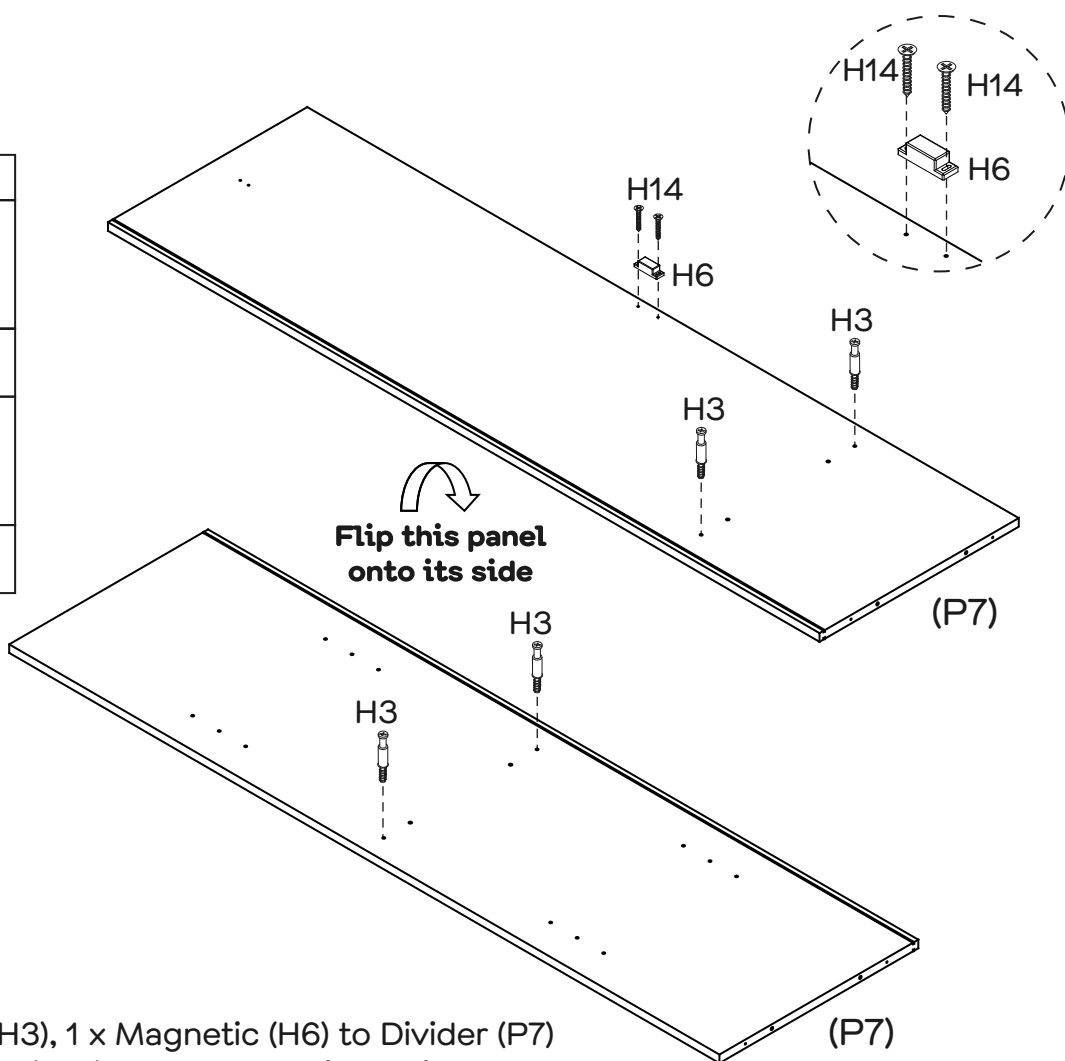

Attach 4 x Cam Bolts (H3), 1 x Magnetic (H6) to Divider (P7) with 2 x Wedge Screws (H14) as shown by tightening with the Phillips Head Screwdriver.




## Step 3

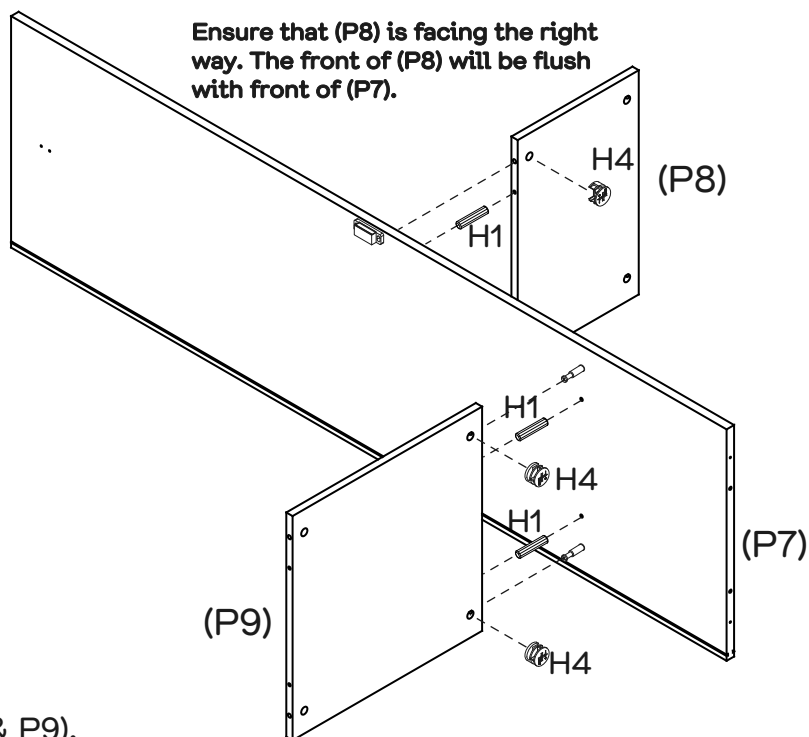
You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 4 x Dowels (H1) into Shelf Panels (P8 & P9).  
 Insert 4 x Cam Nuts (H4) into Shelf Panels (P8 & P9).  
 Rotate the nuts so the arrows point towards the incoming bolts.  
 Attach Shelf Panels (P8 & P9) to Divider (P7) by tightening all nuts with the Phillips Head Screwdriver.




## Step 4

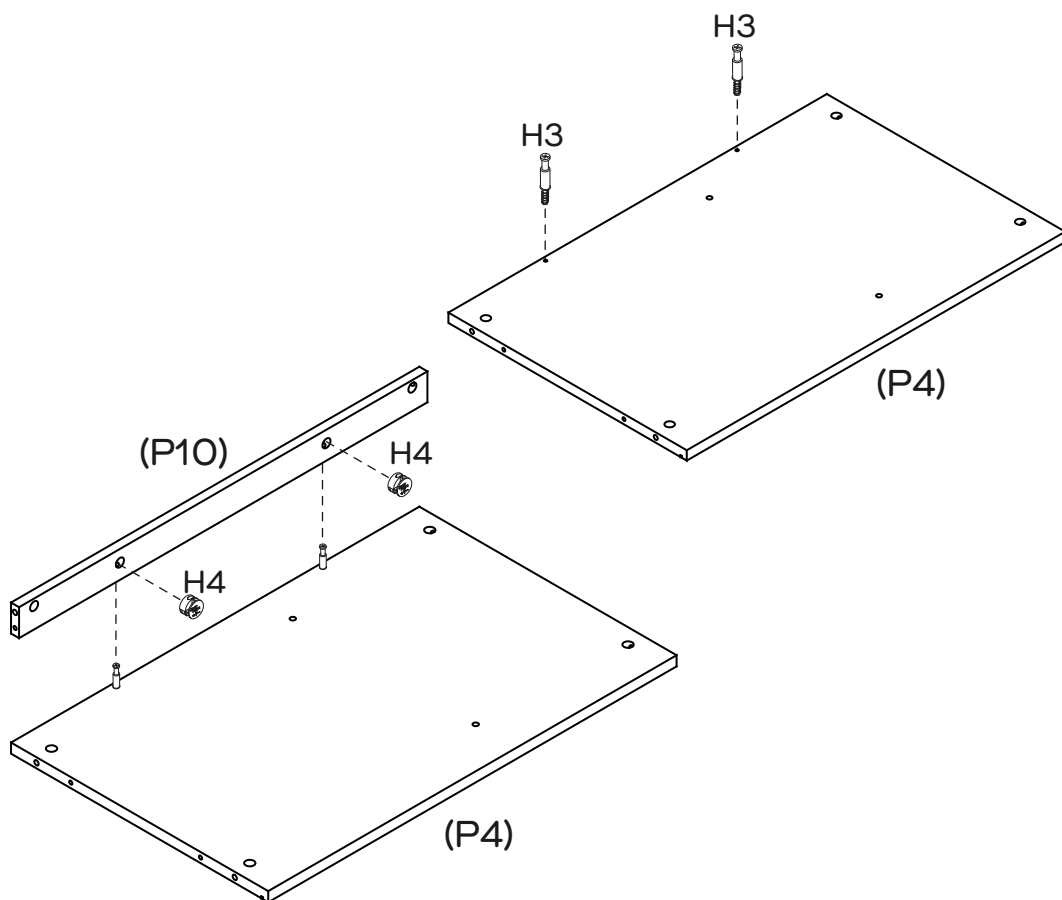
You will need	
	
2 x Cam Bolts (H3)	2 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 2 x Cam Bolts (H3) into Bottom Panel (P4). Tightening with the Phillips Head Screwdriver.  
 Insert 2 x Cam Nuts (H4) into Rail (P10). Rotate the nuts so the arrows point towards the incoming bolts. Attach Rail (P10) to Bottom Panel (P4) by tightening all nuts with the Phillips Head Screwdriver.




## Step 5

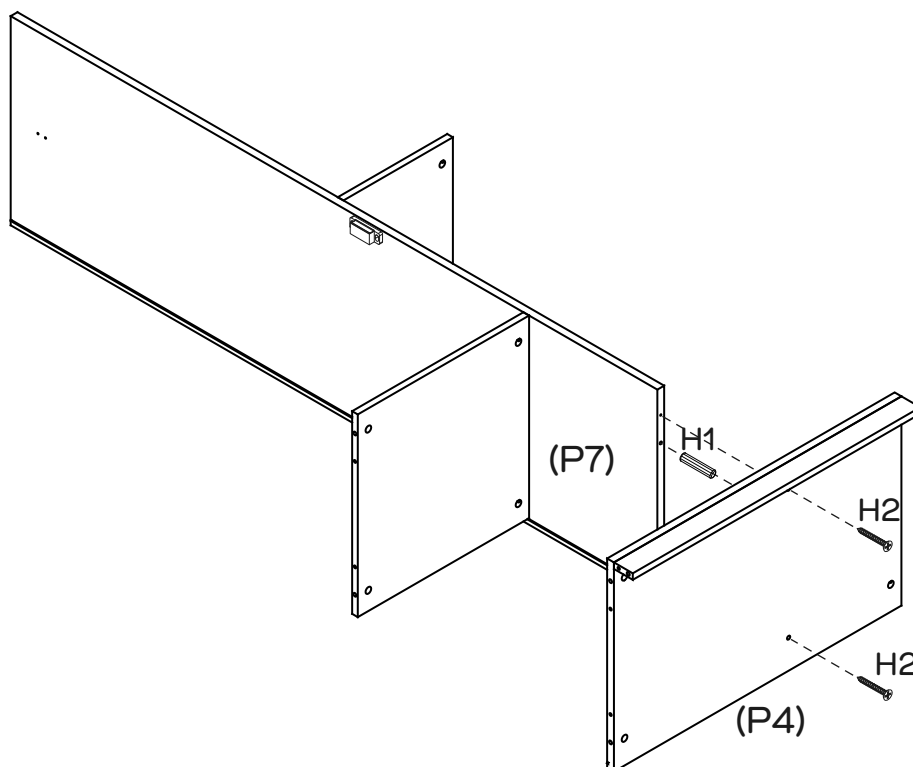You will need	
	
2 x Dowels (H1)	2 x Long Screws (H2)
	
Phillips Head Screwdriver	



Insert 2 x Dowels (H1) into Divider (P7). Attach Bottom Panel (P4) to Divider (P7) with 2 x Long Screws (H2) by tightening with the Phillips Head Screwdriver.


## Step 6

You will need	
	
5 x Dowels (H1)	5x Cam Nuts (H4)
	
Phillips Head Screwdriver	

Two People






Required

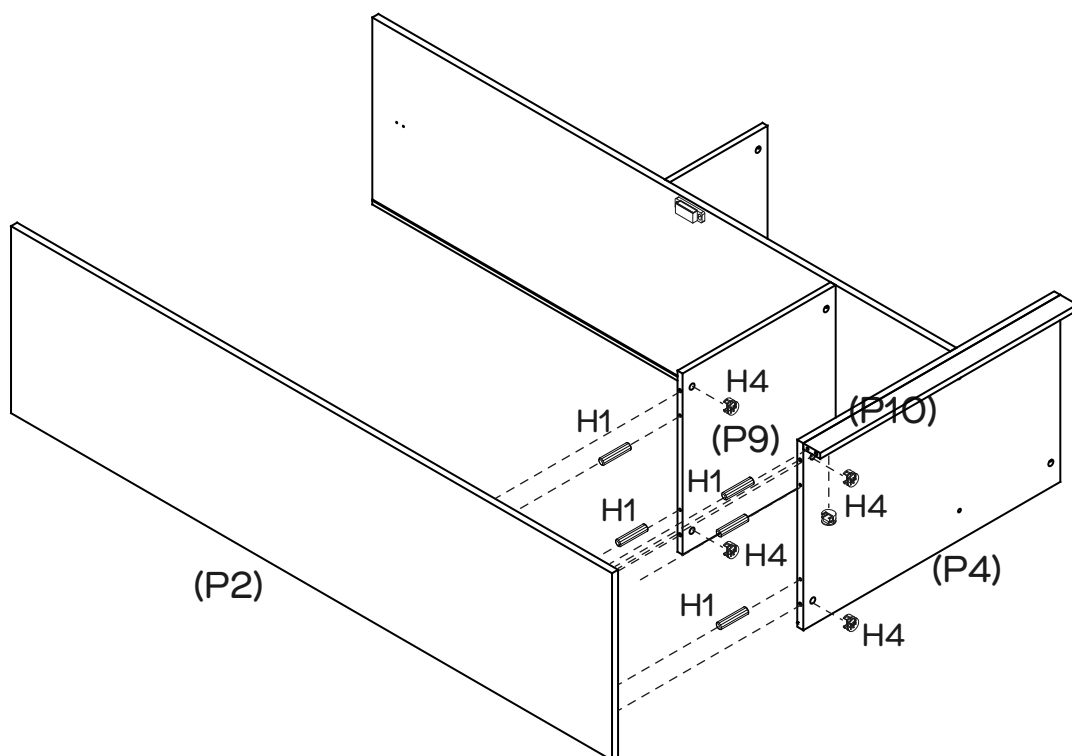

Insert 5 x Dowels (H1) into Shelf Panel (P9), Bottom Panel (P4) and Rail (P10). Insert 5 x Cam Nuts (H4) into Shelf Panel (P9), Bottom Panel (P4) and Rail (P10). Rotate the nuts so the arrows point towards the incoming bolts. Attach Left Side Panel (P2) to Shelf Panel (P9), Bottom Panel (P4) and Rail (P10) by tightening all nuts with the Phillips Head Screwdriver.




## Step 7

You will need	
	
5 x Dowels (H1)	5 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

Two People




Required

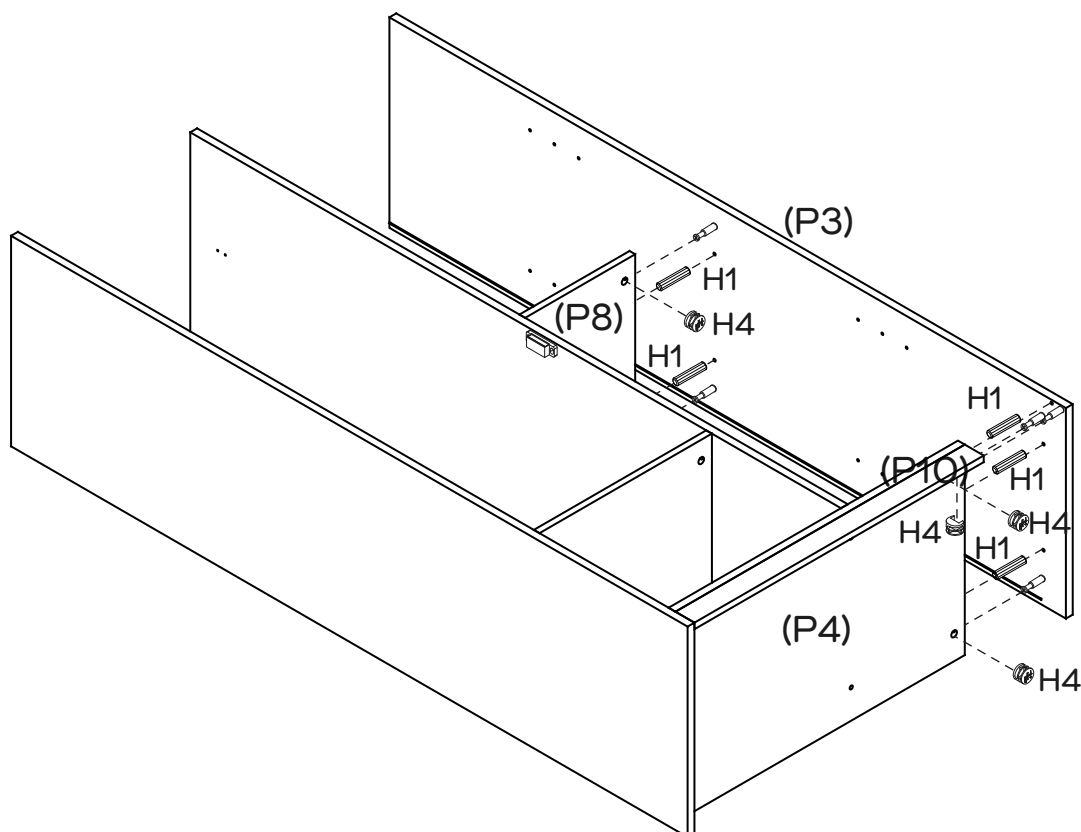

Insert 5 x Dowels (H1) into Shelf Panel (P8), Bottom Panel (P4) and Rail (P10).  
 Insert 5 x Cam Nuts (H4) into Shelf Panel (P8), Bottom Panel (P4) and Rail (P10).  
 Rotate the nuts so the arrows point towards the incoming bolts.  
 Attach Right Side Panel (P3) to Shelf Panel (P8), Bottom Panel (P4) and Rail (P10) by tightening all nuts with the Phillips Head Screwdriver.


## Step 8

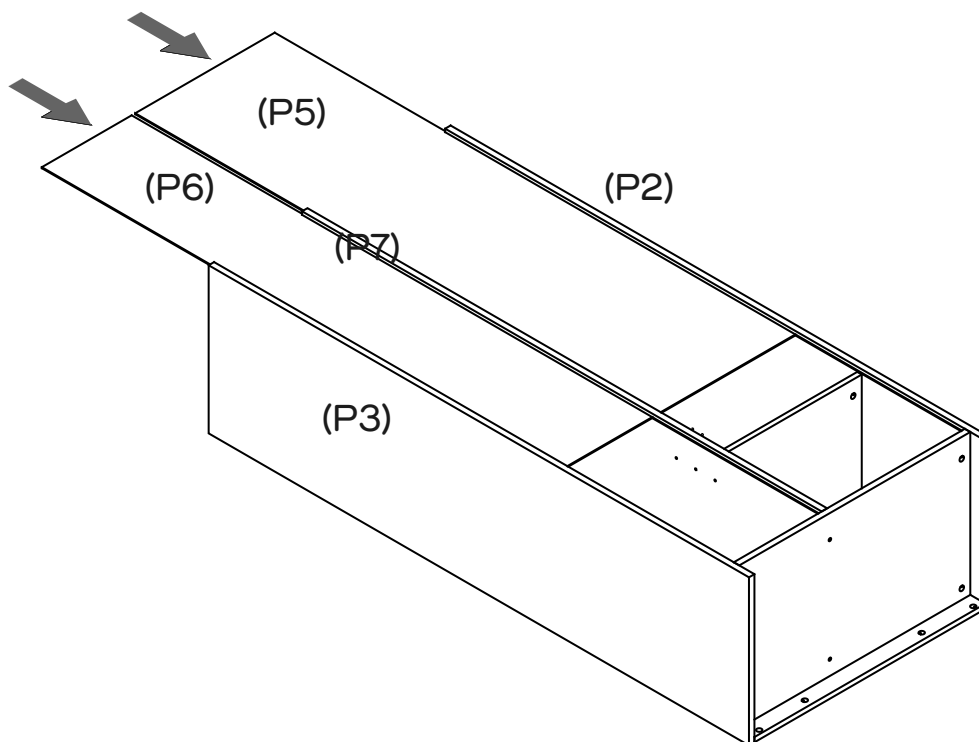

Slide Back Panels (P5 & P6) into the grooves of Left & Right Side Panel (P2 & P3) and Divider (P7).

# Step 9


You will need	
1 x Magnetic Mechanism (H6)	2 x Wedge Screws (H14)
Phillips Head Screwdriver	

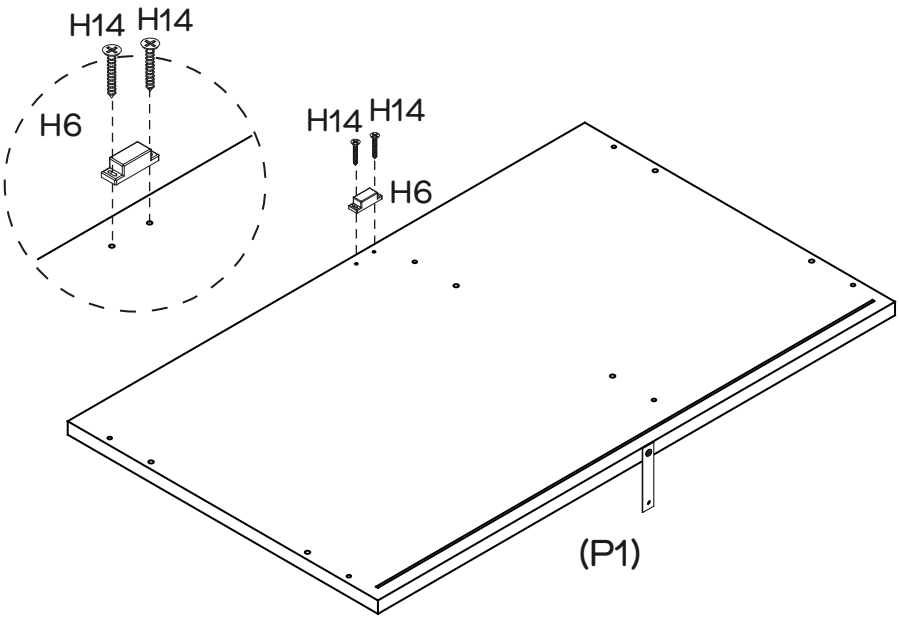

Attach 1 x Magnetic Mechanism (H6) to Top Panel (P1) with 2 x Wedge Screws (H14) as shown by tightening with the Phillips Head Screwdriver.



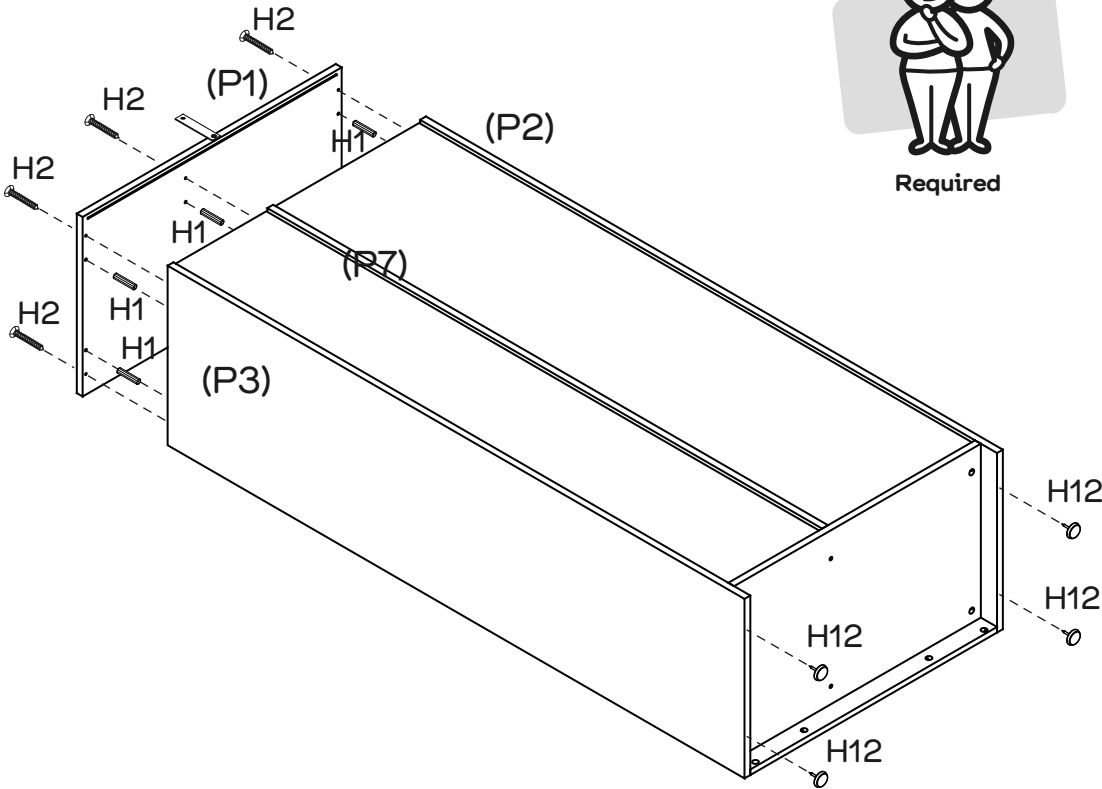

# Step 10

You will need	
6 x Dowel (H1)	6 x Long Screws (H2)
4 x Plastic Glides (H12)	Phillips Head Screwdriver
Hammer	



Insert 6 x Dowels (H1) into Left & Right Side Panel (P2 & P3) and Divider (P7).  
Attach Top panel (P1) to Left & Right Side Panel (P2 & P3) and Divider (P7) with 6 x Long Screws (H2) by tightening with the Phillips Head Screwdriver.  
Attach 4 x Plastic Glides (H12) to Left & Right Side Panel (P2 & P3), gently using a hammer.  
Lift the unit until it is vertical.



## Step 11

You will need	
	
4 x Small Screws (H18)	2 x Hanging Rail Supports (H10)
	
1 x Hanging Rail (H11)	Phillips Head Screwdriver

Two People





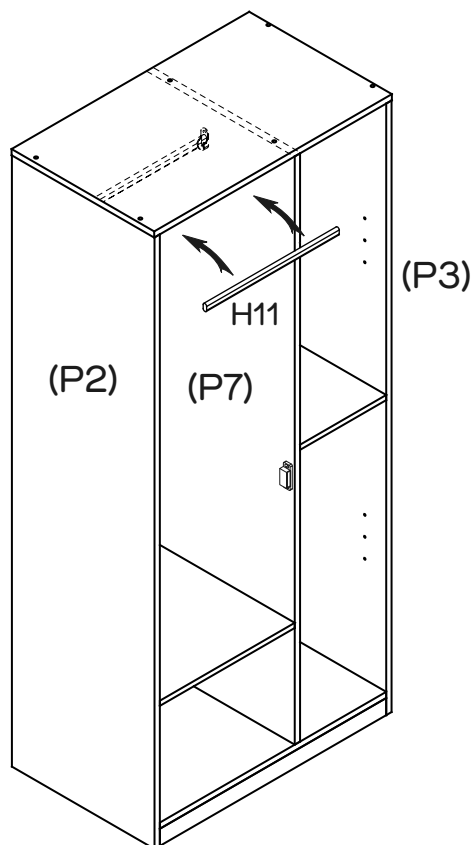


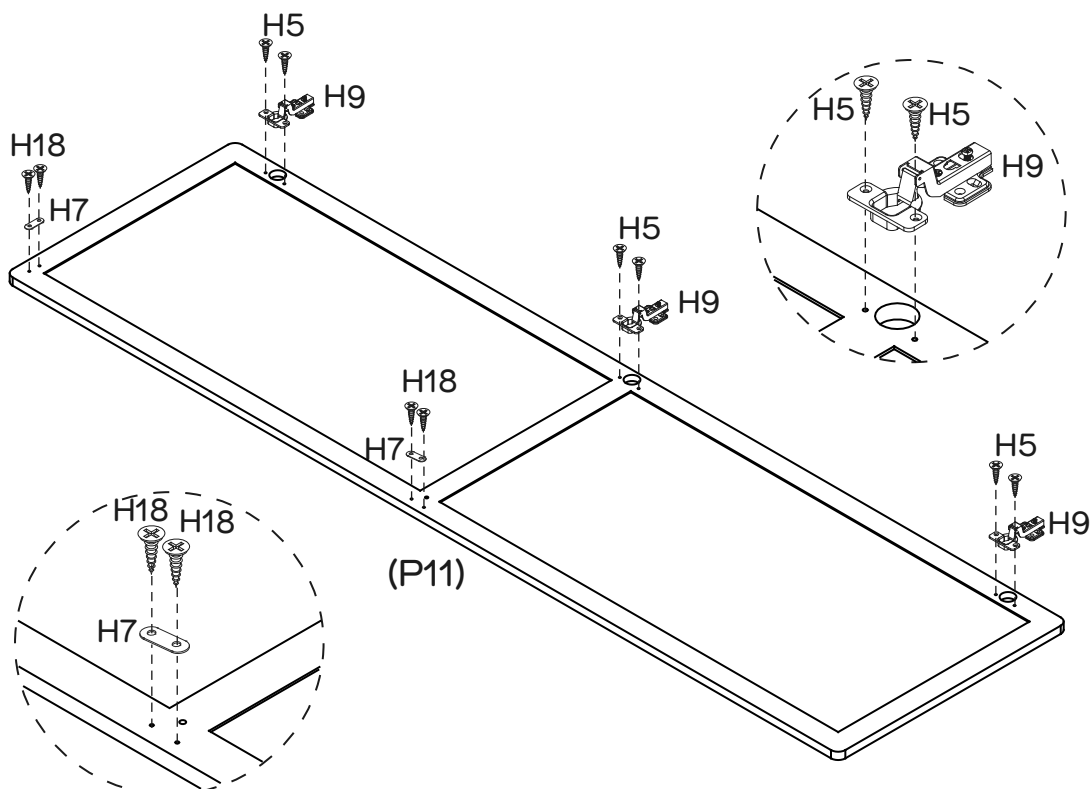
Required



Attach 2 x Hanging Rail Supports (H10) to the Left Side Panels (P2) and Divider (P7) with 4 x Small Screws (H18) by tightening with a Phillips Head Screwdriver.  
Attach 1 x Hanging Rail (H11) to Hanging Rail Support (H10) as shown by slotting it in.





## Step 12




You will need	
	
6 x Screws (H5)	3 x Hinges (H9)
	
2 x Magnetics Bars (H7)	4 x Small Screws (H18)
	
Phillips Head Screwdriver	



Attach 2 x Magnetics Bars (H7) to Door (P11) with 4 x Small Screws (H18).  
Attach 3 x Hinges (H9) to Door (P11) with 6 x Screws (H5).  
Tightening with the Phillips Head Screwdriver.

## Step 13

You will need	
	
12 x Screws (H5)	1 x Handle (H15)
	
1 x Handle Screw (H16)	Phillips Head Screwdriver

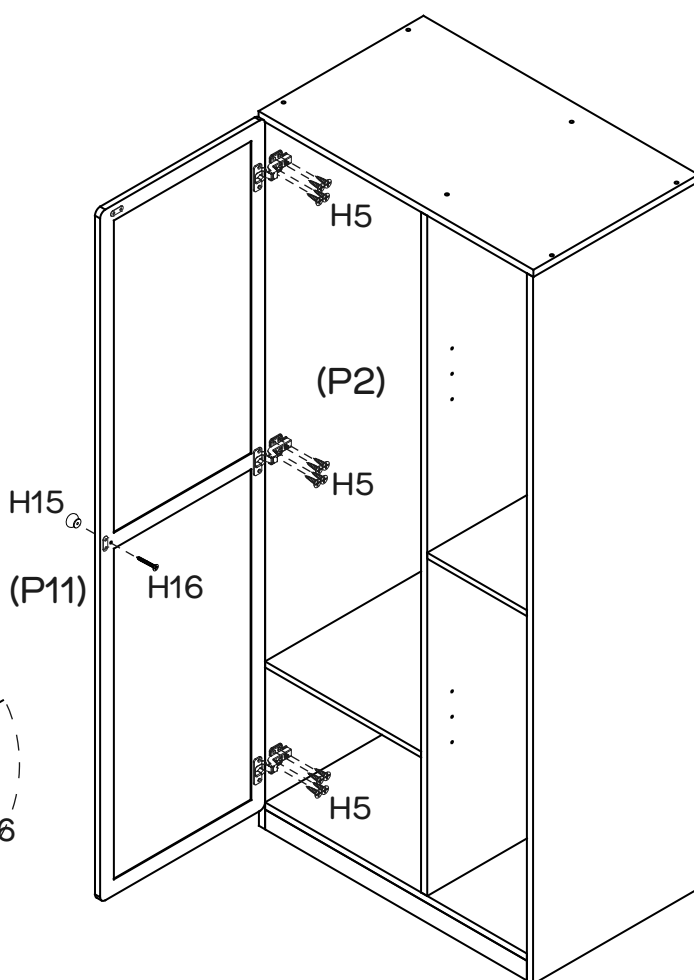


Two People




Required

Attach Door (P11) to Left Side Panel (P2) with 12 x Screws (H5). Attach 1 x Handle (H15) to Door (P11) with 1 x Handle Screw (H16). Tightening with the Phillips Head Screwdriver.

## Step 14



You will need	
	
8 x Shelf Supports (H8)	

Insert 8 x Shelf Supports (H8) into the holes of the Right Side Panel (P3) and Divider (P7) at your preferred shelf height.  
Insert the 2 x Shelf Panels (P12) into the unit by resting each shelf on the Shelf Supports.  
Ensure each shelf is positioned securely.

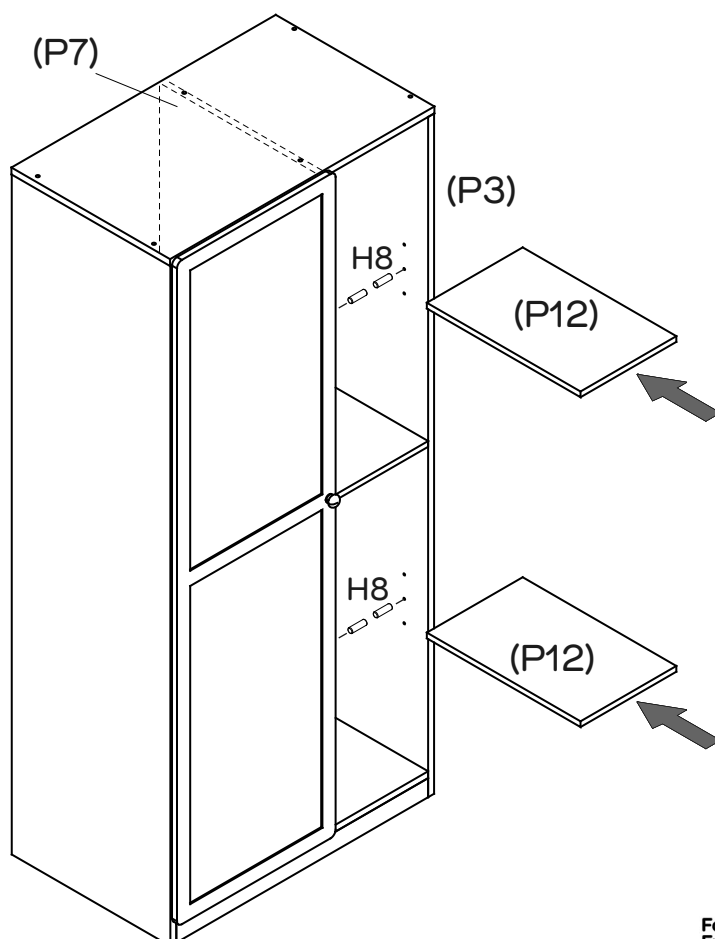

# Step 15



You will need	
10 x Wedges (H13)	10 x Wedge Screws (H14)
Phillips Head Screwdriver	

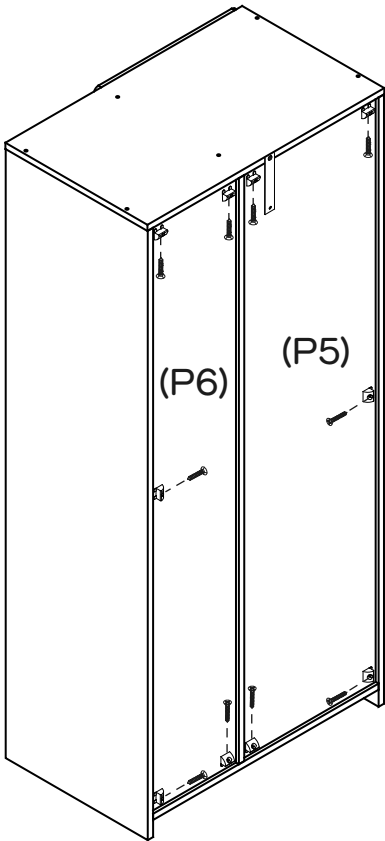

Secure Back Panels (P5 & P6) in place with 10 x Wedges (H13) and 10 x Wedge Screws (H14) by tightening with the Phillips Head Screwdriver.


# Step 16

You will need	
1 x Washer (H17)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

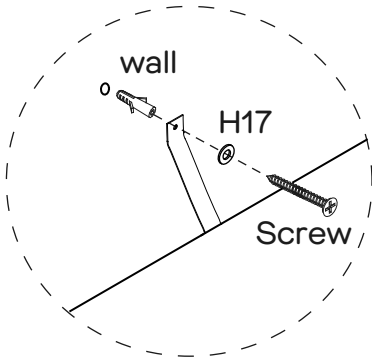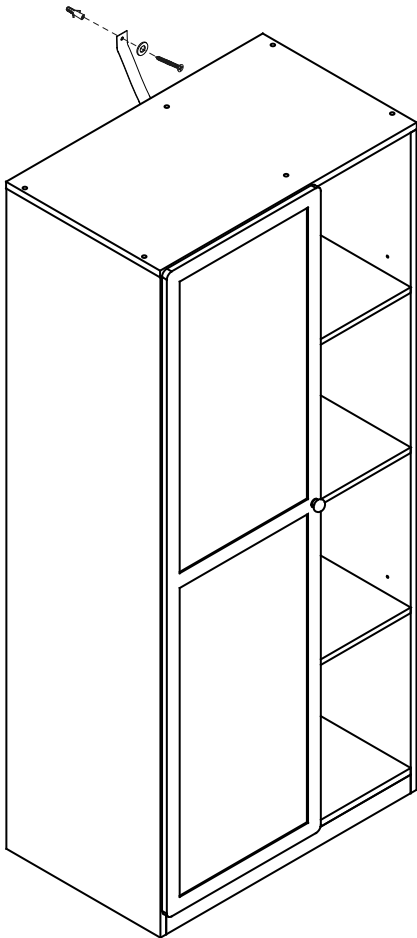

**Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.**

Move the unit to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

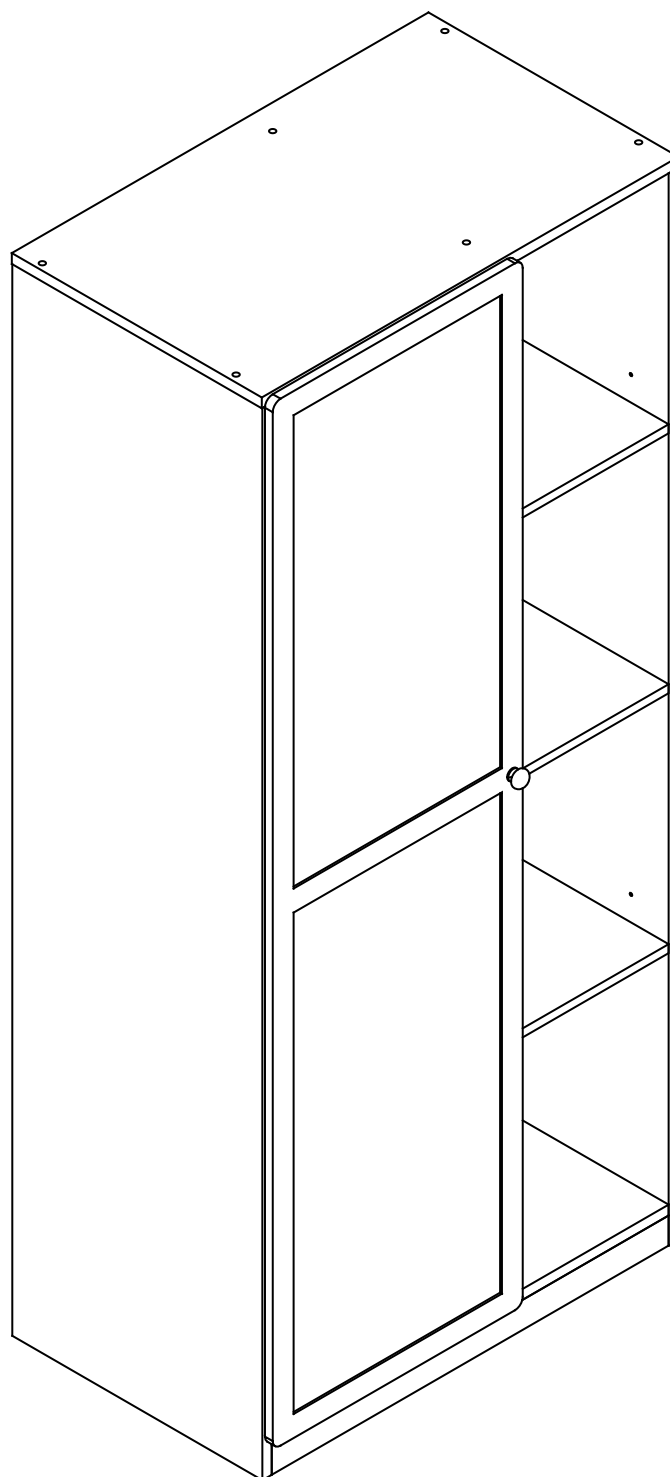


## Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.

# TO ADJUST YOUR DOORS TO MAKE THE GAPS MORE EVEN


## STEP 1

Open the door.

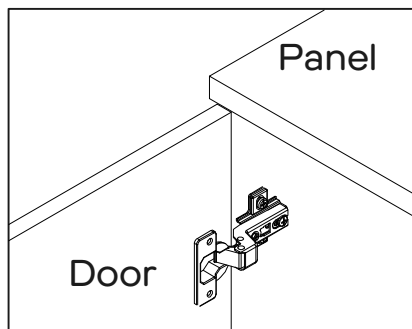


## STEP 2


Adjust the door panels upward or downward

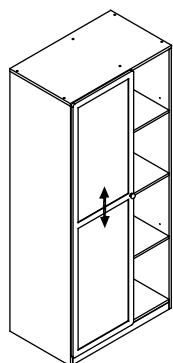

1.




2.



MOVE DOOR UPWARD OR DOWNWARD

3.




Tighten 2 screws in oval holes. Screw in 2 screws in round holes


Unscrew 2 screws in round holes loosen 2 screws in oval holes a bit.

## STEP 3

Adjust the flush between door panel and side panel

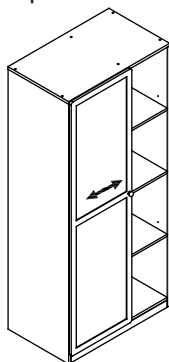


1.




MOVE DOOR OUTWARD by turning this screw counter-clockwise

2.



KEEP DOOR IN RIGHT POSITION


3.




MOVE DOOR OUTWARD by turning this screw clockwise

## STEP 4

Adjust the Gap between door panel and side panel

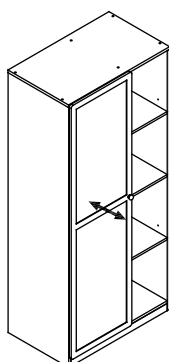


1.




Loosen this screw a bit.

2.



MOVE DOOR BACK OR FORTH

3.



Re-tighten this screw.