





**Fantastic  
Furniture**

Version 1.0

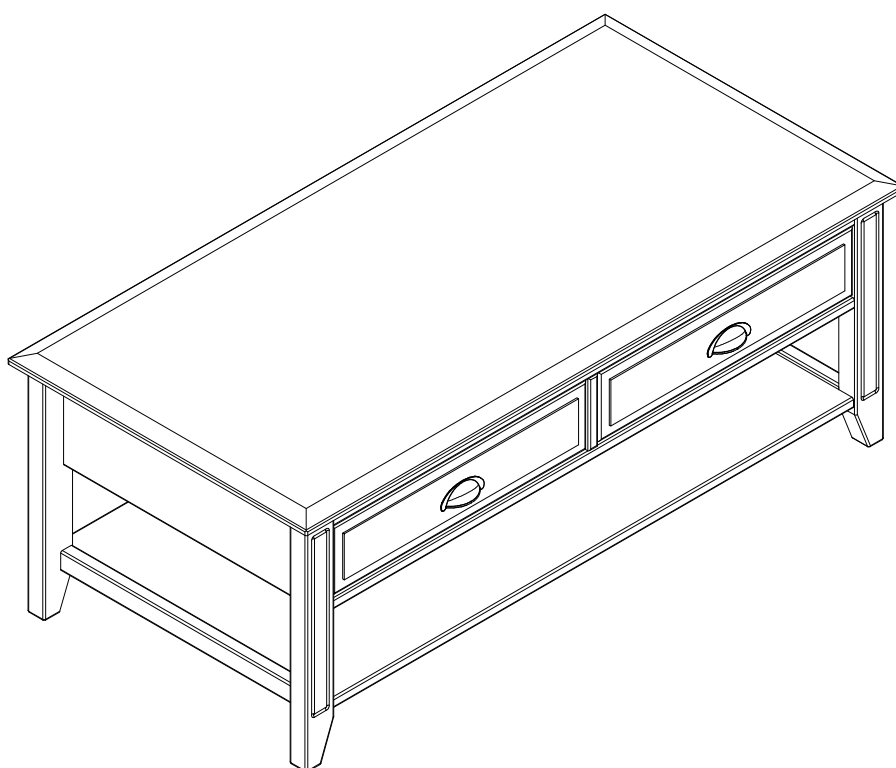

**Two People**



**Required**

# Torkay

Coffee Table 2 Drawer White Walnut

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



## Fantastic Furniture

### Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!  
**@fantasticfurniture**

# Assembly checklist



Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.



Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information



- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk bed should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you Need

To assemble the product









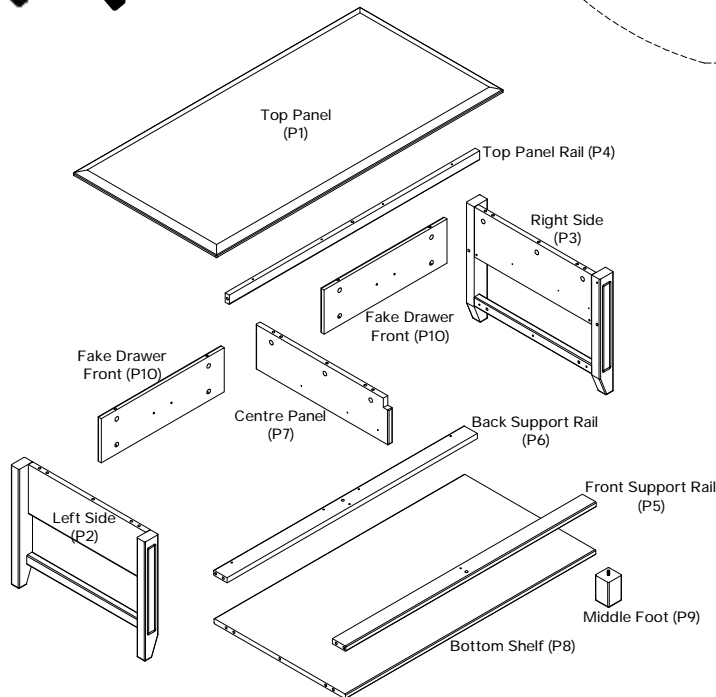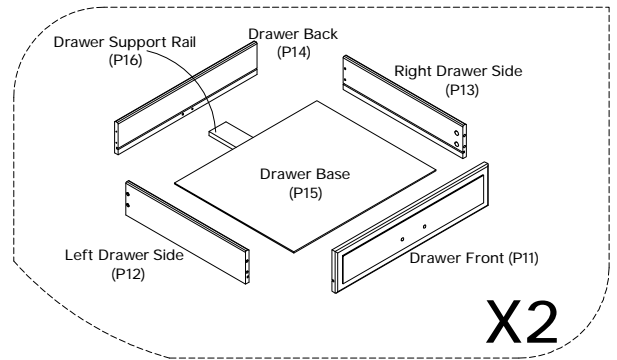







**Other tools you need:**  
Phillips head screwdriver  
Mallet (soft headed)




## Part list


- 1 x Top Panel (P1);
- 1 x Left Side (P2);
- 1 x Right Side (P3);
- 1 x Top Panel Rail (P4);
- 1 x Front Support Rail (P5);
- 1 x Back Support Rail (P6);
- 1 x Centre Panel (P7)
- 1 x Bottom Shelf (P8);
- 1 x Middle Foot (P9);
- 2 x Fake Drawer Fronts (P10);
- 2 x Drawer Fronts (P11);
- 2 x Left Drawer Sides (P12);
- 2 x Right Drawer Sides (P13);
- 2 x Drawer Backs (P14);
- 2 x Drawer Bases (P15);
- 2 x Drawer Support Rails (P16).

## Hardware pack

								
29 x Large Cam Bolts (H1)	29 x Large Cam Nuts (H2)	17x Wooden Dowels (H3)	6 x Large Screws (H4)	8 x Handle Screws (H5)	4 x Handles (H6)	24 x Small Screws (H7)	12 x Medium Screws (H8)	10 x Small Cam Bolts (H9)
								
10 x Small Cam Nuts (H10)	2 x Left Runner Tracks (H11)	2 x Right Runner Tracks (H12)	2 x Left Runners (H13)	2 x Right Runners (H14)				





# Step 1


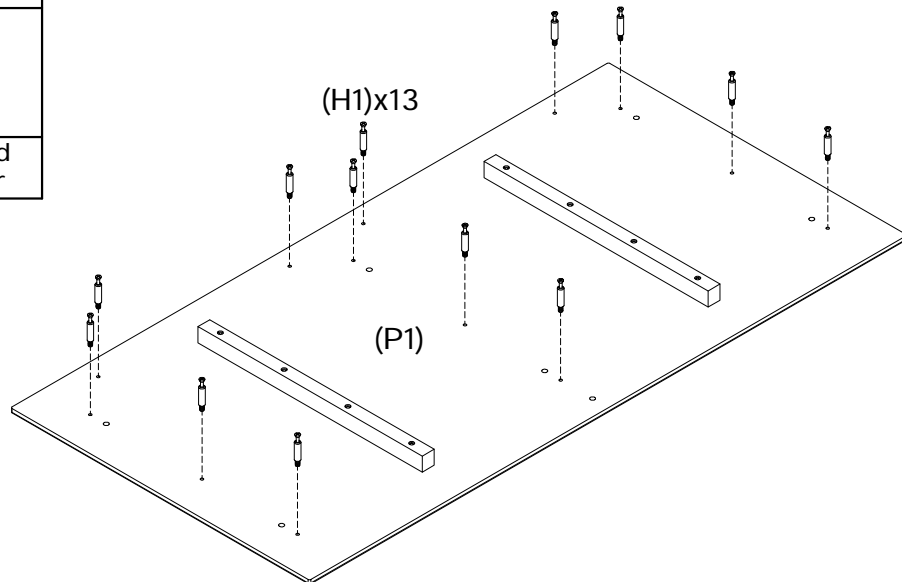
You will need:	
	
13 x Large Cam Bolts (H1)	Phillips Head Screwdriver



Attach 13 x large cam bolts (H1) into top panel (P1) using a phillips head screwdriver.

# Step 2

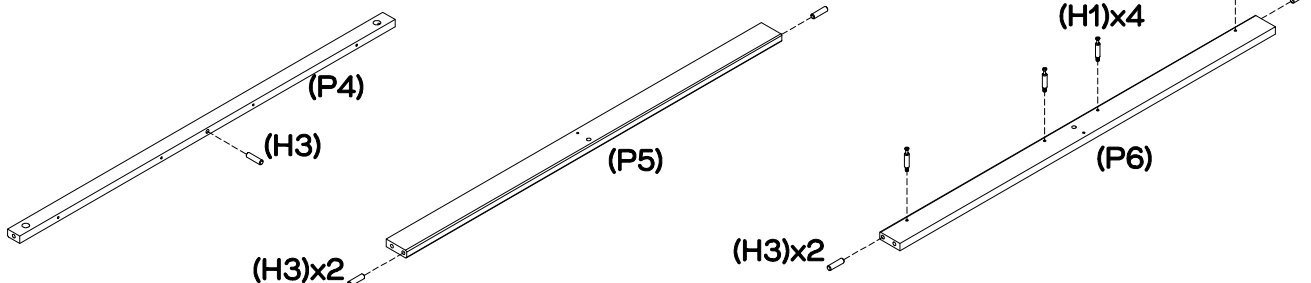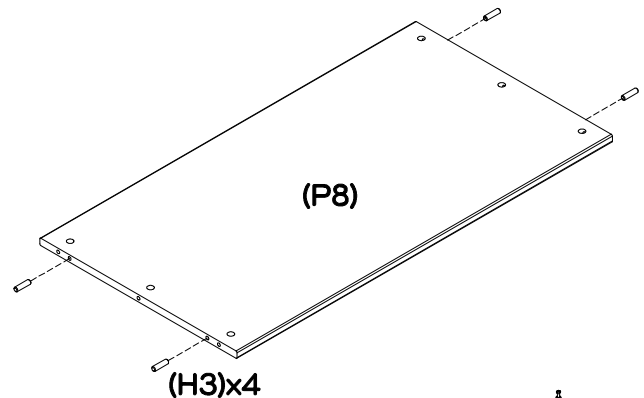


You will need:			
	4 x Large Cam Bolts (H1)		Phillips Head Screwdriver
	9 x Wooden Dowels (H3)		Mallet (soft headed)




Insert 9 x wooden dowels (H3) into top panel rail (P4), front support rail (P5), back support rail (P6) and bottom shelf (P8) as shown.

Attach 4 x large cam bolts (H1) to back support rail (P6) using a phillips head screwdriver.

## Step 3

You will need:			
	6 x Large Cam Bolts (H1)		3 x Small Screws (H7)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver
	1 x Left Runner Track (H11)		Mallet (soft headed)

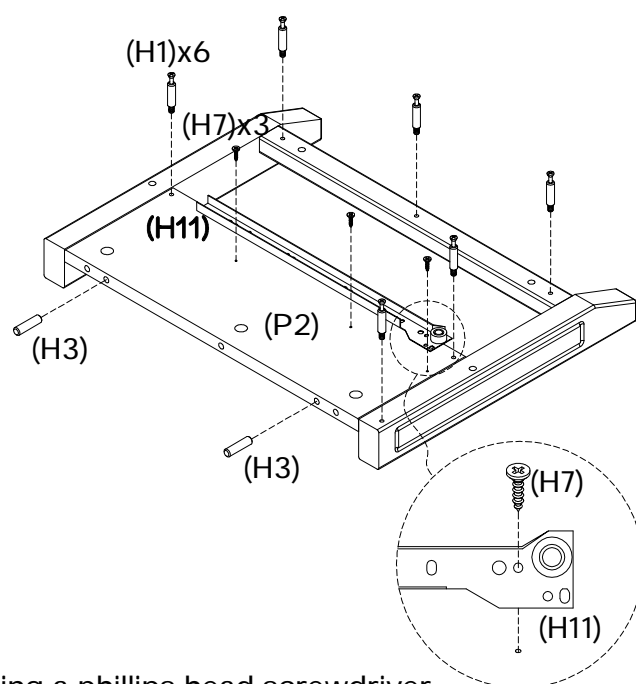






Attach 6 x large cam bolts (H1) to left side (P2) using a phillips head screwdriver.


Insert 2 x wooden dowels into left side (P2).

Attach 1 x left runner track (H11) using 3 x small screws (H7), tightening with a phillips head screwdriver.

Ensure the screws are inserted through the holes shown in the image above.

## Step 4

You will need:			
	6 x Large Cam Bolts (H1)		3 x Small Screws (H7)
	2 x Wooden Dowels (H3)		Phillips Head Screwdriver
	1 x Right Runner Track (H12)		Mallet (soft headed)

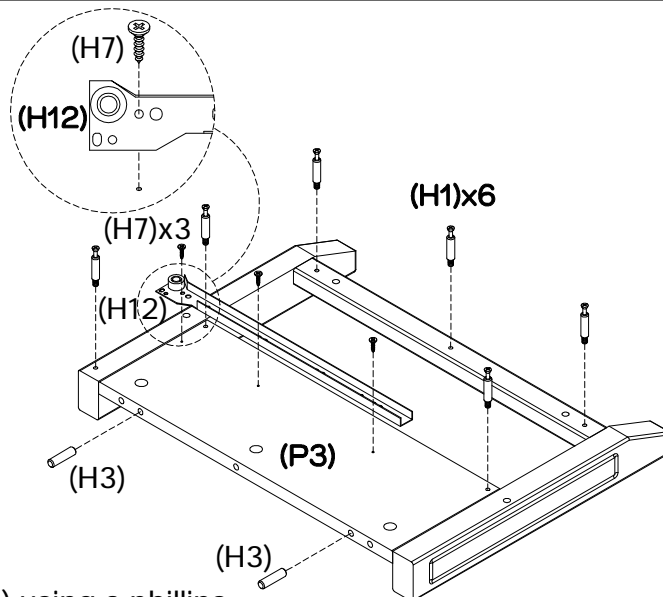







Attach 6 x large cam bolts (H1) to right side (P3) using a phillips head screwdriver.

Insert 2 x wooden dowels into right side (P3).

Attach 1 x right runner track (H12) using 3 x small screws (H7), tightening with a phillips head screwdriver.


Ensure the screws are inserted through the holes shown in the image above.

## Step 5



You will need:			
	4 x Wooden Dowels (H3)		6 x Small Screws (H7)
	1 x Right Runner Track (H12)		Phillips Head Screwdriver
	1 x Left Runner Track (H11)		Mallet (soft headed)


Insert 4 x wooden dowels (H3) into centre panel (P7). Attach 1 x right runner track (H12) to centre panel (P7) using 3 x small screws (H7), tightening with a phillips head screwdriver. Ensure the screws are inserted through the holes shown in the image above.

Turn over the centre panel (P7). Attach 1 x left runner track (H11) to the centre panel (P7), using 3 x small screws (H7), tightening with a phillips head screwdriver. Ensure the screws are inserted through the holes shown in the image above.

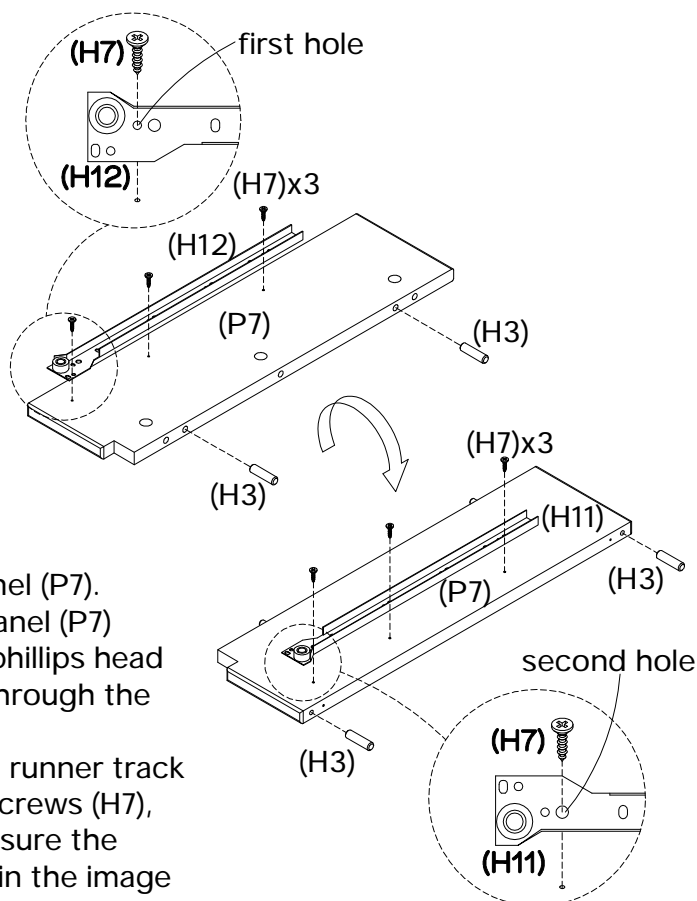



## Step 6



You will need:	
	
2 x Large Screws (H4)	Phillips Head Screwdriver

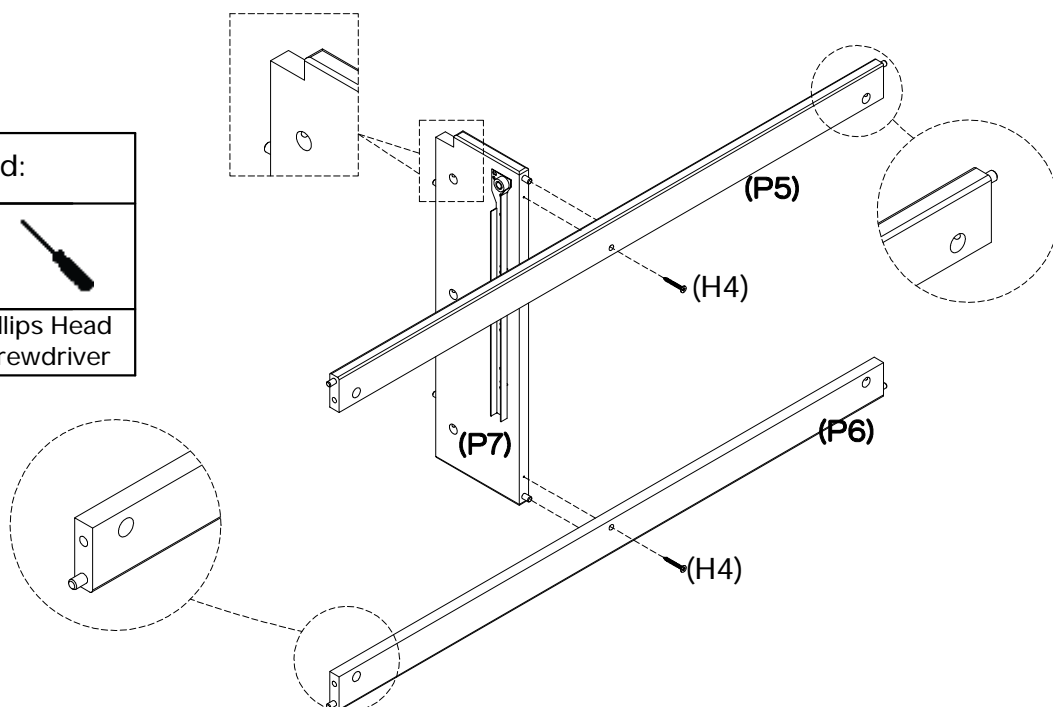

Attach front support rail (P5) and back support rail (P6) to the centre panel (P7) using 2 x large screws (H4), tightening with a phillips head screwdriver.



# Step 7



You will need:	
	
4 x Large Cam Nuts (H2)	Phillips Head Screwdriver

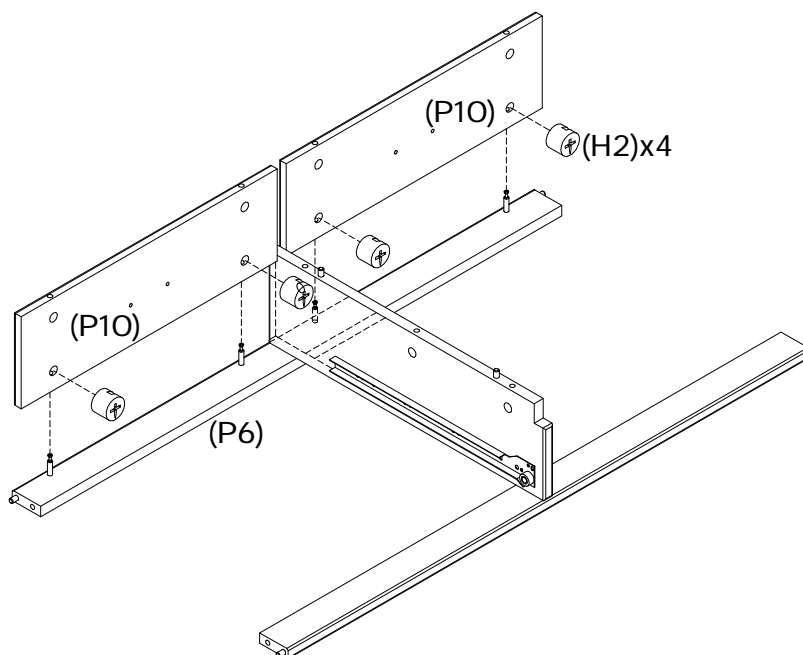

Attach 2 x fake drawer fronts (P10) to the back support rail (P6). Insert 4 x large cam nuts (H2) into the 2 x fake drawer fronts (P10) and rotate so the arrows on the cam nuts face the incoming cam bolts. Using a phillips head screwdriver turn the large cam nuts (H2) clockwise to lock.

# Step 8

You will need:	
	
2 x Large Cam Nuts (H2)	Phillips Head Screwdriver

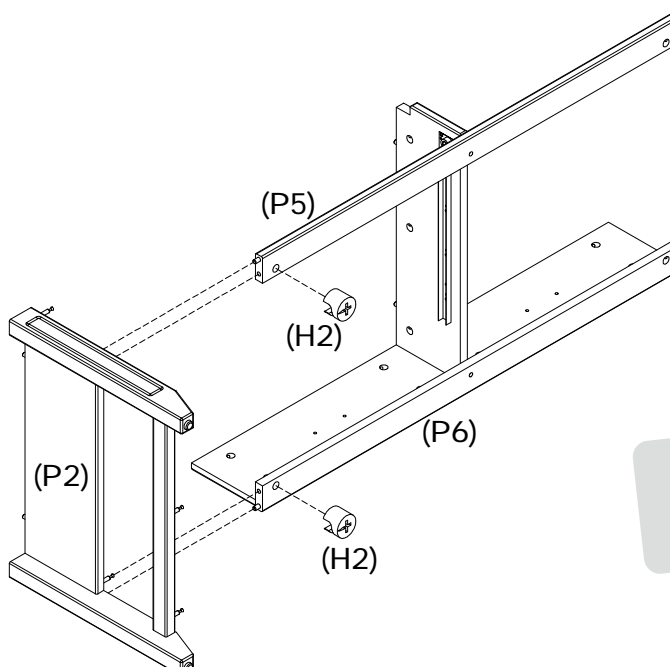

Two People



Required

With assistance, attach the front support rail (P5) and back support rail (P6) to left side (P2). Insert 2 x large cam nuts (H2) into the rails (P5, P6) and rotate so the arrows on the cam nuts face the incoming bolts. Using a phillips head screwdriver, turn the large cam nuts (H2) clockwise to lock.



## Step 9

You will need:



1 x Large  
Cam Nut (H2)




Phillips Head  
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

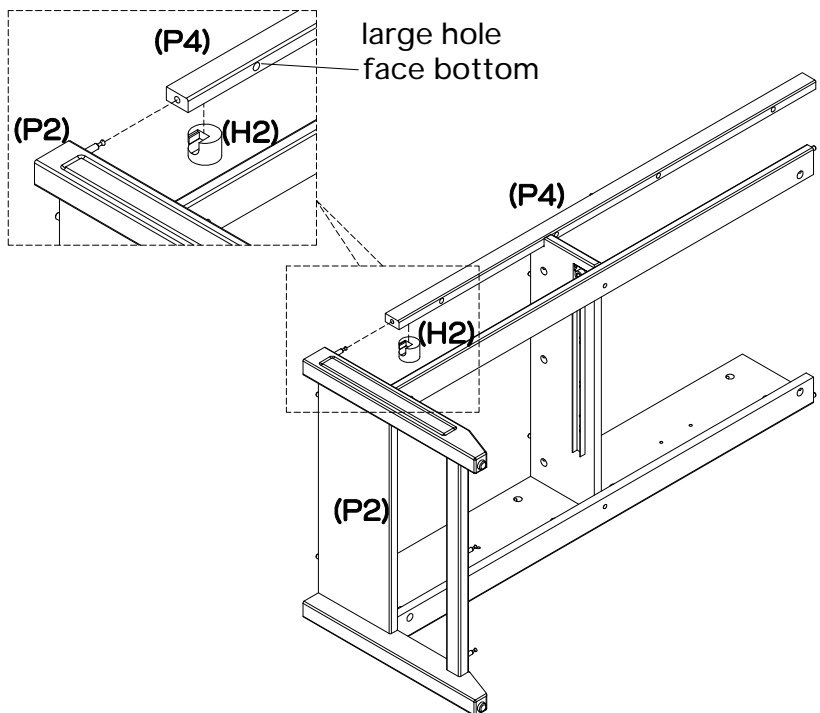

Attach top rail panel (P4) to left side. Insert 1 x large cam nut (H2) into top panel rail (P4) and rotate so the arrow on the cam nut faces the incoming cam bolt. Using a phillips head screwdriver, turn the large cam nut (H2) clockwise to lock.

## Step 10

You will need:



3 x Large  
Cam Nuts (H2)




Phillips Head  
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

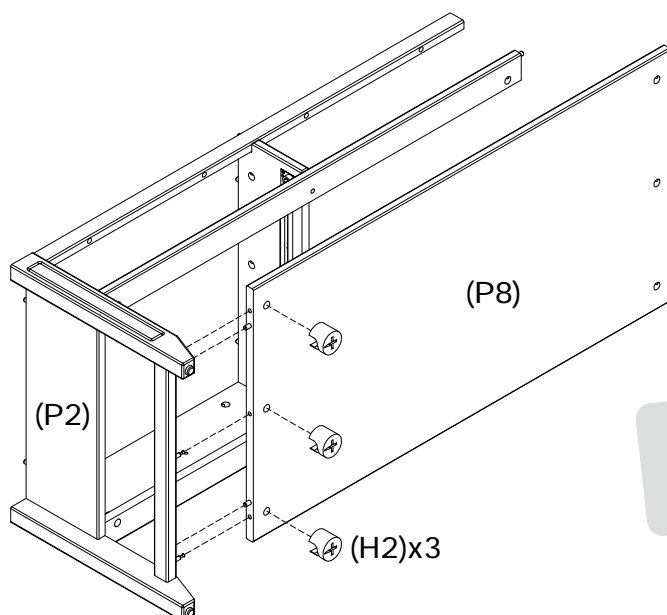

Two People



Required

With assistance, attach the bottom shelf (P8) to left side (P2). Insert 3 x large cam nuts into the bottom shelf (P8) and rotate the cam nuts so the arrows point towards the incoming cam bolts. Using a phillips head screwdriver, turn the large cam nuts (H2) clockwise to lock.

# Step 11

You will need:




6 x Large  
Cam Nuts (H2)




Phillips Head  
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

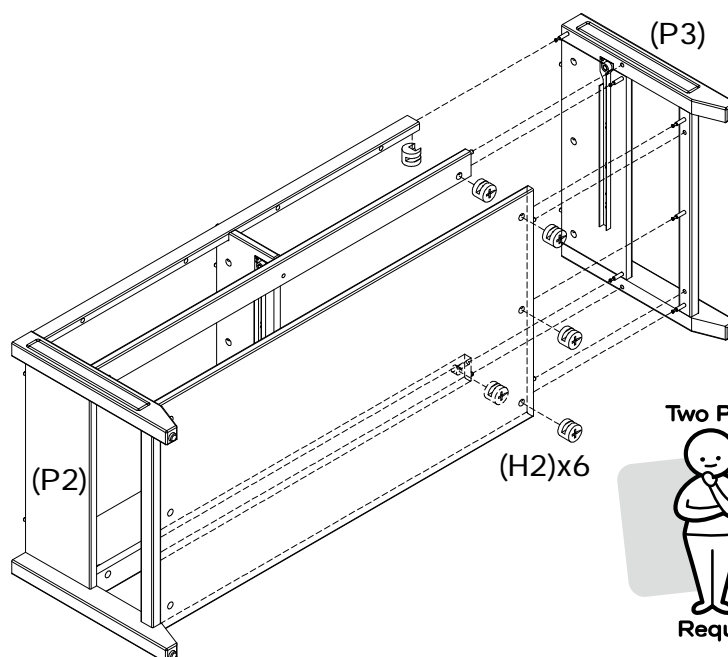


Two People



Required

With assistance, attach right side (P3) to the assembled frame. Insert 6 x large cam nuts (H2) into rails (P4, P5, P6) and bottom shelf (P8) and rotate the cam nuts so the arrows point towards the incoming cam bolts. Using a phillips head screwdriver, turn the large cam nuts (H2) clockwise to lock.

# Step 12

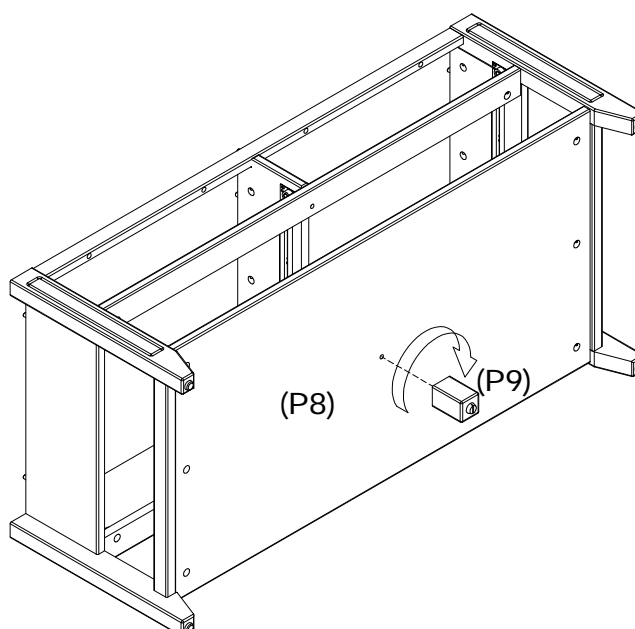




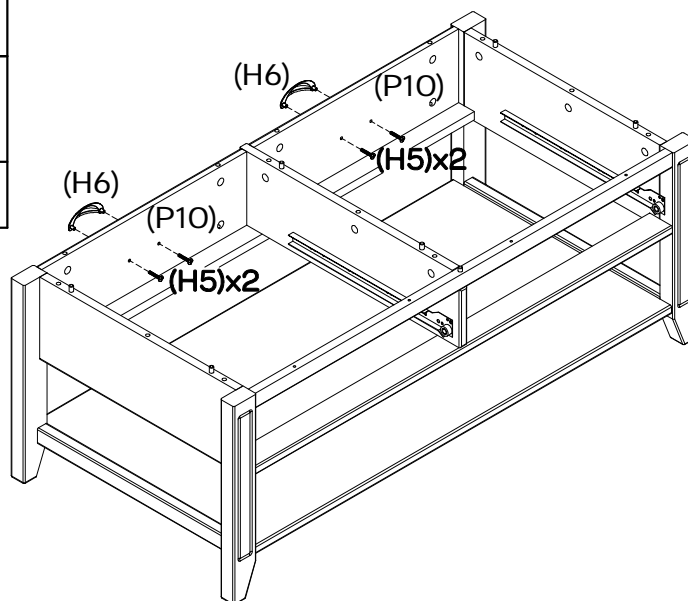
Attach middle foot (P9) to bottom shelf (P8) by turning clockwise to fully lock.



Fantastic  
Furniture




## Step 13

You will need:		
		
4 x Handle Screws (H5)	2 x Handles (H6)	Phillips Head Screwdriver





Attach 2 x handles (H6) to 2 x fake drawer fronts (P10) with 4 x handle screws (H5).

## Step 14



You will need:		
		
13 x Large Cam Nuts (H2)	4 x Large Screw (H4)	Phillips Head Screwdriver

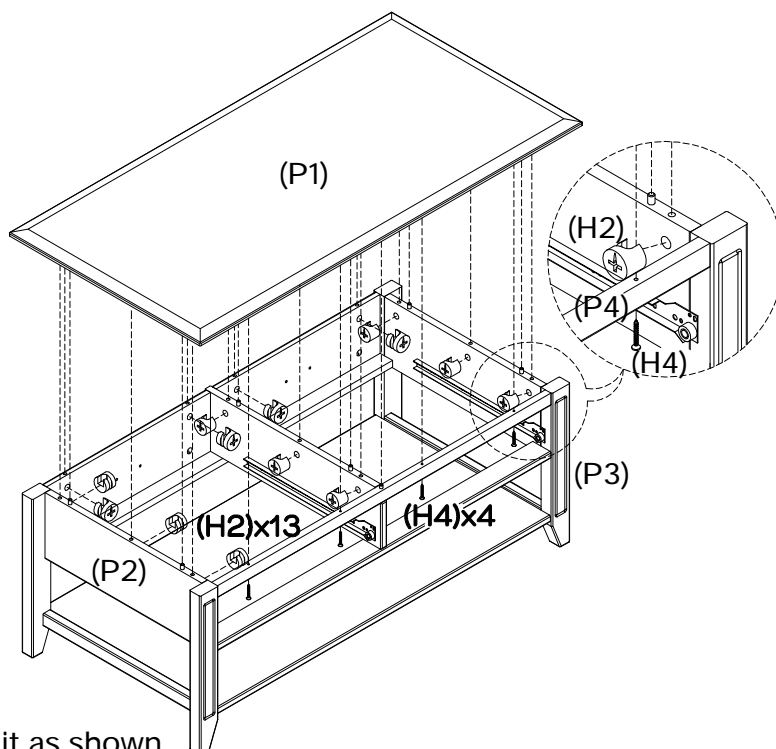
### This is how a cam nut works.....



Attach top panel (P1) to the assemble unit as shown. Insert 13 x large cam nuts (H2) into side panels (P2, P3) and fake drawer fronts (P9), ensuring the arrows point towards incoming cam bolts. Using a phillips head screwdriver, turn the large cam nuts (H2) clockwise to lock. Attach the top panel rail (P4) to top panel (P1) using 4 x large screws (H4).

## Step 15

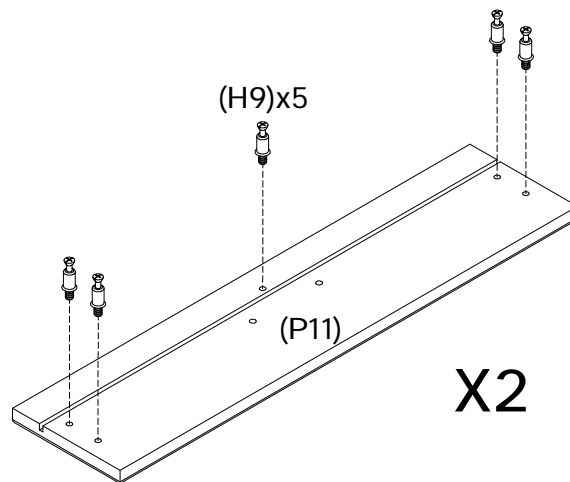

You will need:	
	
10 x Small Cam bolts (H9)	Phillips Head Screwdriver





Attach 5 x small cam bolts (H9) to 1 x drawer front (P11) using a phillips head screwdriver.

Repeat this process for the other drawer front (P11).



## Step 16

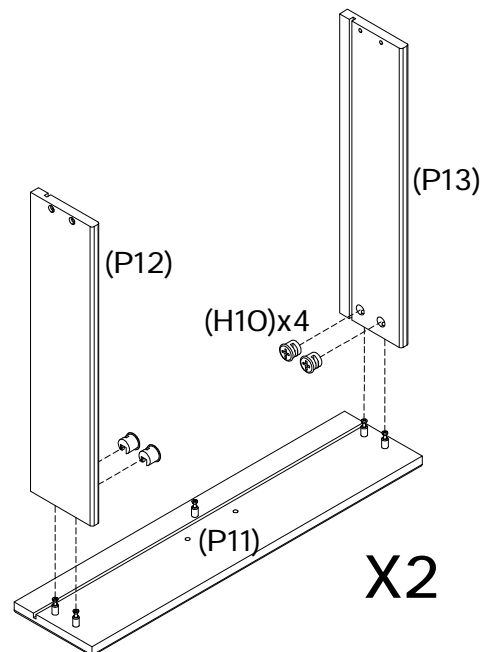

You will need:	
	
8 x Small Cam Nuts (H10)	Phillips Head Screwdriver



Attach 1 x left drawer side (P12) and 1 x right drawer side (P13) to 1 x drawer front (P11), ensuring the grooves on all panels align. Insert 4 x small cam nuts (H10) into the drawer sides (P12, P13), ensuring the arrow on the small cam nuts (H10) faces the incoming cam bolts. Using a phillips head screwdriver, turn the small cam nuts (H10) clockwise to lock. Repeat this process for the other drawer.


## Step 17

You will need:	
	
2 x Small Cam Nuts (H10)	Phillips Head Screwdriver

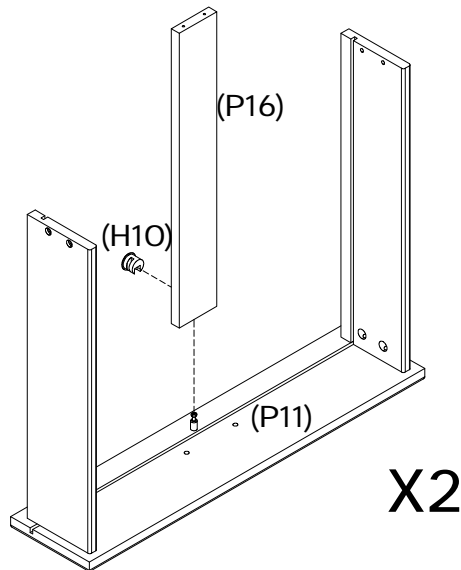



Attach drawer support rail (P16) to the drawer front (P11), Insert 1 x small cam nut (H10) into the drawer support rail (P16), ensuring the arrow on the small cam nuts (H10) faces the incoming cam bolts. Using a phillips head screwdriver, turn the small cam nut (H10) clockwise to lock. Repeat this process for the other drawer.


## Step 18

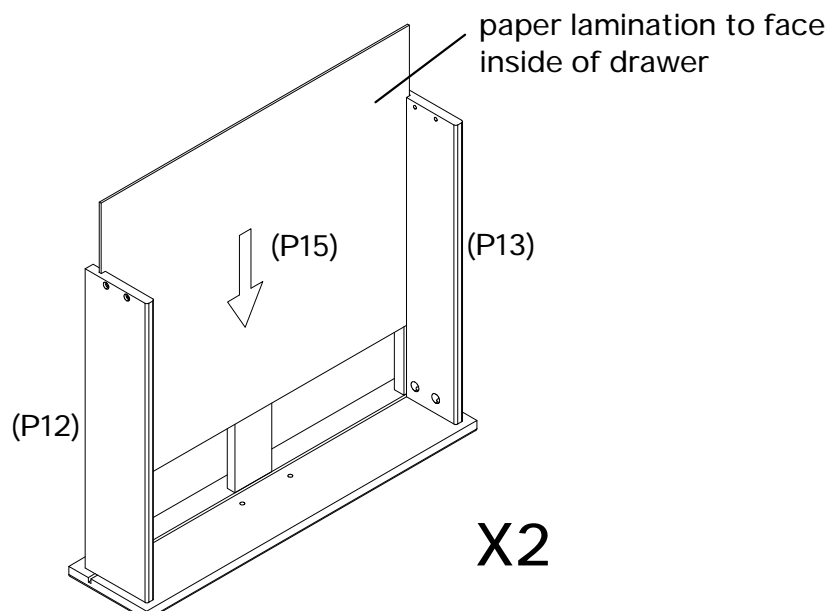

Insert 1 x drawer base (P15) into the grooves on the drawer sides (P12, P13) and drawer front (P10). Repeat this process for the other drawer.




## Step 19

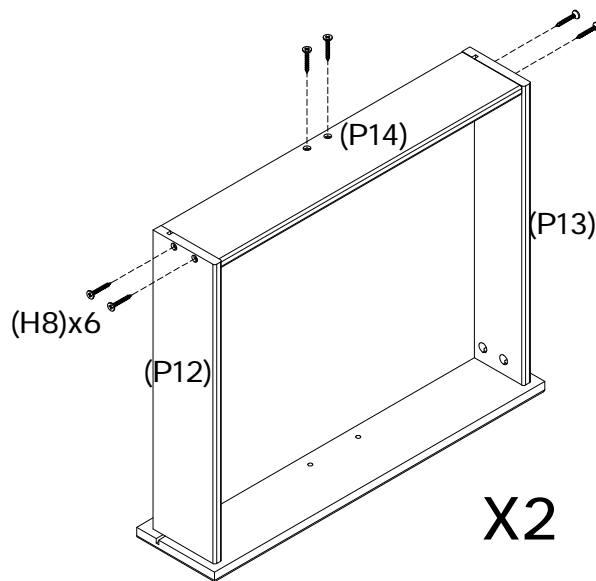
You will need:	
	
12 x Medium Screws(H8)	Phillips Head Screwdriver



Use 6 x medium screws (H8) to attach 1 x drawer back panel (P14) to the drawer sides (P12, P13) and drawer support rail (P15). Repeat this process for the other drawer.



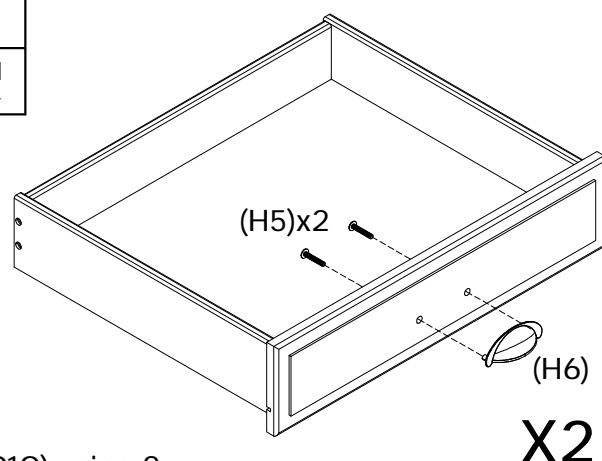

## Step 20


You will need:		
		
4 x Handle Screws (H5)	2 x Handles (H6)	Phillips Head Screwdriver



Attach 1 x handle (H6) to drawer front (P10) using 2 x handle screws (H5), tightening with a phillips head screwdriver. Repeat this process for the other drawer.


## Step 21

You will need:			
			
12 x Small Screws (H7)	2 x Left Runners (H13)	2 x Right Runners (H14)	Phillips Head Screwdriver

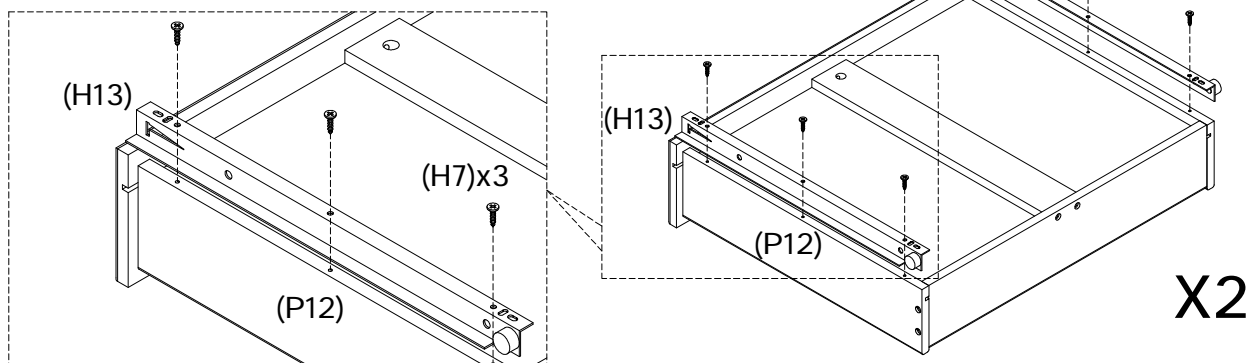


Attach 1x left runner (H13) to left drawer side (P12) and 1 x right runner (H14) to right drawer side (P13) using 6 x small screws (H7), tightening with a phillips head screwdriver. Repeat this process for the other drawer.

## Step 22

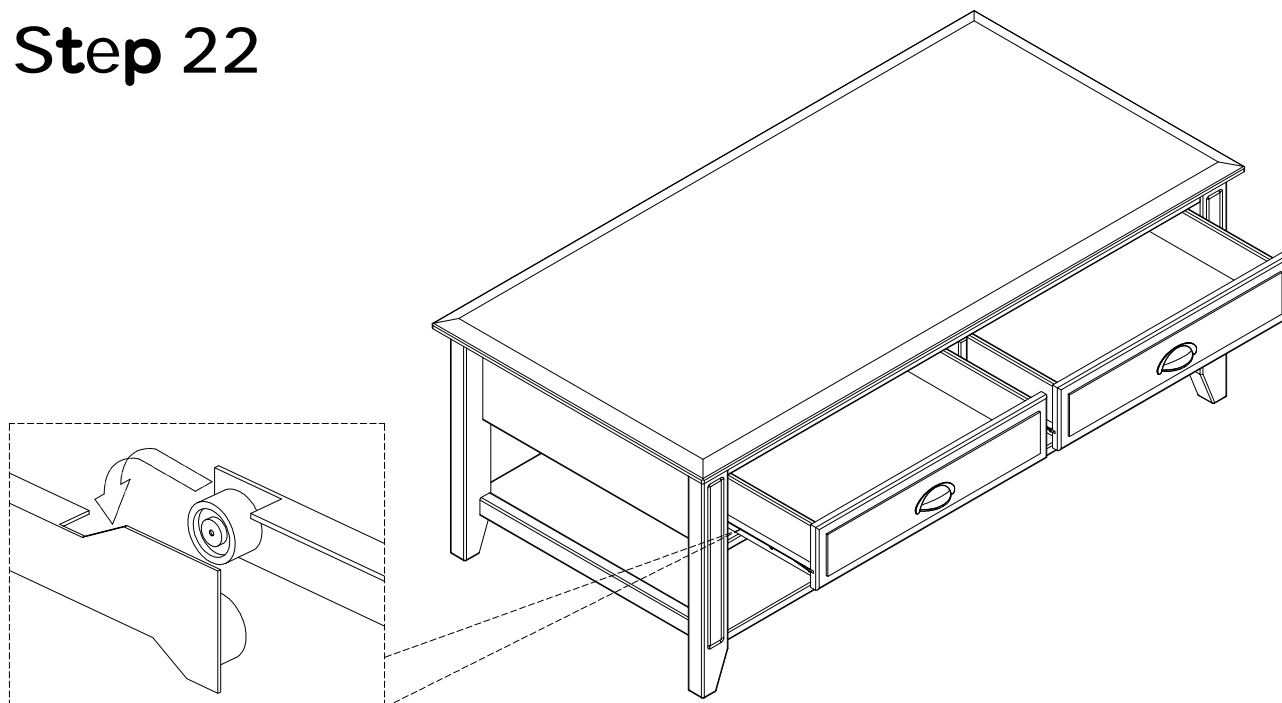

Slide the 2 x assembled drawers into the coffee table as shown.

## Step 23

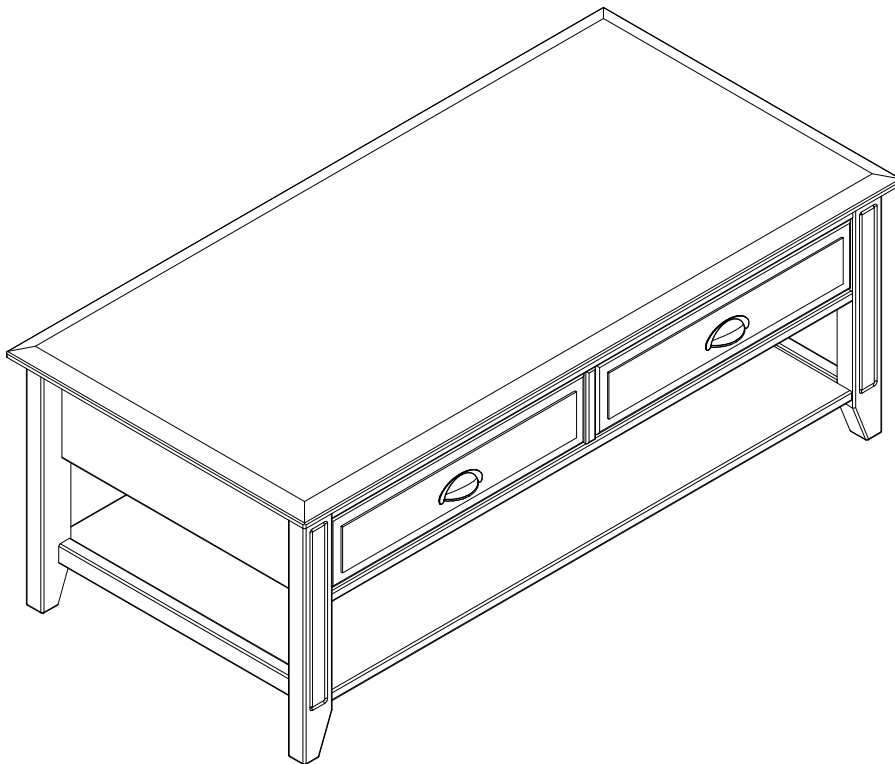

## Job Complete!

In the interest of our environment please dispose  
of all packing thoughtfully.