





**Fantastic
Furniture**

Version 1.0

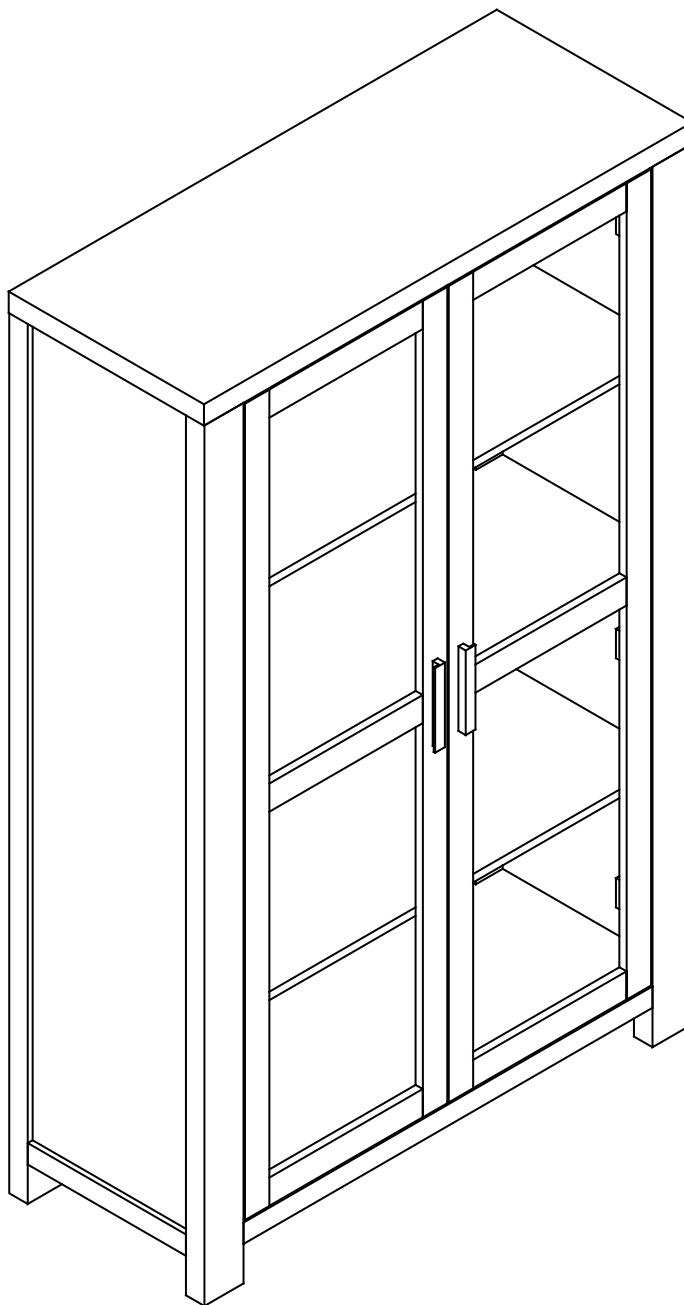

Two People

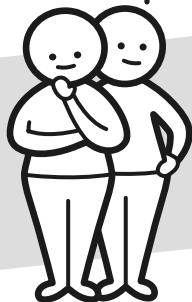

Required

Havana

Display Cabinet 2 Door

fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Recommended Weight Capacity :25kg/shelf

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.

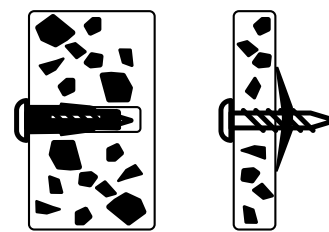

For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.



Glass should always be handled with care.

cause glass to break. This glass is designed to break into small, relatively harmless pieces and not sharp fragments. Avoid placing hot or cold items directly onto the table unless using a thick insulation material such as placemats or coasters.

Avoid dropping objects onto the glass.

Do not allow hard or pointed objects to come into contact with the glass. Never use the top area as a chopping surface.

Do not sit or stand on the glass surface.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

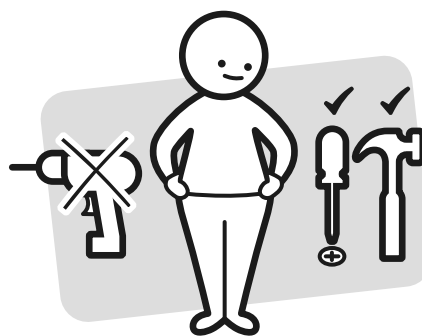

Make sure you have all the required tools. Never use power tools unless instructed.

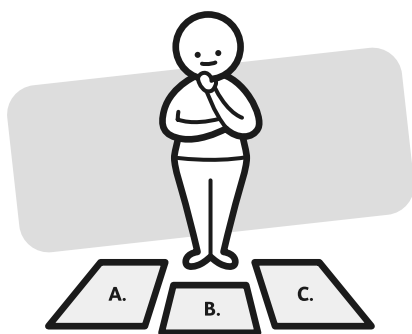

Identify and lay out all of the components before you begin assembly.

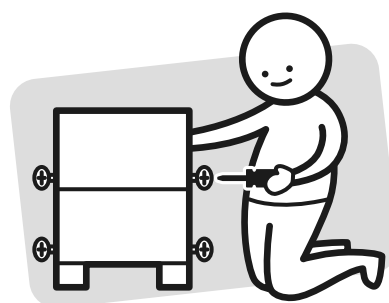

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE




Other tools you need:

Phillips head screwdriver;
Hammer

Parts list

Top Panel (P1);
Left Side Panel (P2);
Right Side Panel (P3);
Leg (P4);
Leg (P5);
Leg (P6);
Leg (P7);
3 x Shelf Panels (P8);
Bottom Panel (P9);
4 x Back Panels (P10) ;
Left Door (P11)
Right Door (P12)

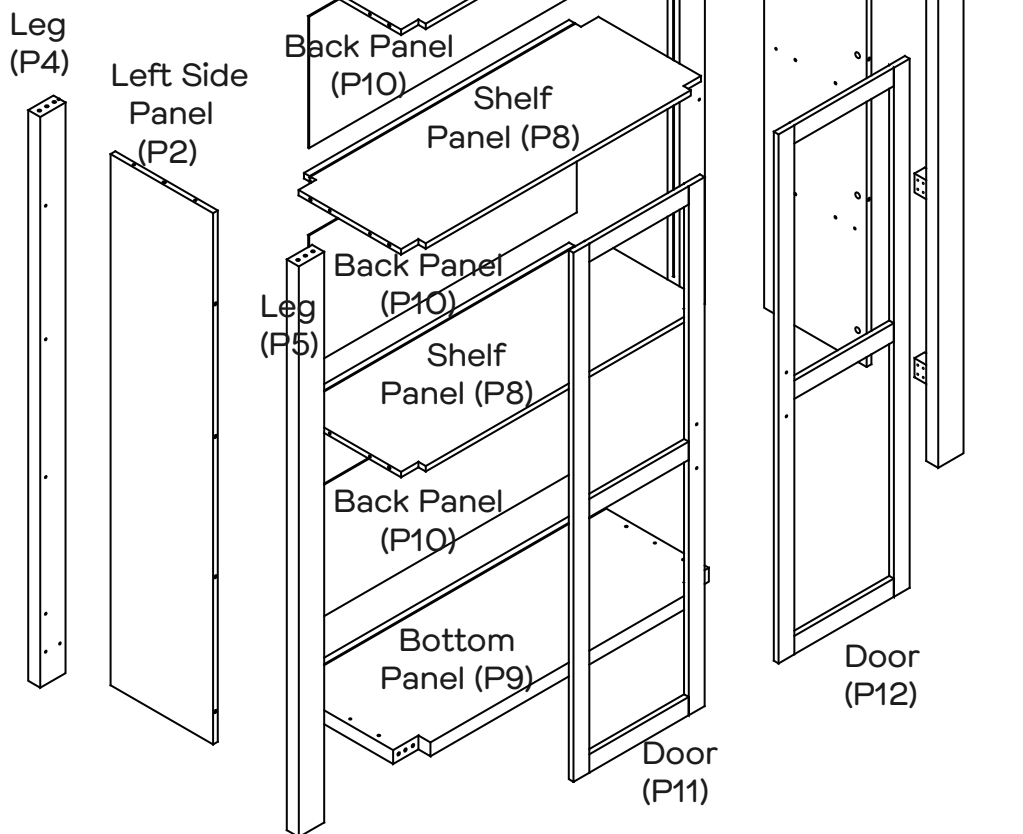


Hardware pack



20 x Dowels
(H1)



2 x Buffer
Plates
(H2)




28 x Cam
Bolts
(H3)



28 x Cam
Nuts
(H4)



12 x Large Dowels
(H5)



14 x Bolts
(H6)




1 x Allen Key
(H7)



2 x Handles
(H8)



4 x Handle
Bolts
(H9)



6 x Hinges
(H10)



36 x Screws
(H11)




4 x Plastic
Glides
(H12)



8 x Wedges
(H13)



8 x Wedge
Screws
(H14)

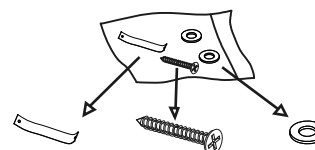



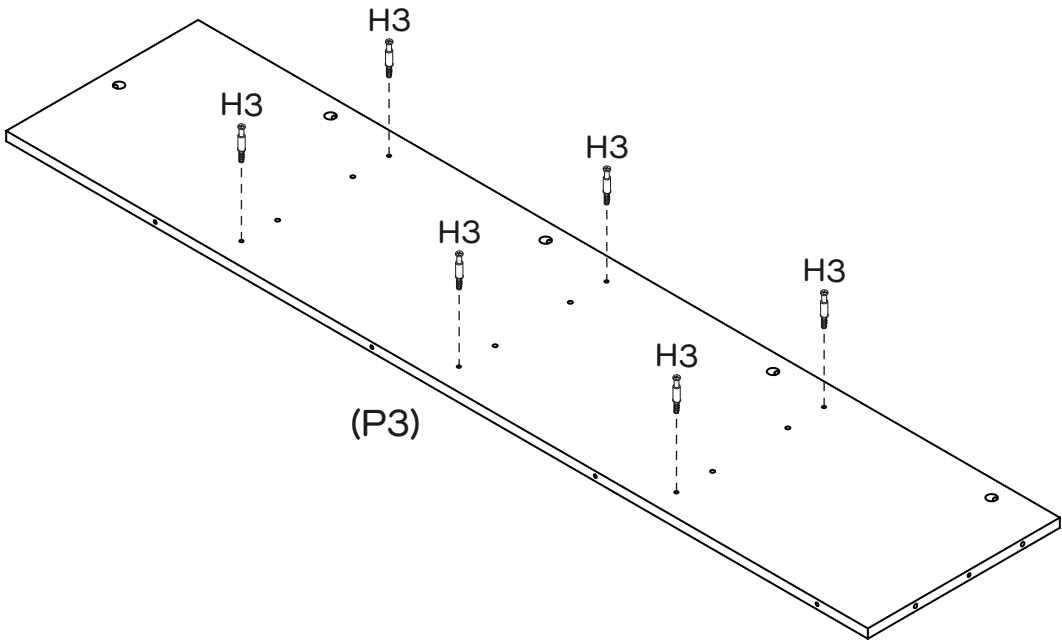
1 x Safety
Strap
(H15)

1 x Safety
Strap Screw
(H16)

2 x Washers
(H17)



Step 1


You will need	
	
6 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 6 x Cam Bolts (H3) to Right Side Panel (P3) by tightening with the Phillips Head Screwdriver.




Step 2

You will need	
	
6 x Cam Bolts (H3)	Phillips Head Screwdriver

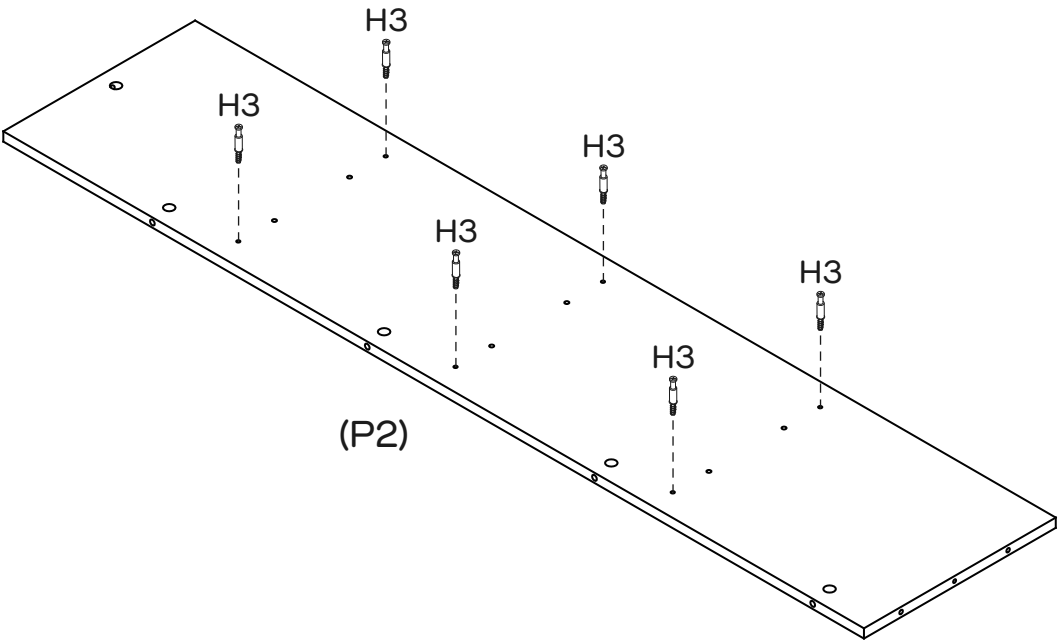


Attach 6 x Cam Bolts (H3) to Left Side Panel (P2) by tightening with the Phillips Head Screwdriver.


Step 3

You will need	
	
6 x Dowels (H1)	6 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

Make sure cam nut hole face top

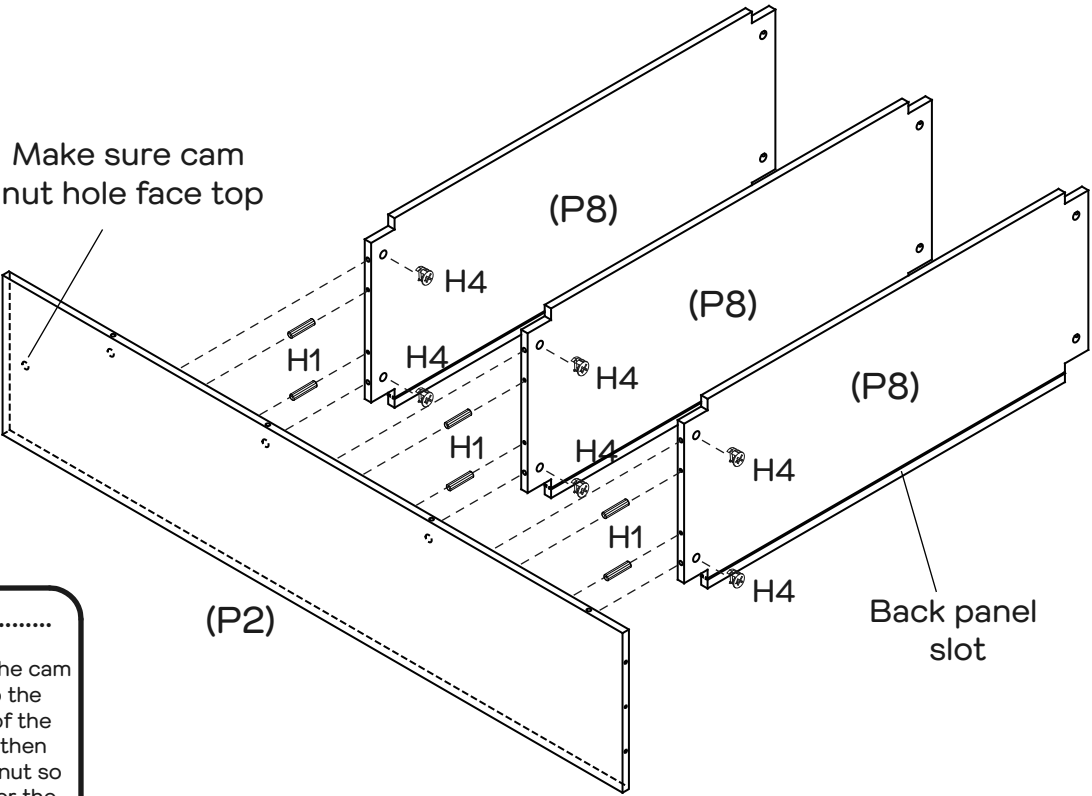




This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 6 x Dowels (H1) and 6 x Cam Nuts (H4) into Shelf Panels (P8x3) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Shelf Panels (P8x3) to Left Side Panel (P2) by tightening the Cam Nuts (H4) with the Phillips Head Screwdriver.

Step 4




You will need	
	
6 x Dowels (H1)	6 x Cam Nuts (H4)
	
Phillips Head Screwdriver	


Make sure cam nut hole face top

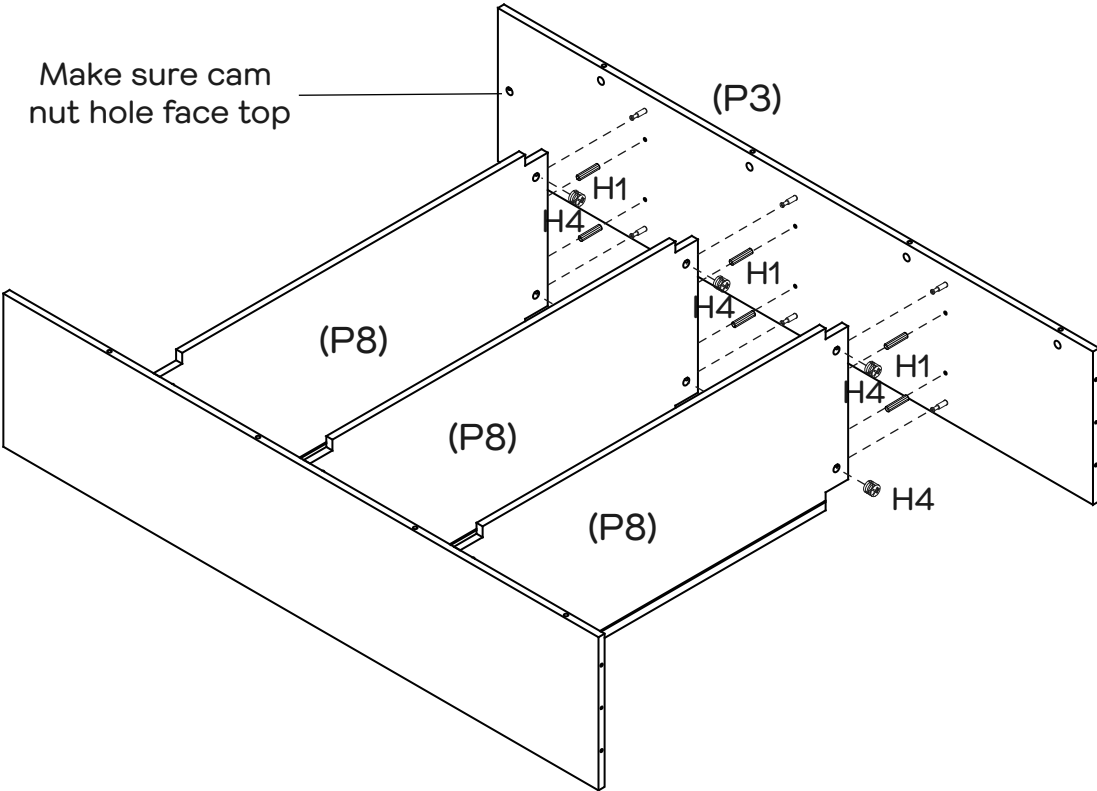

Insert 6 x Dowels (H1) and 6 x Cam Nuts (H4) into Shelf Panels (P8x3) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Shelf Panels (P8x3) to Right Side Panel (P3) by tightening the Cam Nuts (H4) with the Phillips Head Screwdriver.



Step 5


You will need	
	
4 x Dowels (H1)	2 x Bolts (H6)
	
1 x Allen Key (H7)	

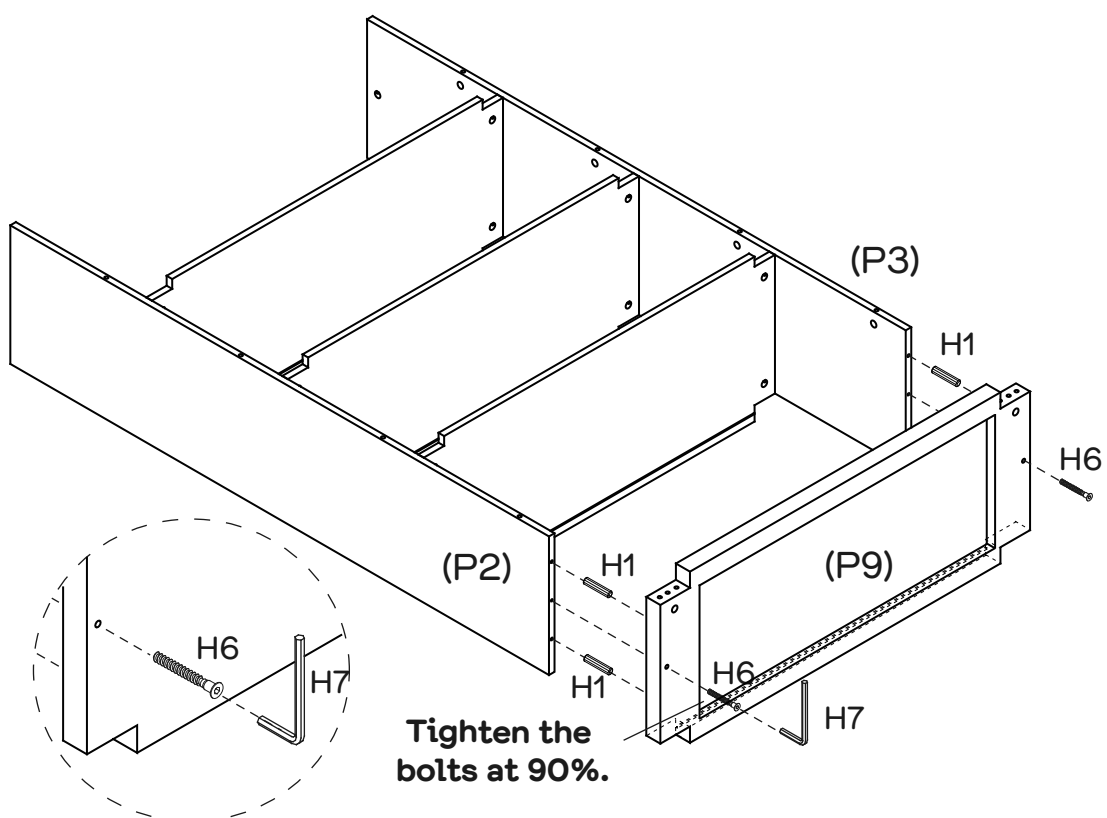

Attach Bottom Panel (P9) to Left & Right Side Panels (P2 & P3) with 4 x Dowels (H1) and 2 x Bolts (H6) by tightening with the Allen Key (H7) as shown.




Step 6

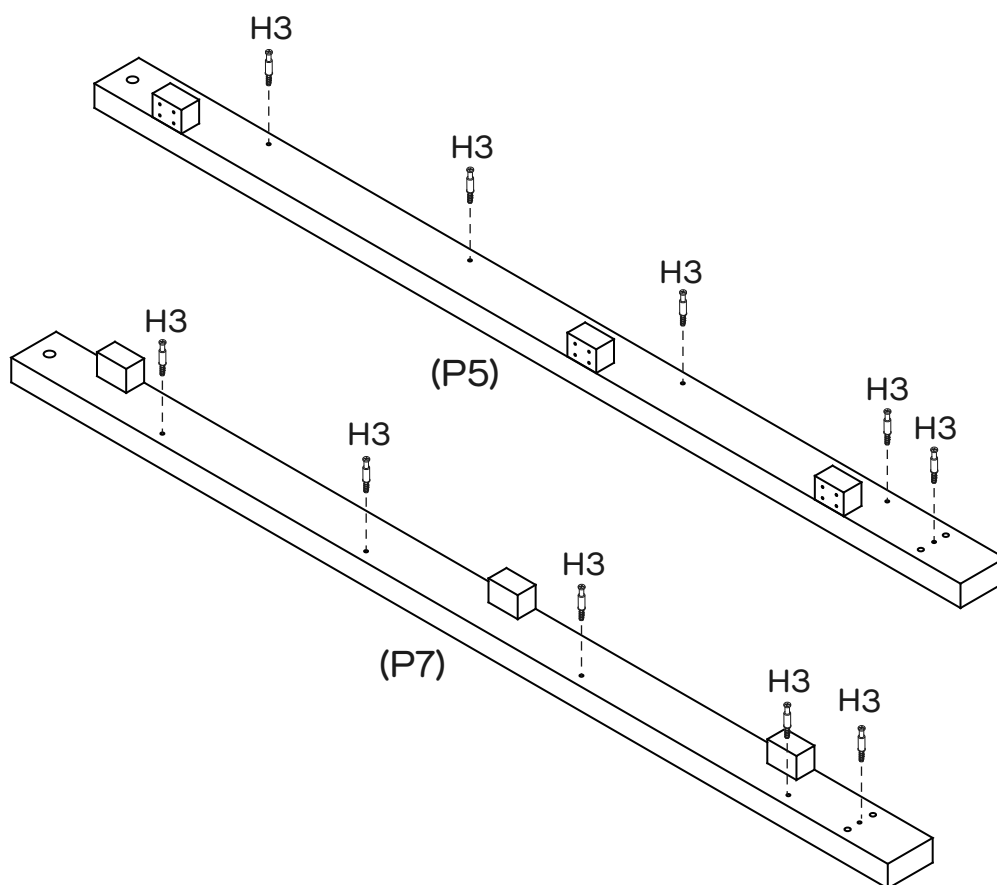You will need	
	
10 x Cam Bolts (H3)	Phillips Head Screwdriver




Attach 10 x Cam Bolts (H3) to Legs (P7 & P5) by tightening with the Phillips Head Screwdriver.



Step 7

You will need	
	
10 x Cam Nuts (H4)	4 x Large Dowels (H5)
	
Phillips Head Screwdriver	

Insert 4 x Large Dowels (H5) into Bottom Panel (P9) as shown. Insert 10 x Cam Nuts (H4) into Left & Right Side Panels (P2 & P3) and Bottom Panel (P9) as shown. Rotate the cam nuts so the arrow points towards the incoming cam bolts. Attach Legs (P5 & P7) to Left & Right Side Panels (P2 & P3) and Bottom Panel (P9) by tightening the Cam Nuts (H4) with the Phillips Head Screwdriver.

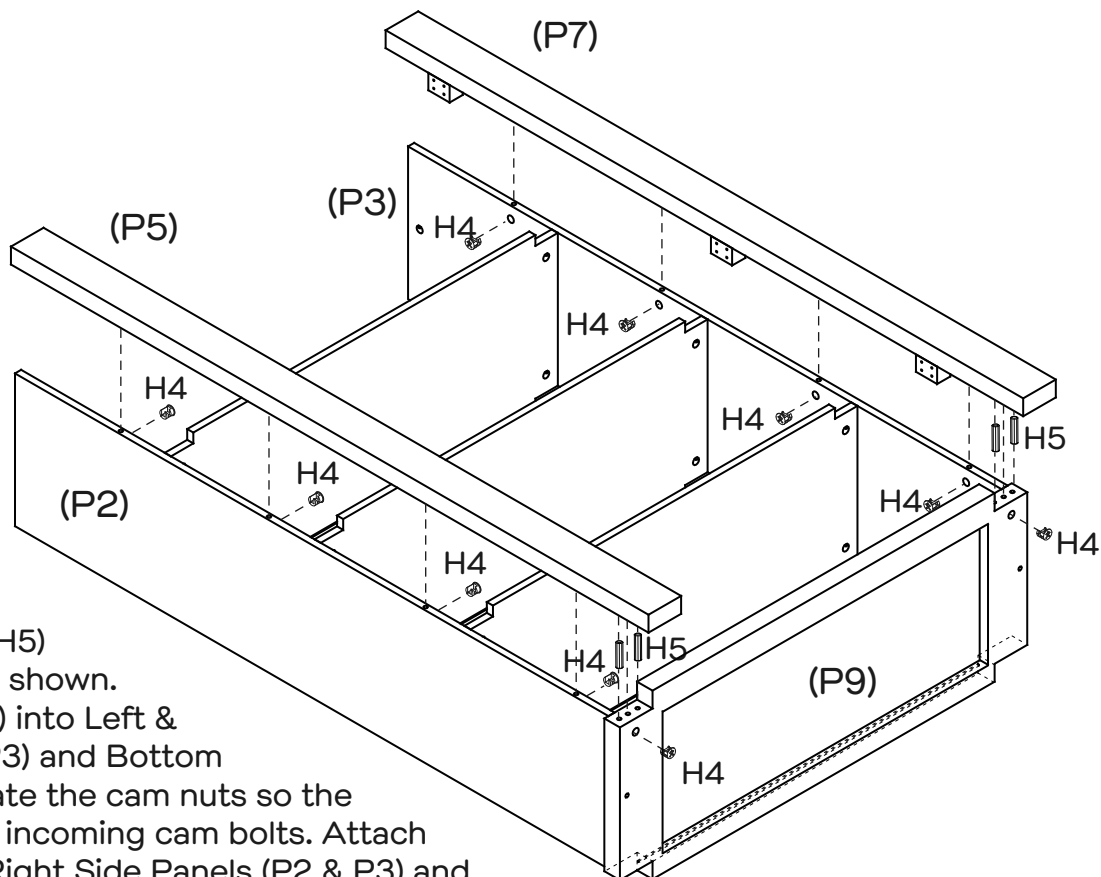


Step 8

You will need	
	
6 x Bolts (H6)	1 x Allen Key (H7)

Two People




Required

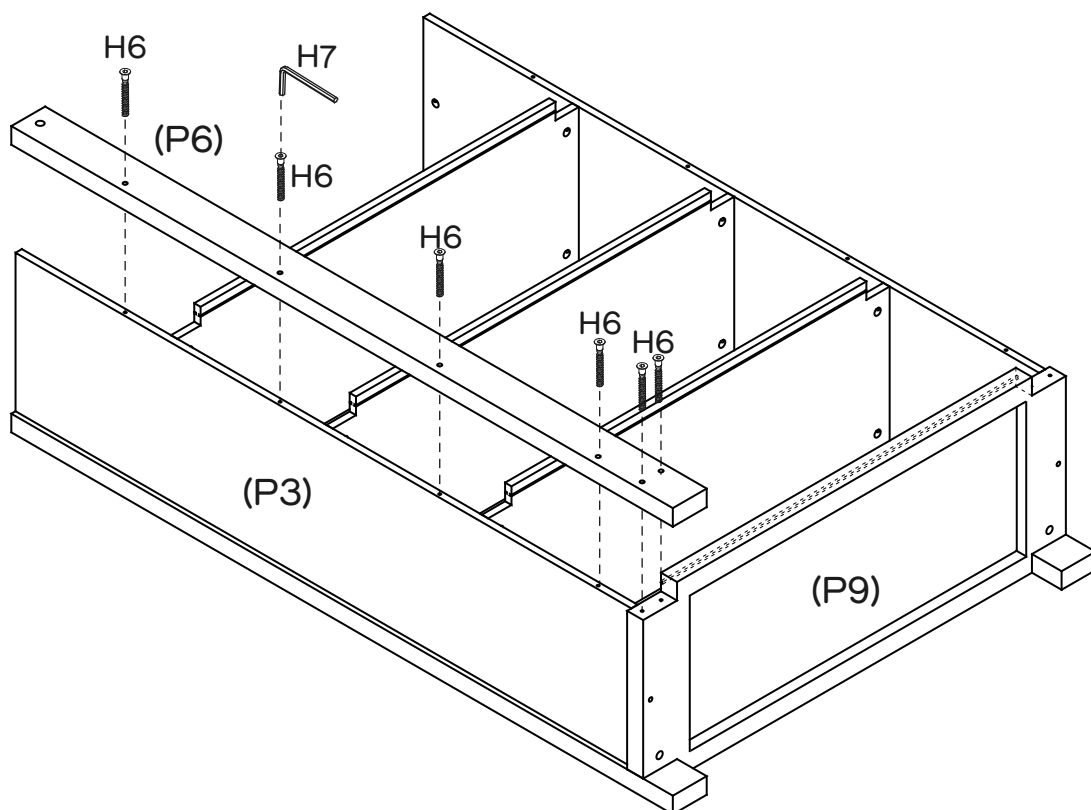


Carefully turn the unit over. Attach Leg (P6) to Right Side Panel (P3) with 6 x Bolts (H6) by tightening with the Allen Key (H7).

Step 9

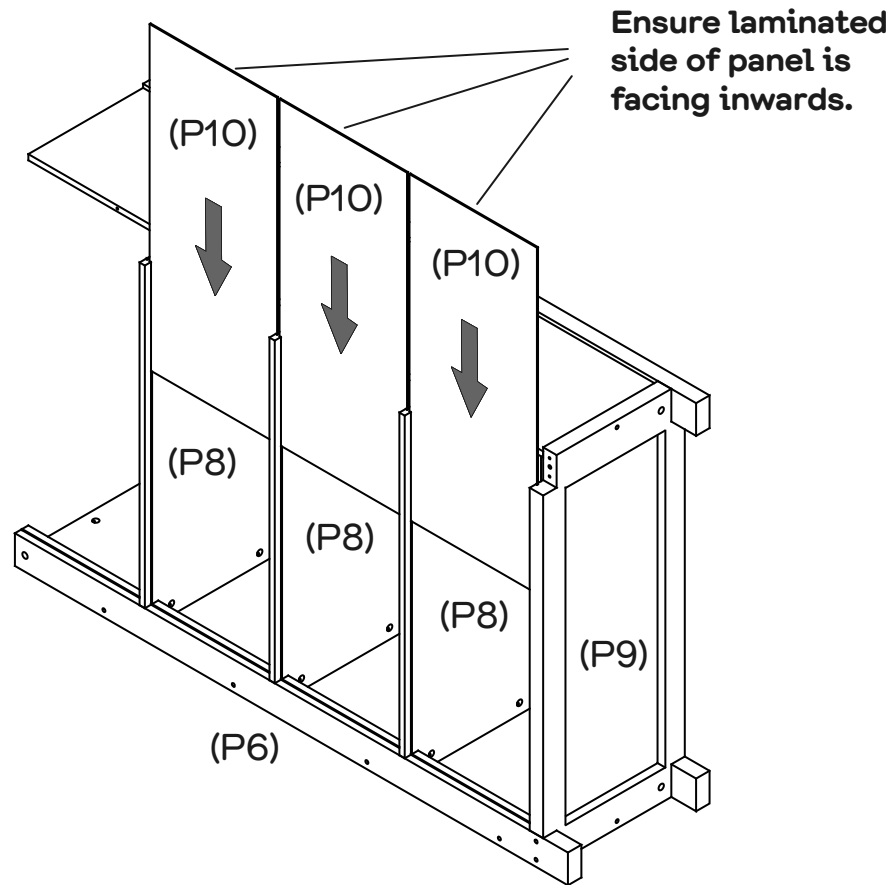





Gently stand the unit on it's side as shown. Slide Back Panels (P10x3) into the grooves of Shelf Panels (P8x3) & Bottom Panel (P9).

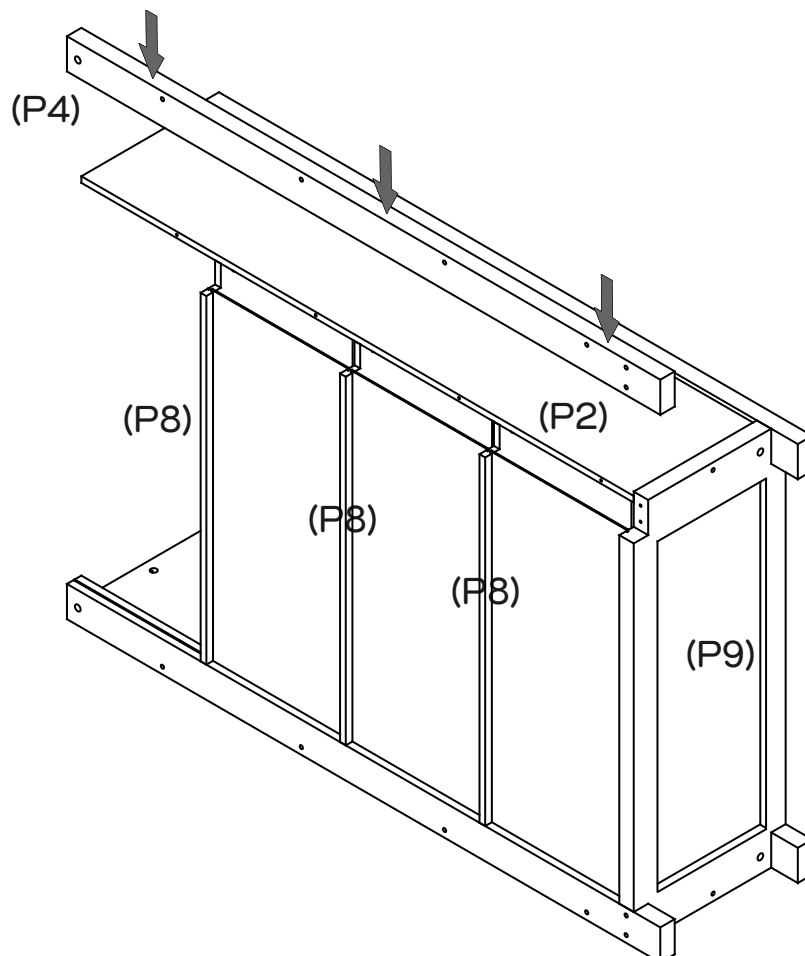
Step 10



Align holes on Leg (P4) with Shelf Panels (P8x3) and Bottom Panel (P9).

Step 11


You will need	
	
6 x Bolts (H6)	1 x Allen Key (H7)
	
4 x Plastic Glides (H12)	Hammer

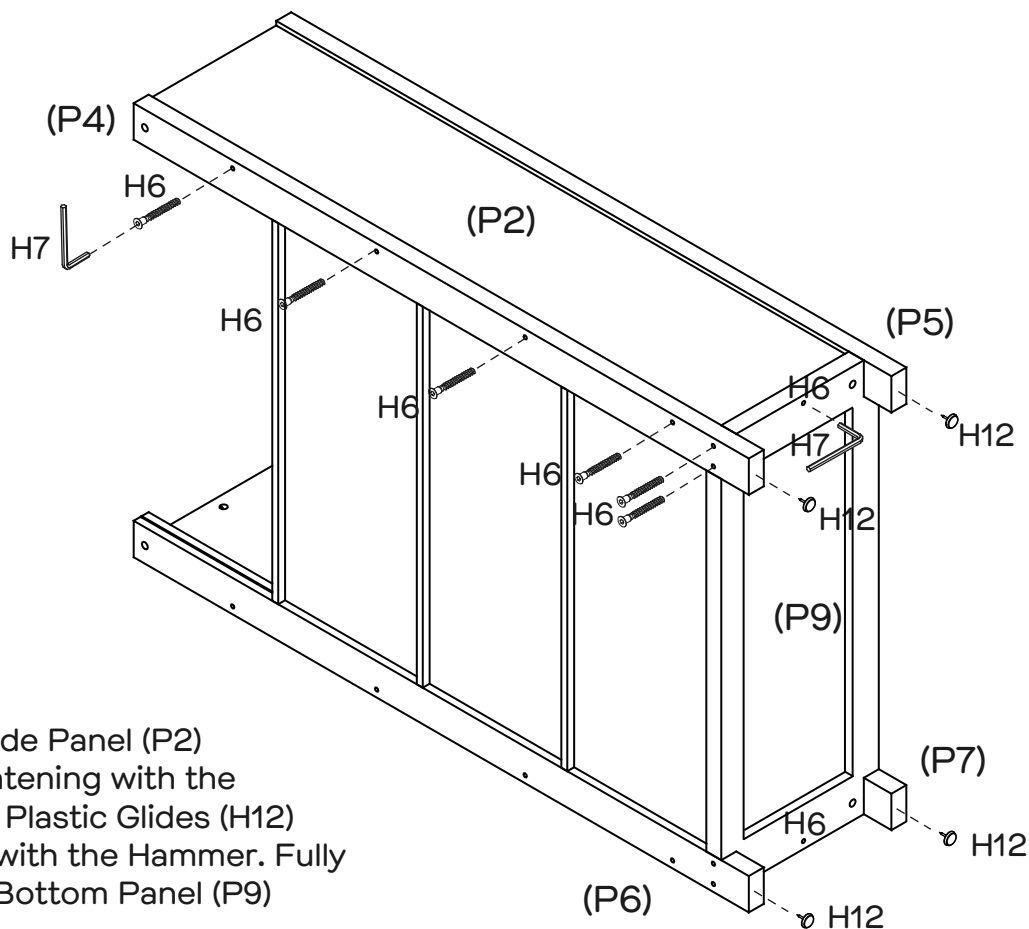

Attach Leg (P4) to Left Side Panel (P2) with 6 x Bolts (H6) by tightening with the Allen Key (H7). Attach 4 x Plastic Glides (H12) to Legs (P4&P5&P6&P7) with the Hammer. Fully tighten 2 x Bolts (H6) on Bottom Panel (P9) with the Allen Key (H7).

Step 12

Ensure laminated side of panel is facing inwards.

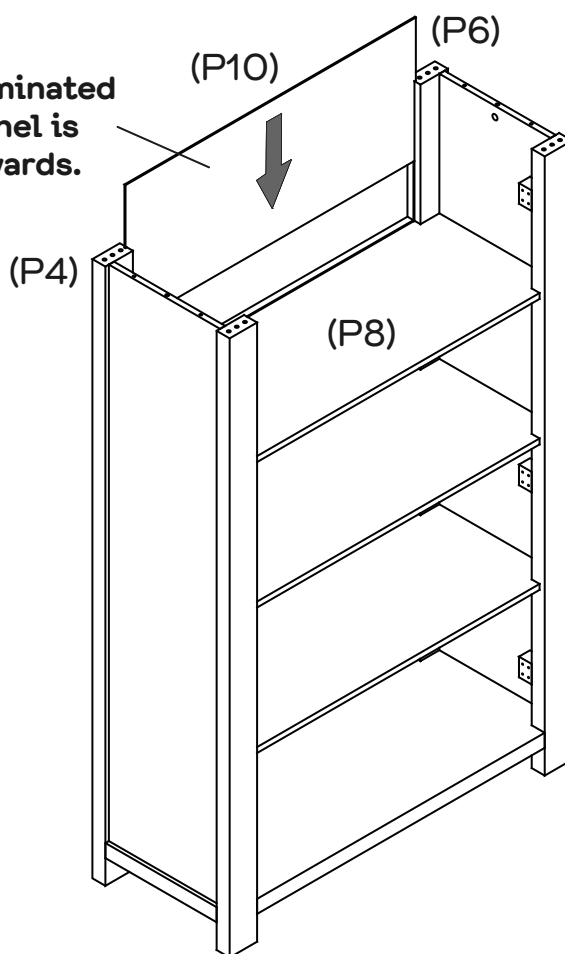



Two People




Required

Gently stand the unit upright. Slide Back Panel (P10) into the grooves of Legs (P4 & P6).





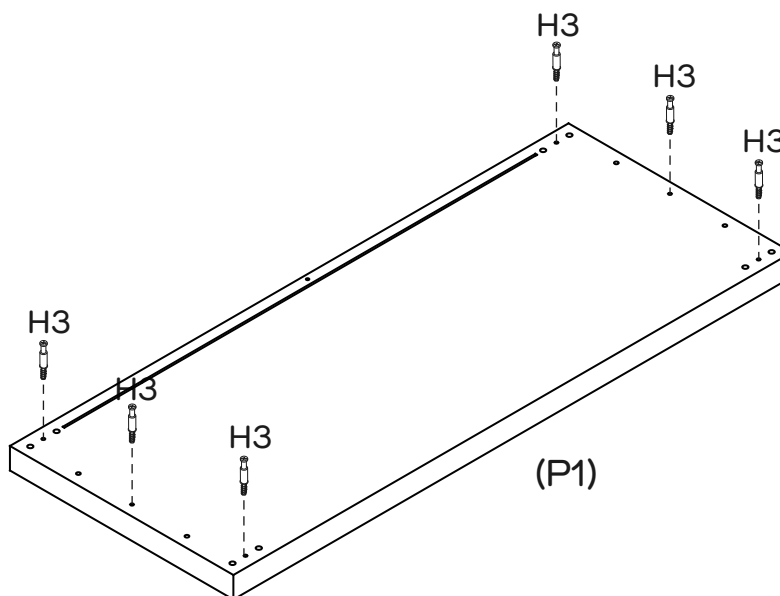Step 13


You will need	
	
6 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 6 x Cam Bolts (H3) to Top Panel (P1) by tightening with the Phillips Head Screwdriver.






Step 14

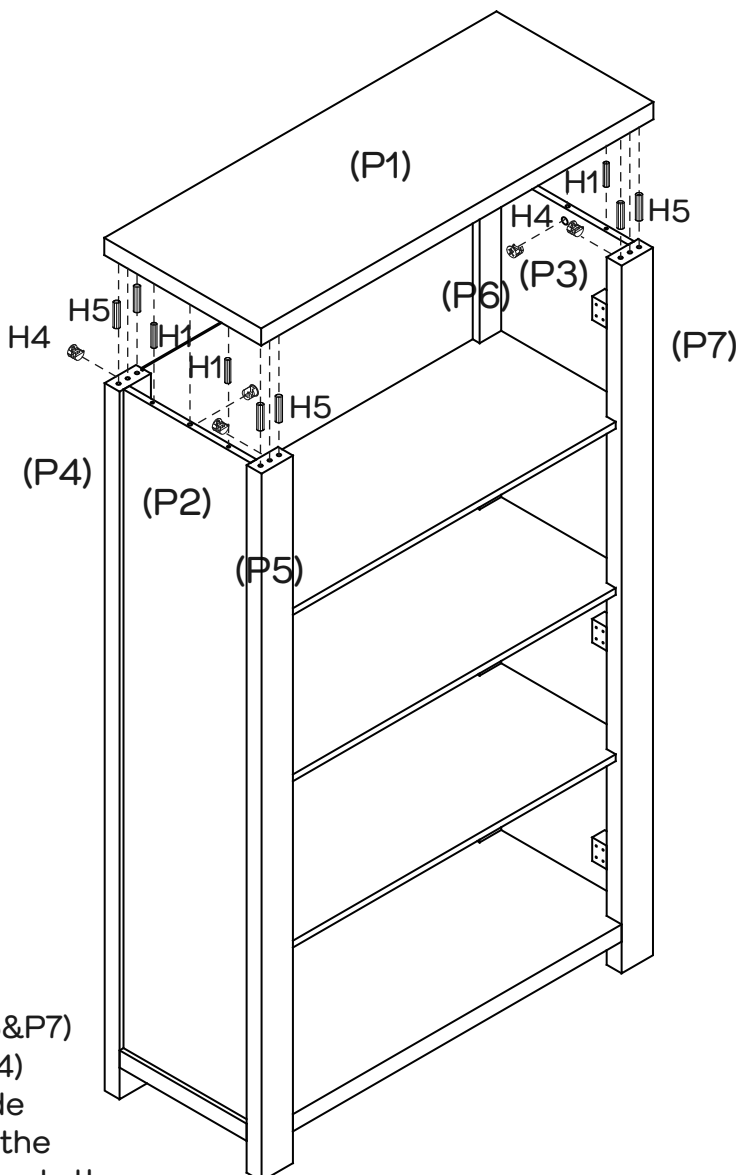
You will need	
	
4 x Dowels (H1)	8 x Large Dowels (H5)
	
6 x Cam Nuts (H4)	Phillips Head Screwdriver



Insert 4 x Dowels (H1) into Side Panels (P2&P3). Insert 8 x Large Dowels (H5) into Legs (P4&P5&P6&P7) as shown. Insert 6 x Cam Nuts (H4) into Legs (P4&P5&P6&P7) and Side Panels (P2&P3) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts. Attach Top Panel (P1) to the unit as shown by tightening with the Phillips Head Screwdriver.




Step 15

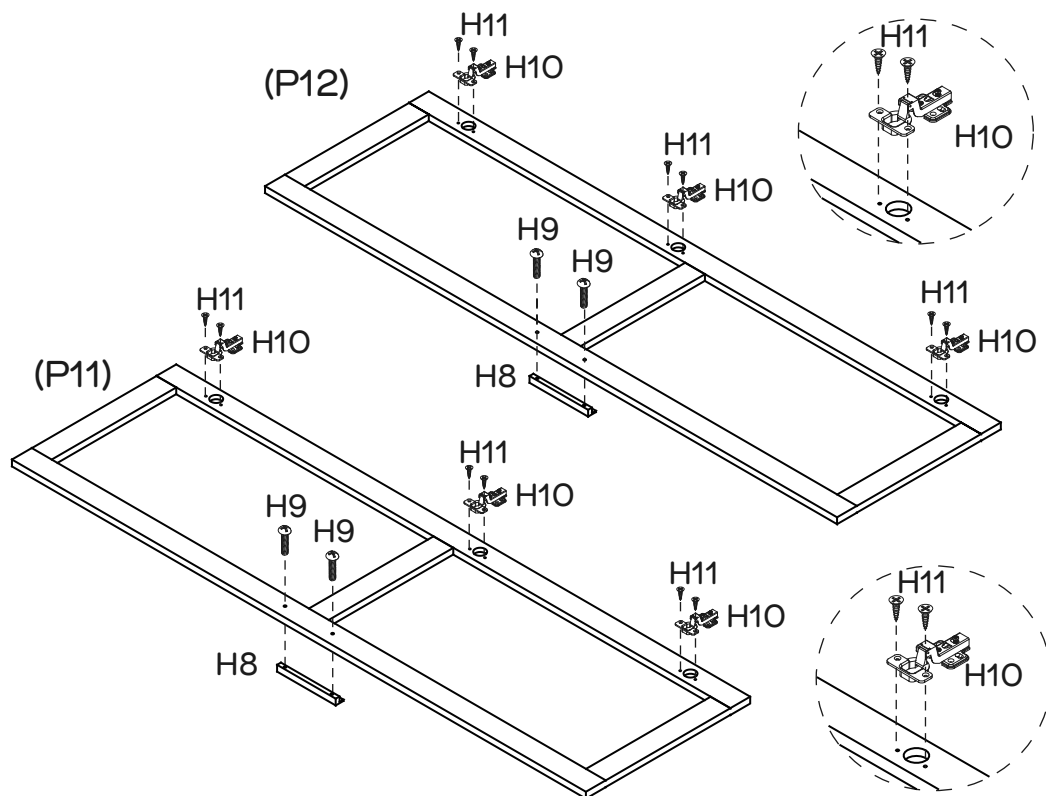
You will need	
	
2 x Handles (H8)	4 x Handle Bolts (H9)
	
6 x Hinges (H10)	12 x Screws (H11)
	
Phillips Head Screwdriver	



Attach 6 x Hinges (H10) to Left & Right Doors (P11&P12) with 12 x Screws (H11) by tightening with the Phillips Head Screwdriver. Attach 2 x Handles (H8) to Left & Right Doors (P11&P12) with 4 x Handle Bolts (H9) by tightening with the Phillips Head Screwdriver.




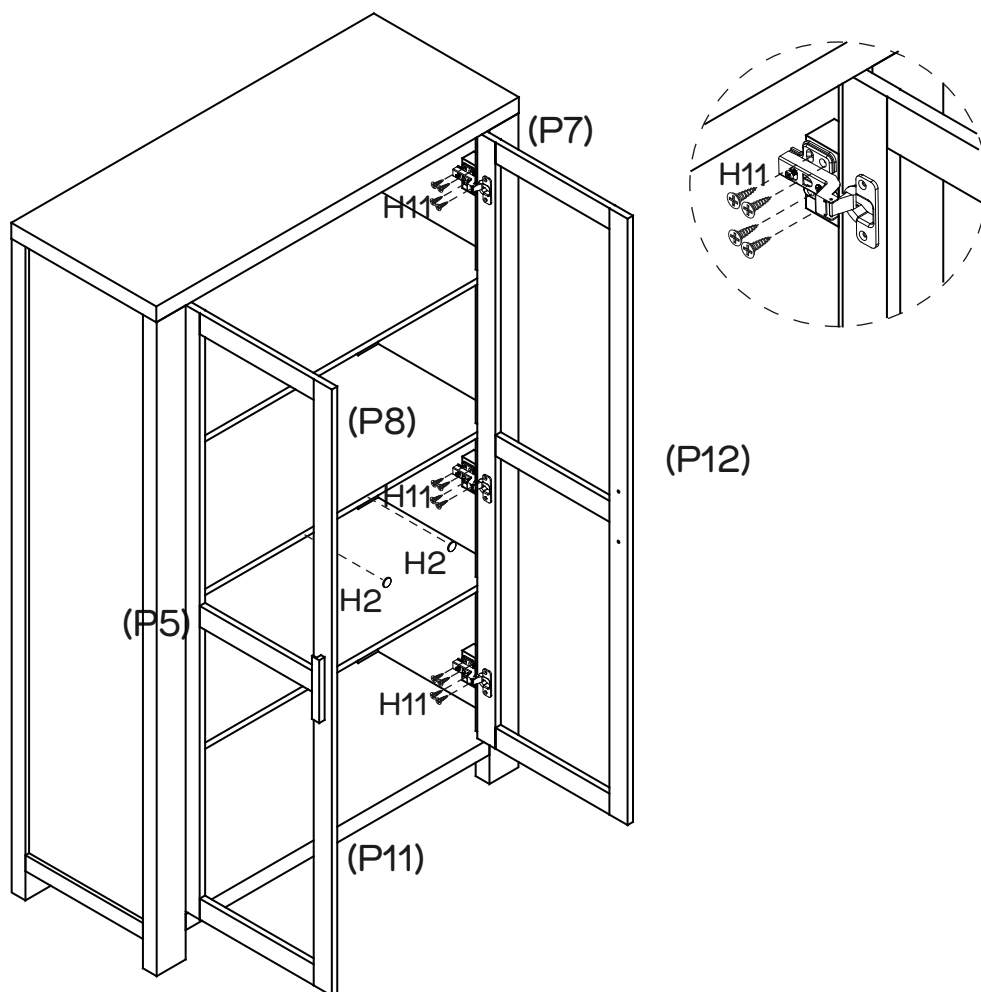


Step 16




You will need	
	
2 x Buffer Plates (H2)	24 x Screws (H11)
	
Phillips Head Screwdriver	



Attach Left & Right Doors (P11&P12) to Legs (P5&P7) with 24 x Screws (H11) by tightening with the Phillips Head Screwdriver. Attach 2 x Buffer Plates (H2) to Shelf Panel (P8) as shown. Ensure the doors open and close easily.

Step 17



You will need	
	
8 x Wedges (H13)	8 x Wedge Screws (H14)
	
1 x Safety Strap (H15)	1 x Safety Strap Screw (H16)
	
1 x Washer (H17)	Phillips Head Screwdriver

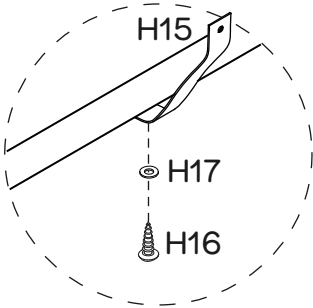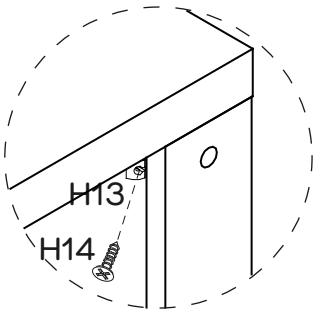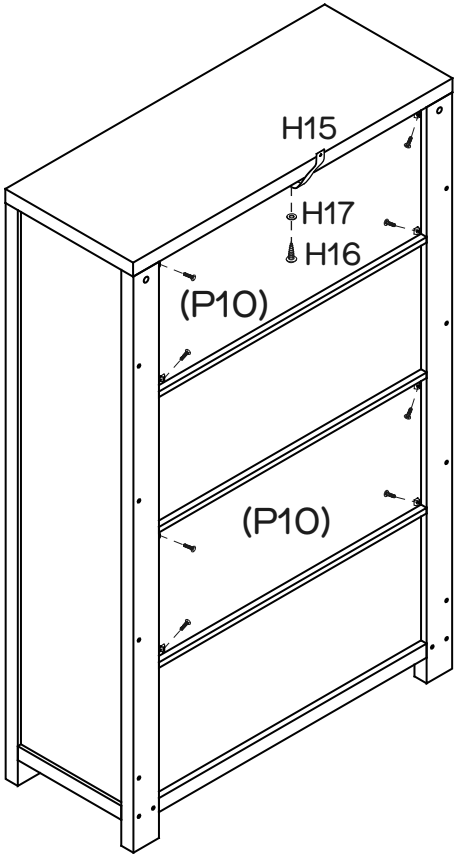

Attach 1 x Safety Strap (H15) to Top Panel (P1) with 1 x Safety Strap Screw (H16) and 1 x Washer (H17) by tightening with the Phillips Head Screwdriver. Secure Back Panels (P10x2) in place with 8 x Wedges (H13) using 8 x Wedge Screws (H14) by tightening with the Phillips Head Screwdriver.

Step 18

You will need	
	
1 x Washer (H17)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

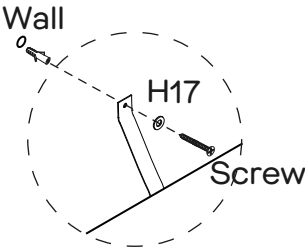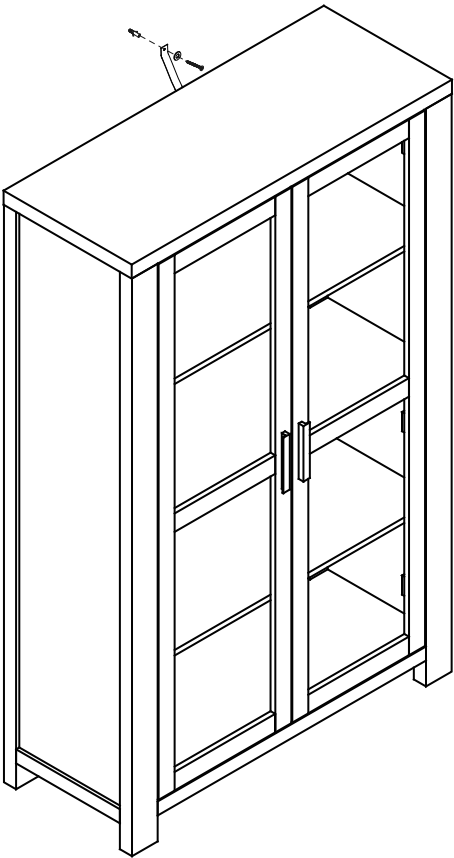

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

Move the bookcase to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.


Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.

HOW TO ADJUST THE HINGES TO ALIGN THE DOORS IF NEEDED.


STEP 1

Open the door.

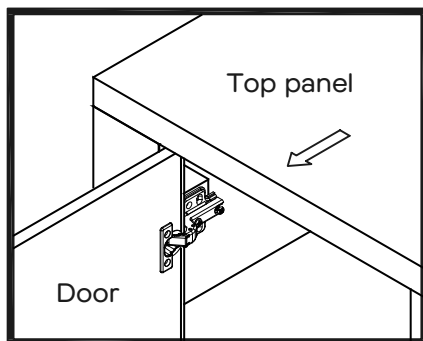


STEP 2

Adjust the door move in or out a little

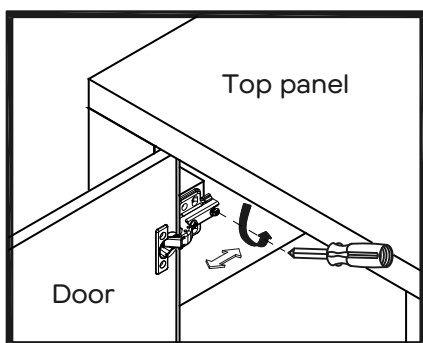


Loosen the screw indicated a little, adjust the hinge to right position (see step 2a & 2B), then tighten screw.

STEP 2a MOVE DOOR IN

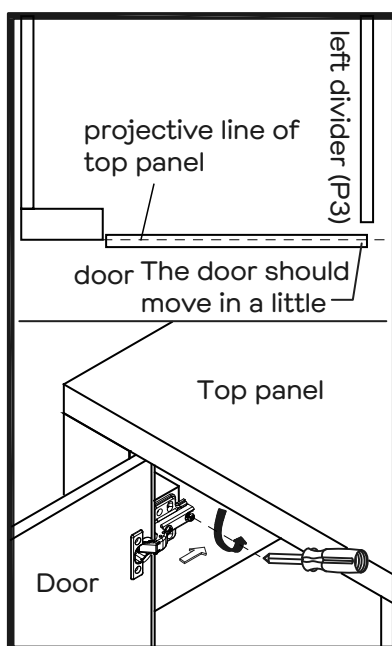

Push the hinge back a little.


STEP 2b MOVE DOOR OUT

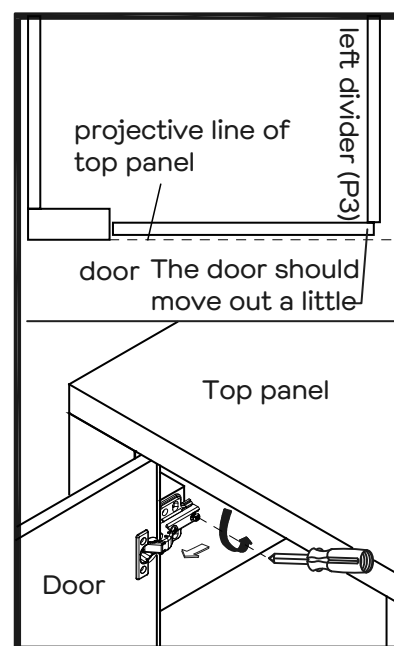

Pull the hinge forward a little.


STEP 3

To adjust the gap between door and leg

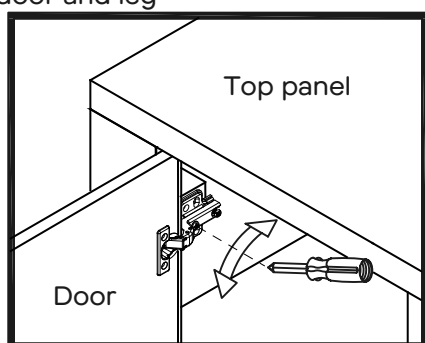


Loosen or tighten the screw indicated a little to adjust the gap between door and leg (see step 3a & step 3b)

STEP 3a MOVE DOOR RIGHT

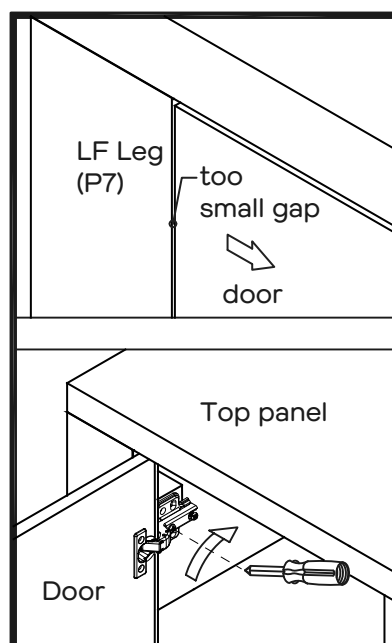

Turn the screw clockwise a little as shown to make the gap big.

STEP 3b MOVE DOOR LEFT

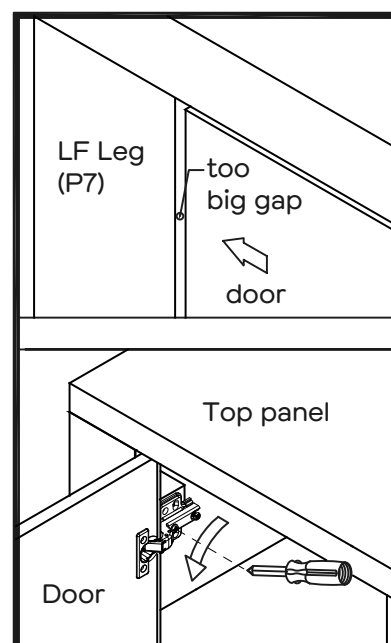

Turn the screw counterclockwise a little as shown to make the gap small.