




**Fantastic
Furniture**

Version 1.0

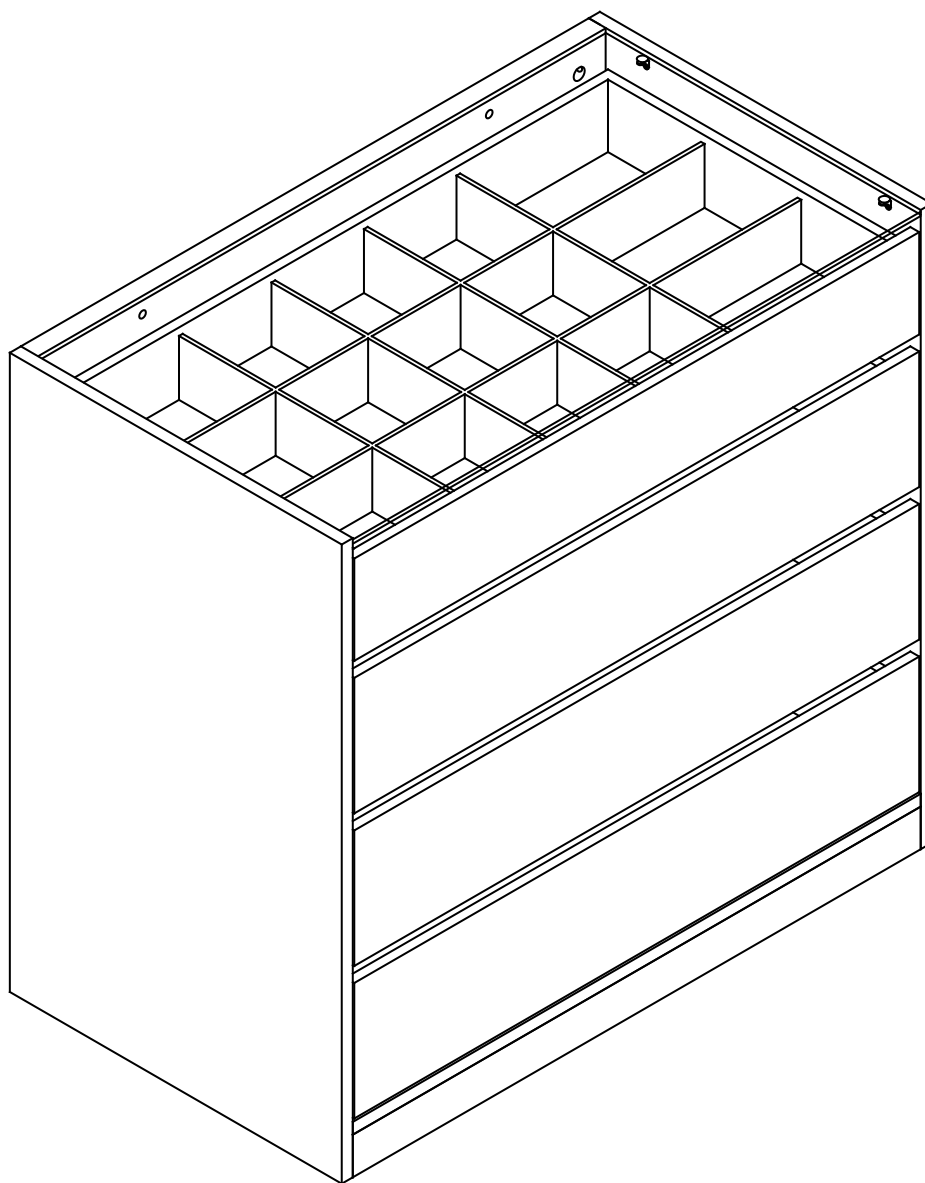


Eden

Utility 4 Drawer Oak Glass

fantasticfurniture.com.au

Secure it!

Reduce the risk of furniture tip-over accidents



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Recommended Weight Capacity :15kg/drawer & 10kg on top

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.




- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.
- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

Wall attachment guide




For plasterboard
(without available wood stud)

Securing method:
Self drilling plasterboard anchor.



For plasterboard
(with available wood stud)

Securing method:
Screw inserted directly into stud.



For masonry wall

Securing method:
Solid wall: Plug with screw
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.



Glass should always be handled with care.

cause glass to break. This glass is designed to break into small, relatively harmless pieces and not sharp fragments. Avoid placing hot or cold items directly onto the table unless using a thick insulation material such as placemats or coasters.

Avoid dropping objects onto the glass.

Do not allow hard or pointed objects to come into contact with the glass. Never use the top area as a chopping surface.

Do not sit or stand on the glass surface.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

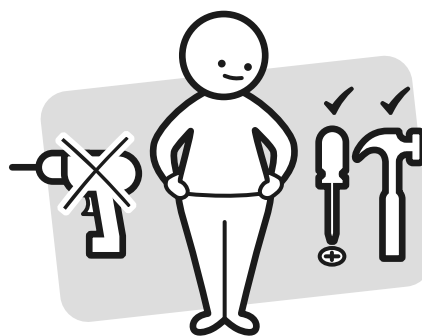

Make sure you have all the required tools. Never use power tools unless instructed.

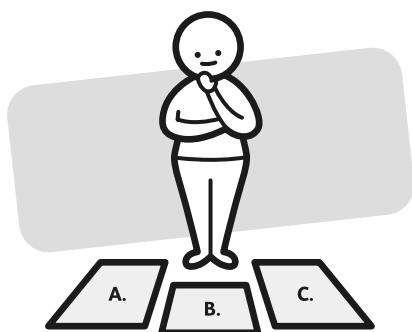

Identify and lay out all of the components before you begin assembly.

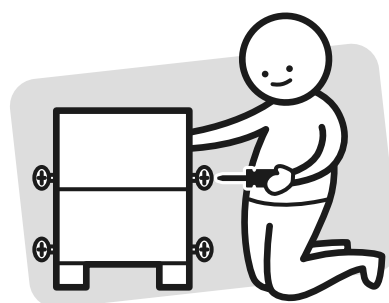

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE





Other tools you need:


Phillips head screwdriver;
Hammer

Parts list



Top Panel (P1); Bottom Panel (P2);
Left Side Panel (P3); Right Side Panel (P4);
2 x Back Panels (P5); Rail (P6); Rail (P7);
Rail (P8); 2 x Rail (P9); Drawer Front (P10);
Left Drawer Side (P11);
Right Drawer Side (P12);
Drawer Back (P13); 4 x Rails (P14);
Drawer Base (P15); 3 x Drawer Front (P16);
3 x Left Drawer Side (P17);
3 x Right Drawer Side (P18);
3 x Drawer Back (P19);
3 x Drawer Base (P20);
4 x Dividers (P21);
2 x Dividers (P22)

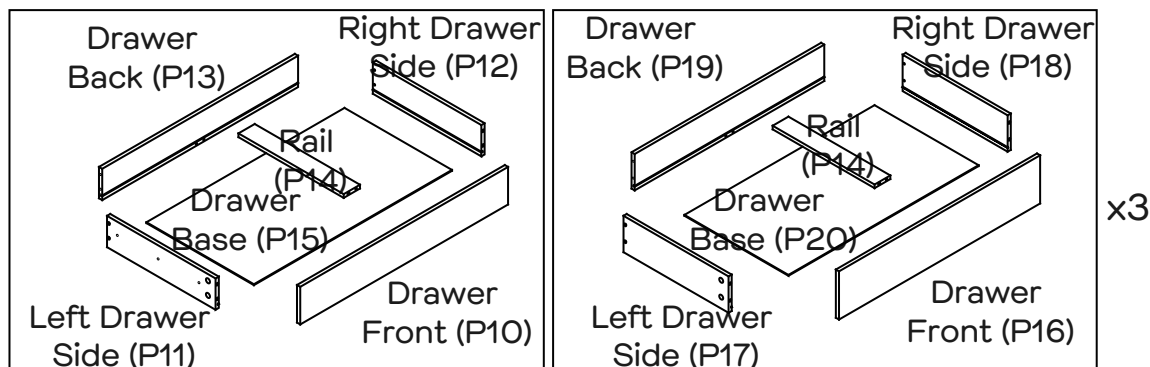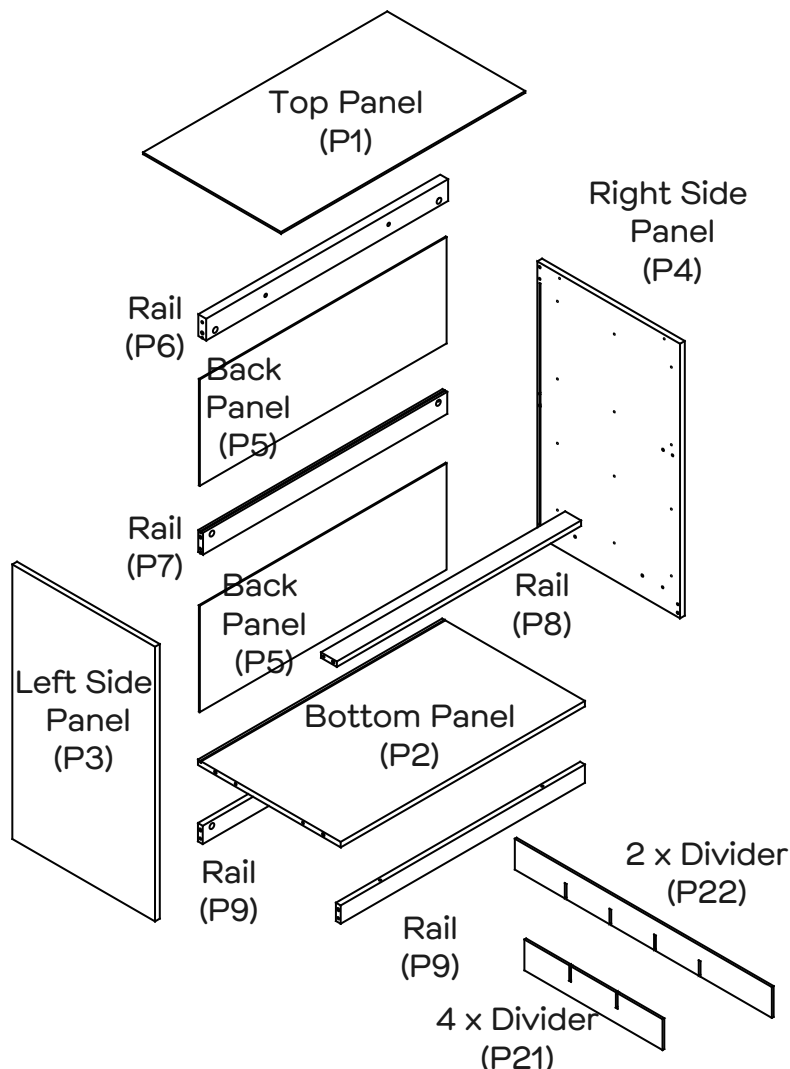


Hardware pack

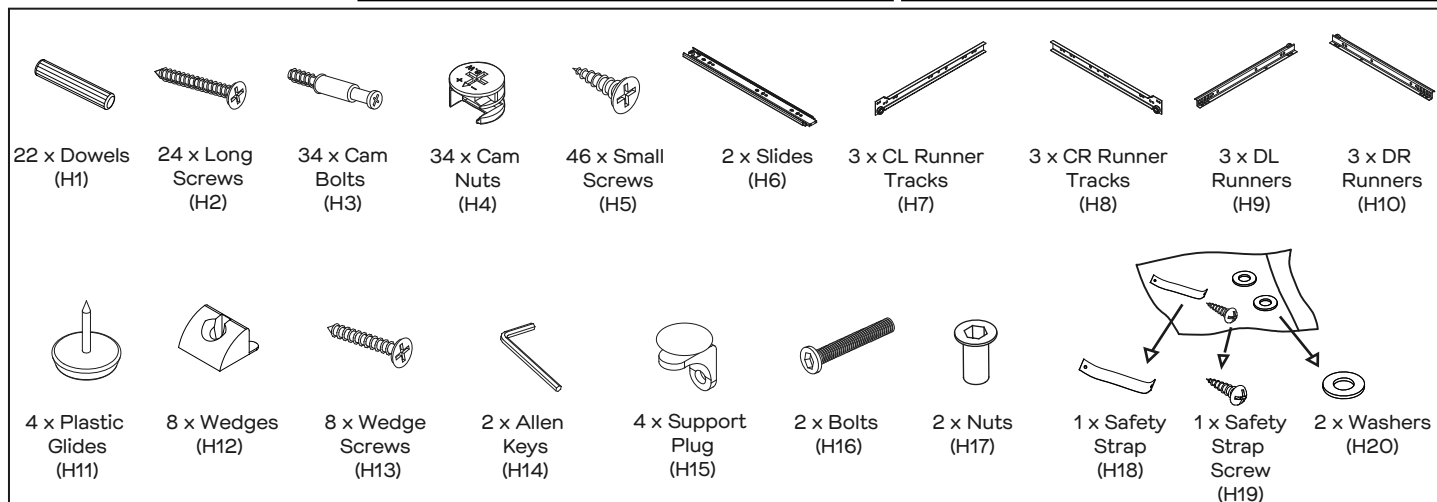


Step 1

You will need	
	
7 x Cam Bolts (H3)	Phillips Head Screwdriver

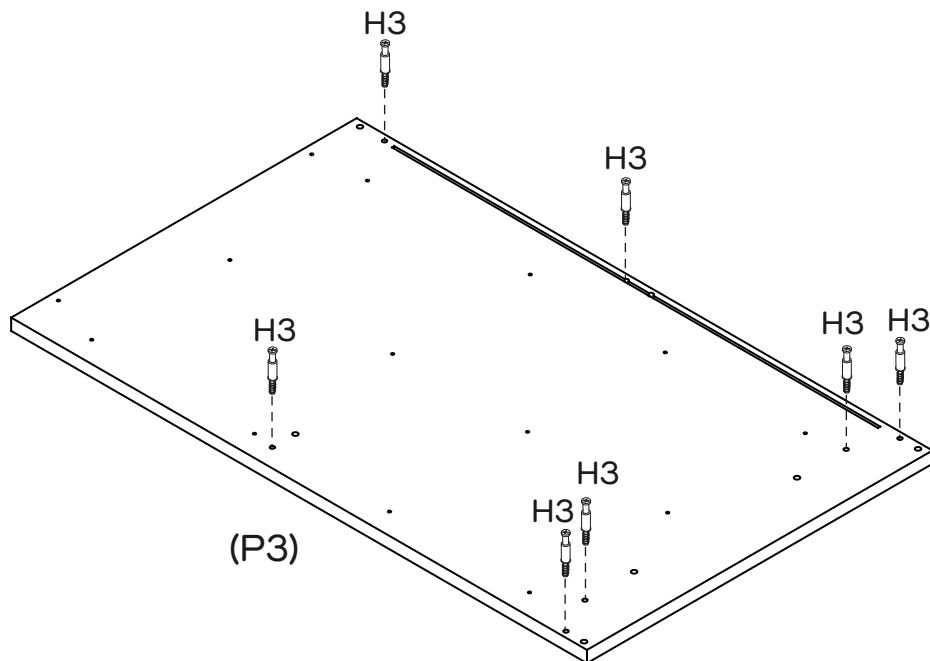


Attach 7 x Cam Bolts (H3) to Left Side Panel (P3) as shown by tightening with the Phillips Head Screwdriver.


Step 2

You will need	
	
2 x Slides (H6)	


Separate 2 x Slide (H6) into Slide Tracks (H6-1) and Slide Runners (H6-2) as shown below:

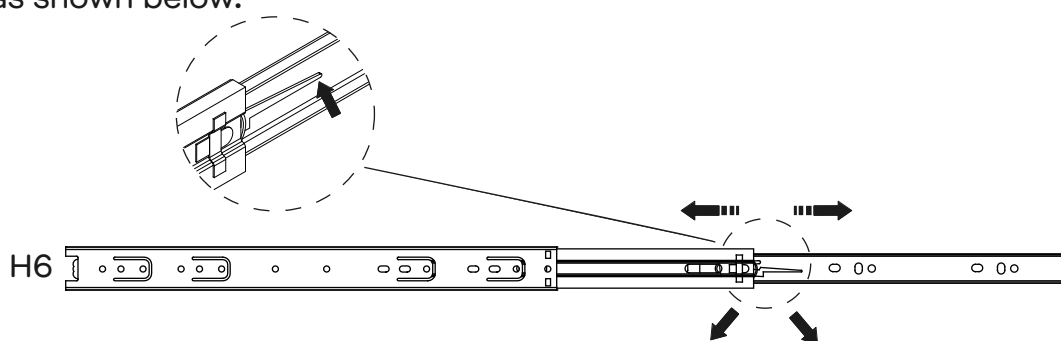

Press down on the plastic release lever to extend the Slide Runner (H6-2) from Slide Track (H6-1) and then separate the two pieces completely.




Slide Track (H6-1)




Slide Runner (H6-2)

Adjust Runner to access the screw holes.

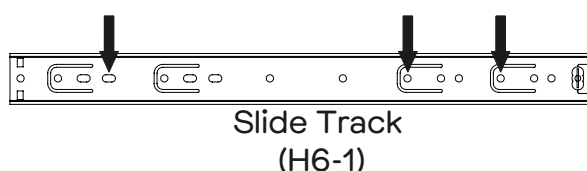


Step 3

You will need	
	
1 x Slide Track (H6-1)	3 x CL Runner Tracks (H7)
	
12 x Small Screws (H5)	Phillips Head Screwdriver

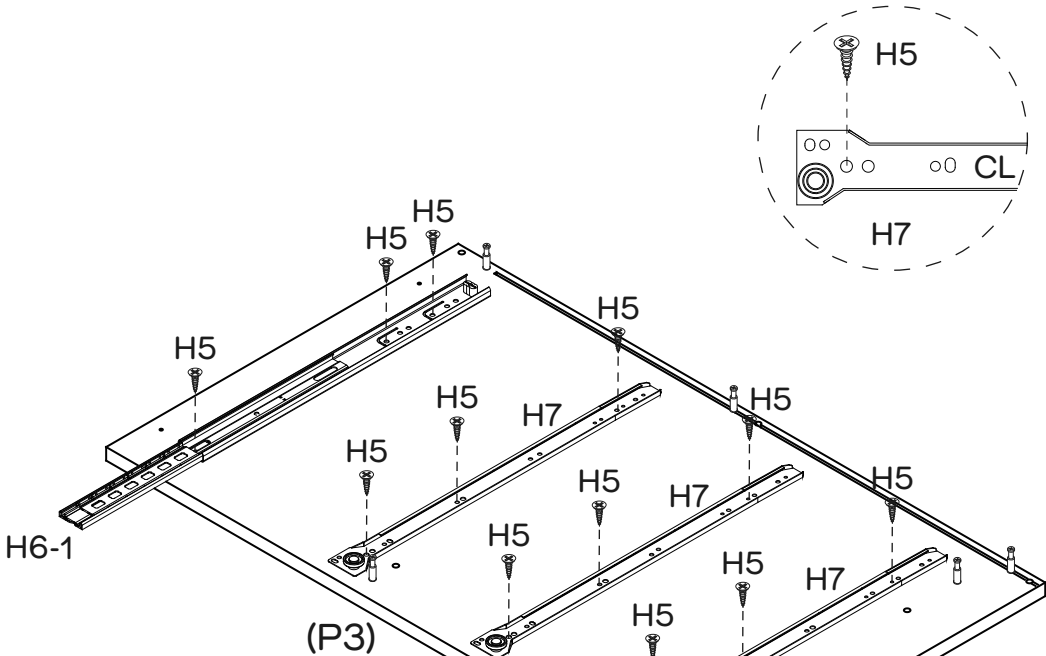



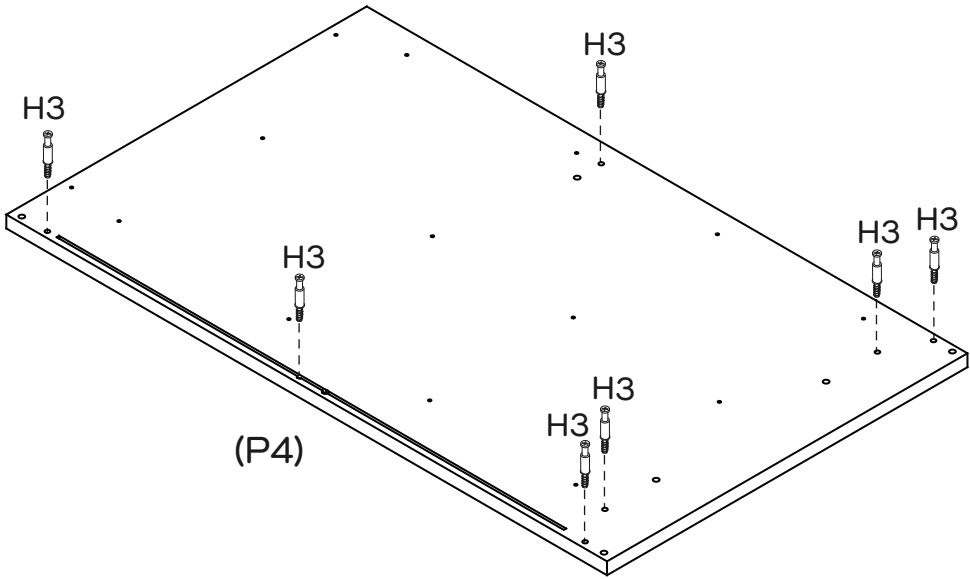
Use the holes shown below on the Slide Track (H6-1) to secure the screws.



Secure 1 x Slide Track (H6-1) and 3 x CL Runner Tracks (H7) to Left Side Panel (P3) with 12 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.

Step 4

You will need	
	
7 x Cam Bolts (H3)	Phillips Head Screwdriver





Attach 7 x Cam Bolts (H3) to Right Side Panel (P4) as shown by tightening with the Phillips Head Screwdriver.

Step 5




You will need	
	
1 x Slide Track (H6-1)	3 x CR Runner Tracks (H8)
	
12 x Small Screws (H5)	Phillips Head Screwdriver

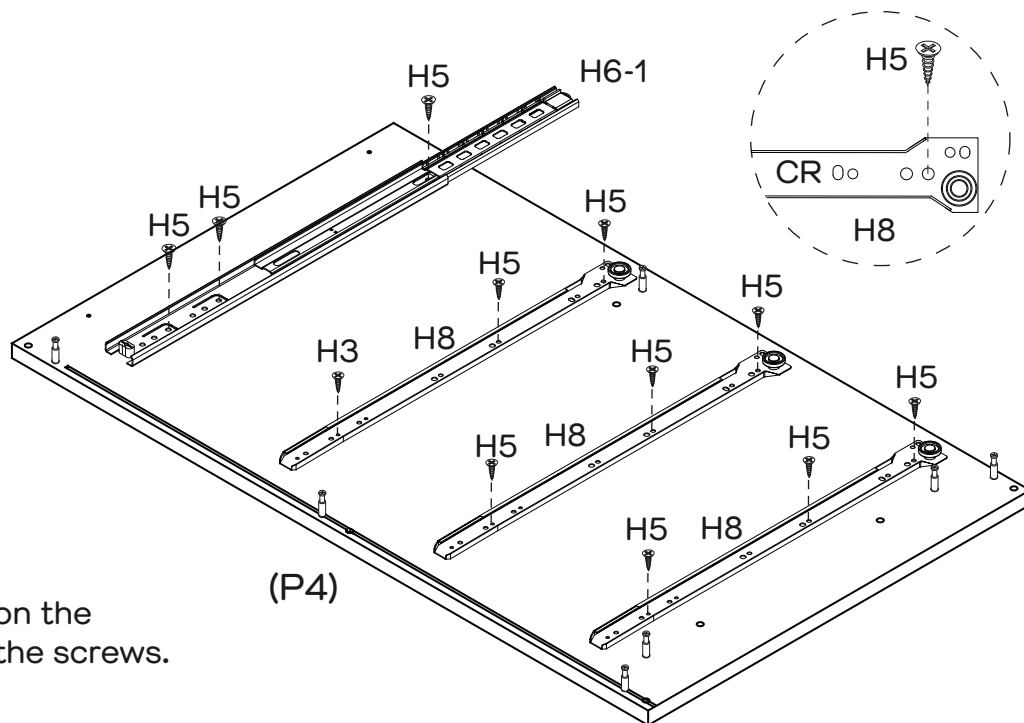Use the holes shown below on the Slide Track (H6-1) to secure the screws.




Secure 1 x Slide Track (H6-1) and 3 x CR Runner Tracks (H8) to Right Side Panel (P4) with 12 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.

Step 6


You will need	
	
3 x Dowels (H1)	3 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

This is how a cam nut works.....





The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 3 x Dowels (H1) into Left Side Panel (P3).
 Insert 3 x Cam Nuts (H4) into Rails (P6, P7, P8).
 Rotate the nuts so the arrows point towards the incoming bolts. Attach Rails (P6, P7, P8) to Left Side Panel (P3) by tightening all nuts with the Phillips Head Screwdriver.

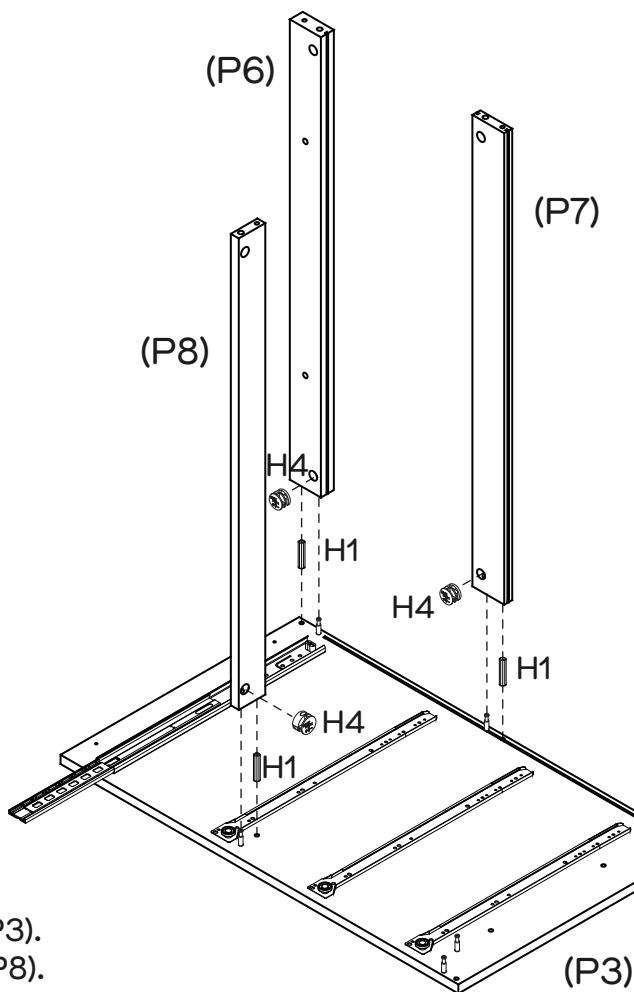




Step 7

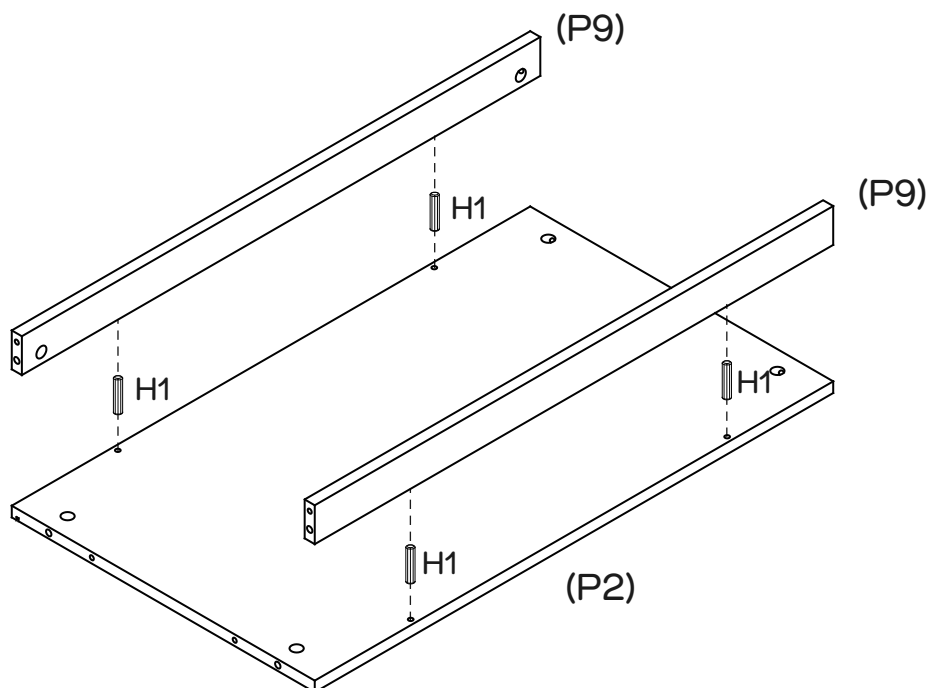
You will need	
	
4 x Dowels (H1)	



Insert 4 x Dowels (H1) into Bottom Panel (P2) and attach Rails (P9 x 2) as shown.


Step 8

You will need	
	
4 x Dowels (H1)	4 x Cam Nuts (H4)
	
Phillips Head Screwdriver	

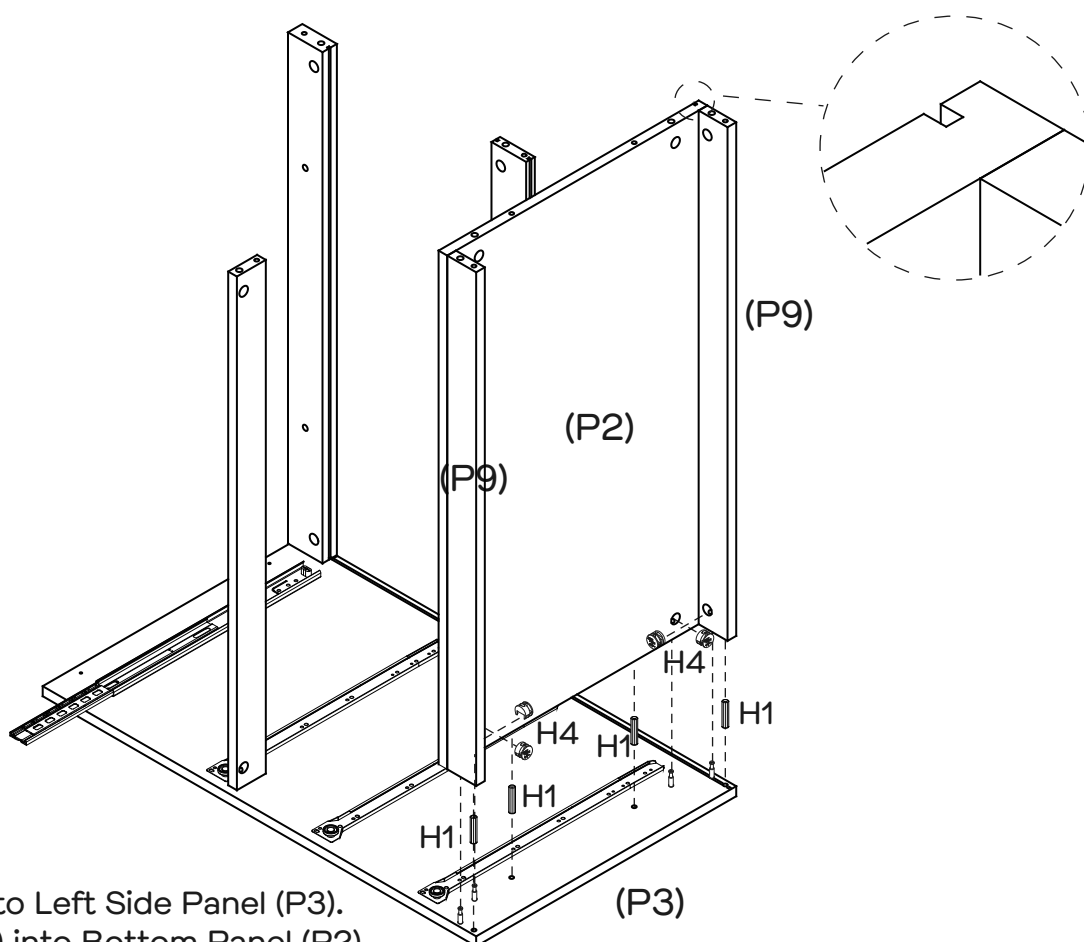


Insert 4 x Dowels (H1) into Left Side Panel (P3). Insert 4 x Cam Nuts (H4) into Bottom Panel (P2) and Rails (P9 x 2). Rotate the nuts so the arrows point towards the incoming bolts. Attach Bottom Panel (P2) and Rails (P9 x 2) to Left Side Panel (P3) by tightening all nuts with the Phillips Head Screwdriver.


Step 9

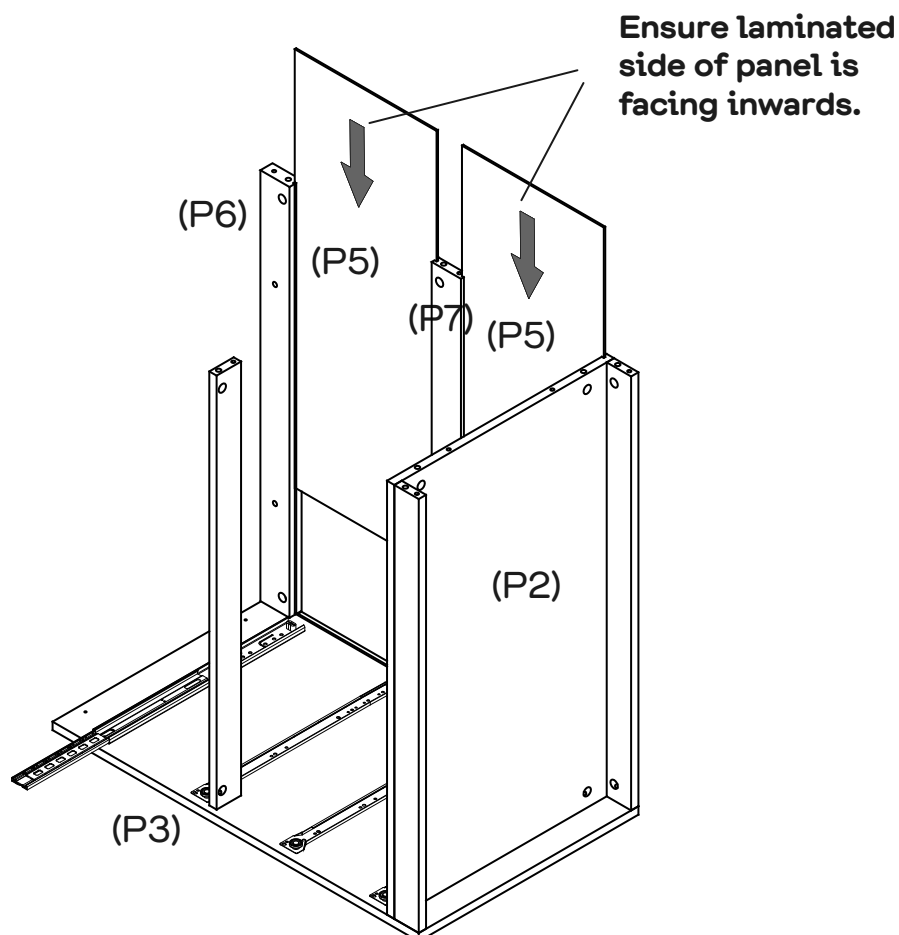

Slide Back Panels (P5 x 2) into the grooves of Bottom Panel (P2), Rails (P6 & P7) and Left Side Panel (P3).



Step 10

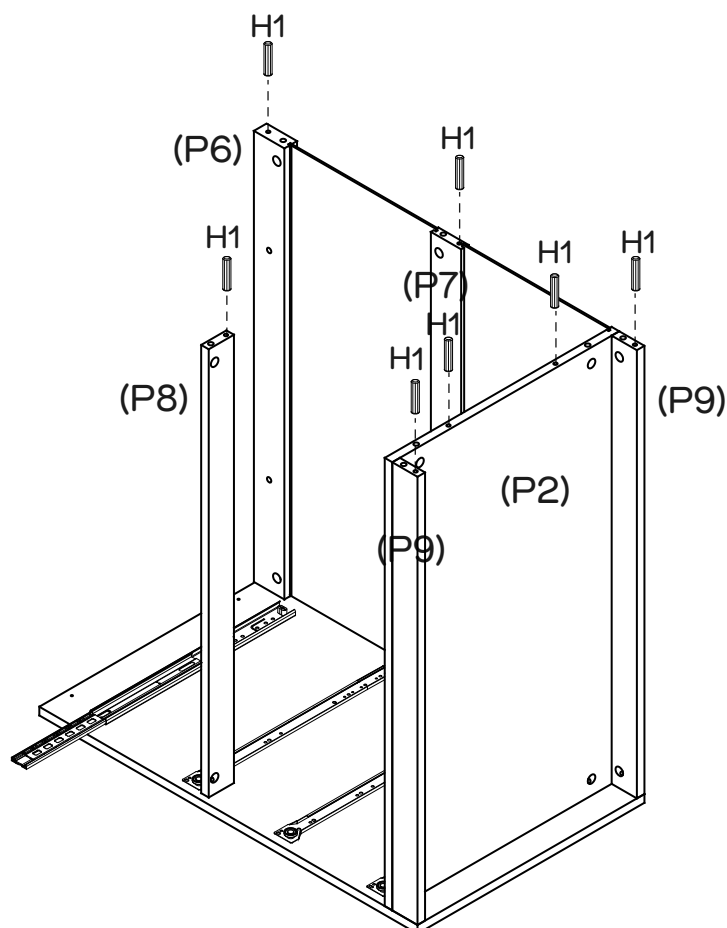You will need	
	
7 x Dowels (H1)	




Insert 7 x Dowels (H1) into Bottom Panel (P2) and Rails (P6, P7, P8, P9 x 2) as shown.
fantasticfurniture.com.au



Step 11

You will need	
	
7 x Cam Nuts (H4)	Phillips Head Screwdriver

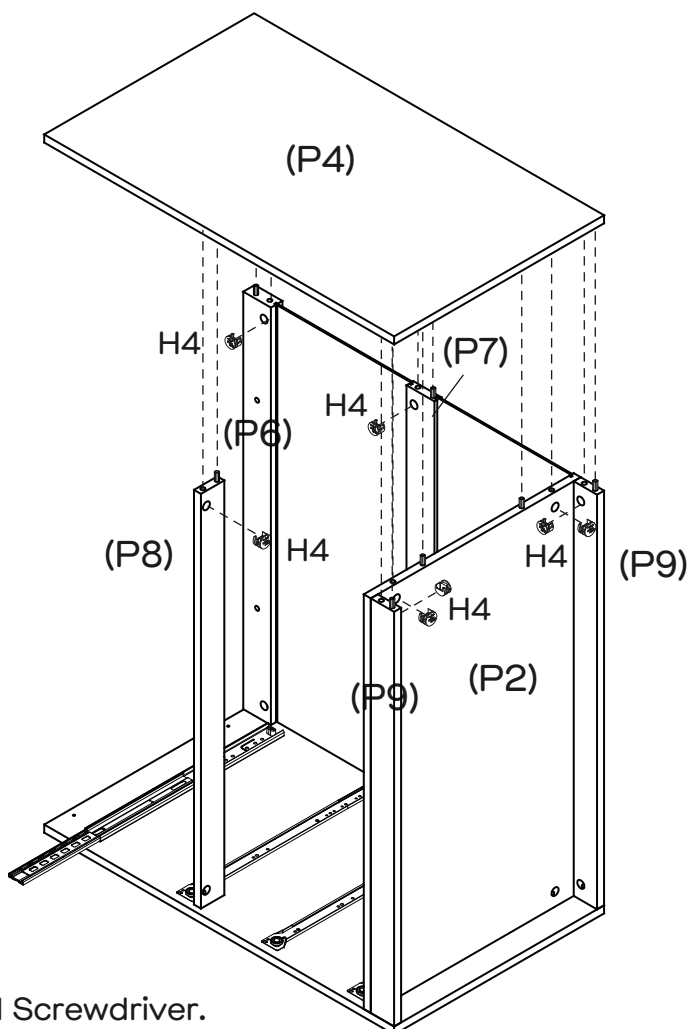
Insert 7 x Cam Nuts (H4) into Bottom Panel (P2) and Rails (P6, P7, P8, P9 x 2). Rotate the nuts so the arrows point towards the incoming bolts. Attach Right Side Panel (P4) to Bottom Panel (P2) and Rails (P6, P7, P8, P9 x 2) by tightening all nuts with the Phillips Head Screwdriver.





Step 12


You will need	
	
4 x Plastic Glides (H11)	Hammer

Secure 4 x Plastic Glides (H11) to the bottom of Left & Right Side Panels (P3 & P4) as shown using the Hammer.

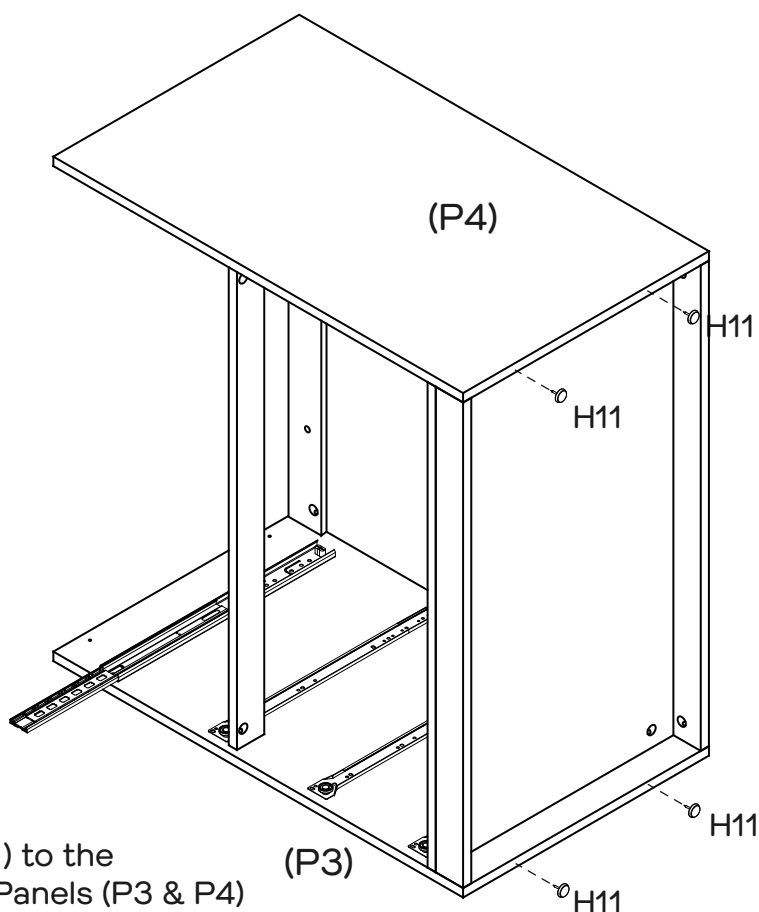


Step 13


You will need	
	
5 x Cam Bolts (H3)	Phillips Head Screwdriver

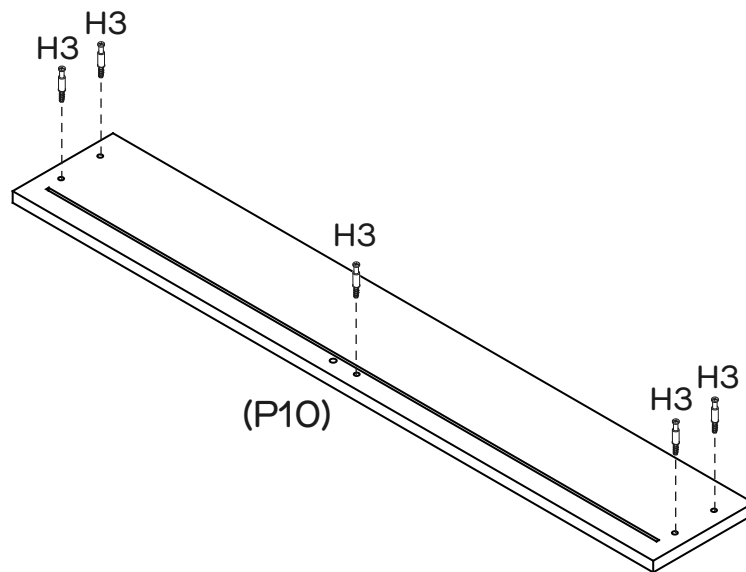

Attach 5 x Cam Bolts (H3) to Drawer Front (P10). Tightening with the Phillips Head Screwdriver.


Step 14

You will need	
	
6 x Long Screws (H2)	Phillips Head Screwdriver

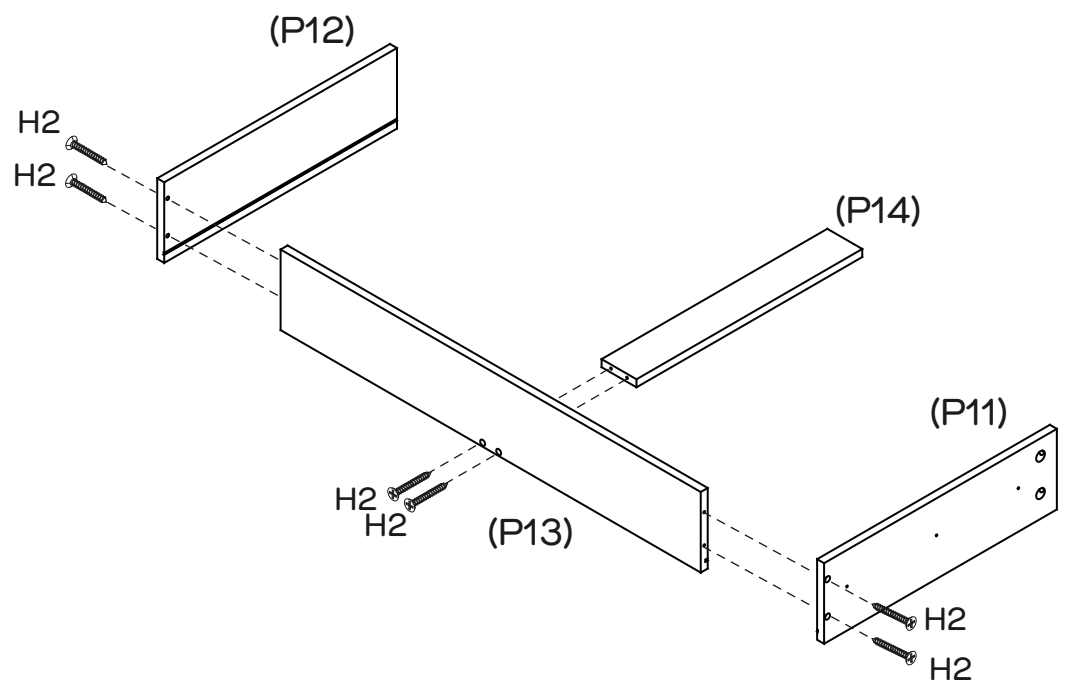

Attach Drawer Back (P13) to Left & Right Drawer Sides (P11 & P12) and Rail (P14) with 6 x Long Screws (H2) by tightening with the Phillips Head Screwdriver.


Step 15

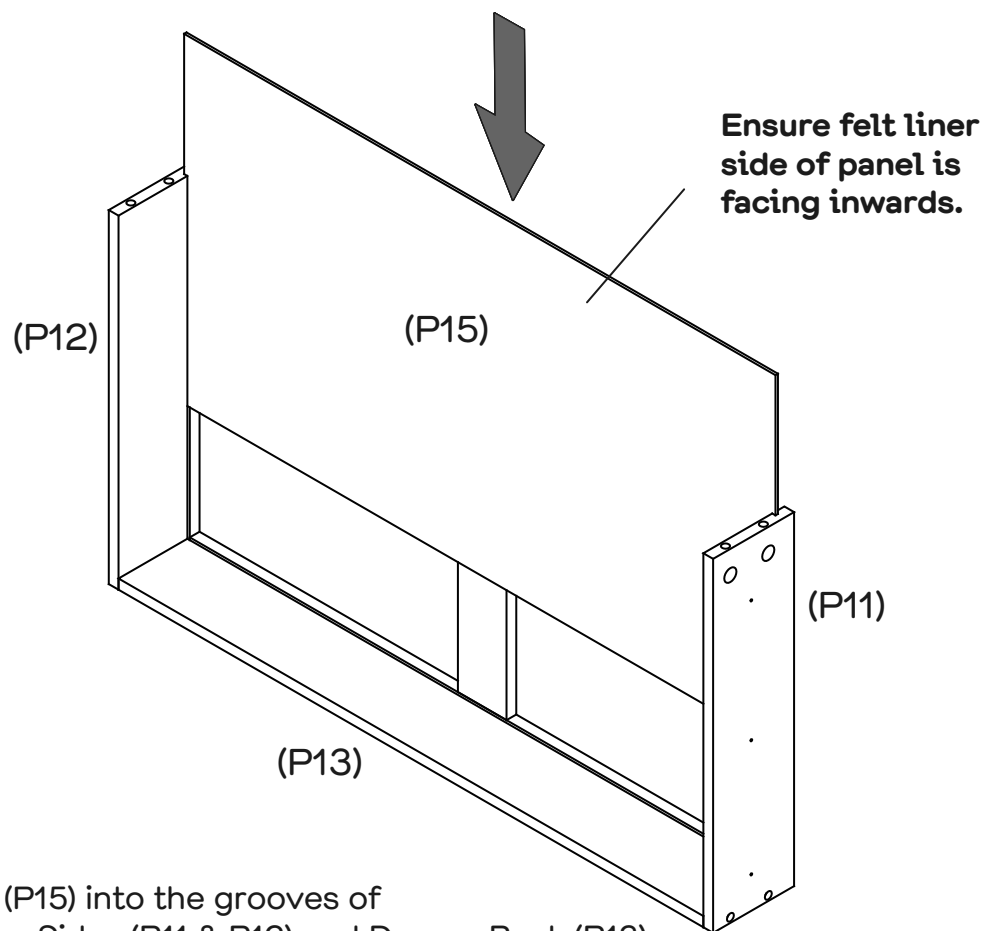

Slide Drawer Base (P15) into the grooves of Left & Right Drawer Sides (P11 & P12) and Drawer Back (P13).




Step 16

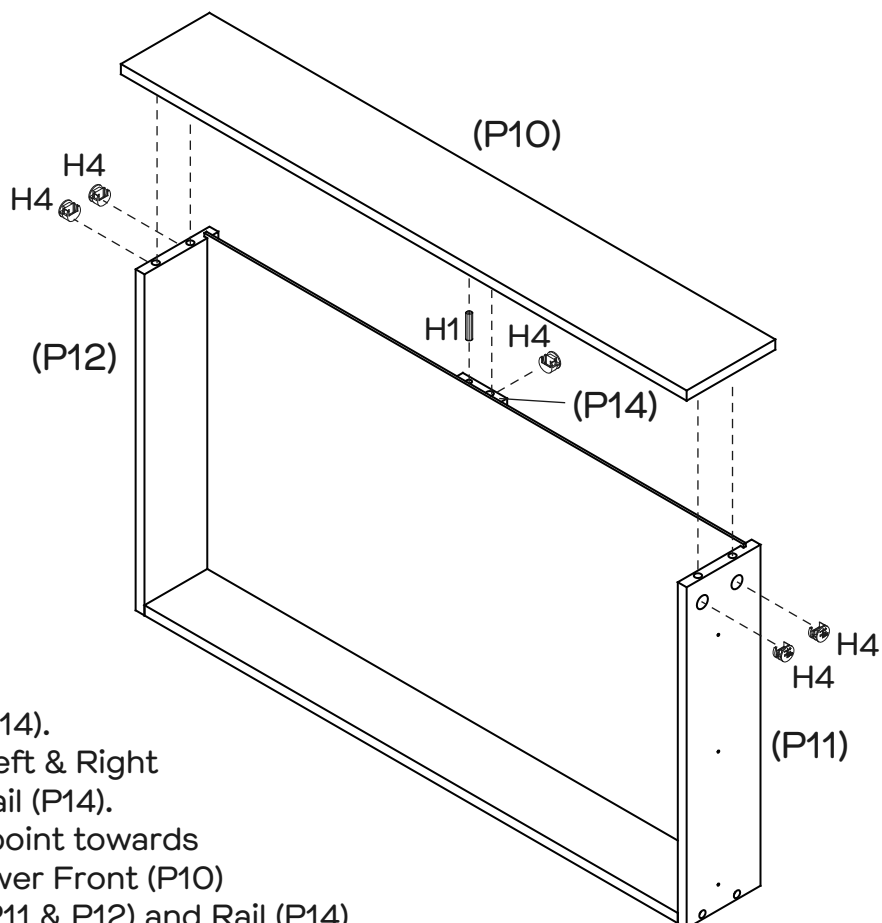
You will need	
1 x Dowel (H1)	5 x Cam Nuts (H4)
Phillips Head Screwdriver	



Insert 1 x Dowel (H1) into Rail (P14).
 Insert 5 x Cam Nuts (H4) into Left & Right Drawer Sides (P11 & P12) and Rail (P14).
 Rotate the nuts so the arrows point towards the incoming bolts. Attach Drawer Front (P10) to Left & Right Drawer Sides (P11 & P12) and Rail (P14) by tightening all nuts with the Phillips Head Screwdriver.


Step 17

You will need	
	
6 x Small Screws (H5)	2 x Slide Runners (H6-2)
	
Phillips Head Screwdriver	

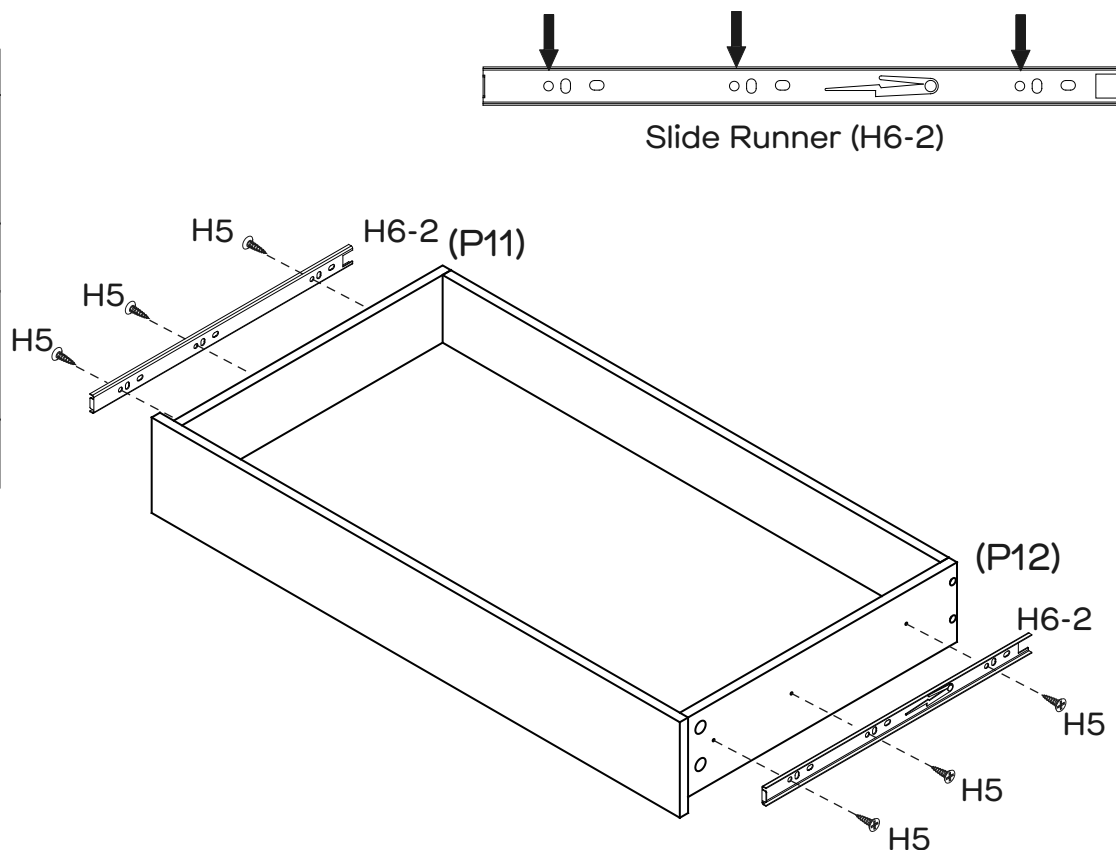


Attach 2 x Slide Runners (H6-2) to Left & Right Drawer Sides (P11 & P12) with 6 x Small Screws (H5) as shown by tightening with the Phillips Head Screwdriver.

Step 18

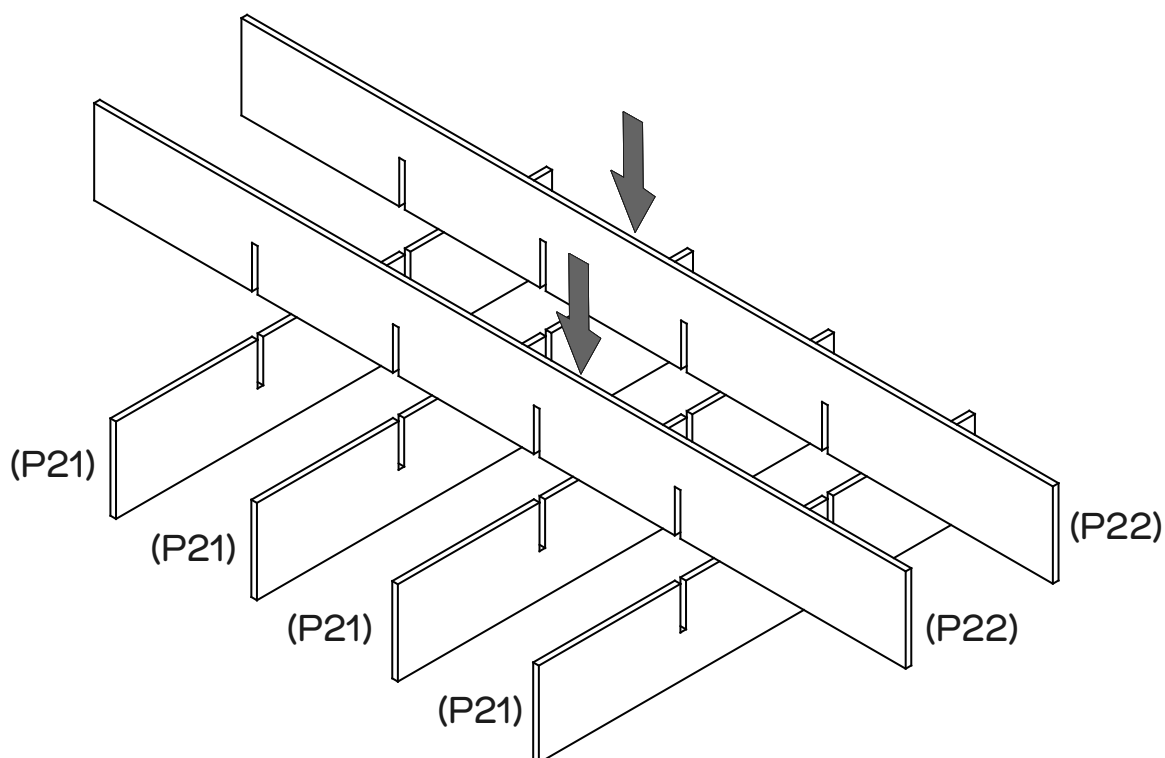



Attach 2 x Dividers (P22) to 4 x Dividers (P21) as shown.


Step 19

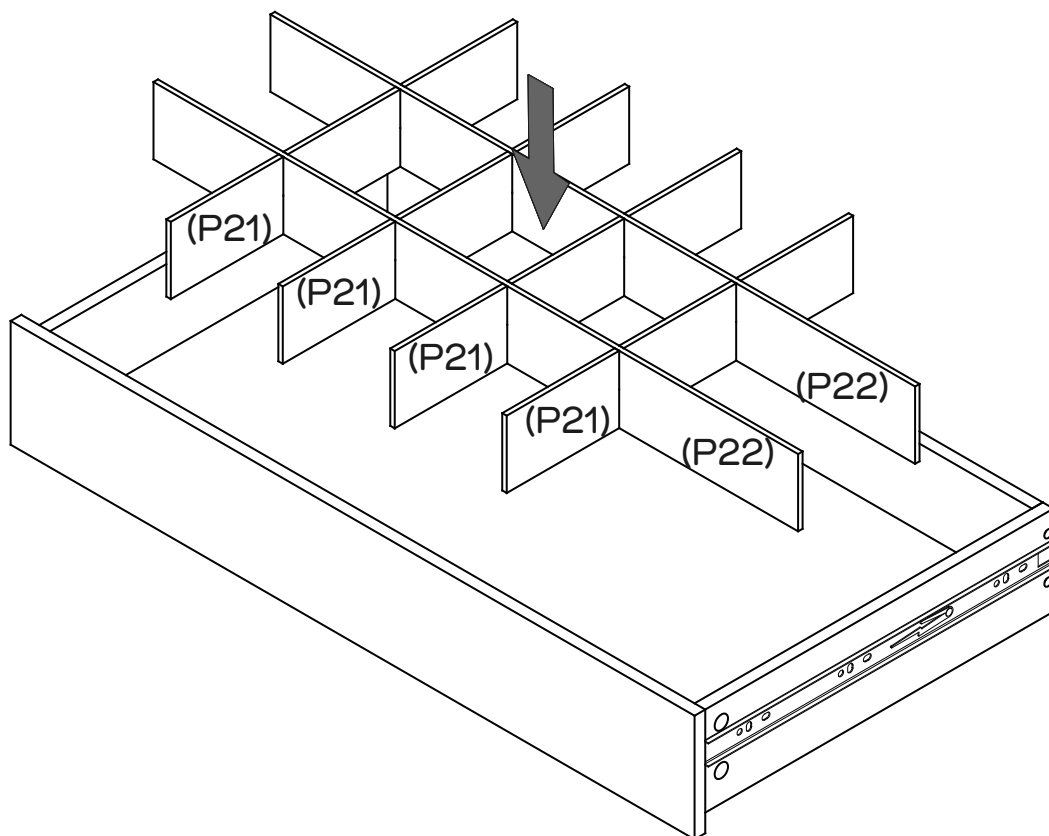

Place Dividers (P21 & P22) into Drawer Base (P15) as shown.



Step 20

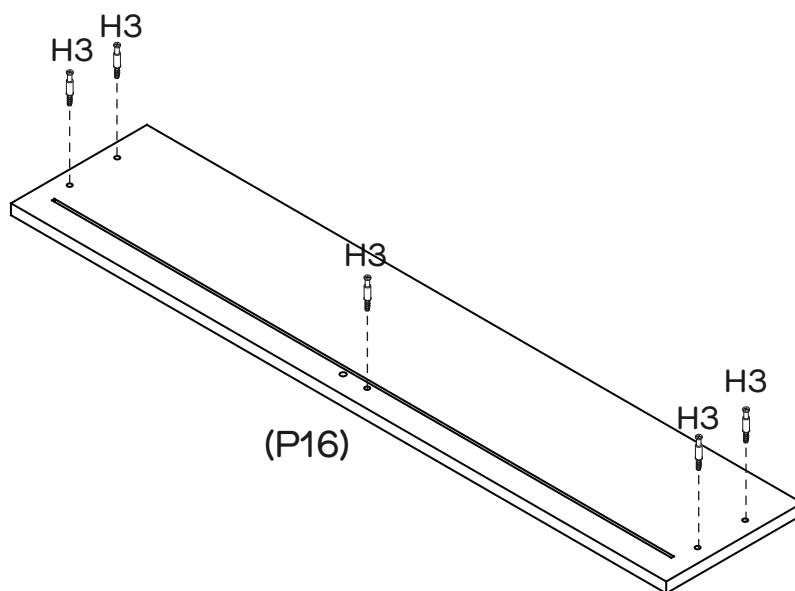
You will need	
	
15 x Cam Bolts (H3)	Phillips Head Screwdriver



Attach 5 x Cam Bolts (H3) to Drawer Front (P16) by tightening with the Phillips Head Screwdriver. Repeat this step for the remaining two Drawer Fronts (P16 x 2).


Step 21

You will need	
	
18 x Long Screws (H2)	Phillips Head Screwdriver

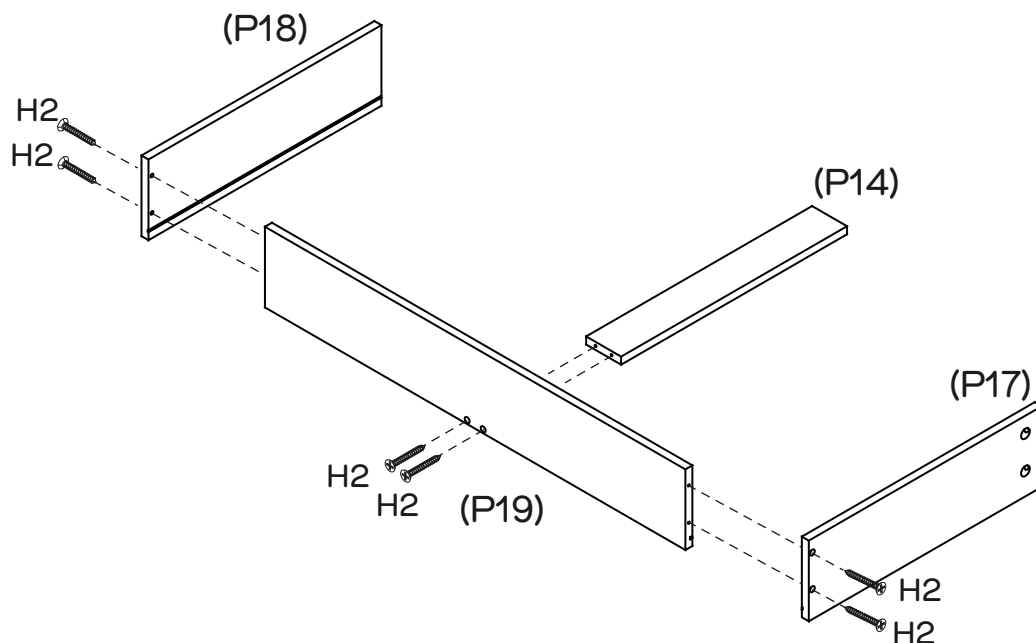




Attach Drawer Back (P19) to Left & Right Drawer Sides (P17 & P18) and Rail (P14) with 6 x Long Screws (H2) by tightening with the Phillips Head Screwdriver. Repeat this step for the remaining Drawer Backs (P19 x 2), Drawer Sides (P17 x 2 & P18 x 2), and Rails (P14 x 2).

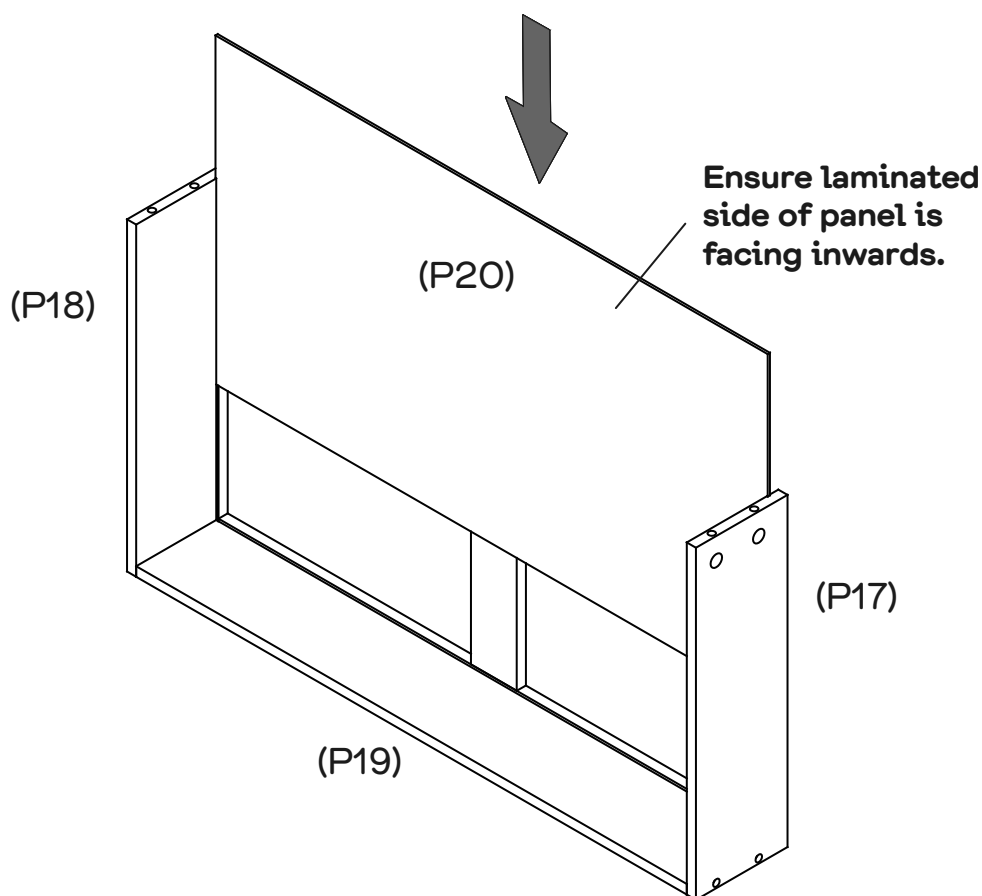
Step 22



Slide Drawer Base (P20) into the grooves of Left & Right Drawer Sides (P17 & P18) and Drawer Back (P19). Repeat this step for the remaining Drawer Bases (P20 x 2).





Step 23


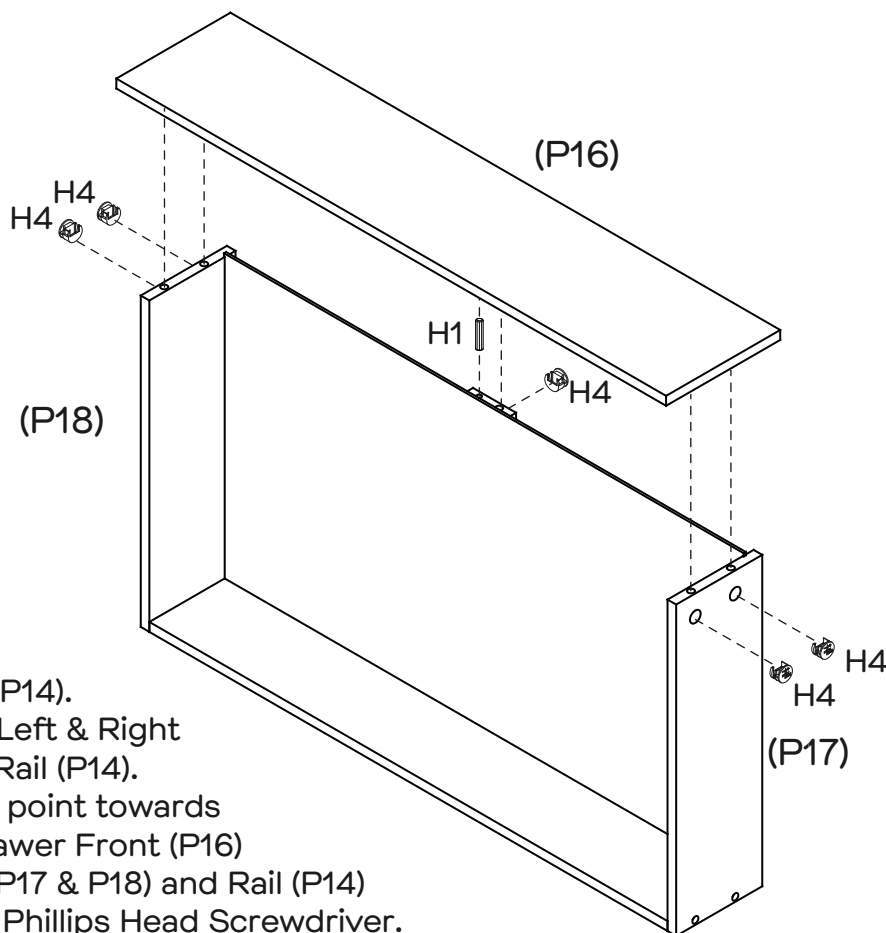
You will need	
	
3 x Dowel (H1)	15 x Cam Nuts (H4)
	
Phillips Head Screwdriver	



Insert 1 x Dowel (H1) into Rail (P14).
 Insert 5 x Cam Nuts (H4) into Left & Right Drawer Sides (P17 & P18) and Rail (P14).
 Rotate the nuts so the arrows point towards the incoming bolts. Attach Drawer Front (P16) to Left & Right Drawer Sides (P17 & P18) and Rail (P14) by tightening all nuts with the Phillips Head Screwdriver.
 Repeat this step for the remaining Drawer Sides (P17 x 2 & P18 x 2) and Drawer Fronts (P16 x 2).




Step 24

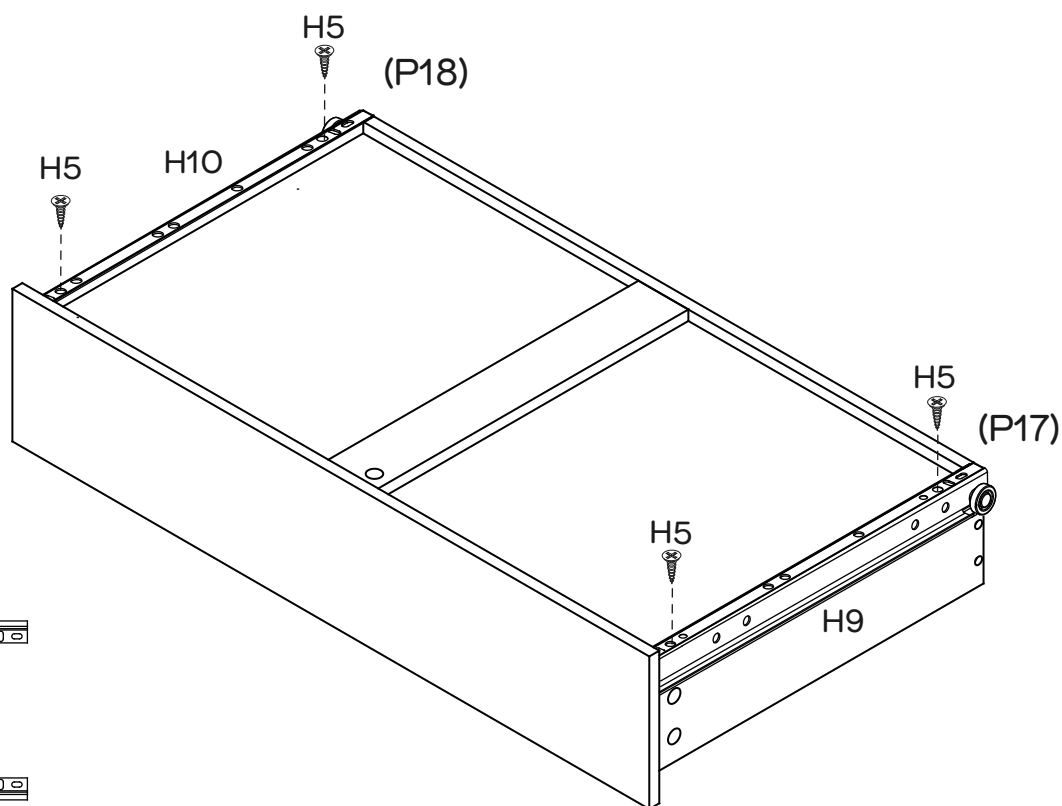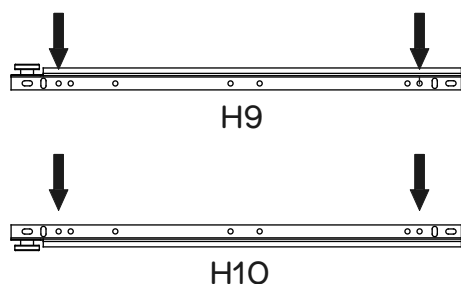
You will need	
	
12 x Small Screws (H5)	3 x DL Runners (H9)
	
3 x DR Runners (H10)	Phillips Head Screwdriver



Attach 1 x DL Runner (H9) to the bottom of Left Drawer Side (P17) and 1 x DR Runner (H10) to the bottom of Right Drawer Side (P18) using 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver. Repeat this step for the remaining two Drawers.


Step 25

You will need	
	
4 x Support Plug (H15)	4 x Small Screws (H5)
	
Phillips Head Screwdriver	

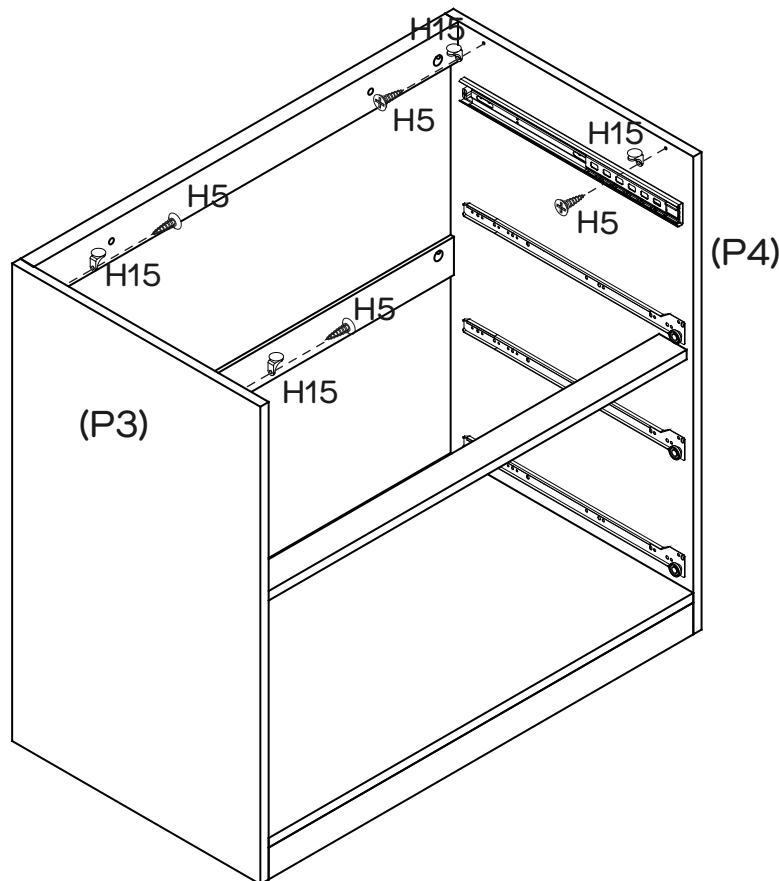



Attach 4 x Support Plug (H15) to Left & Right Side Panels (P3 & P4) with 4 x Small Screws (H5) by tightening with the Phillips Head Screwdriver.

Step 26


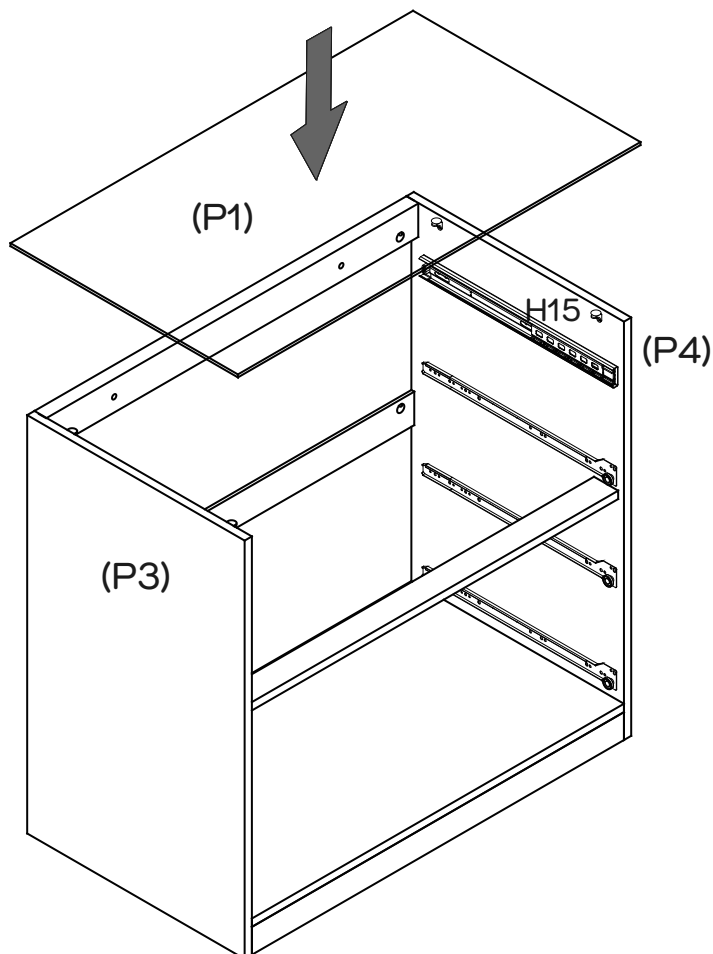


Gently place Top Panel (P1) onto Support Plugs (H15) as shown. Ensure the Top Panel (P1) is secured firmly into place.



Step 27

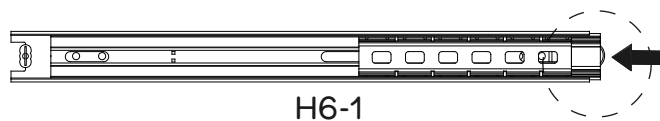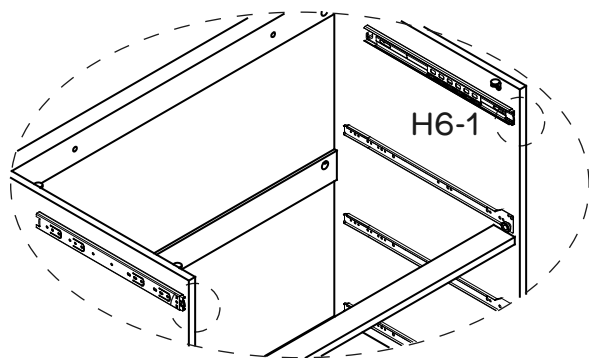


Before inserting the assembled drawer into the unit, adjust 2 x Slide Tracks (H6-1) on Left & Right Side Panels (P3 & P4) to bring the slide to the front

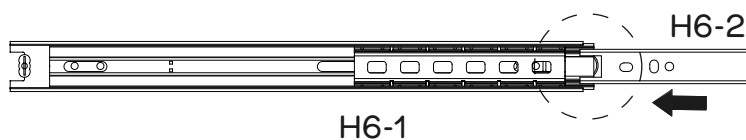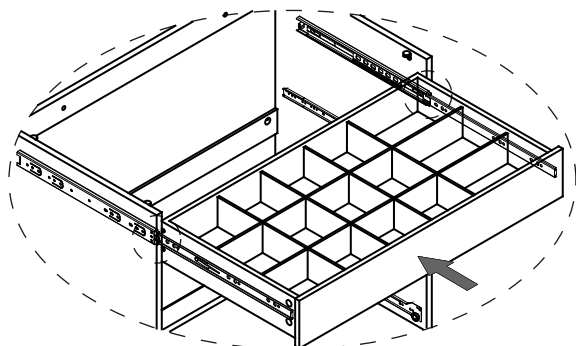

Gently insert the assembled drawer into the unit by aligning the 2 x Slide Runners (H6-2) with the 2 x Slide Tracks (H6-1). Ensure that you insert the drawer into the unit at a straight angle.

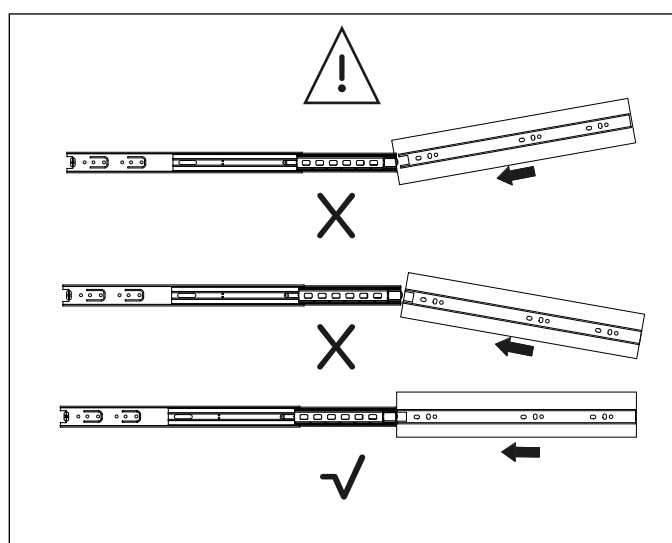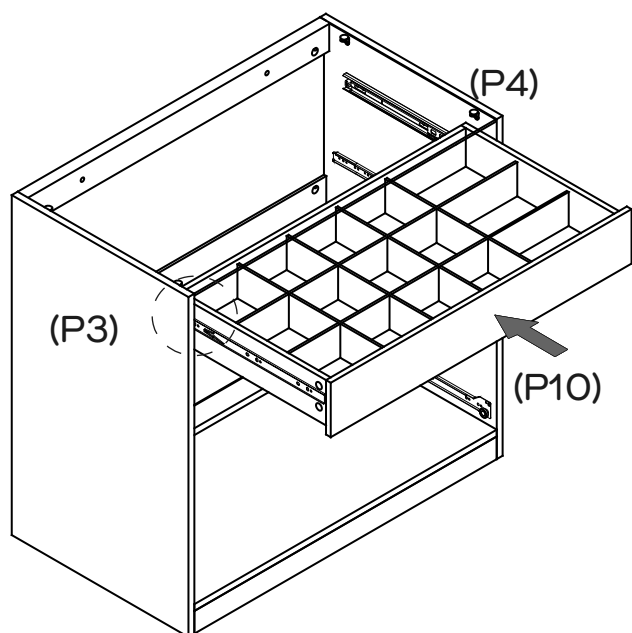




Step 28

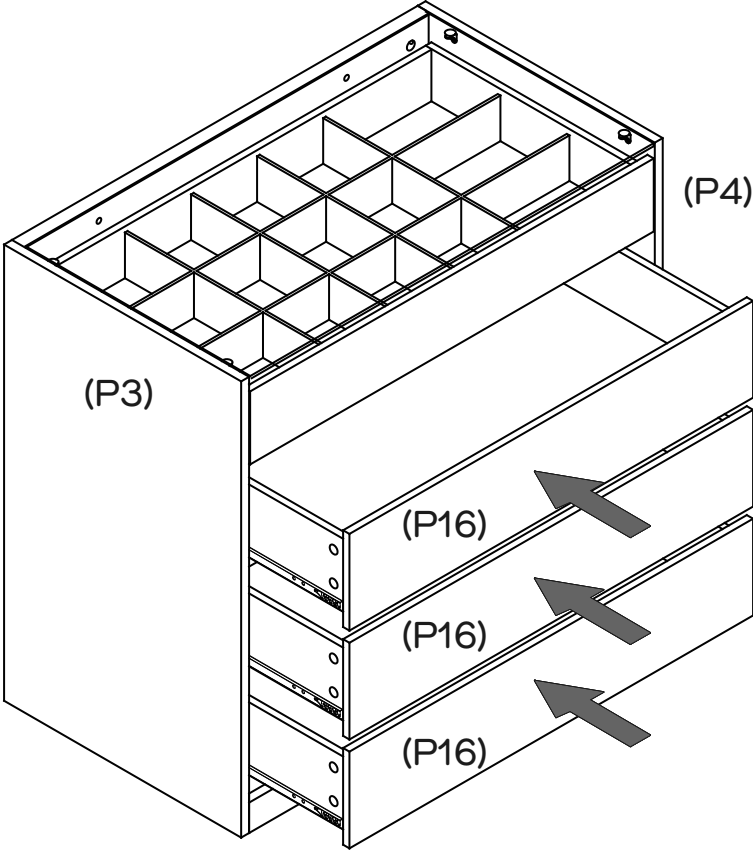

Insert the assembled drawers into the unit by carefully lining up the drawer runners with the drawer runner tracks.

Step 29

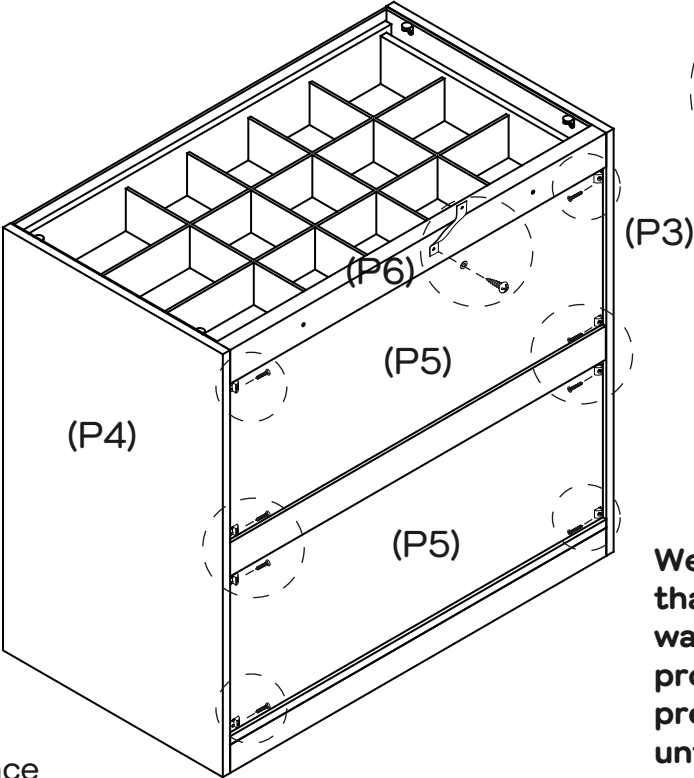

You will need	
8 x Wedges (H12)	8 x Wedge Screws (H13)
1 x Safety Strap (H18)	1 x Safety Strap Screw (H19)
1 x Washer (H20)	Phillips Head Screwdriver




We strongly advise that you use the wall safety strap provided to prevent the unit from toppling.


Secure Back Panels (P5 x 2) in place with 8 x Wedges (H12) and 8 x Wedge Screws (H13) by tightening with the Phillips Head Screwdriver. Attach the Safety Strap (H18) to the Rail (P6) with 1 x Safety Strap Screw (H19) & 1 x Washer (H20) by tightening with the Phillips Head Screwdriver.

Step 30

You will need	
	
1 x Washer (H20)	Phillips Head Screwdriver
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	



Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

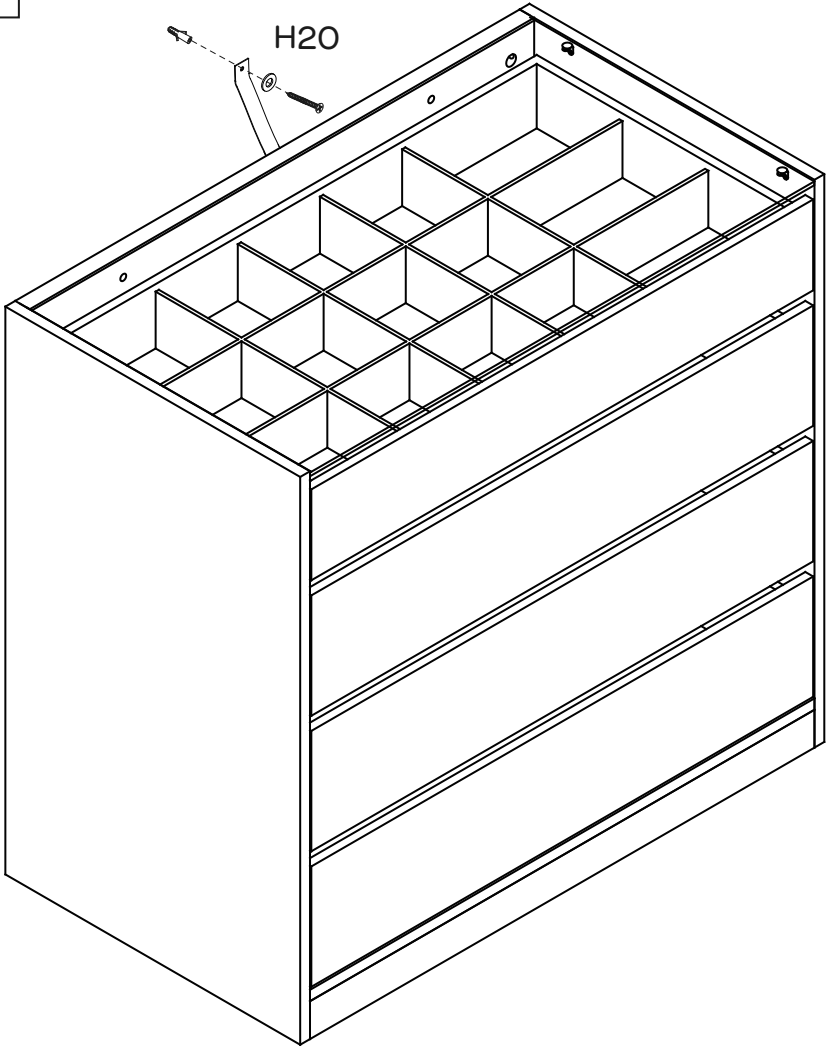




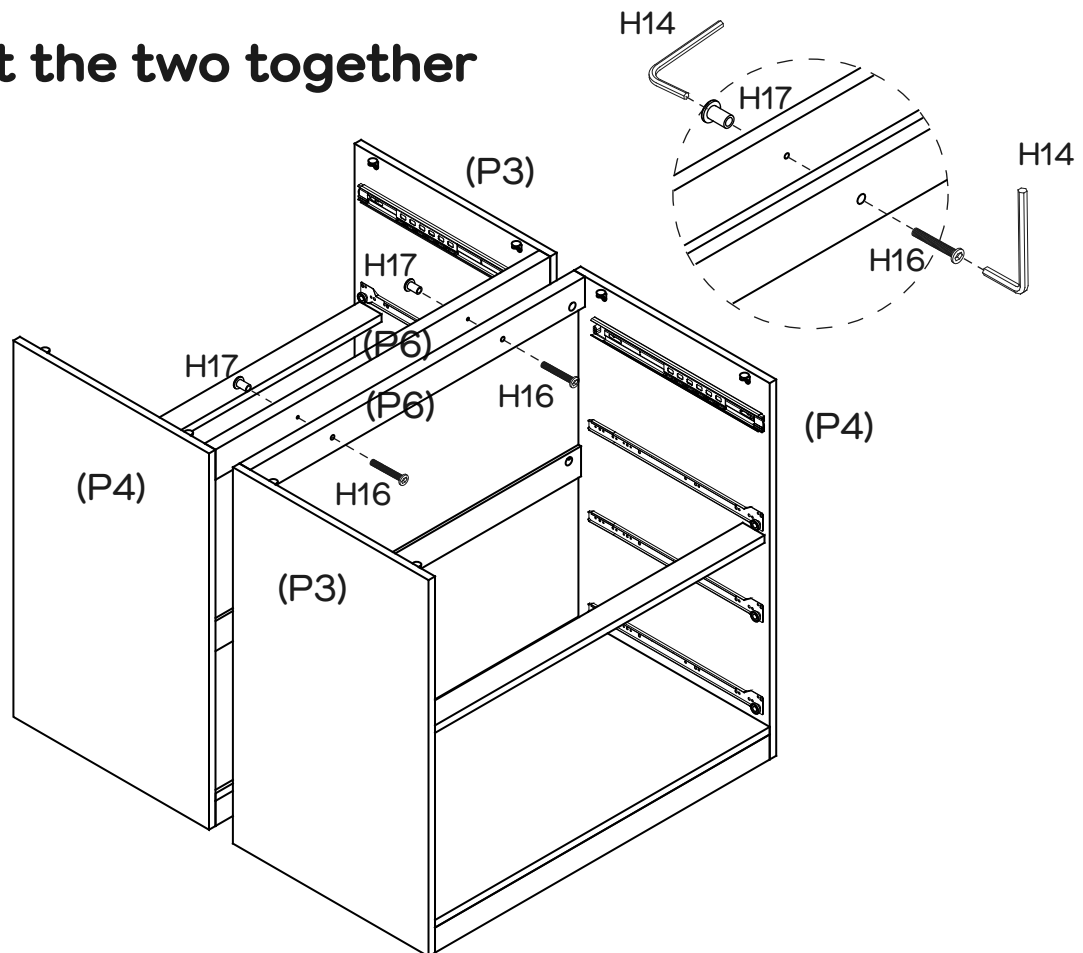
Move the unit to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

Job Complete!


In the interest of our environment please dispose of all packaging thoughtfully.

How to Connect the two together

You will need	
	
2 x Allen Keys (H14)	2 x Bolts (H16)
	
2 x Nuts (H17)	




Use 2 x Bolts and 2 x Nuts (H17) to thread through the Rails (P6) and connect them together . Tightening with Allen key (H14).

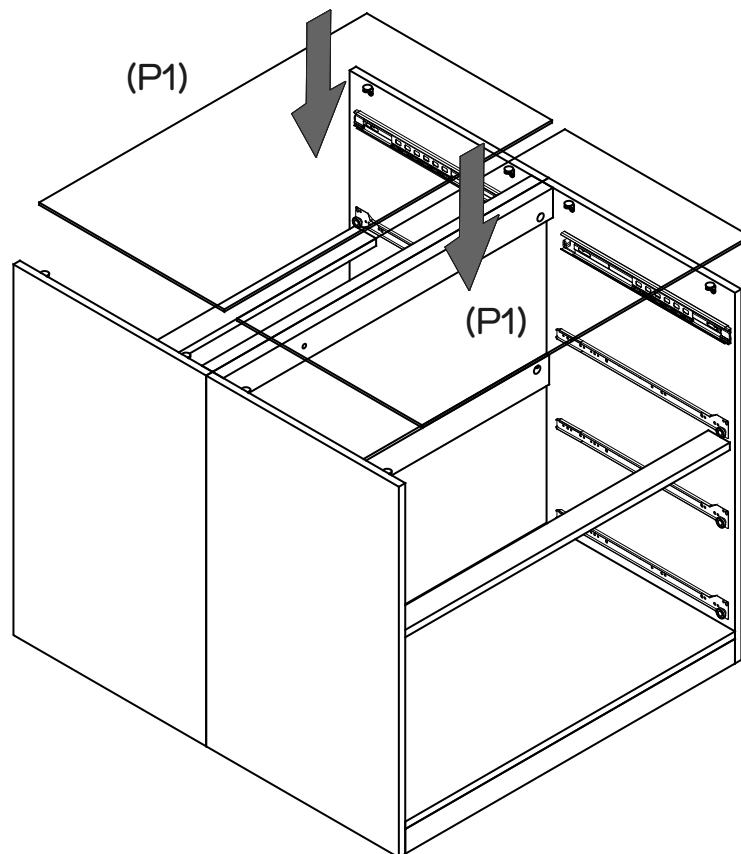


Attach Top Panels (P1) to the Support Plugs (H15).

How to Connect the two together

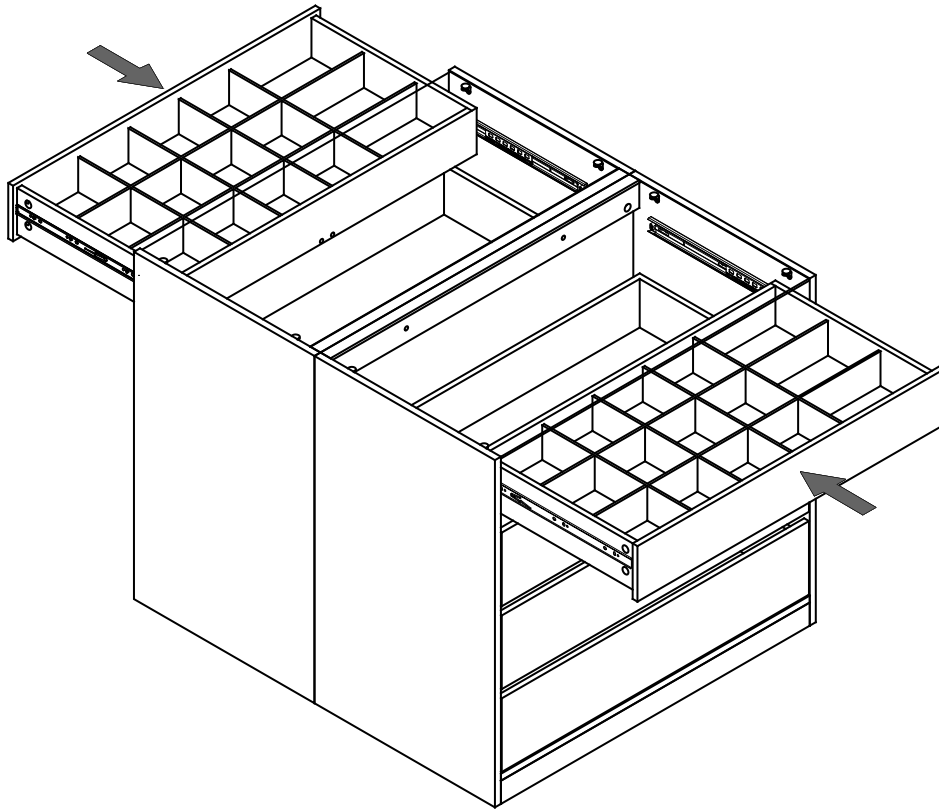

Insert the assembled drawers into the unit by carefully lining up the drawer runners with the drawer runner tracks.

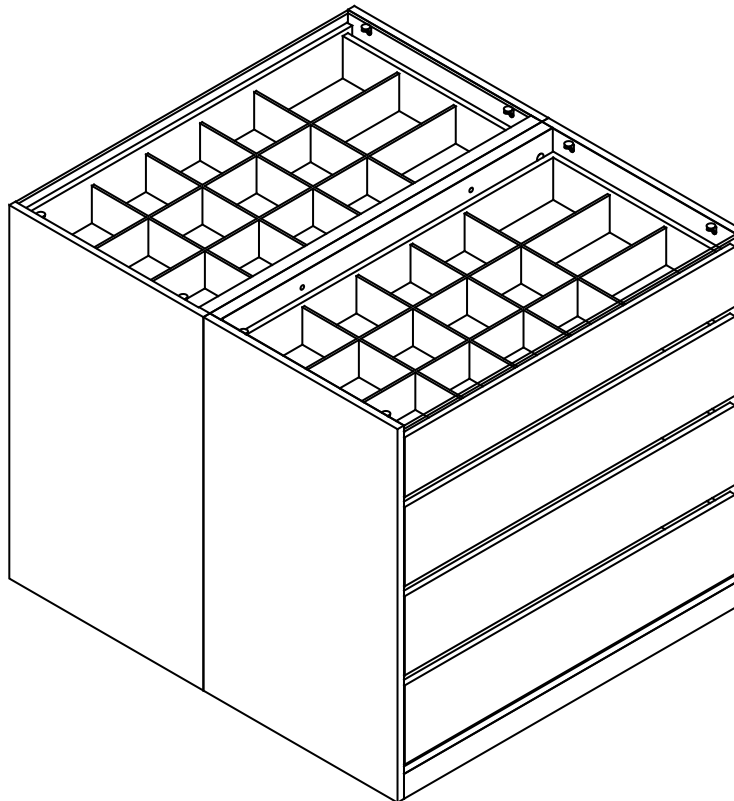

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.