




**Fantastic
Furniture**

Version 1.0

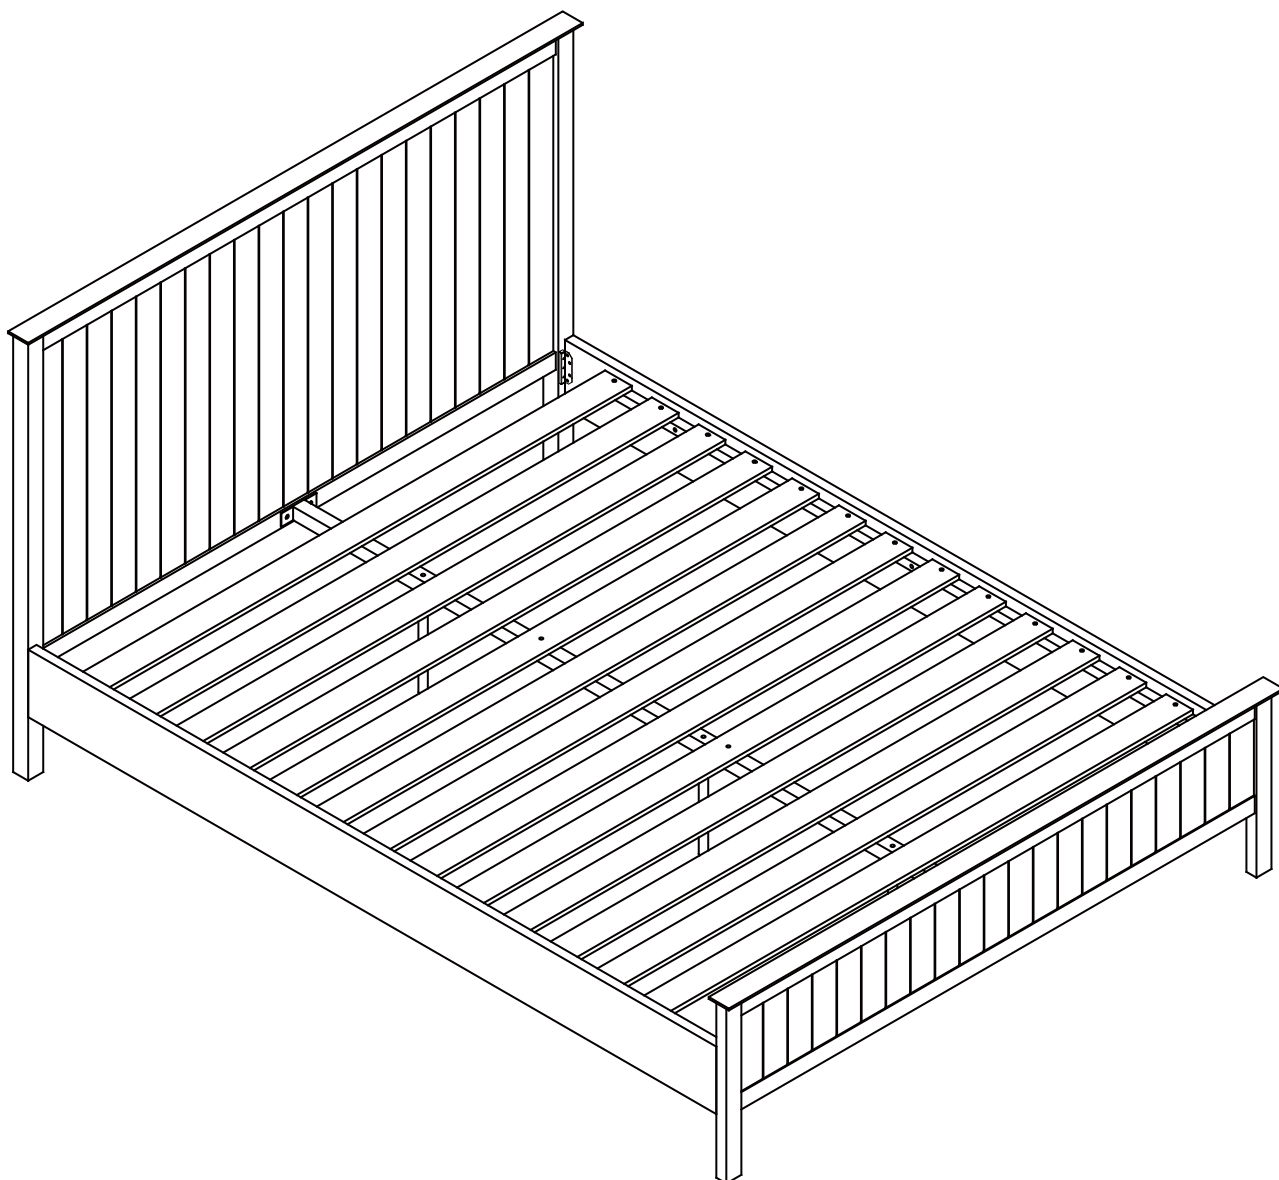

Two People



Required

Hamilton

Queen bed

fantasticfurniture.com.au

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

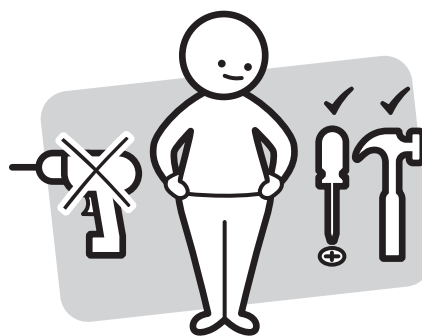

Make sure you have all the required tools. Never use power tools unless instructed.

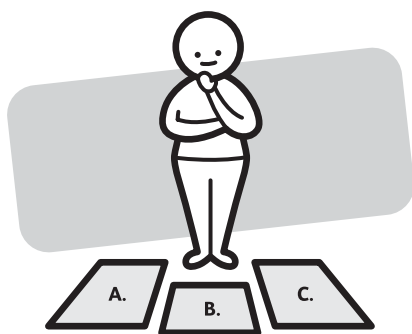

Identify and lay out all of the components before you begin assembly.

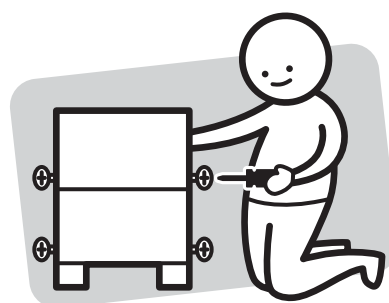

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need


to assemble the product



DO NOT USE



Other tools you need:
Phillips head screwdriver;

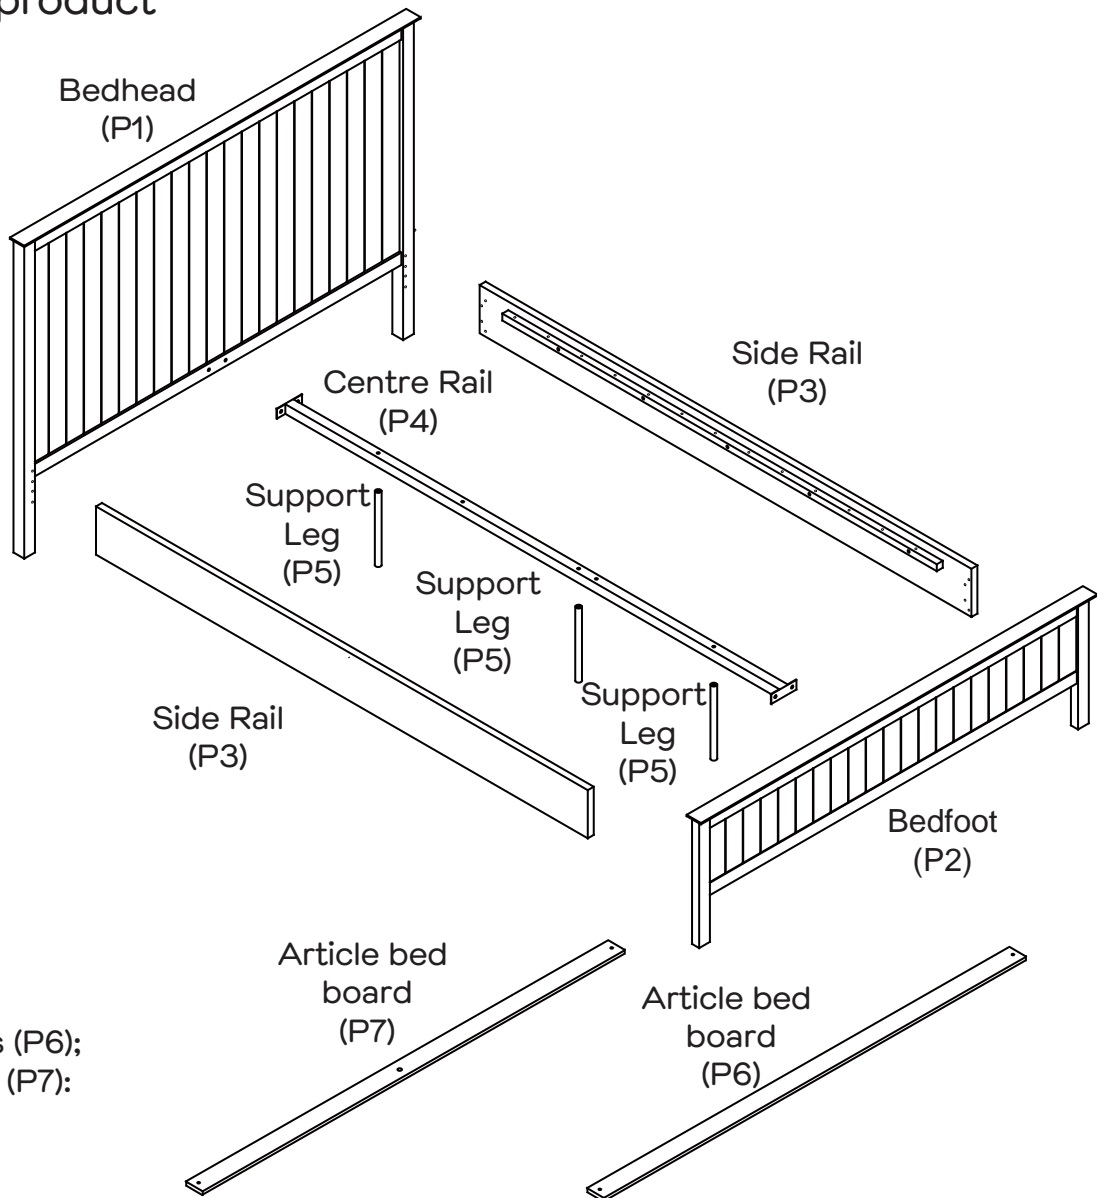




Parts list


Bedhead (P1);
Bedfoot (P2);
2 x Side Rails (P3);
Centre Rail (P4);
3 x Support Legs (P5);
11 x Article bed boards (P6);
2 x Article bed boards (P7);

Hardware pack

42 x Screws (H1)	4 x Bolts (H2)	5 x Long Bolts (H3)	2 x Hexagonal Nuts (H4)	3 x Adjustable (H5)	5 x Washers (H6)
12 x Bolts (H7)	4 x Elbow Connectors (H8)	4 x Flat Connectors (H9)	1 x Allen Key (H10)	16 x Screws (H11)	1 x Spanner (H12)




Step 1

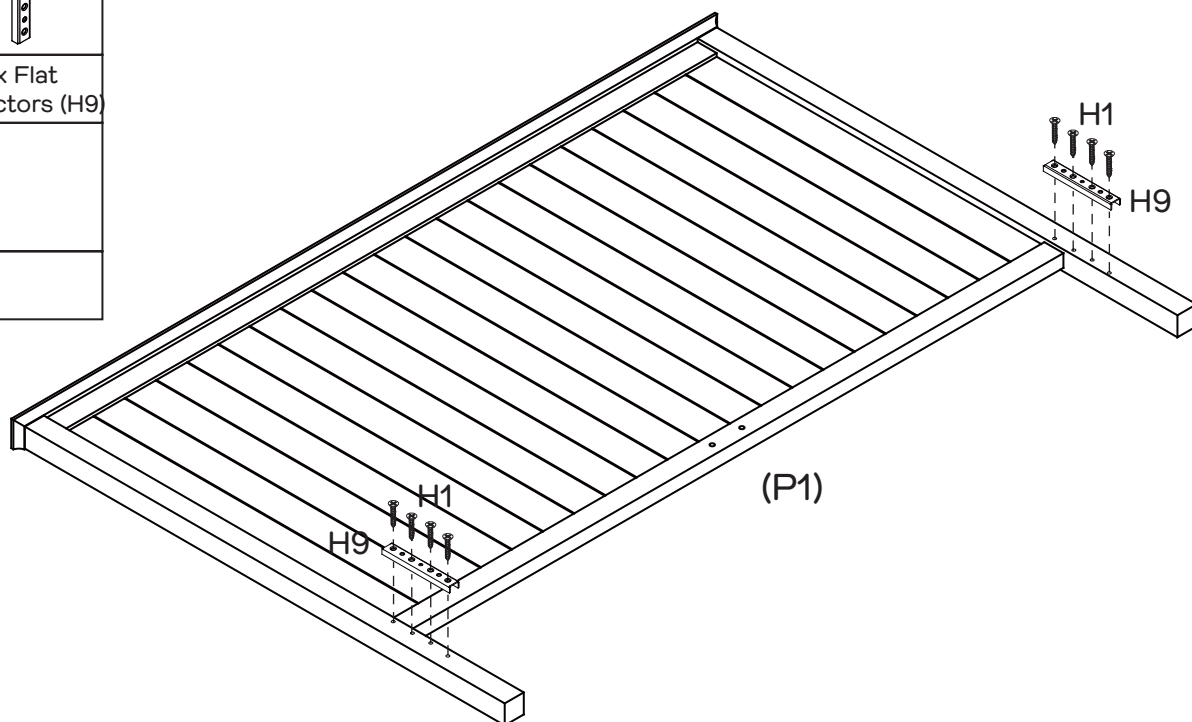
You will need	
	
8 x Screws (H1)	2 x Flat Connectors (H9)
	
Phillips head screwdriver	



Attach 2 x Flat Connectors (H9) to Bedhead (P1) with 8 x Screws (H1) by tightening with the Phillips Head Screwdriver.




Step 2

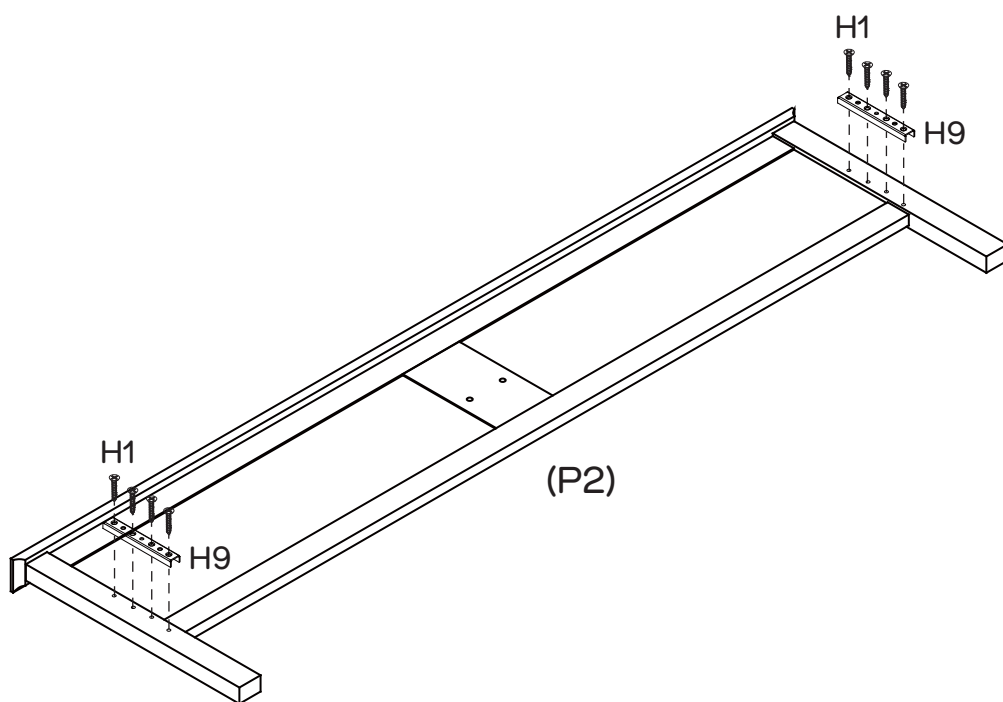
You will need	
	
8 x Screws (H1)	2 x Flat Connectors (H9)
	
Phillips head screwdriver	



Attach 4 x Flat Connectors (H9) to Bedfoot (P2) with 8 x Screws (H1) by tightening with the Phillips Head Screwdriver.



Step 3


You will need	
	
16 x Screws (H11)	4 x Elbow Connectors (H8)
	
Phillips head screwdriver	

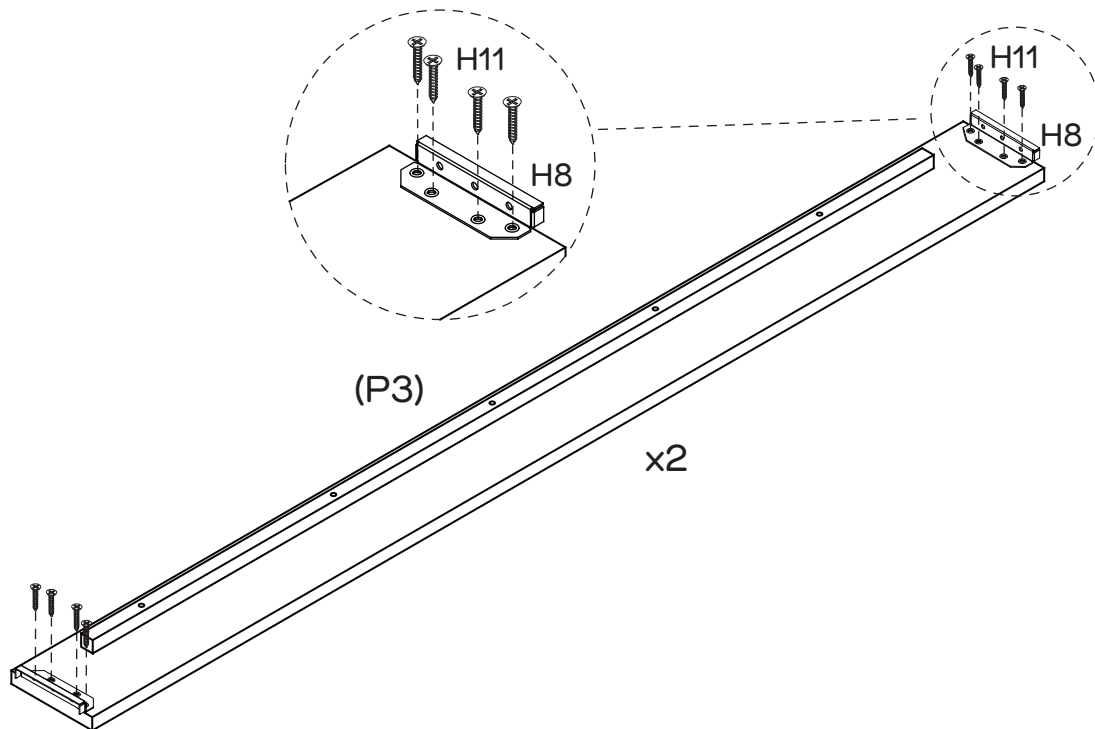

Attach 4 x Elbow Connectors (H8) to Side Panels (P3 x 2) with 16 x Screws (H11) by tightening with the Phillips Head Screwdriver.



Step 4

You will need	
	
6 x Bolts (H7)	1 x Allen Key (H10)

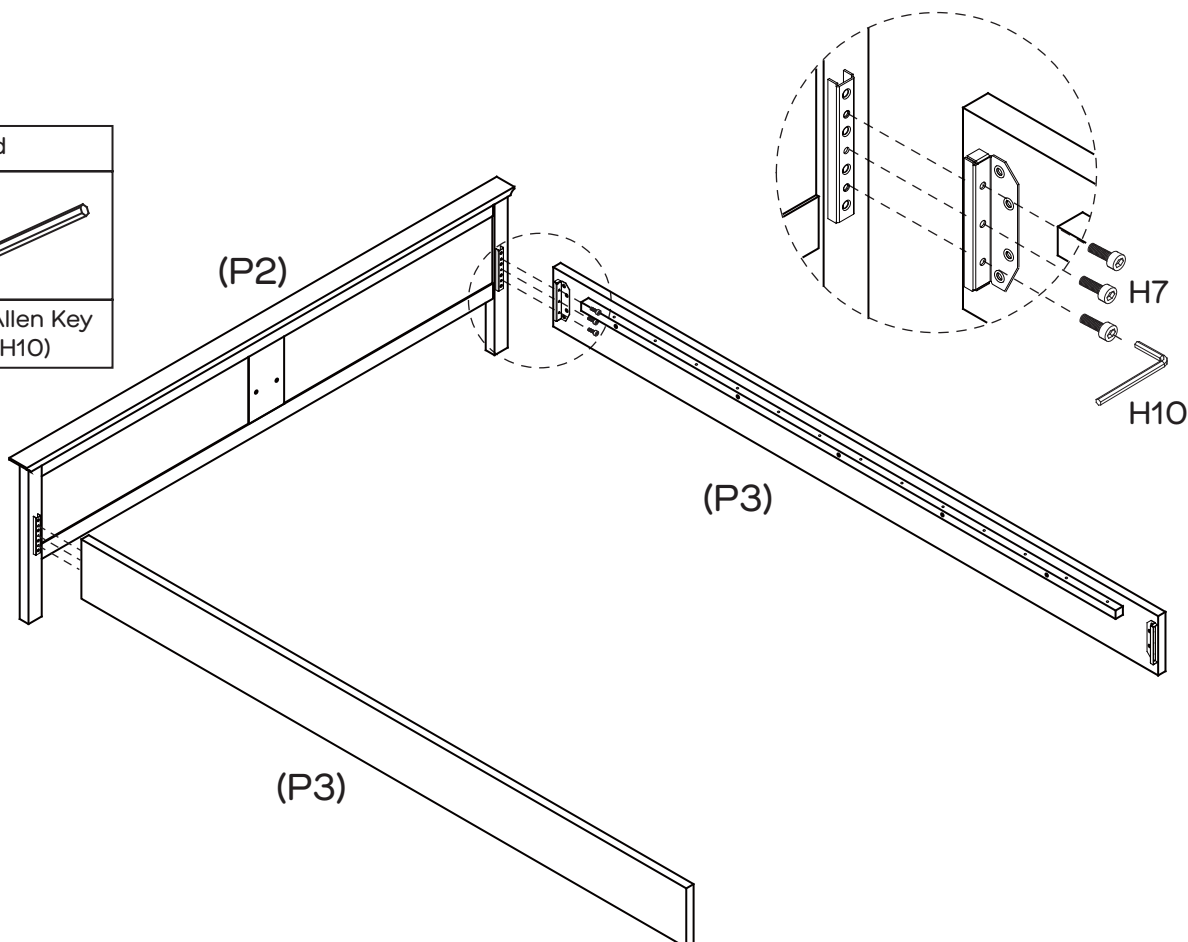

Attach Side Panels (P3 x 2) to Bedfoot (P2) with 6 x Bolts (H7) by tightening with 1 x Allen Key (H10).


Step 5

You will need	
	
6 x Bolts (H7)	1 x Allen Key (H10)

Two People





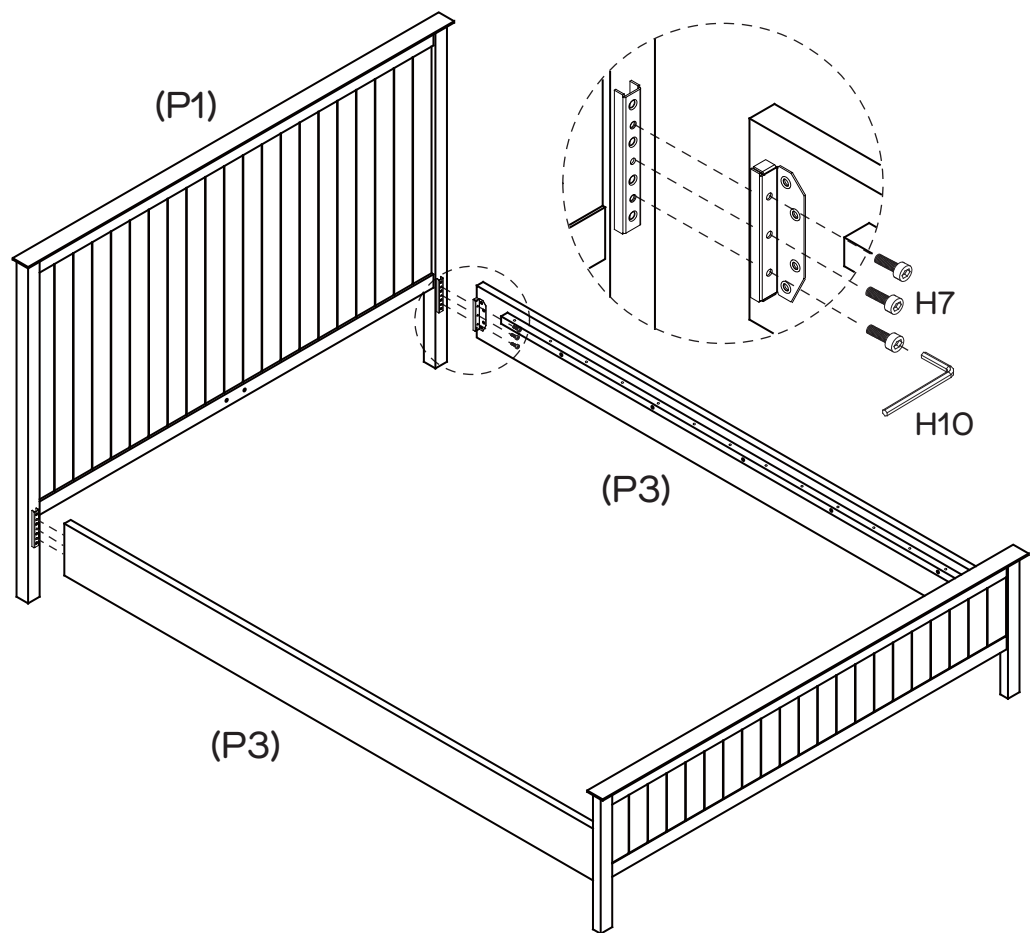


Required



Attach Side Panels (P3 x 2) to Bedhead (P1) with 6 x Bolts (H7) by tightening with 1 x Allen Key (H10).



Step 6

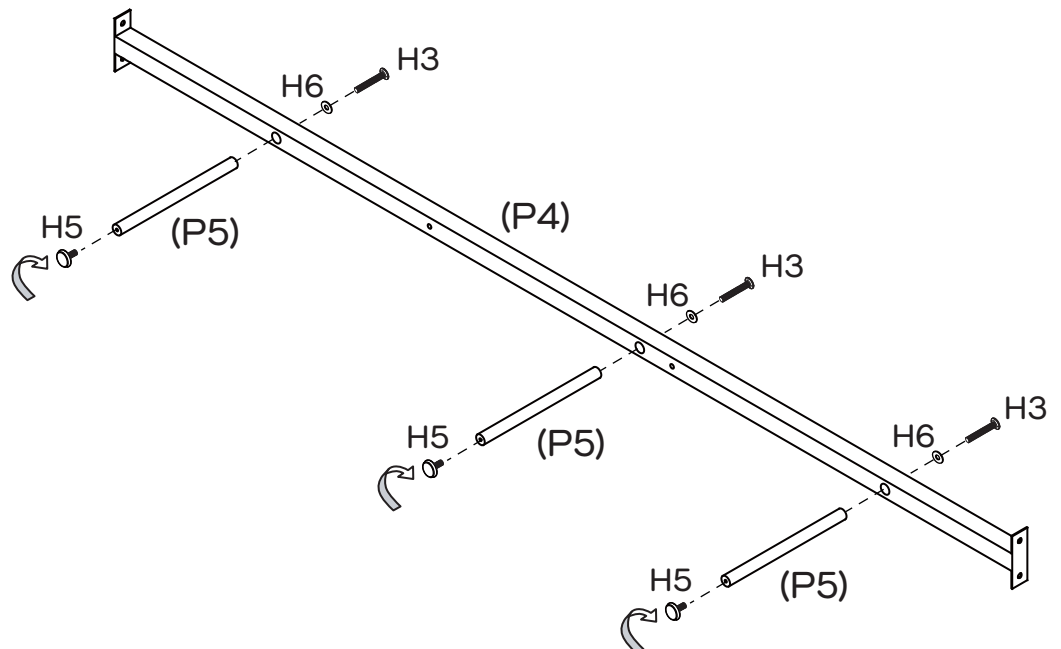
You will need	
	
3 x Long Bolts (H3)	3 x Adjustable (H5)
	
3 x Washers (H6)	Phillips head screwdriver



Attach Support Legs (P5 x 3) to Centre Rail (P4) with 3 x Washers (H6) and 3 x Long Bolts (H3) using Phillips Head Screwdriver. Insert the 3 x Adjustable (H5) into the Support Legs (P5 x 3).




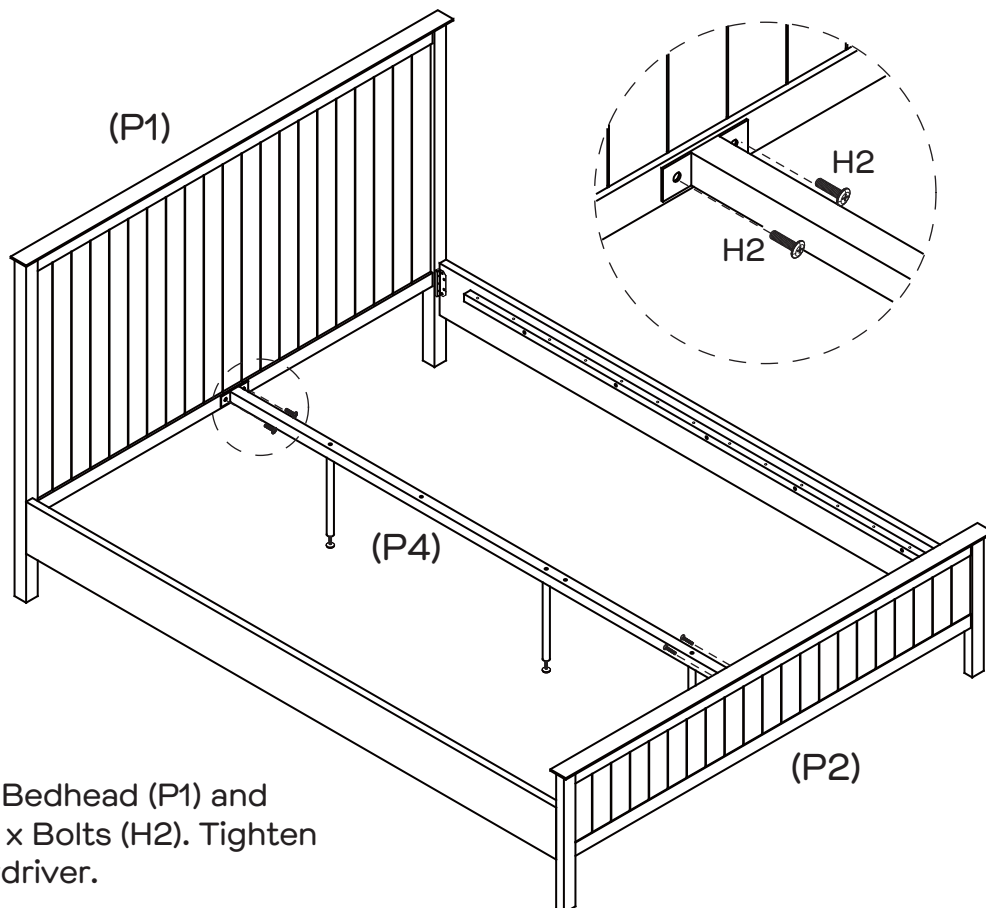


Step 7


You will need	
	
4 x Bolts (H2)	Phillips head screwdriver



Attach Centre Rail (P4) to Bedhead (P1) and Bedfoot (P2) screw with 4 x Bolts (H2). Tighten with a Phillips Head Screwdriver.



Step 8

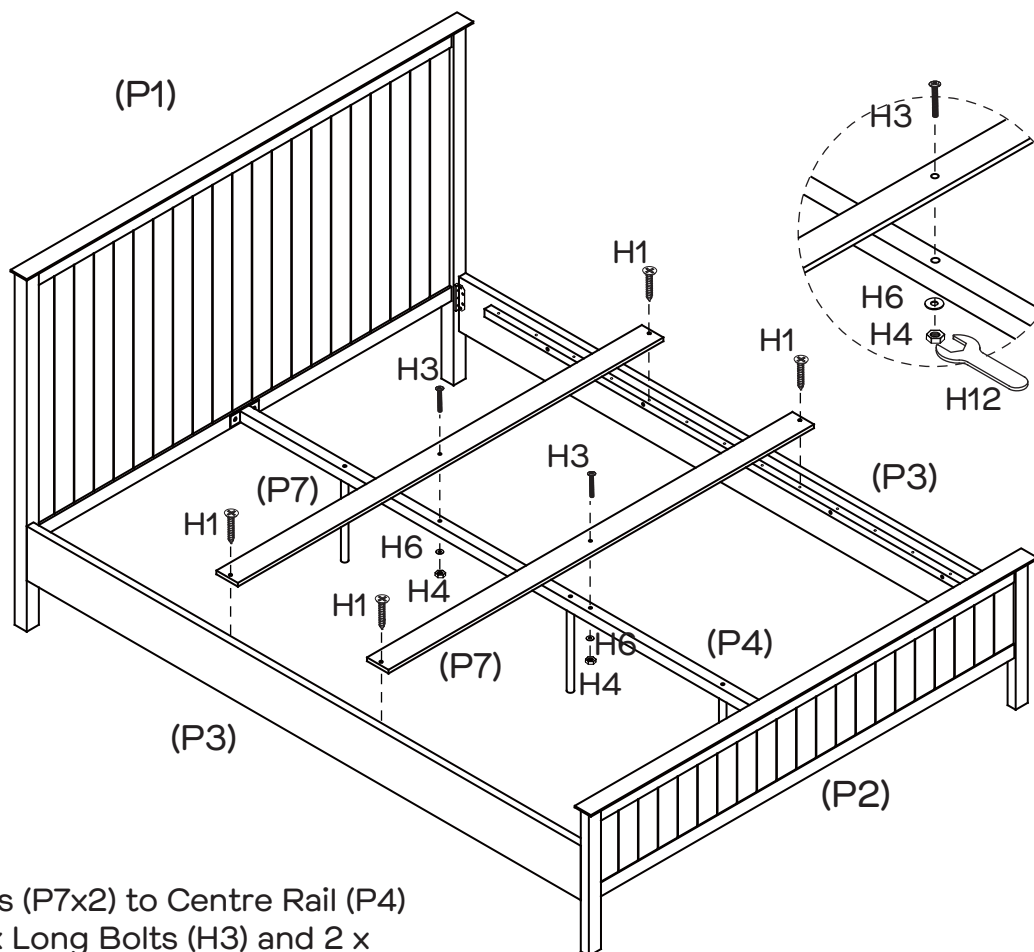
You will need	
	
4 x Screws (H1)	2 x Long Bolts (H3)
	
2 x Hexagonal Nuts (H4)	2 x Washers (H6)
	
Phillips head screwdriver	1 x Spanner (H12)




Attach Article Bed Boards (P7x2) to Centre Rail (P4) with 2 x Washers (H6), 2 x Long Bolts (H3) and 2 x Hexagonal Nuts (H4) using Spanner (H12) and Phillips Head Screwdriver. Then screw Article Bed Boards (P7x2) with 4 x Screws (H1). **Move the bed in proper position after adjusting the foot 5mm upwards.** Once the bed is in correct position, please rotate and adjust foot to the floor level.

Step 9

You will need	
	
22 x Screws (H1)	Phillips head screwdriver

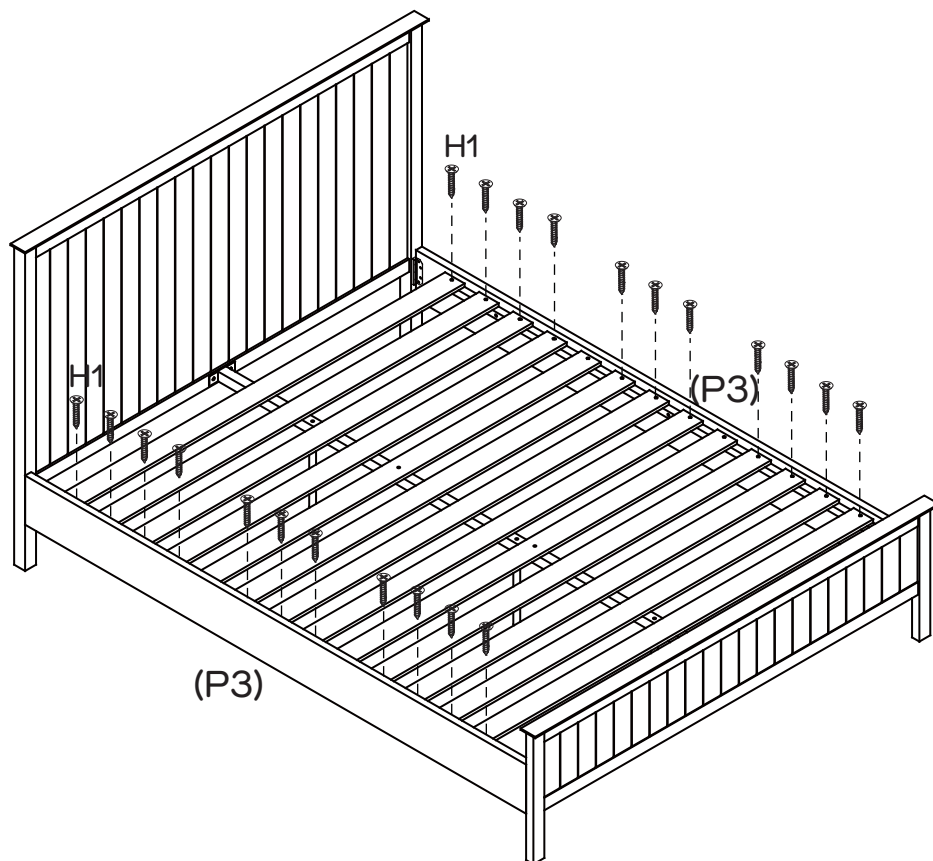

Attach Article Bed Boards (P6 x 11) to Side Rails (P3 x 2) with 22 x Screws (H1). Tighten with a Phillips head screwdriver.

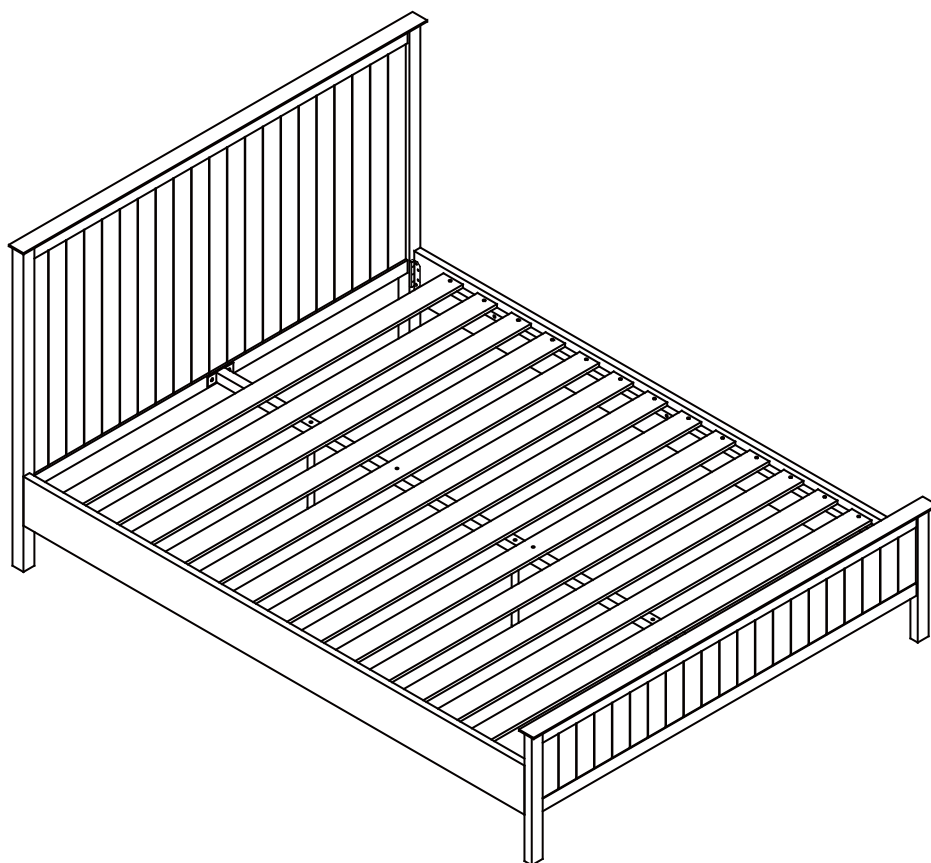


Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.

Assembly Instructions

HAYMAN

BEDSIDE 2 DRW

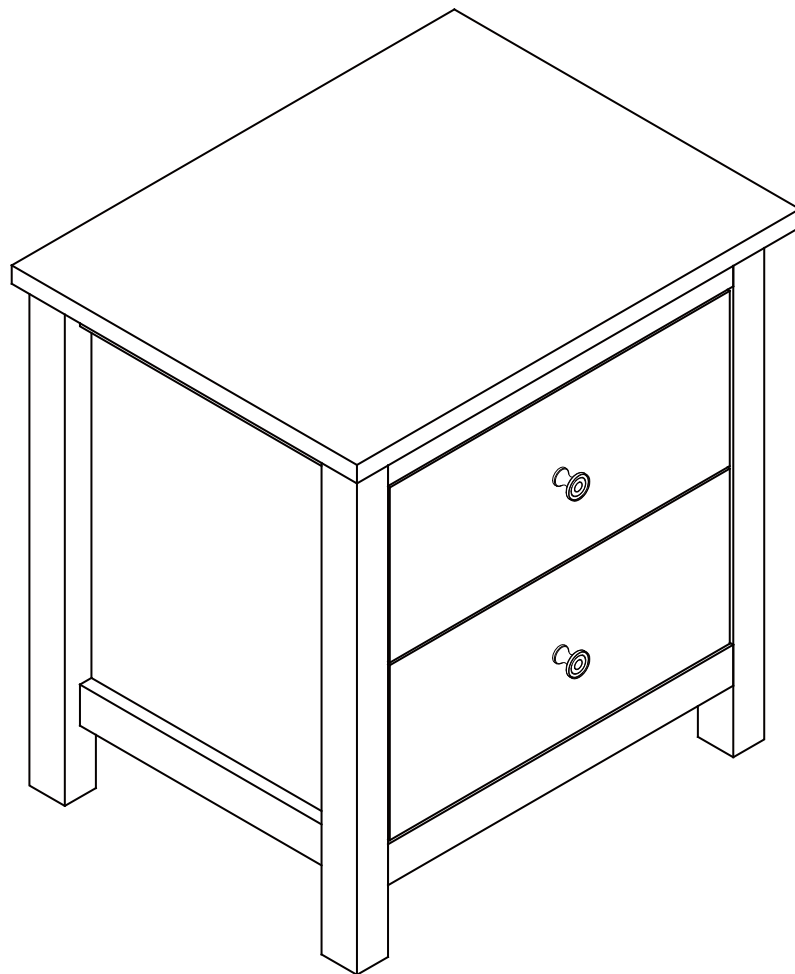


VER 1.1



WARNING


FAILURE TO FOLLOW THESE BASIC STEPS CAN LEAD TO DAMAGE THAT IS NOT COVERED BY YOUR WARRANTY

1

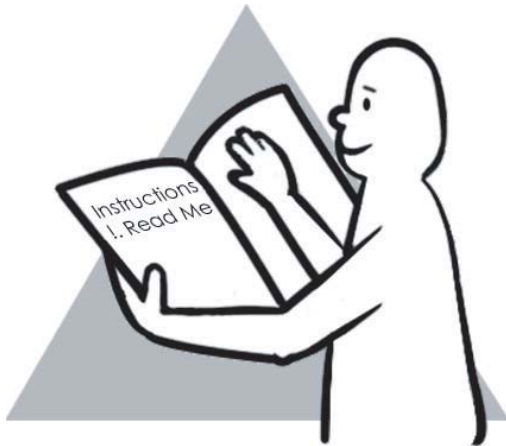


Read Instructions carefully.
Check no parts are missing.

2

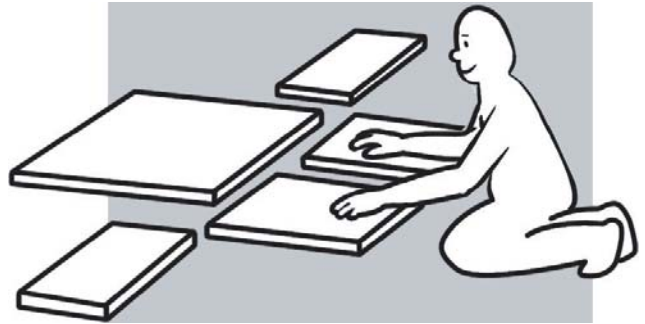

Lay out all of the components on a soft surface
as if you were preparing to do a jigsaw puzzle.

3

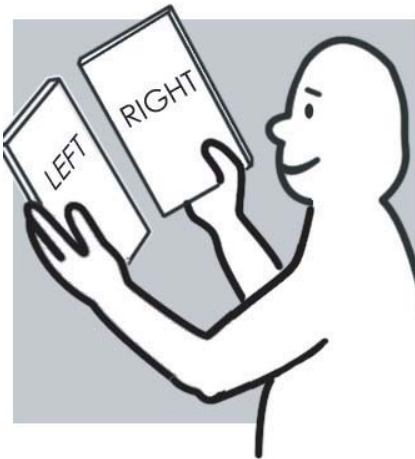


Carefully identify each component, especially
those that are similar. The most common mistake
is getting things back to front.

4




Separate and identify each component from the
hardware pack and rest each one in its proper
location before fastening.

5

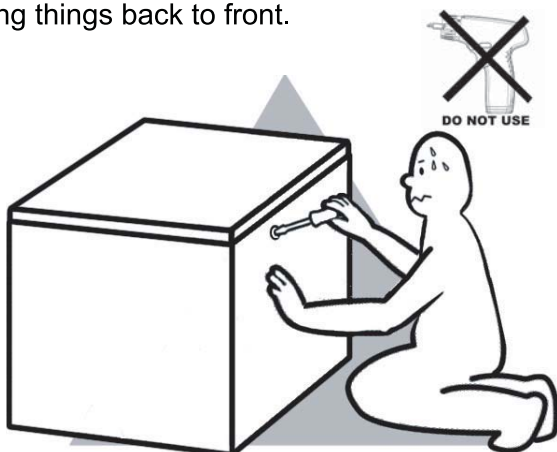


DO NOT fully tighten screws (leave slightly
loose). When the item is fully assembled
tighten the screws - but do not over tighten.

6

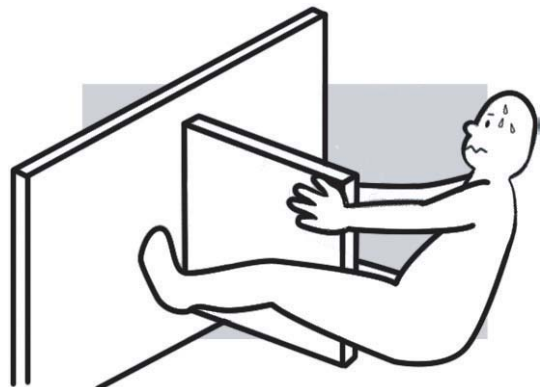

If glue is required **DO NOT** set until you are
certain that the parts belong together.

What You Need





To Assemble The Body

(Tools not provided)
Flat Blade Screwdriver
Phillips Head Screwdriver
Mallet




DO NOT USE

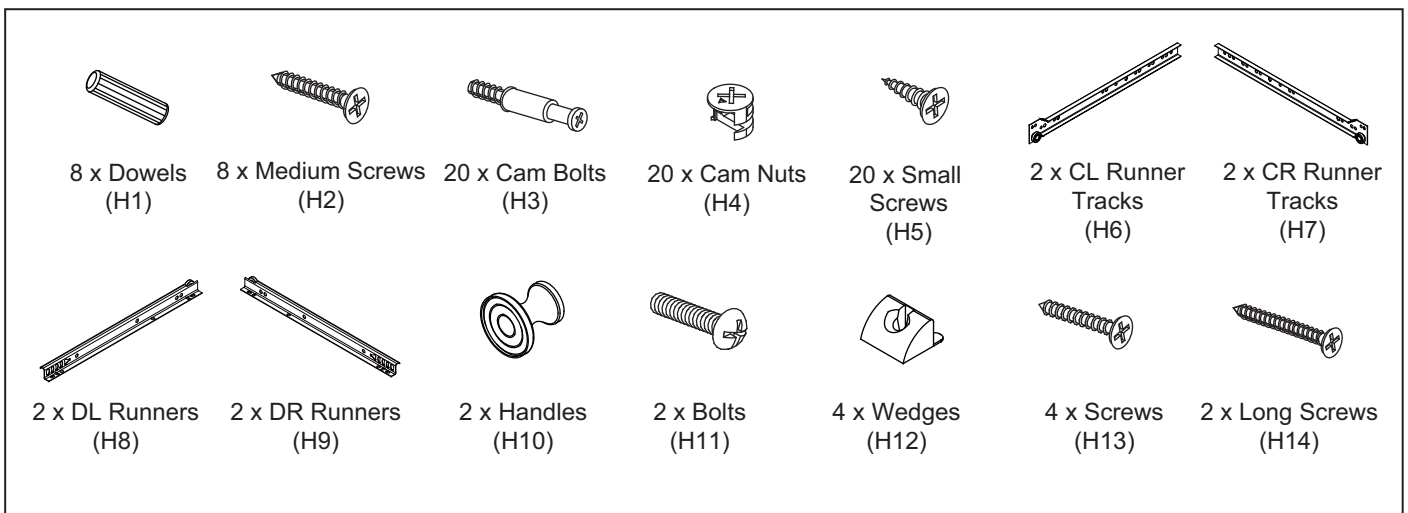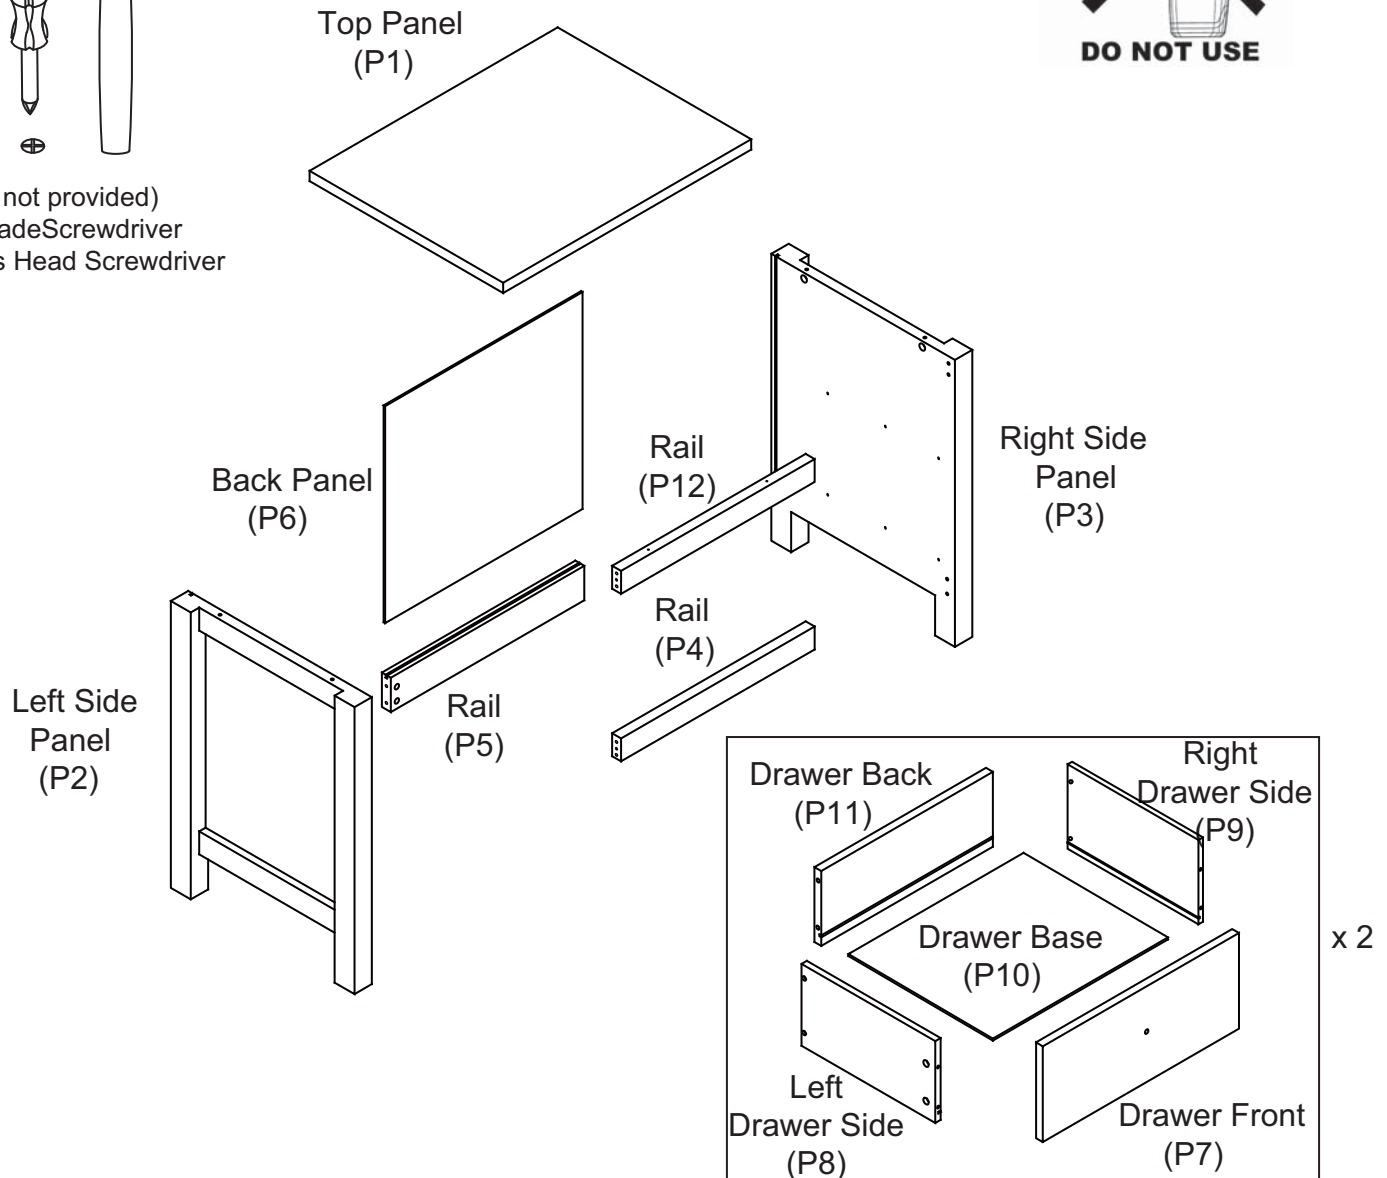

Please make sure you have all these parts before you start.

Step 1


You will need:	
2 x CL Runner Tracks (H6)	
6 x Small Screws (H5)	
4 x Cam Bolts (H3)	
4 x Dowels (H1)	

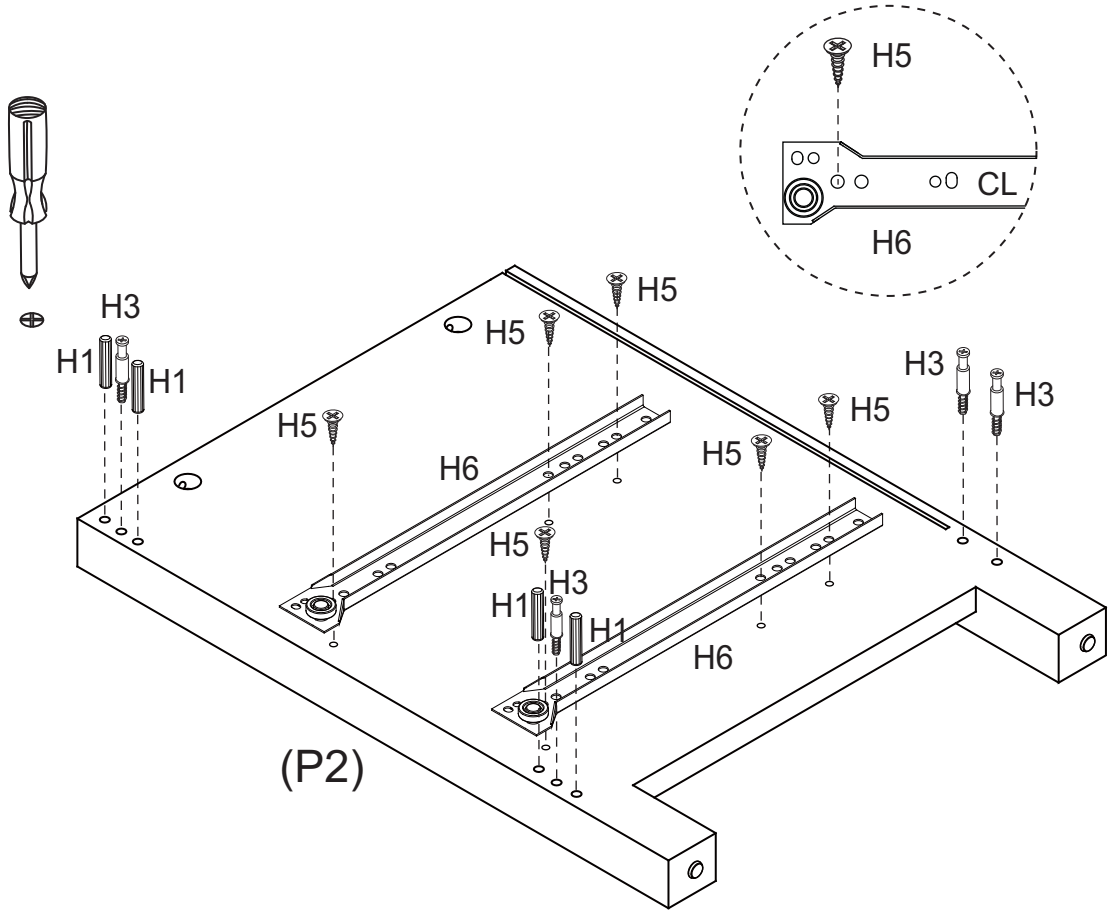

Attach 2 x CL Runner Tracks (H6) to Left Side Panel (P2) with 6 x Small Screws (H5).
Insert 4 x Dowels (H1) into Left Side Panel (P2).
Attach 4 x Cam Bolts (H3) to Left Side Panel (P2) as shown.

Step 2

You will need:	
2 x CR Runner Tracks (H7)	
6 x Small Screws (H5)	
4 x Cam Bolts (H3)	

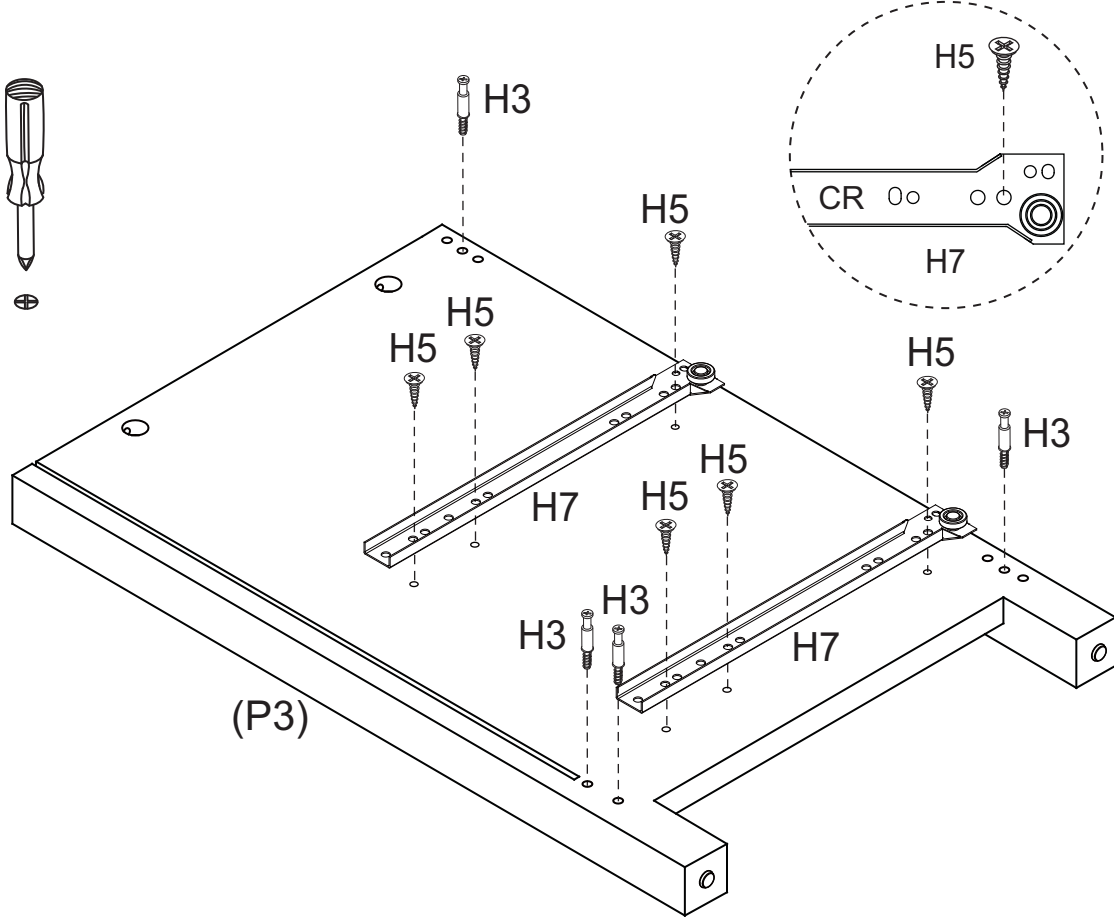


Attach 2 x CR Runner Track (H7) to Right Side Panel (P3) with 6 x Small Screws (H5).
Attach 4 x Cam Bolts (H3) to Right Side Panel (P3) as shown.


Step 3

You will need:

4 x Cam Nuts
(H4)

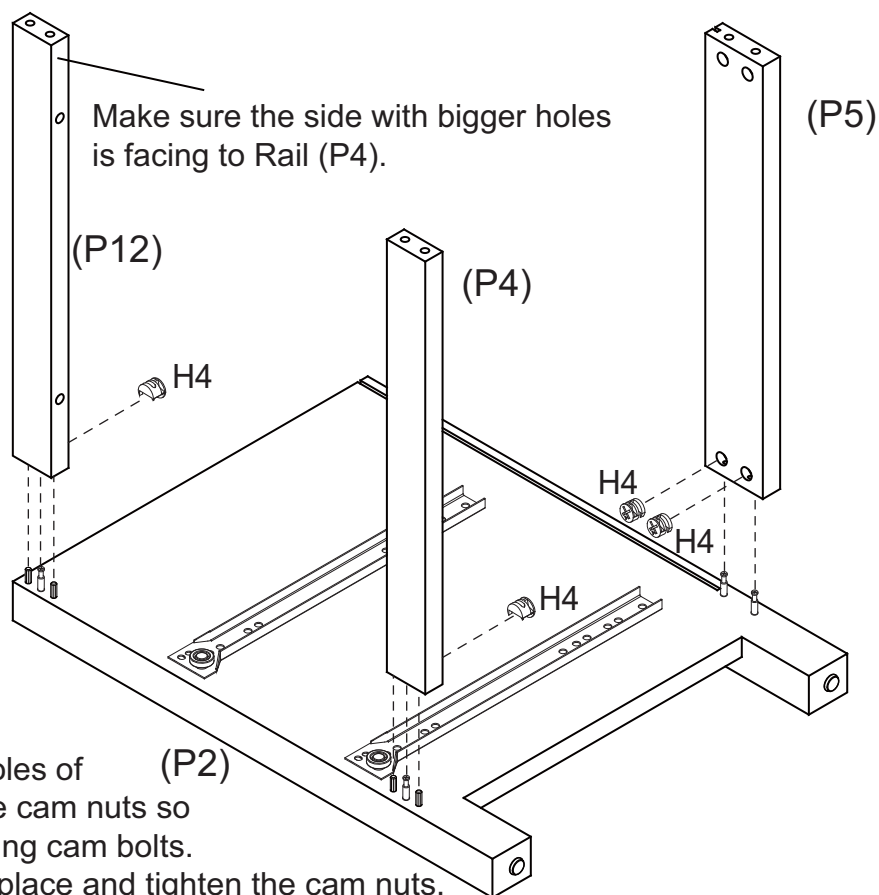

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Insert 4 x Cam Nuts (H4) into the holes of Rails (P4, P5) and (P12). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Rails (P4, P5) and (P12) into place and tighten the cam nuts.


Step 4

You will need:

4 x Dowels
(H1)




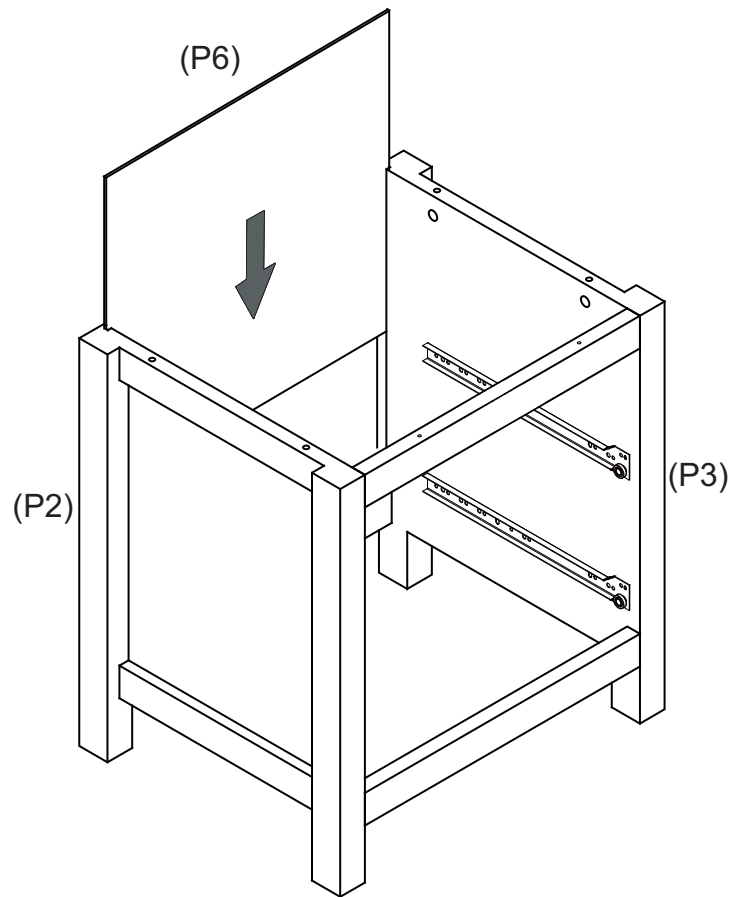
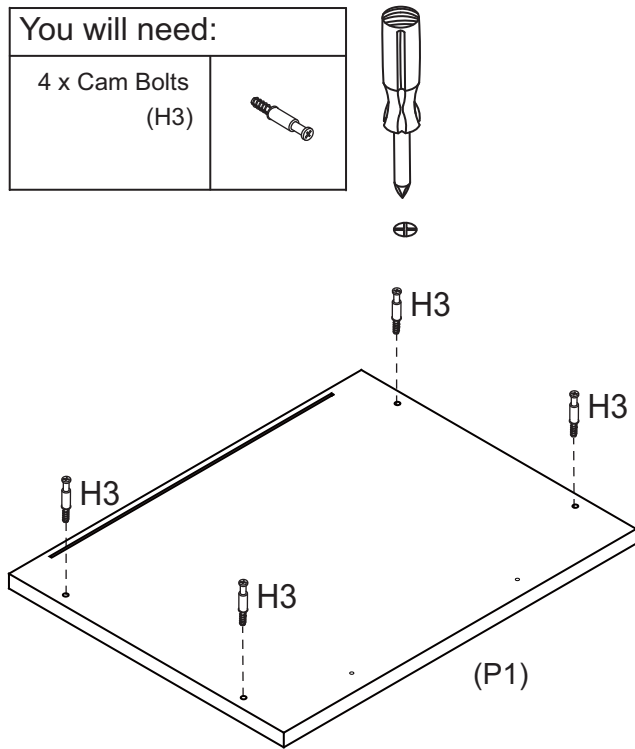
4 x Cam Nuts
(H4)

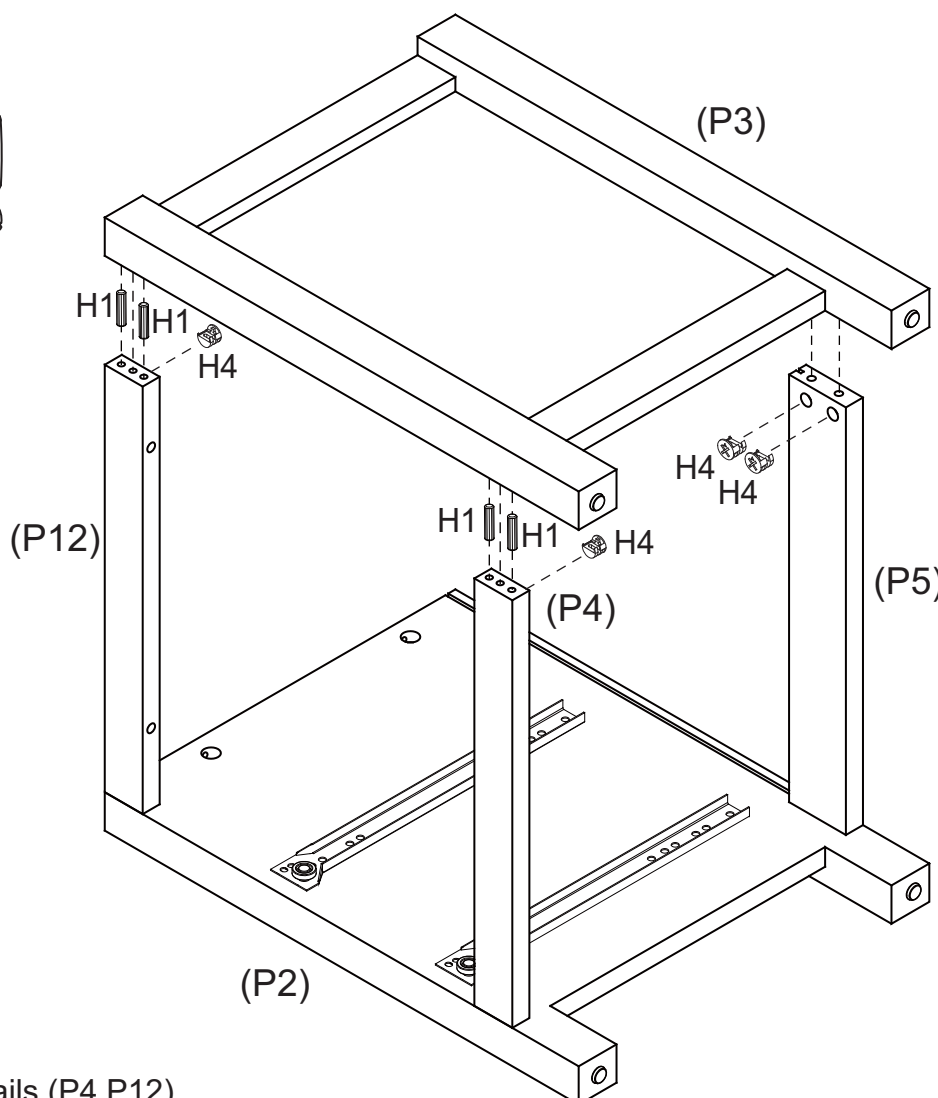

Insert 4 x Dowels (H1) into Rails (P4,P12).
Insert 4 x Cam Nuts (H4) into the holes of Rails (P4,P5) and (P12).
Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Push Right Side Panel (P3) into place and tighten the cam nuts.


Step 5


You will need:	
4 x Cam Bolts (H3)	



Slide Back Panel (P6) into the groove of Left Side Panel (P2) and Right Side Panel (P3).
Attach 4 x Cam Bolts (H3) into Top Panel (P1) as shown.


Step 6


You will need:	
4 x Cam Nuts (H4)	

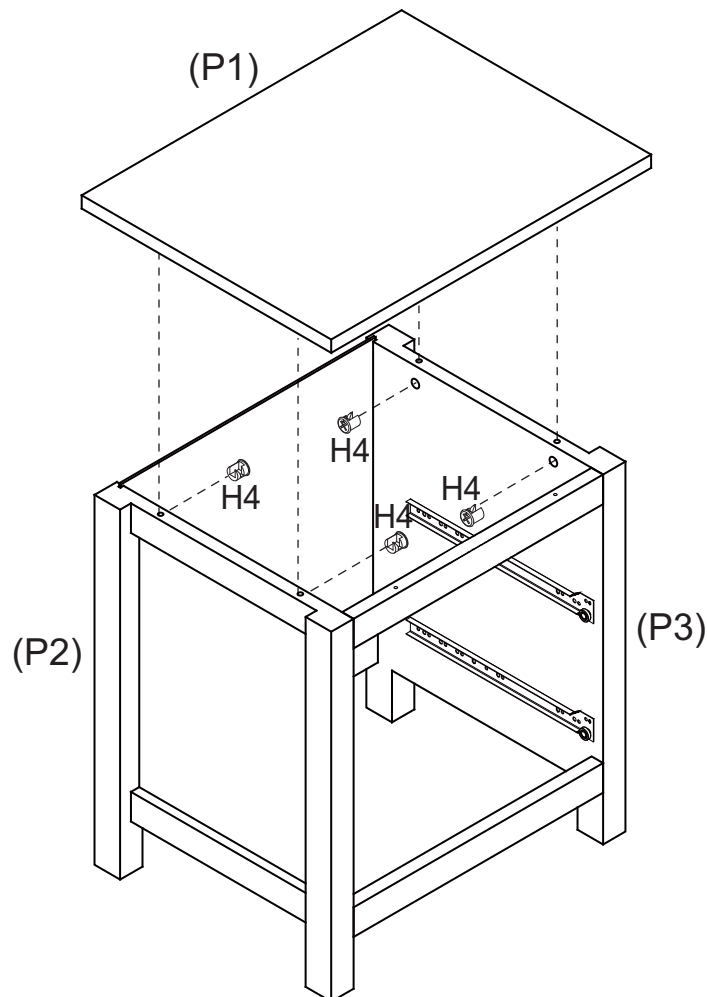

Insert 4 x Cam Nuts (H4) into the holes of Side Panels (P2) and (P3).
Rotate the cam nuts so the arrows point towards the incoming cam bolts.
Attach Top Panel (P1) and tighten the cam nuts.



Step 7



You will need:	
2 x Screws (H14)	

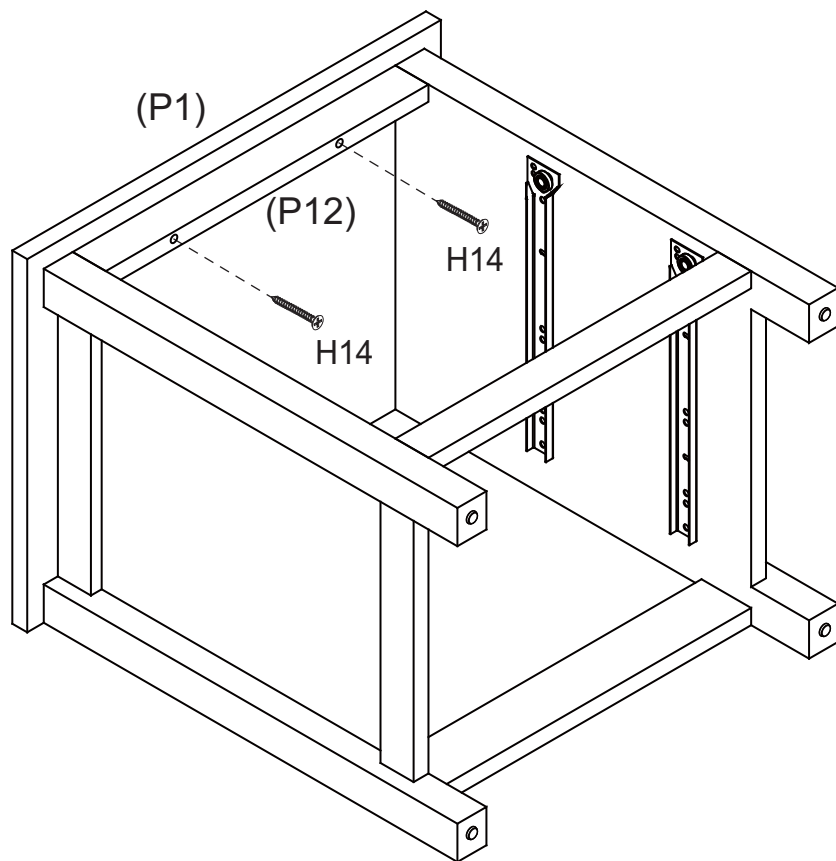

Attach Rail (P12) to Top panel (P1) with 2 x Long Screws (H14).

Step 8


You will need:	
4 x Wedges (H12)	
4 x Screws (H13)	

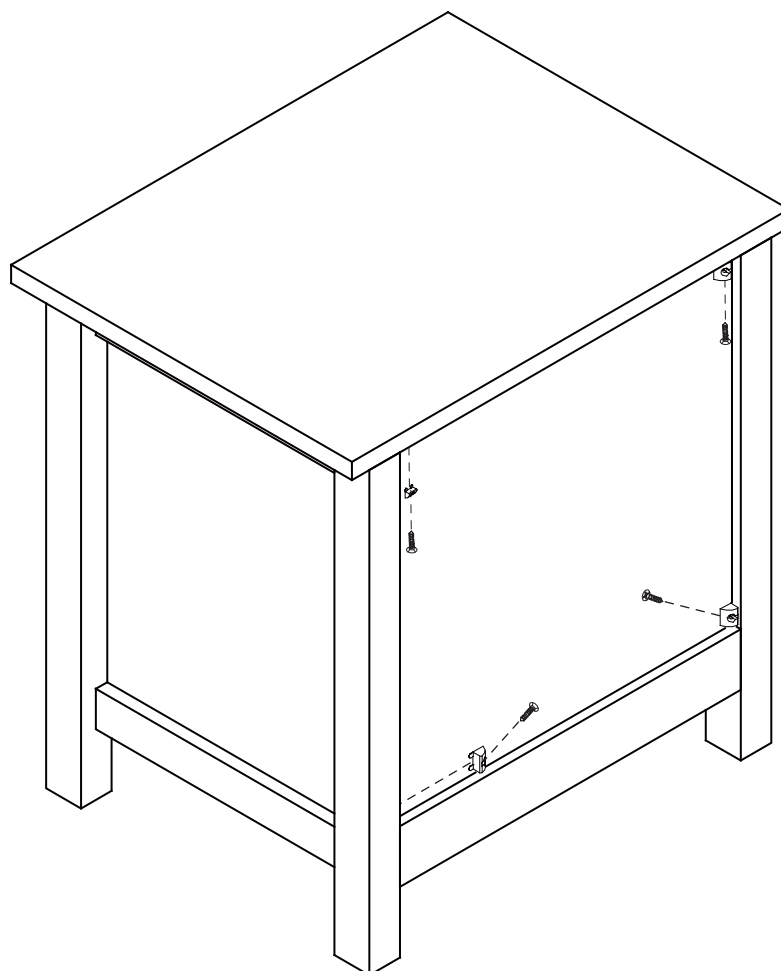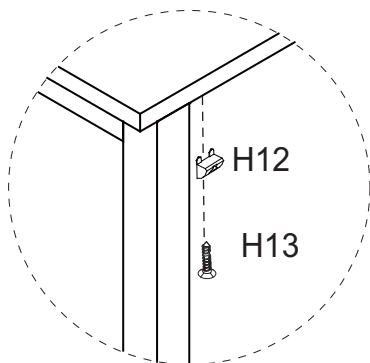


Make sure Wedge (H12) is facing to the bottom of Top Panel (P1) as shown.

Secure Back Panel (P6) in place with 4 x Wedges (H12) using 4 x Screws (H13).




Step 9


You will need:	
4 x Cam Bolts (H3)	

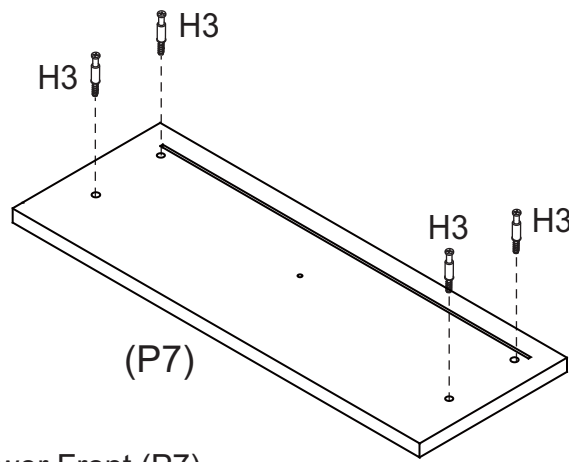

Attach 4 x Small Cam Bolts (H3) to Drawer Front (P7).


Step 10


You will need:	
1 x DL Runner (H8)	
1 x DR Runner (H9)	
4 x Small Screws (H5)	

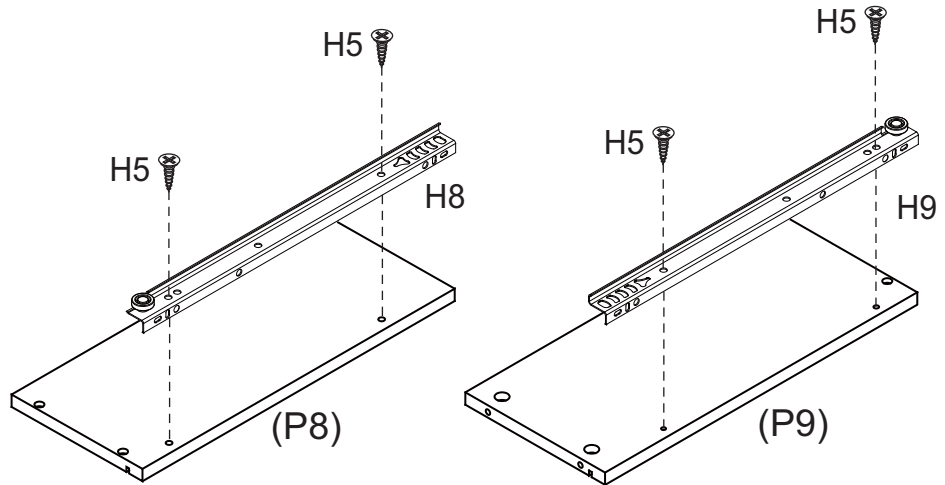


Attach 1 x DL Runner (H8) to Left Drawer Side (P8) and 1 x DR Runner (H9) to Right Drawer Side (P9) with 4 x Small Screws (H5).

Step 11

You will need:	
4 x Cam Nuts (H4)	

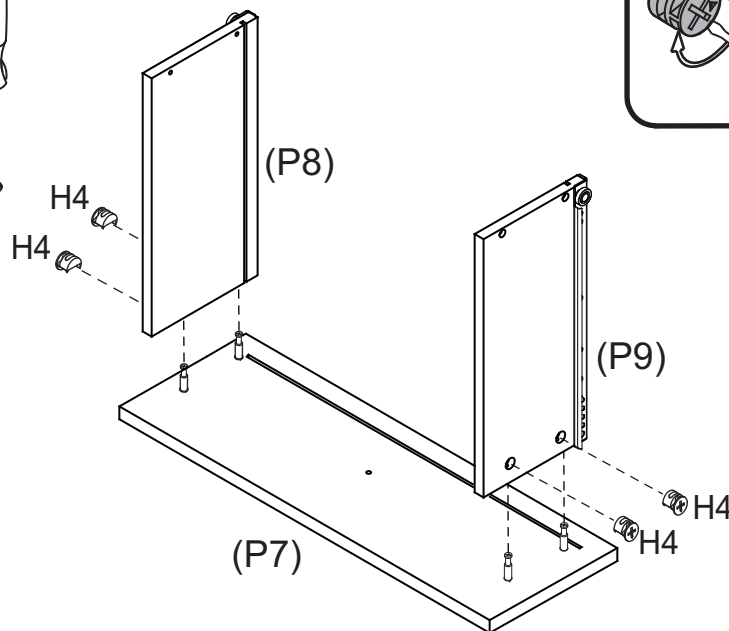


This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.


Insert 4 x Cam Nuts (H4) into the holes of Drawer Sides (P8) and (P9). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Drawer Sides (P8) and (P9) into place and tighten the cam nuts.


Step 12

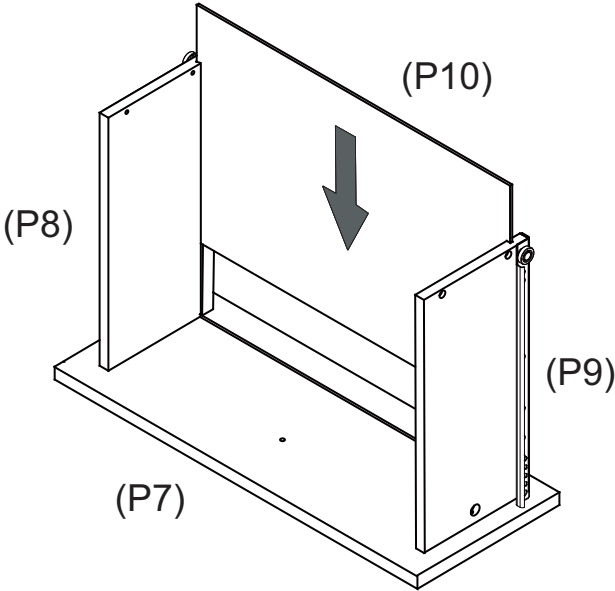

Slide Drawer Base (P10) into the groove in Drawer Sides (P8) and (P9).



Step 13

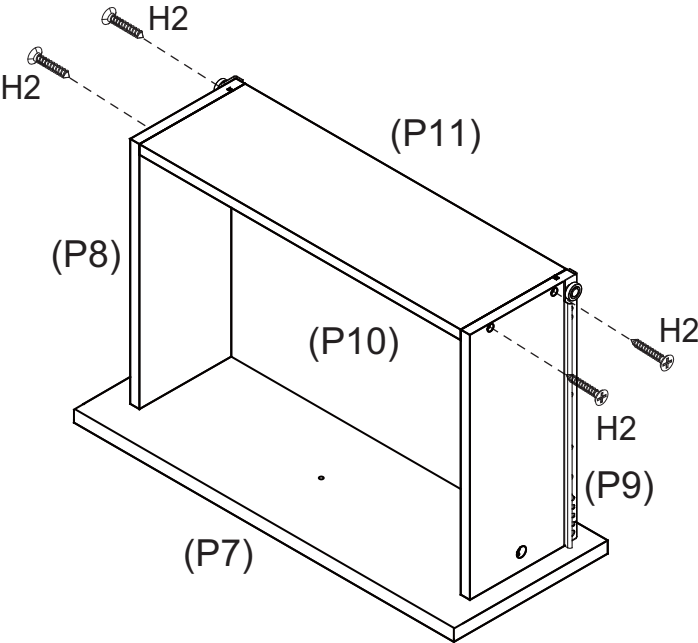
You will need:	
4 x Medium Screws (H2)	



Attach Drawer Back (P11) to Drawer Sides (P8) and (P9) with 4 x Medium Screws (H2), make sure that the groove lines up the whole way around the drawer.


Step 14

You will need:	
1 x Handle (H10)	
1 x Bolt (H11)	

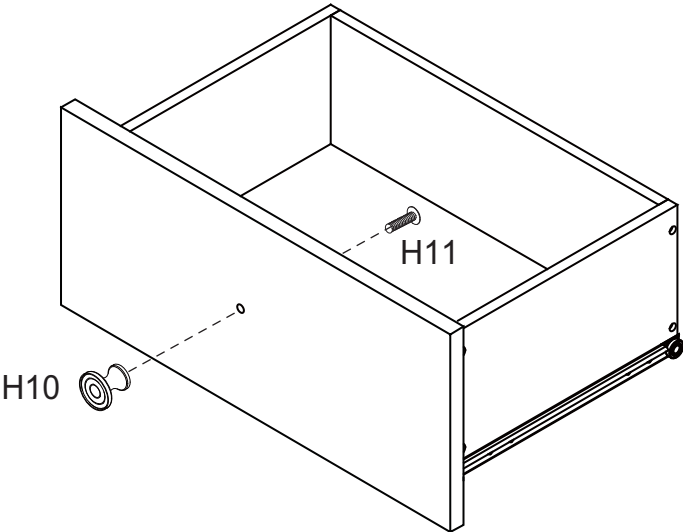


Attach 1 x Handle (H10) to Drawer Front (P7) with 1 x Bolt (H11).

Step 15

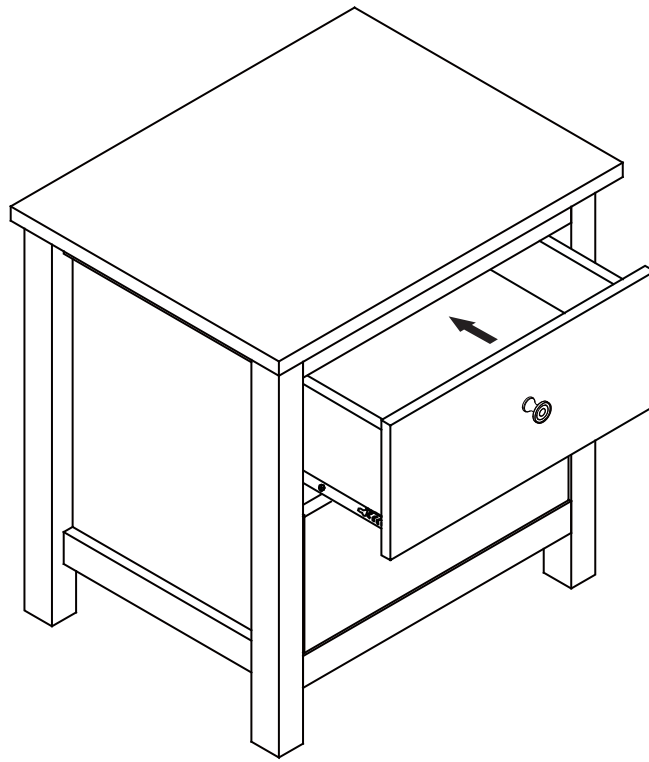

Repeat Step 9 to Step 14 to assemble the other drawer.
Then put the drawers into the chest.

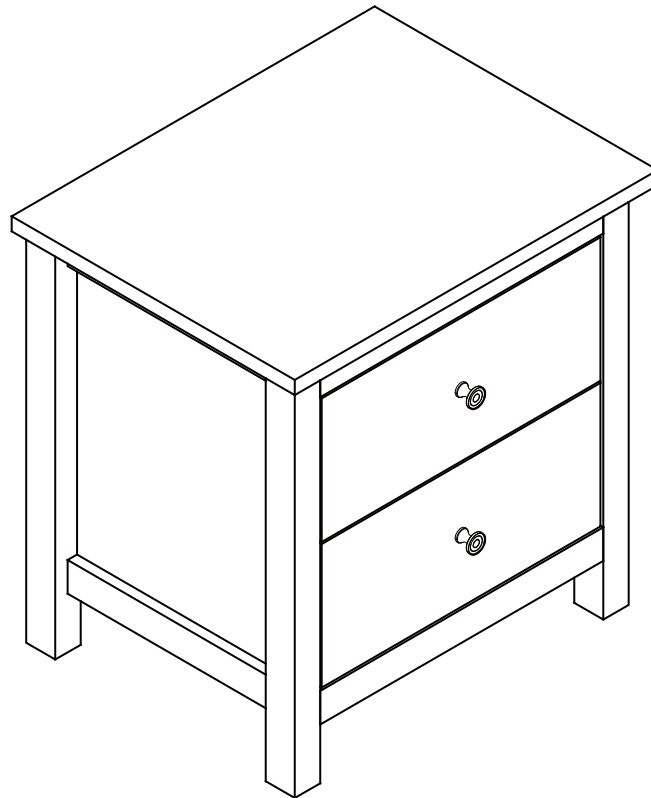


Please make sure your bedside is sitting squarely on the floor, then tighten all the screws and bolts – being careful not to over tighten

The job is now complete!

In the interest of our environment
Please dispose of all packaging thoughtfully.



Version 1.0

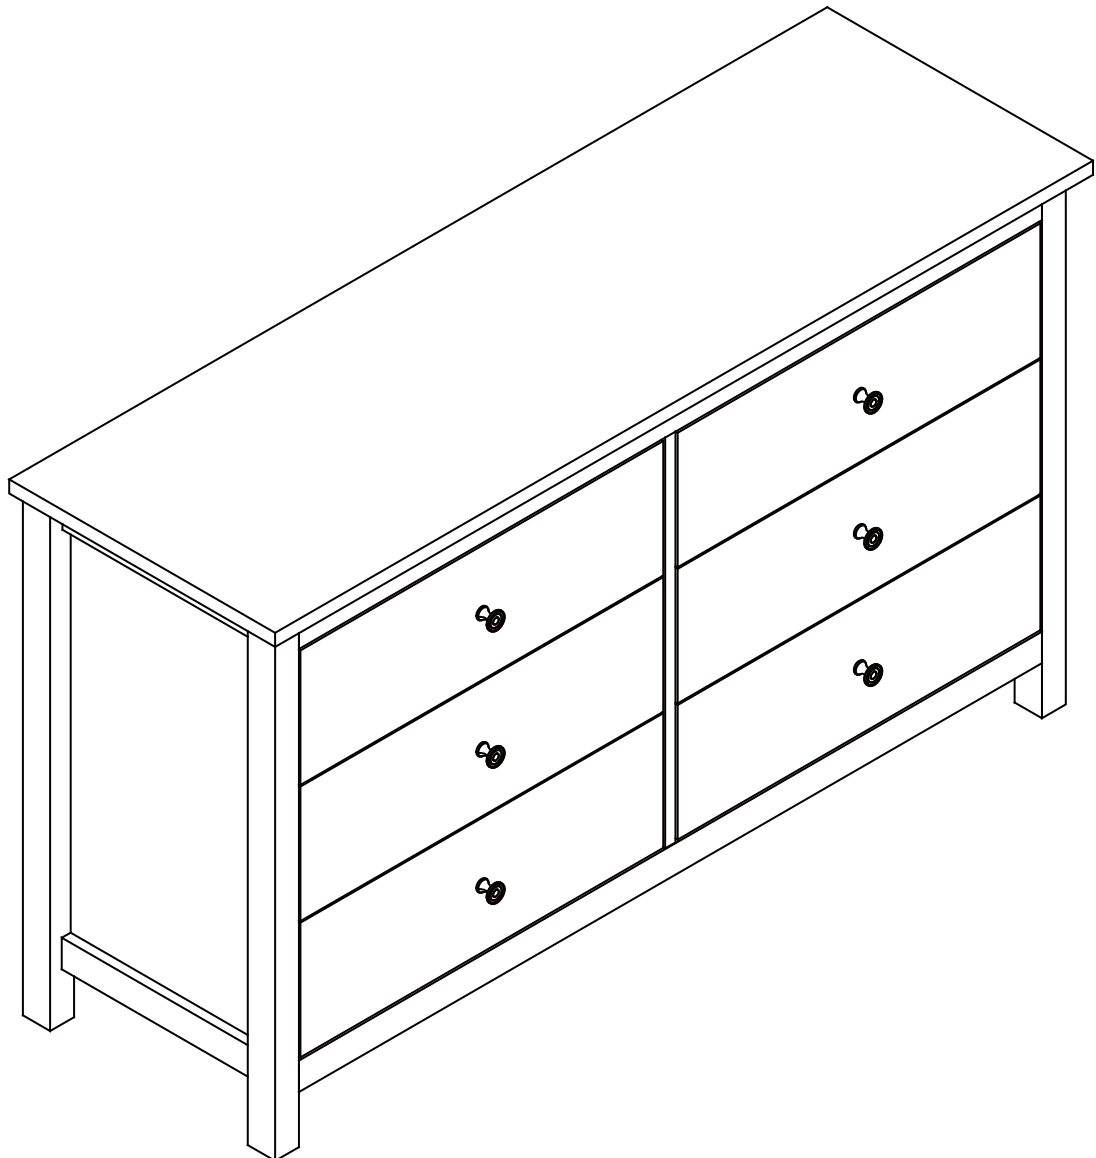

HAYMAN

Dresser 6 Drawer

www.fantasticfurniture.com.au


Enjoy
Your purchase from
Australia's Best Value Furniture Store




Assembly checklist




Read through the instructions carefully before you begin.

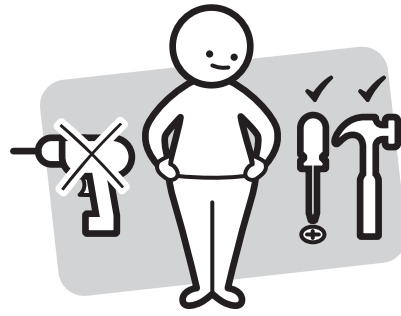

Make sure you have all the required tools.
Never use power tools unless instructed.

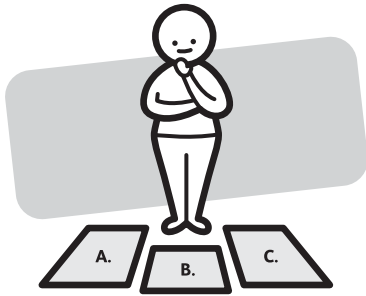

Identify and lay out all of the components before you begin assembly.

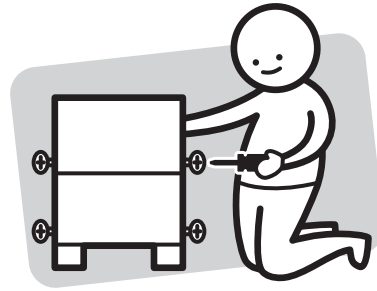

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need to assemble the product




DO NOT USE



Other tools you need



Flat head screwdriver;
Phillips head screwdriver;

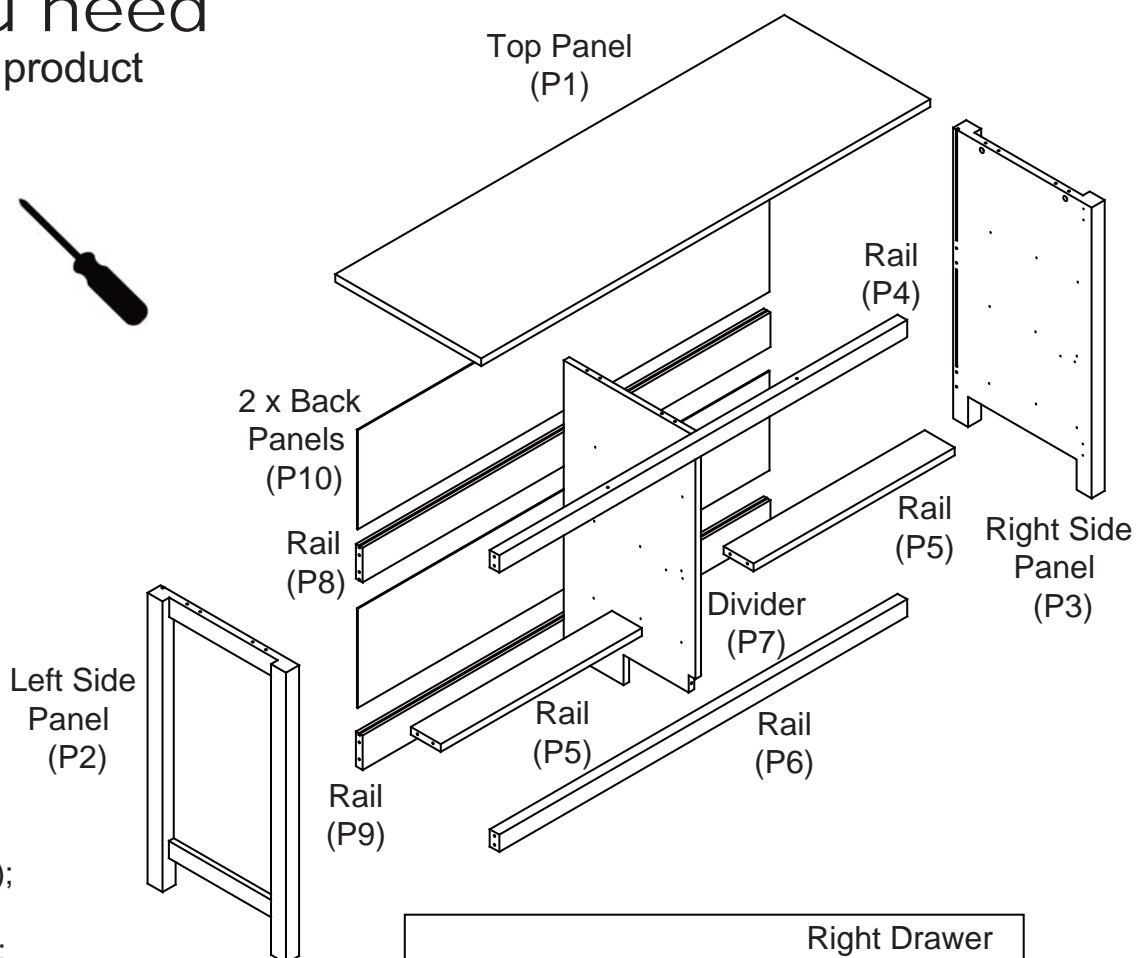

Parts list

Box 1: Top Panel (P1);
Left Side Panel (P2);
Right Side Panel (P3);
Rail (P4); 2 x Rails (P5);
Rail (P6); Divider (P7);
Rail (P8); Rail (P9);
2 x Back Panels (P10);
6 x Drawer Fronts (P11);
6 x Left Drawer Sides (P12);
6 x Right Drawer Sides (P13);
6 x Drawer Bases (P14);
6 x Drawer Backs (P15);


Hardware pack

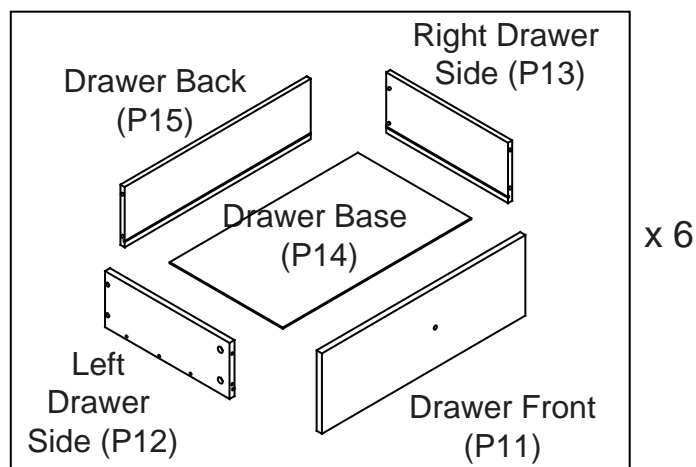

11 x Dowels
(H1)



28 x Long
Screws
(H2)




51 x Cam
Bolts
(H3)




51 x Cam
Nuts
(H4)




72 x Small
Screws
(H5)




6 x CL Runner
Tracks
(H6)



6 x CR Runner
Tracks
(H7)



6 x DL
Runners
(H8)




6 x DR
Runners
(H9)




6 x Handles
(H10)



6 x Bolts
(H11)




8 x Wedges
(H12)



8 x Screws
(H13)



2 x Wooden
Screws
(H14)



1 x Safety
Strap
(H15)










1 x Screw
(H16)



2 x Washers
(H17)



Step 1


You will need	
	
3 x CL Runner Tracks (H6)	3 x CR Runner Tracks (H7)
	
18 x Small Screws (H5)	Phillips head screwdriver

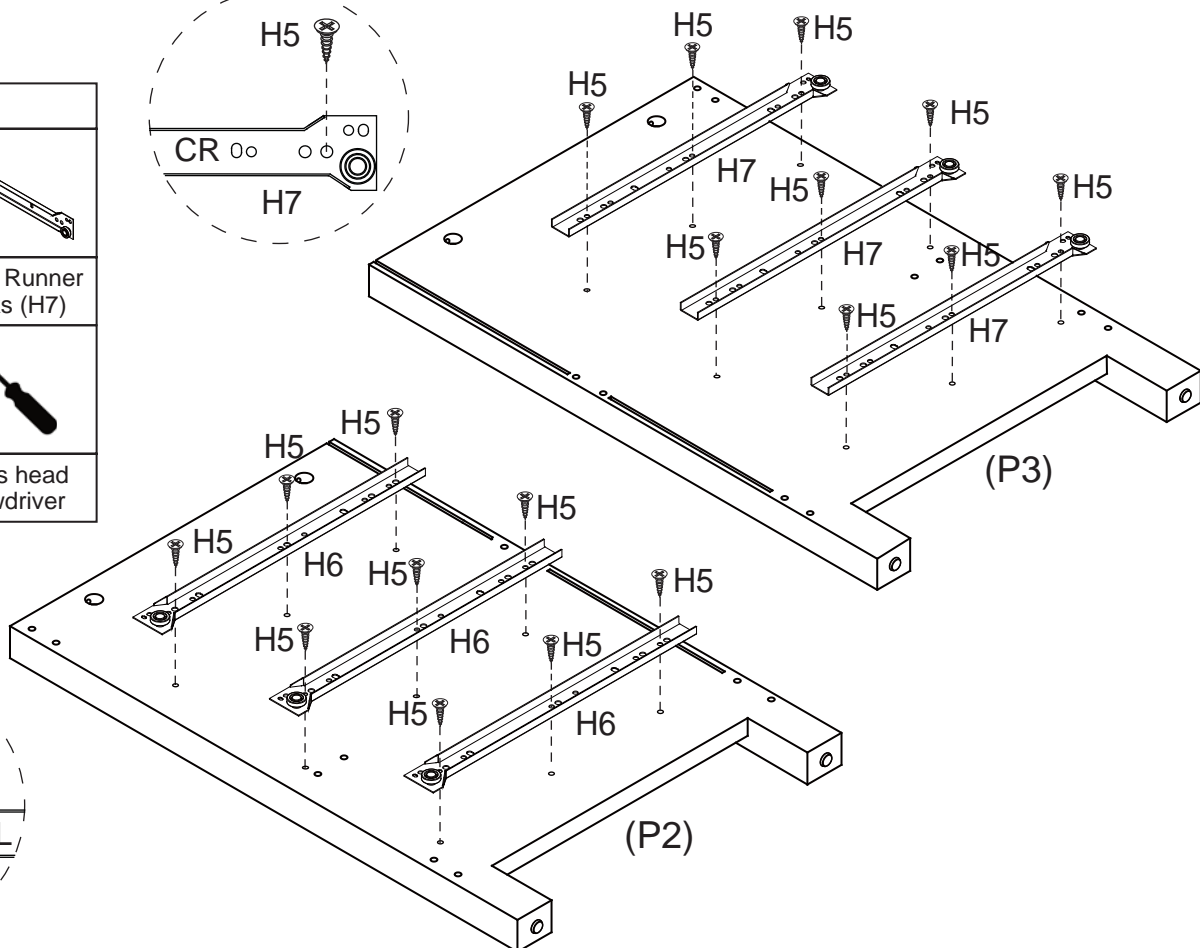

Attach 3 x CL Runner Tracks (H6) to Left Side Panel (P2) with 9 x Small Screws (H5).
Attach 3 x CR Runner Tracks (H7) to Right Side Panel (P3) with 9 x Small Screws (H5).





Step 2


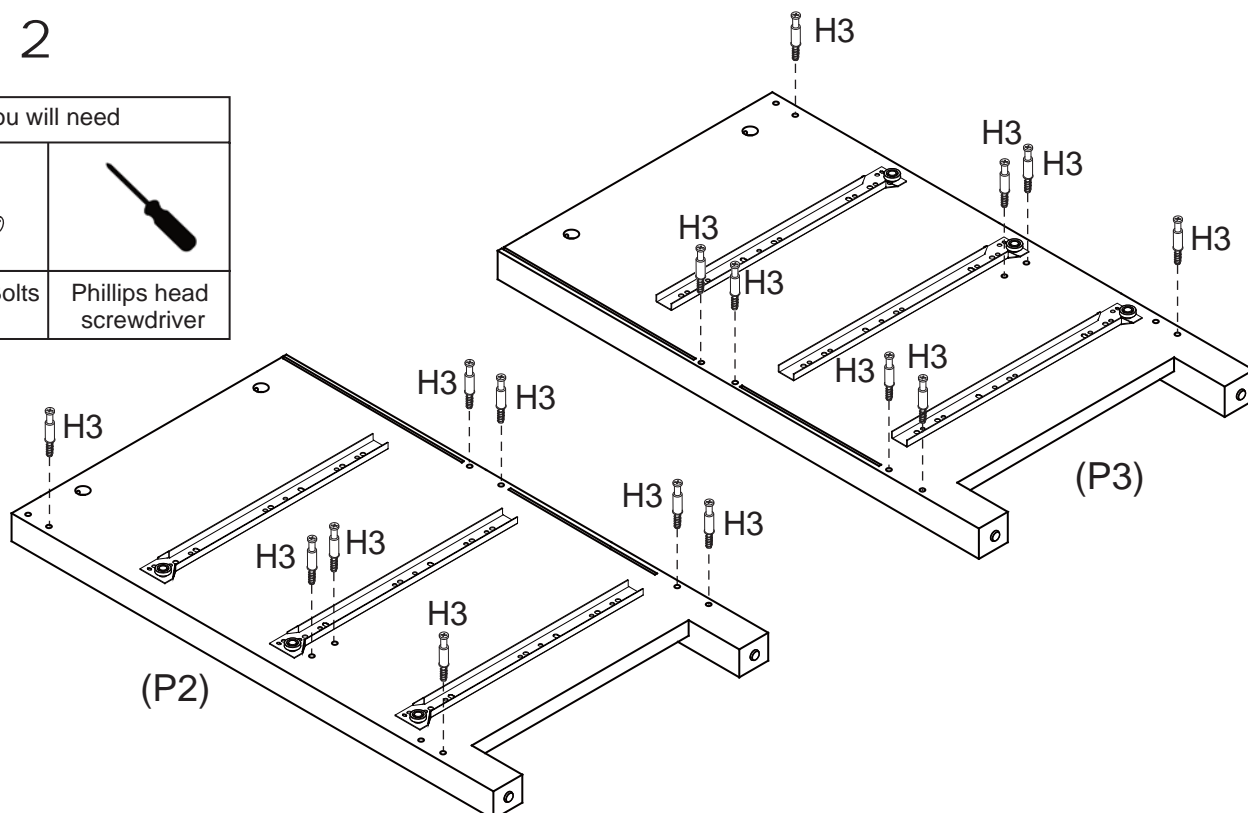
You will need	
	
16 x Cam Bolts (H3)	Phillips head screwdriver



Attach 16 x Cam Bolts (H3) into Side Panels (P2, P3) as shown.





Step 3



You will need	
	
3 x CL Runner Tracks (H6)	9 x Small Screws (H5)
	
2 x Cam Bolts (H3)	Phillips head screwdriver

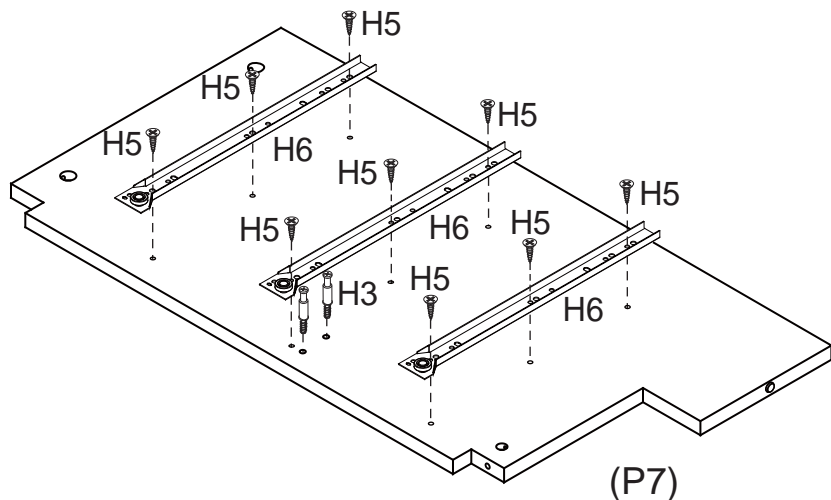

Attach 2 x Cam Bolts (H3) into Divider (P7) as shown.
Attach 3 x CL Runner Tracks (H6) to Divider (P7) with 9 x Small Screws (H5).






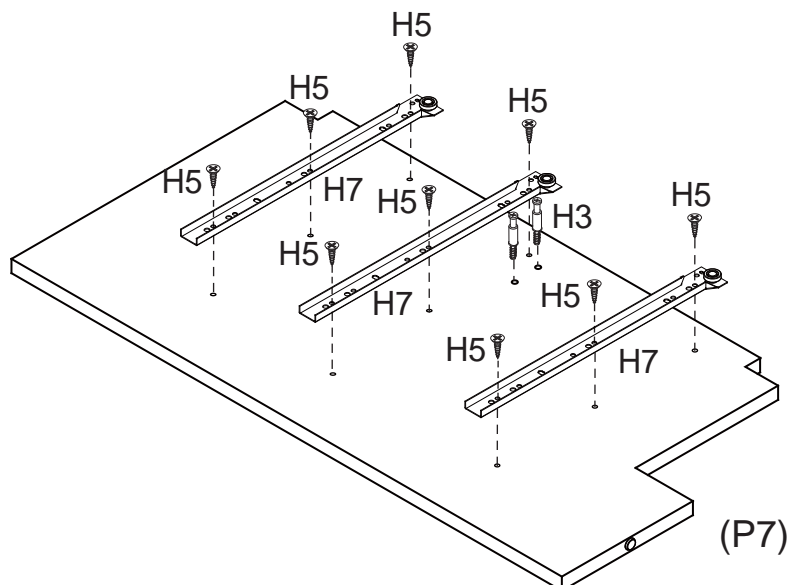Step 4


You will need	
	
3 x CR Runner Tracks (H7)	9 x Small Screws (H5)
	
2 x Cam Bolts (H3)	Phillips head screwdriver



Turn Divider (P7) over to the other side.
Attach 2 x Cam Bolts (H3) into Divider (P7) as shown.
Attach 3 x CR Runner Tracks (H7) to Divider (P7) with 9 x Small Screws (H5).



Step 5

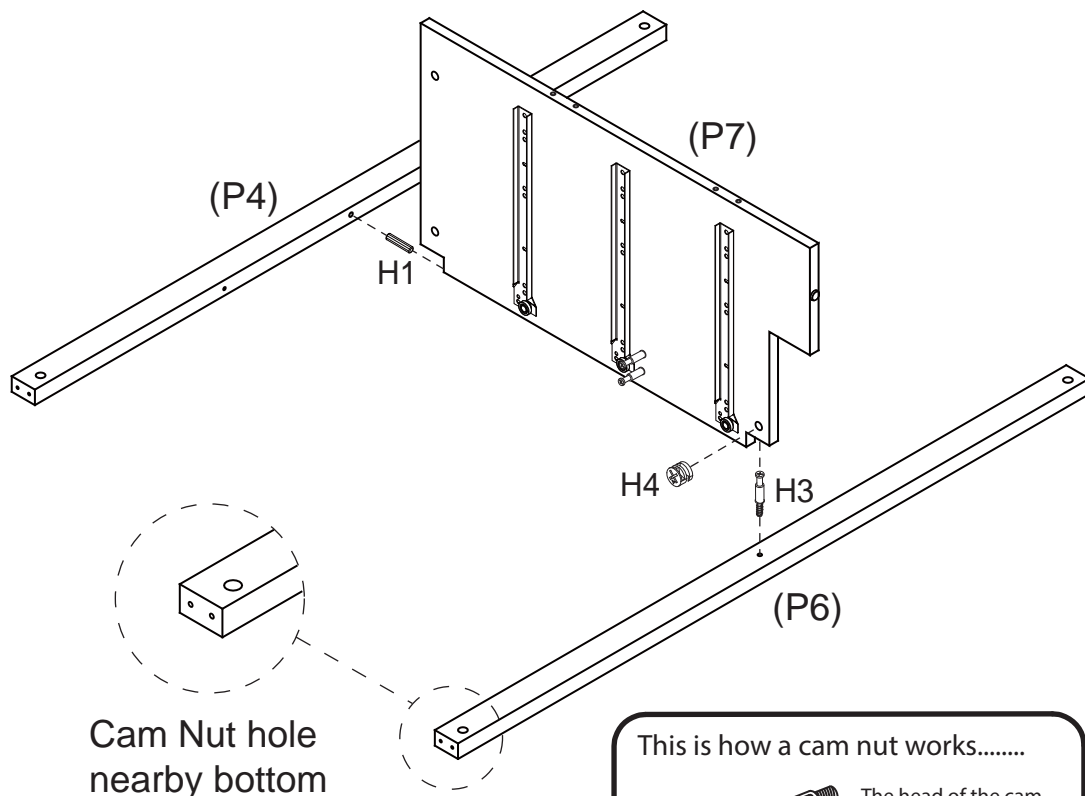
You will need	
	
1 x Dowel (H1)	1 x Cam Bolt (H3)
	
1 x Cam Nut (H4)	Phillips head screwdriver
	
Flat head screwdriver	



Attach 1 x Cam Bolt (H3) into Rail (P6) as shown.
 Insert 1 x Cam Nut (H4) into the hole of Divider (P7).
 Rotate the cam nut so the arrow point towards the incoming cam bolt.
 Attach Divider (P7) to Rail (P6), then tighten the cam nut using a Flat head screwdriver.
 Insert 1 x Dowel (H1) into the hole of Divider (P7), then attach Rail (P4) to Divider (P7) as shown.



Step 6

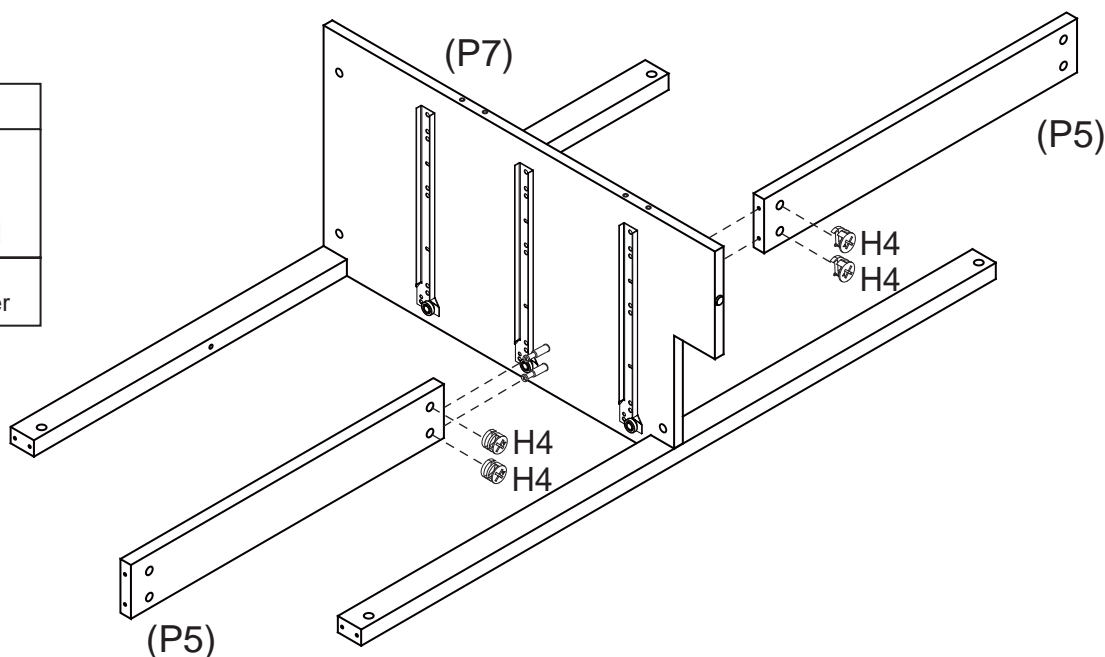
You will need	
	
4 x Cam Nuts (H4)	Flat head screwdriver



Insert 4 x Cam Nuts (H4) into the holes of Rails (P5).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Attach Rails (P5) to Divider (P7), then tighten the cam nuts using a Flat head screwdriver.




Step 7

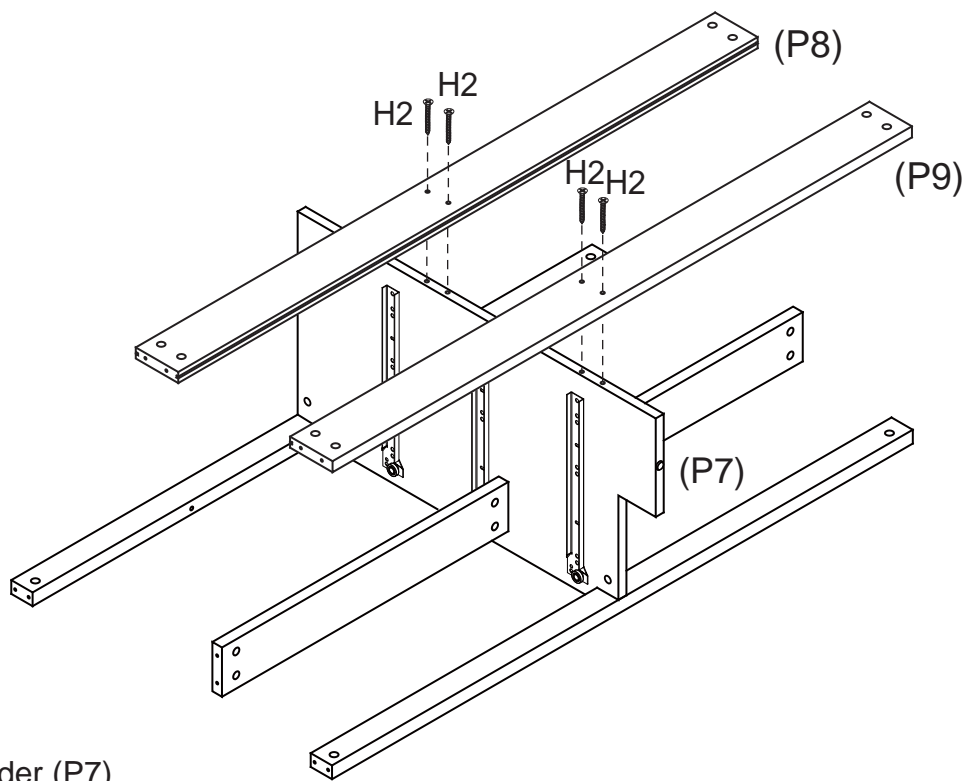
You will need	
	
4 x Long Screws (H2)	Phillips head screwdriver



Attach Rails (P8, P9) to Divider (P7) with 4 x Long Screws (H2) using a Phillips head screwdriver.


Step 8

You will need	
	
2 x Dowels (H1)	8 x Cam Nuts (H4)
	
Flat head screwdriver	

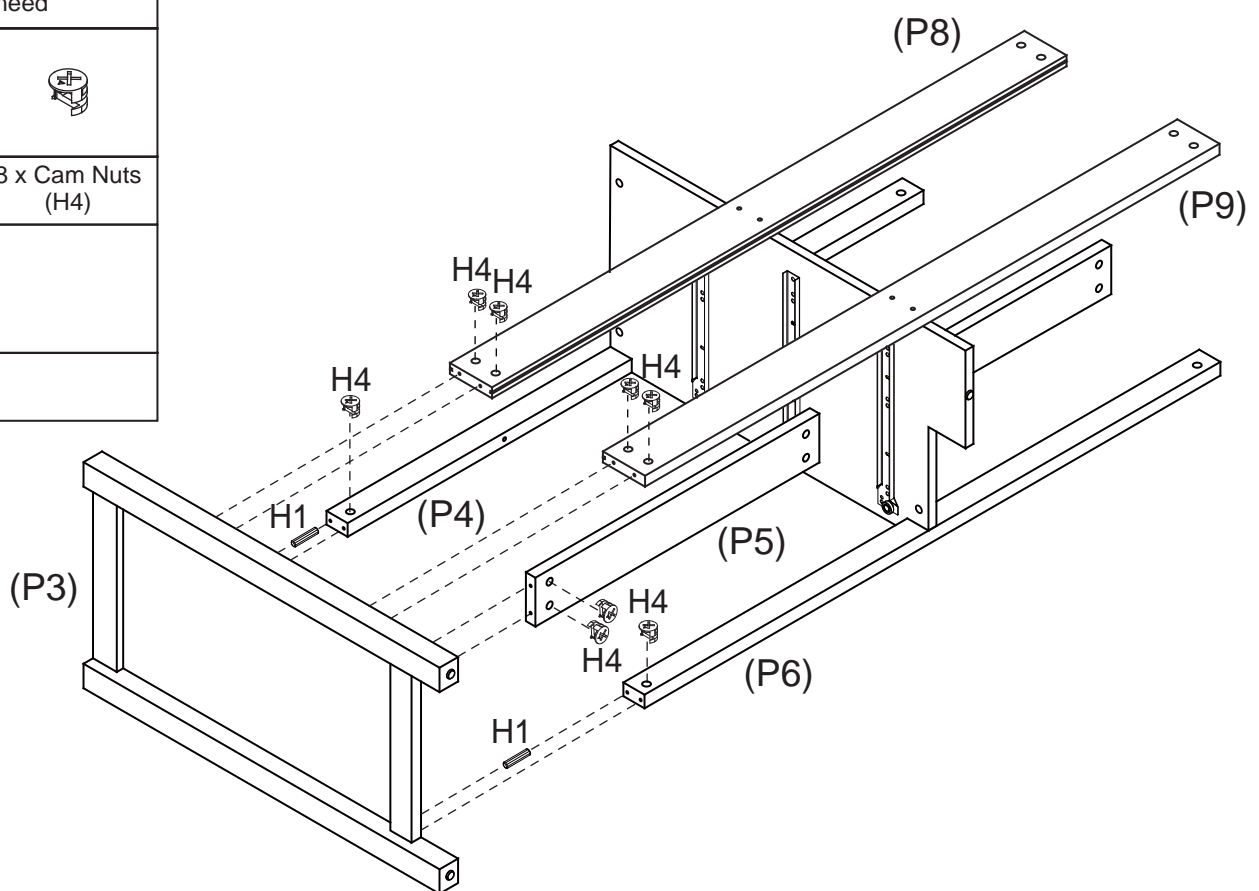




Insert 2 x Dowels (H1) into Right Side Panel (P3).
 Insert 8 x Cam Nuts (H4) into the holes of Rails (P4, P5, P6, P8, P9).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Attach Right Side Panel (P3) to the frame, then tighten the cam nuts.

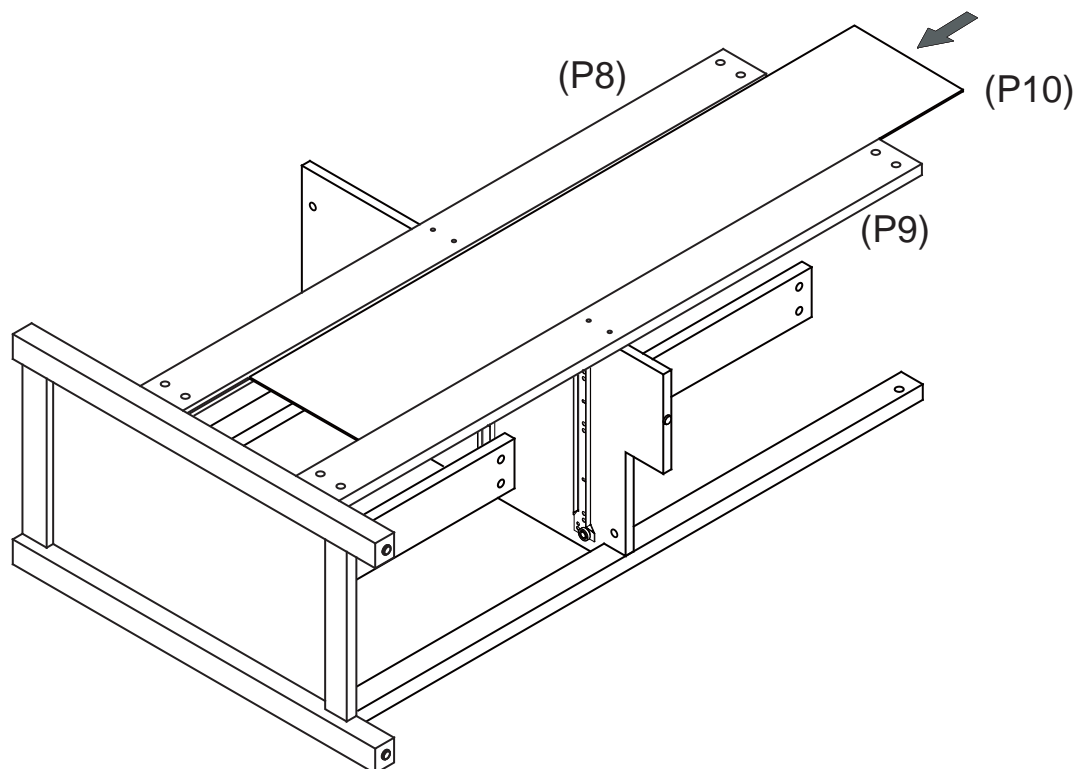
Step 9



Put Back Panel (P10) into the grooves of Rail (P8) and Rail (P9).

Step 10

You will need	
	
2 x Dowels (H1)	8 x Cam Nuts (H4)
	
Flat head screwdriver	

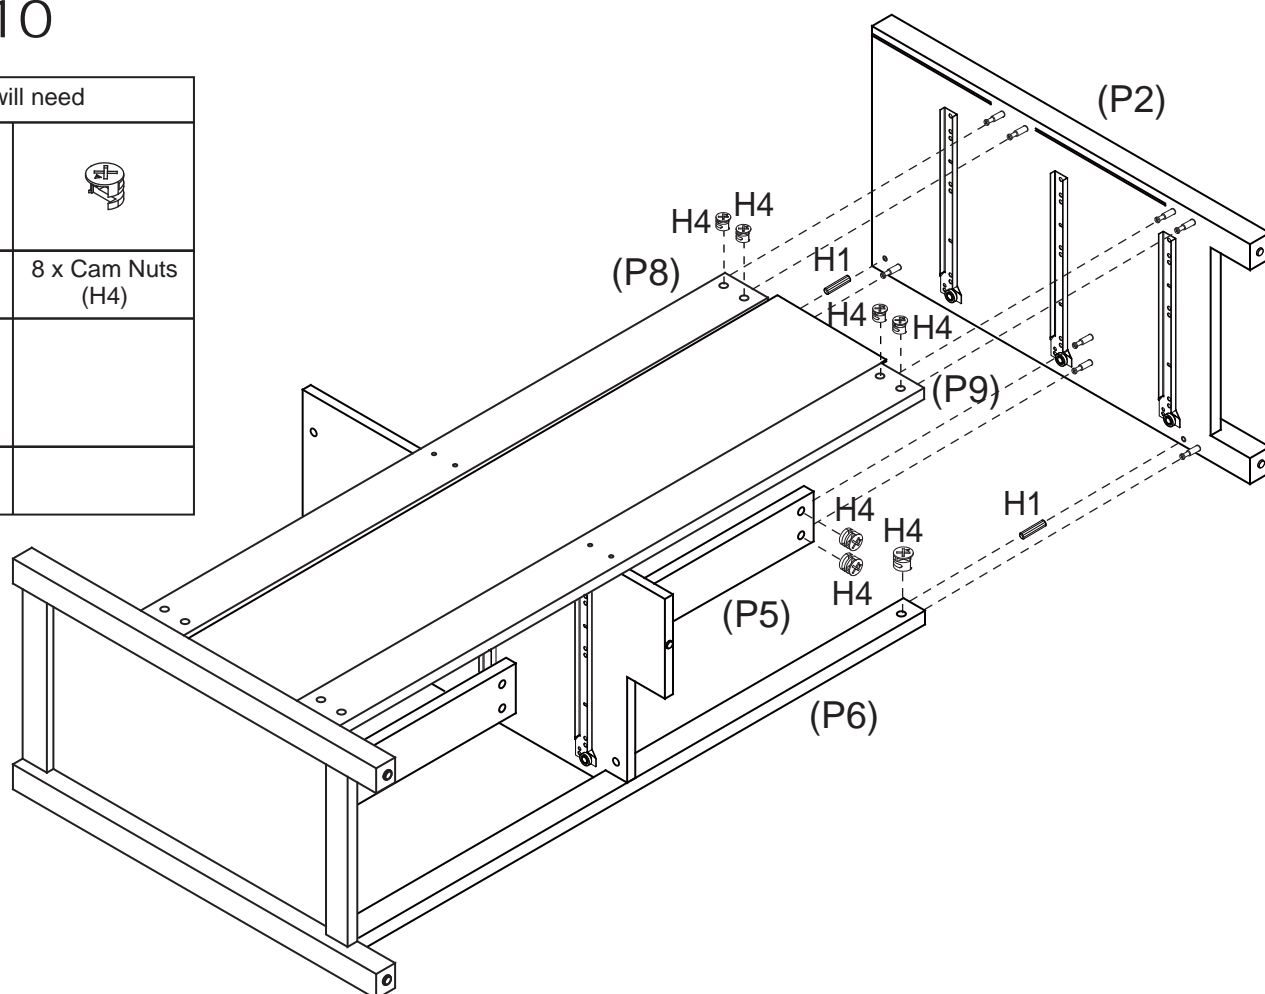


Insert 2 x Dowels (H1) into Left Side Panel (P2).

Insert 8 x Cam Nuts (H4) into the holes of Rails (P4, P5, P6, P8, P9).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.



Attach Left Side Panel (P2) to the frame, then tighten the cam nuts.

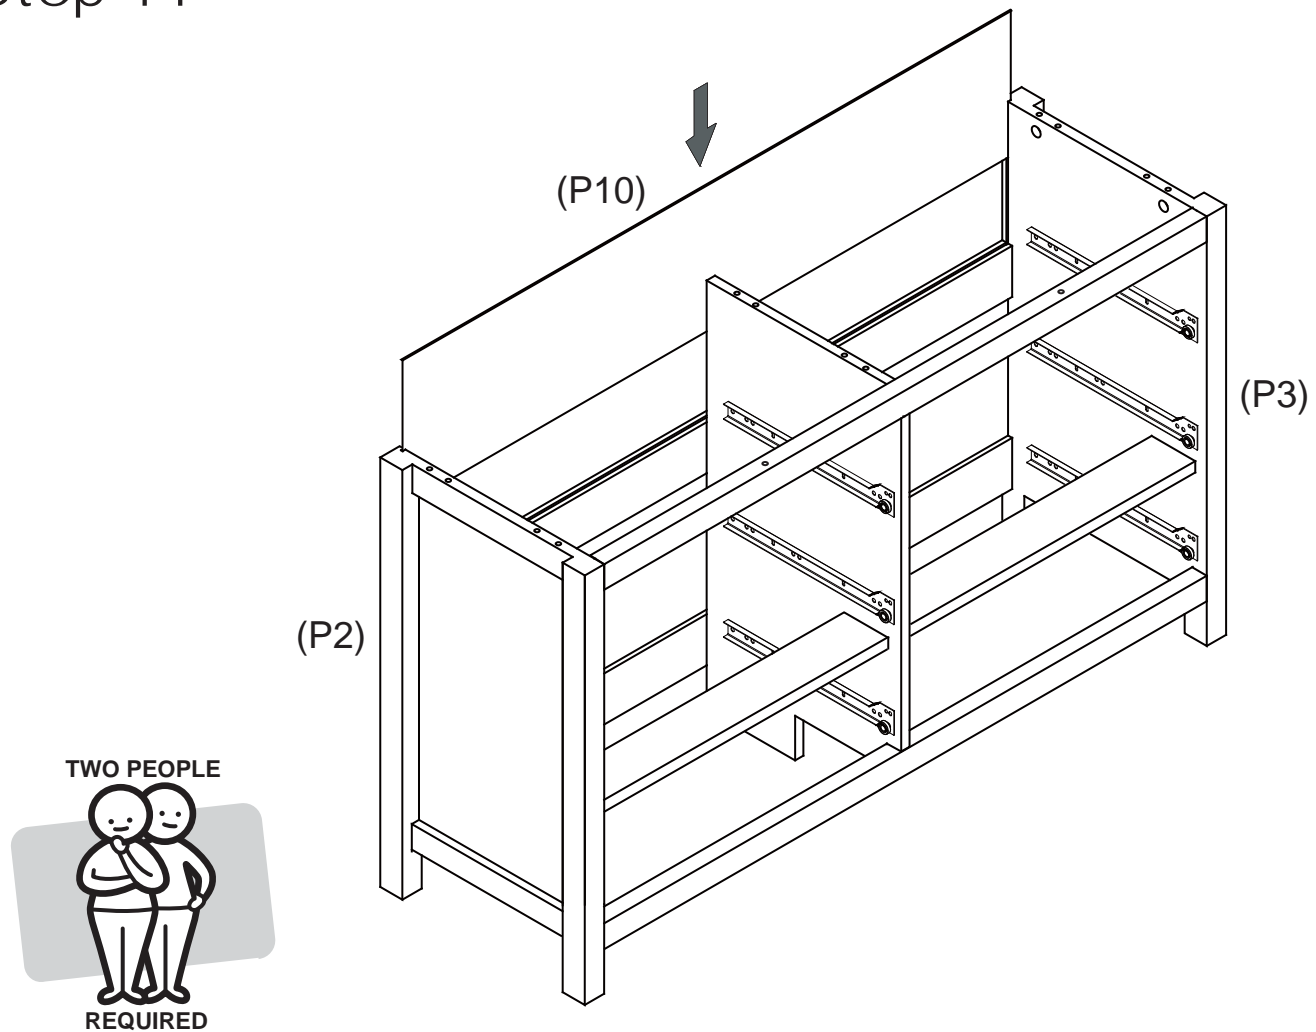
Step 11



Carefully turn the dresser over to an upright position.
Put Back Panel (P10) into the grooves of Side Panels (P2, P3) and Rail (P8).




Step 12

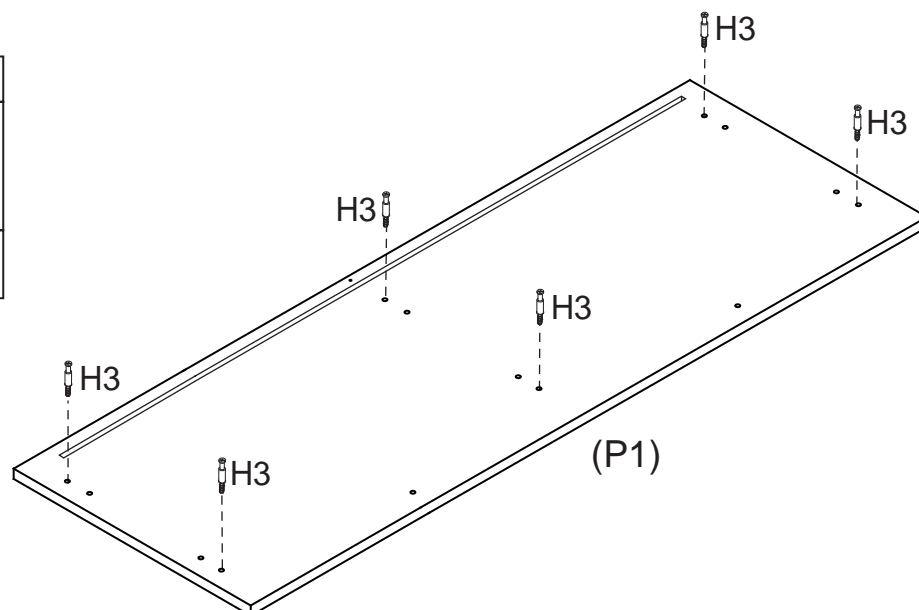
You will need	
	
6 x Cam Bolts (H3)	Phillips head screwdriver



Attach 6 x Cam Bolts (H3) into Top Panel (P1) as shown.



Step 13


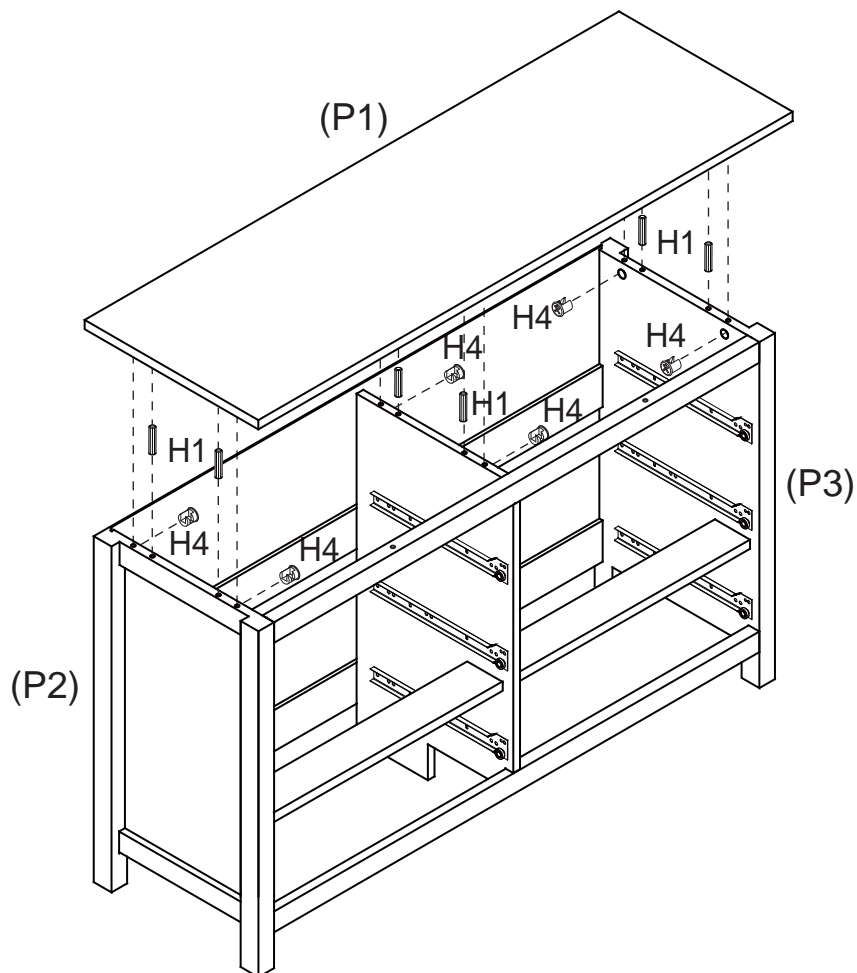
You will need	
	
6 x Dowels (H1)	6 x Cam Nuts (H4)
	
Flat head screwdriver	



Insert 6 x Dowels (H1) into the holes of Side Panels (P2, P3) and Divider (P7).
 Insert 6 x Cam Nuts (H4) into the holes of Side Panels (P2, P3) and Divider (P7).
 Rotate the cam nuts so the arrows point towards the incoming cam bolts.
 Attach Top Panel (P1) to the frame and then tighten the cam nuts.




Step 14



You will need	
	
2 x Wooden Screws (H14)	Phillips head screwdriver

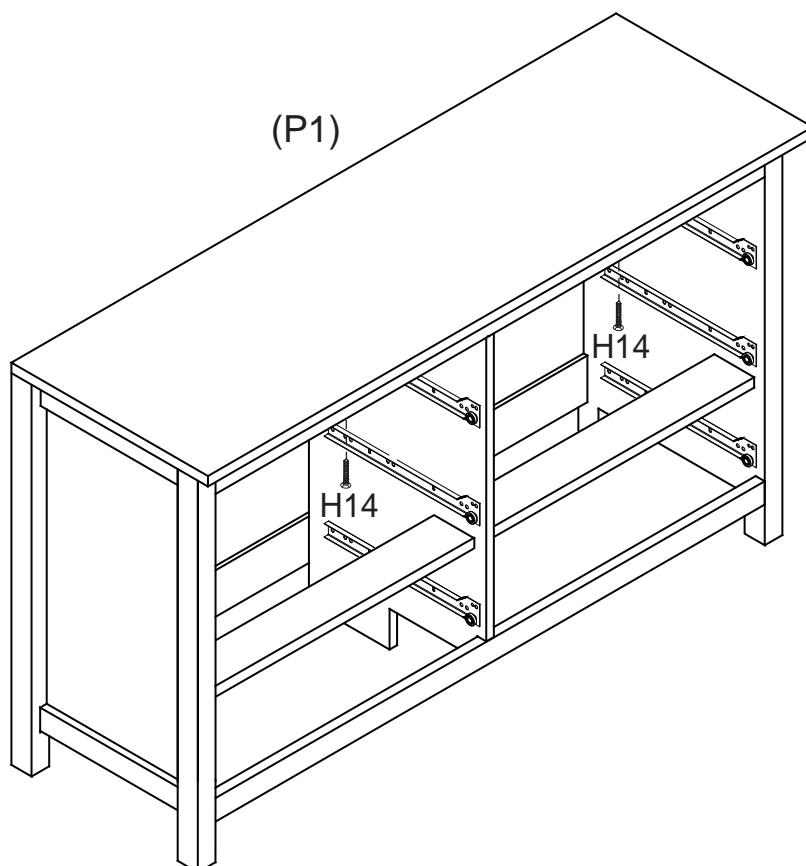

Attach Rail (P4) to Top panel (P1) with 2 x Wooden Screws (H14).

Step 15



You will need	
	
8 x Wedges (H12)	8 x Screws (H13)
	
Phillips head screwdriver	

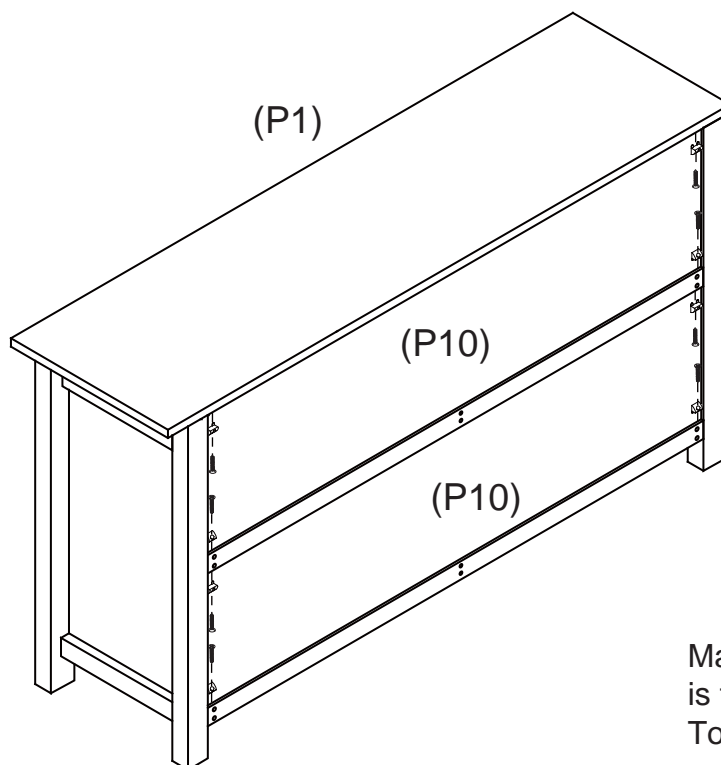


Make sure Wedge (H12) is facing to the bottom of Top Panel (P1) as shown.

Secure Back Panels (P10) in place with 8 x Wedges (H12) using 8 x Screws (H13).



Step 16

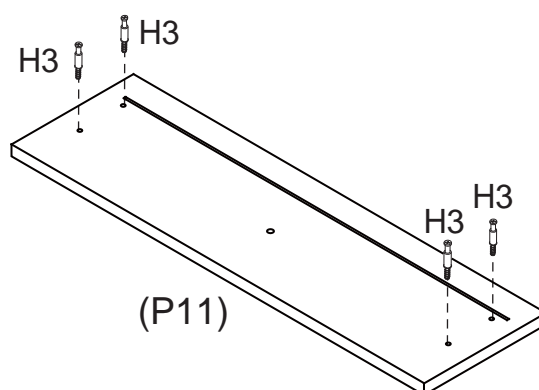
You will need	
	
4 x Cam Bolts (H3)	Phillips head screwdriver



Attach 4 x Cam Bolts (H3) to Drawer Front (P11) as shown.


Step 17

You will need	
	
4 x Cam Nuts (H4)	Flat head screwdriver

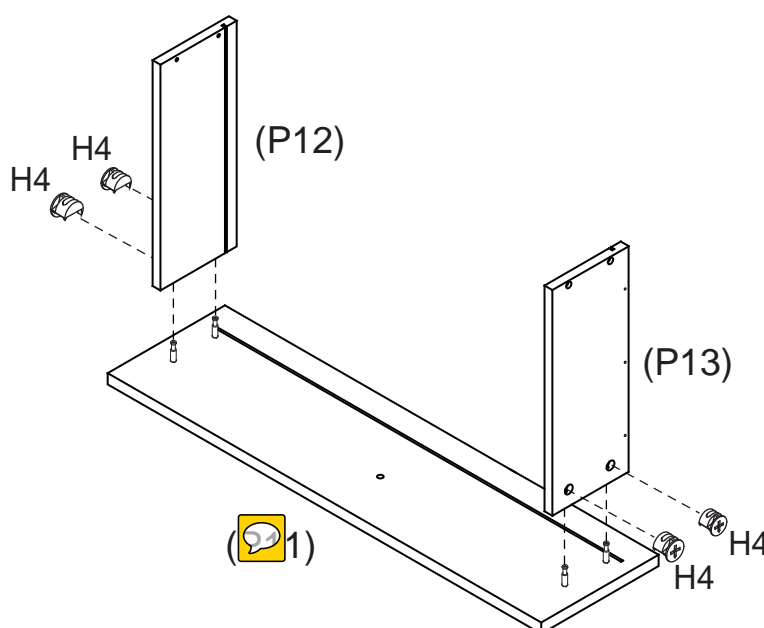

Insert 4 x Cam Nuts (H4) into the holes of Drawer Sides (P12, P13). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Push Drawer Sides (P12, P13) into place and then tighten the cam nuts.


Step 18

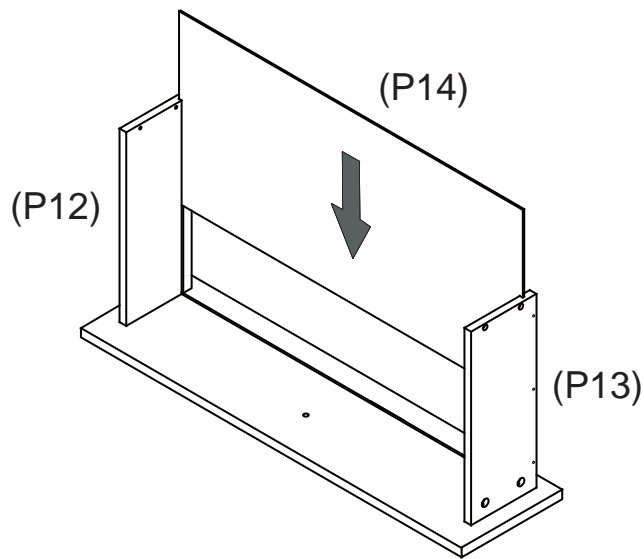

Slide Drawer Base (P14) into the grooves in Drawer Sides (P12, P13).

Step 19


You will need	
4 x Long Screws (H2)	Phillips head screwdriver

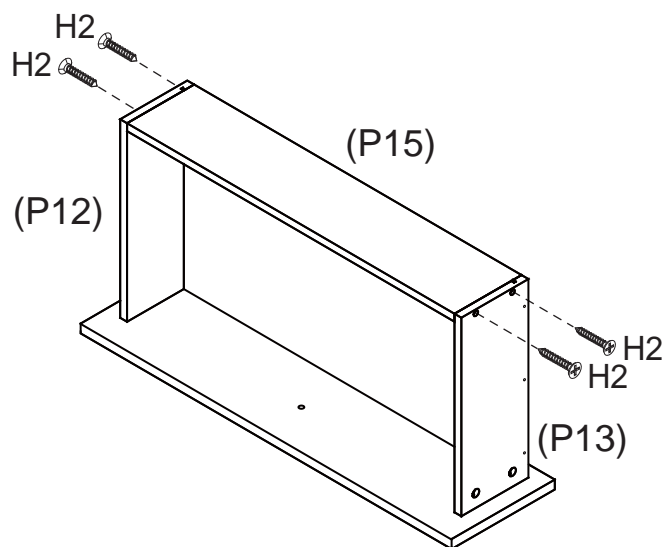

Attach Drawer Back (P15) to Drawer Sides (P12, P13) with 4 x Long Screws (H2). Make sure that the groove lines up the whole way around the drawer.




Step 20


You will need	
1 x DL Runner (H8)	1 x DR Runner (H9)
6 x Small Screws (H5)	Phillips head screwdriver

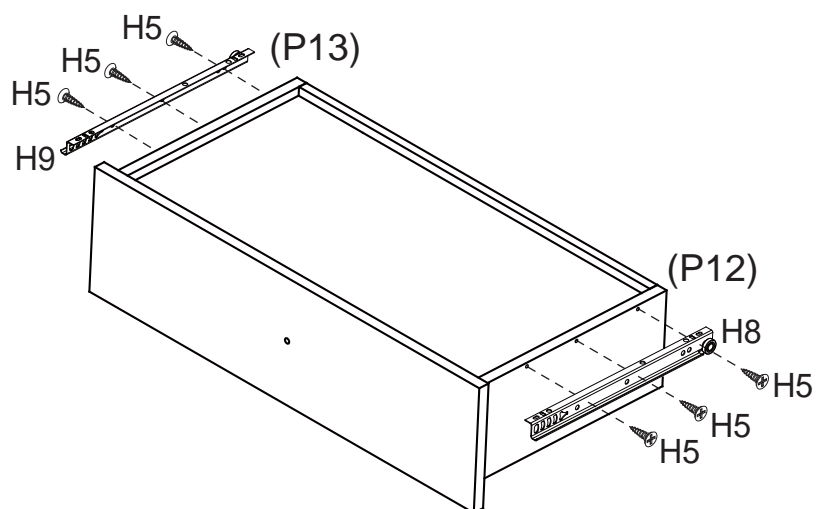

Attach 1 x DL Runner (H8) to Left Drawer Side (P12) and 1 x DR Runner (H9) to Right Drawer Side (P13) with 6 x Small Screws (H5).


Step 21

You will need	
	
1 x Handle (H10)	1 x Bolt (H11)
	
Phillips head screwdriver	

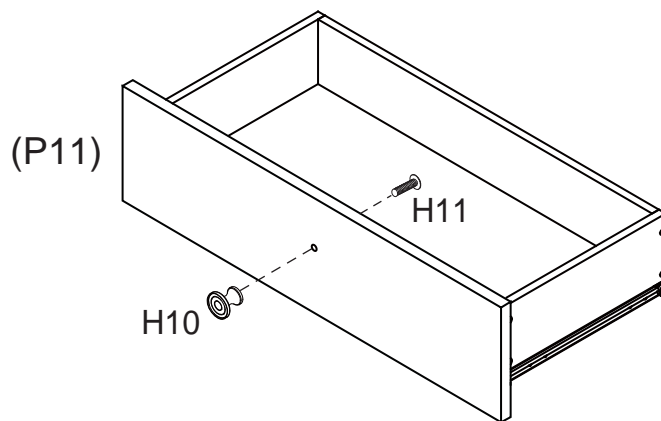


Attach 1 x Handle (H10) to Drawer Front (P11) with 1 x Bolt (H11).

Step 22

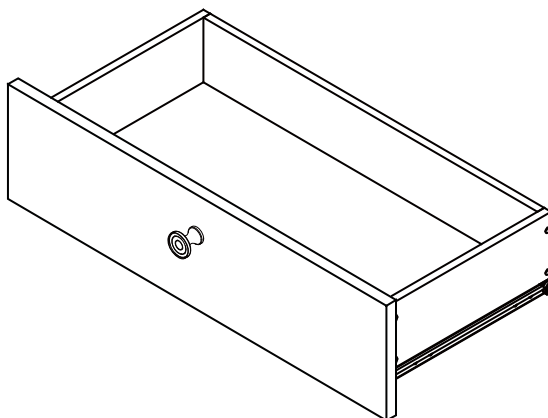

Repeat Step 16 to Step 21 to assemble the other 5 drawers.

Step 23

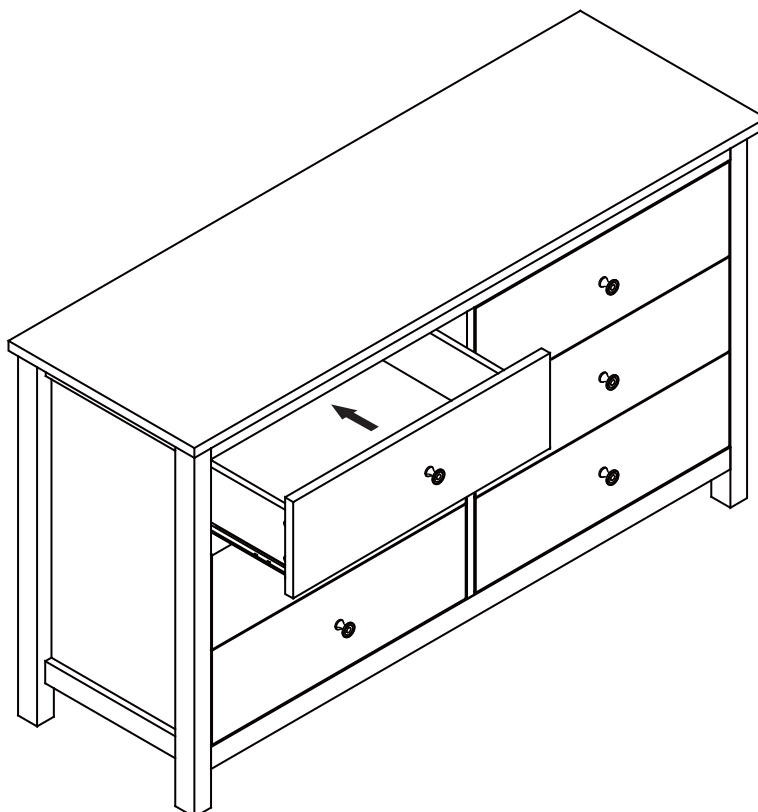





Put the drawers into the dresser.

www.fantasticfurniture.com.au

Step 24

We strongly advise that you use the wall safety strap provided to prevent the unit toppling

You will need	
	
1 x Safety Strap (H15)	1 x Screw (H16)
	
1 x Washer (H17)	Phillips head screwdriver

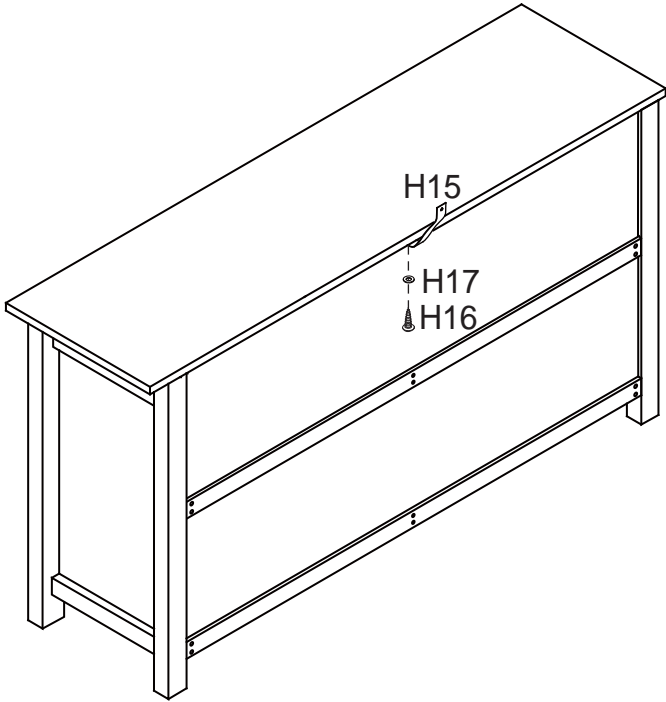





Safety Strap

Use 1 x Screw (H16) and 1 x Washer (H17) to attach 1 x Safety Strap (H15) securely on back bottom of top panel (P1) as shown.


Step 25

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

You will need	
	
1 x Washer (H17)	Phillips head screwdriver
Screw and Wall Plug which are not provided. Please use appropriate fixtures for your wall.	

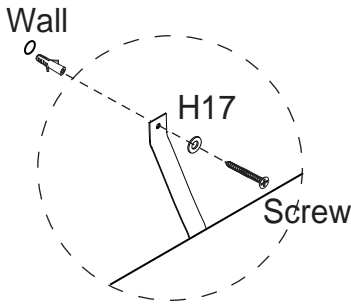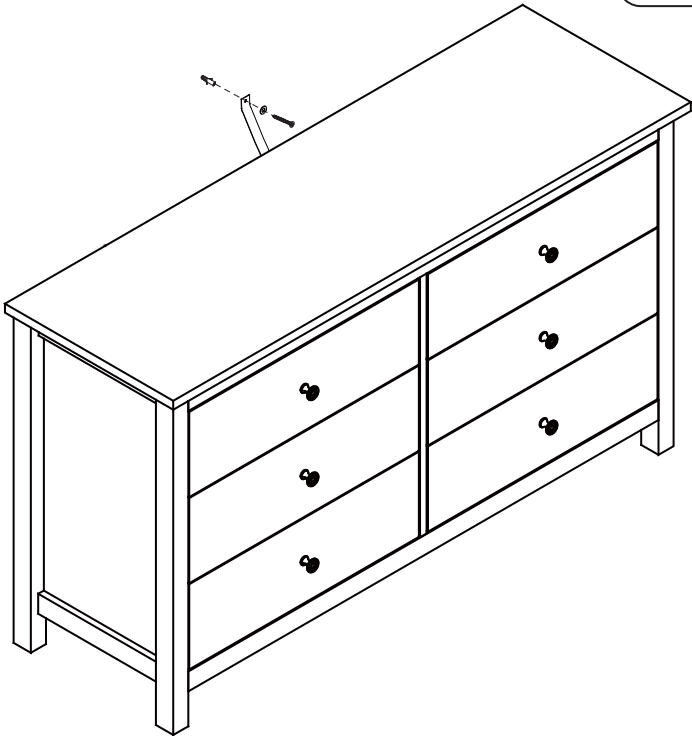

Move the dresser to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.
www.fantasticfurniture.com.au

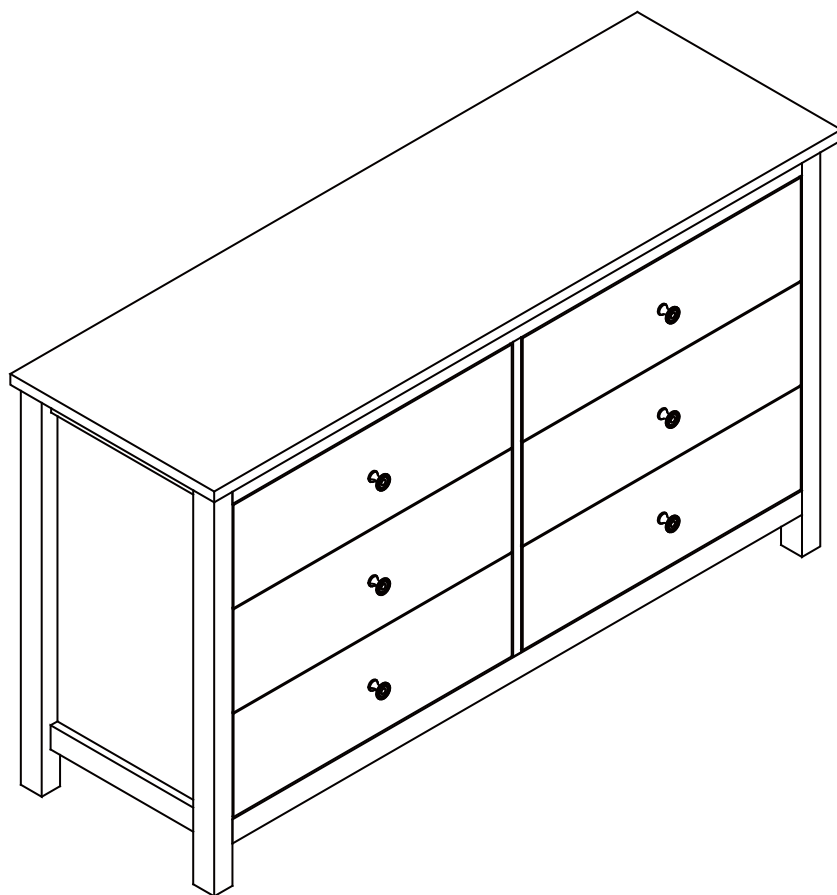

Recommended weight capacity : 80KG.

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.