




Version 1.1



TWO PEOPLE

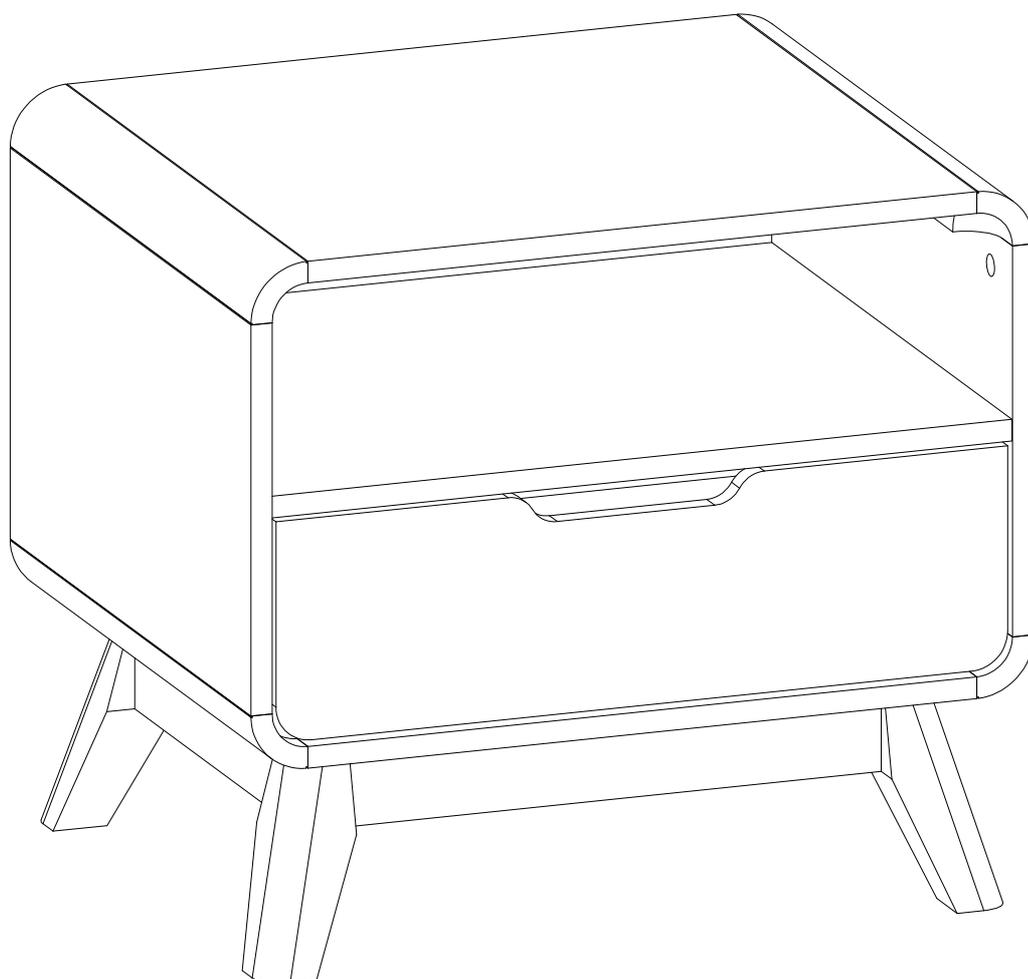

REQUIRED

NIVA

Lamp Table 1 Drawer

www.fantasticfurniture.com.au

Enjoy

Your purchase from
Australia's Best Value Furniture Store



Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

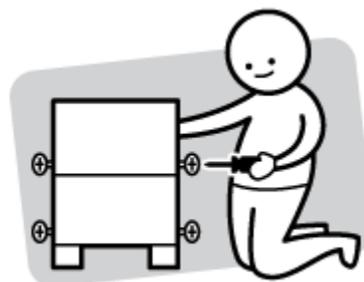

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

What you need

to assemble the product



DO NOT USE





Other tools you need


Flat head screwdriver; Phillips head screwdriver; Mallet

Part list

Box 1: Top Panel (P1); Bottom Panel (P2); Left Side Panel (P3); Right Side Panel (P4); Shelf (P5); Long Rail (P6); Short Rail (P7); Leg (P8); Back Panel (P9); Drawer Front (P10); Drawer Left Side Panel (P11); Drawer Right Side Panel (P12); Drawer Back (P13); Drawer Base (P14); Hardware Pack.

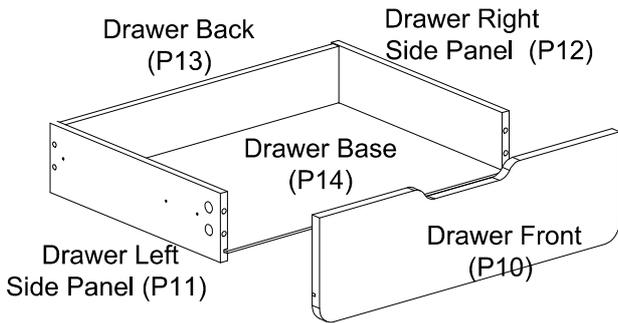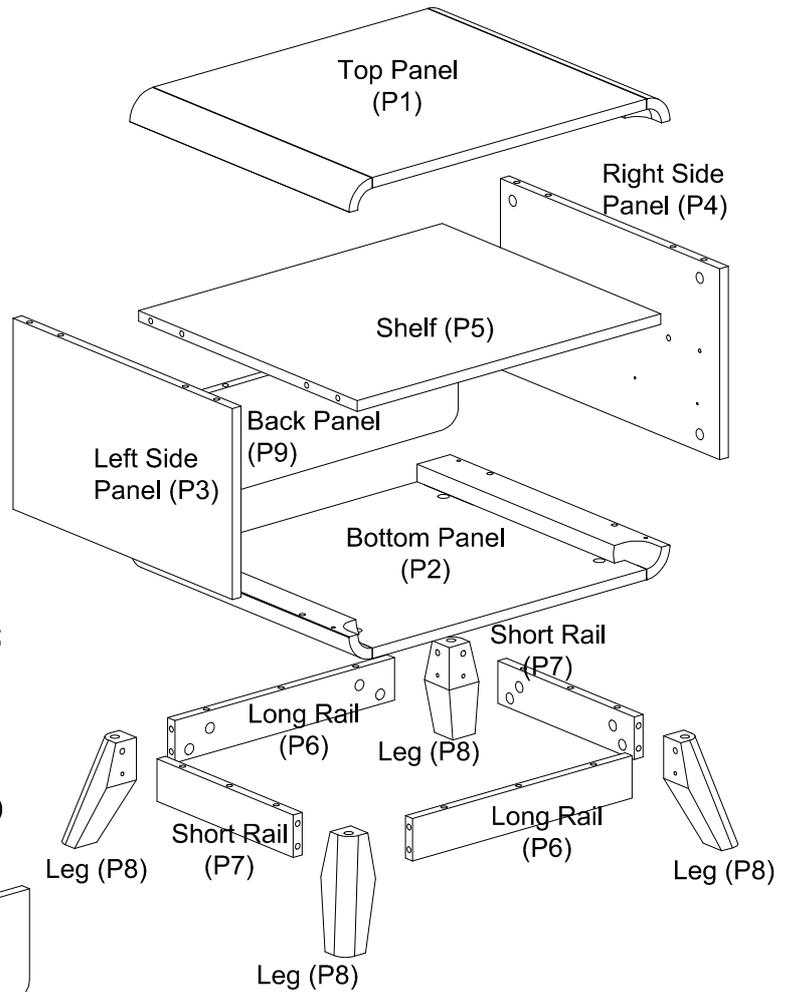


Hardware pack

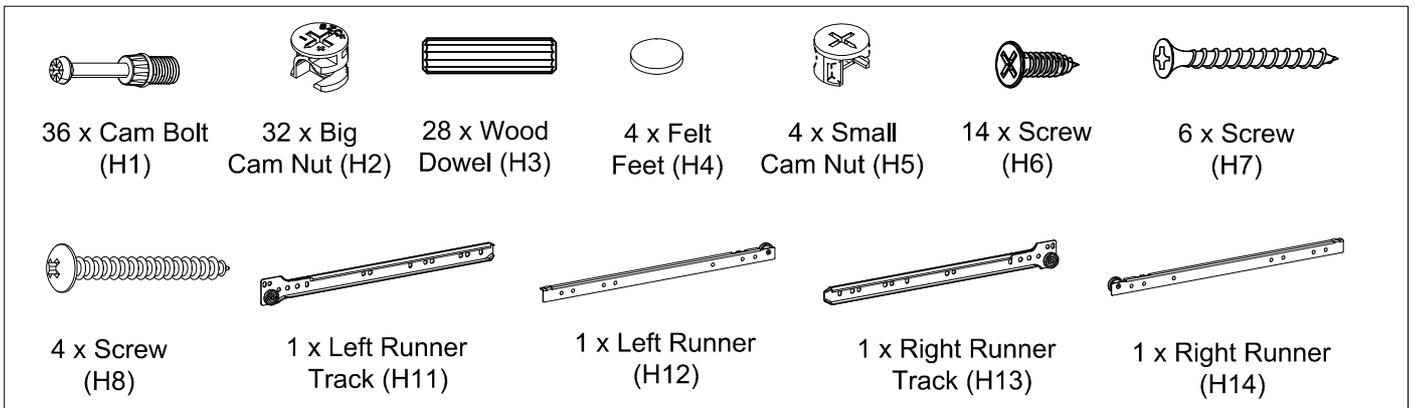

Step 1


You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver

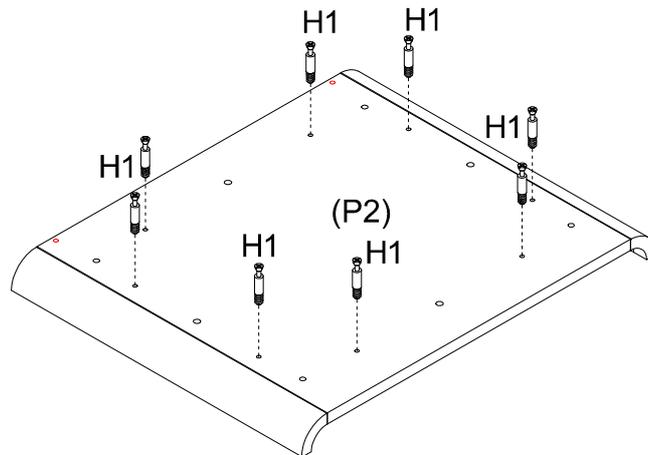

Screw 8 x Cam Bolts (H1) into Bottom Panel (P2) using a Phillips head screwdriver.


Step 2





You will need	
	
12 x Wood Dowels (H3)	Mallet

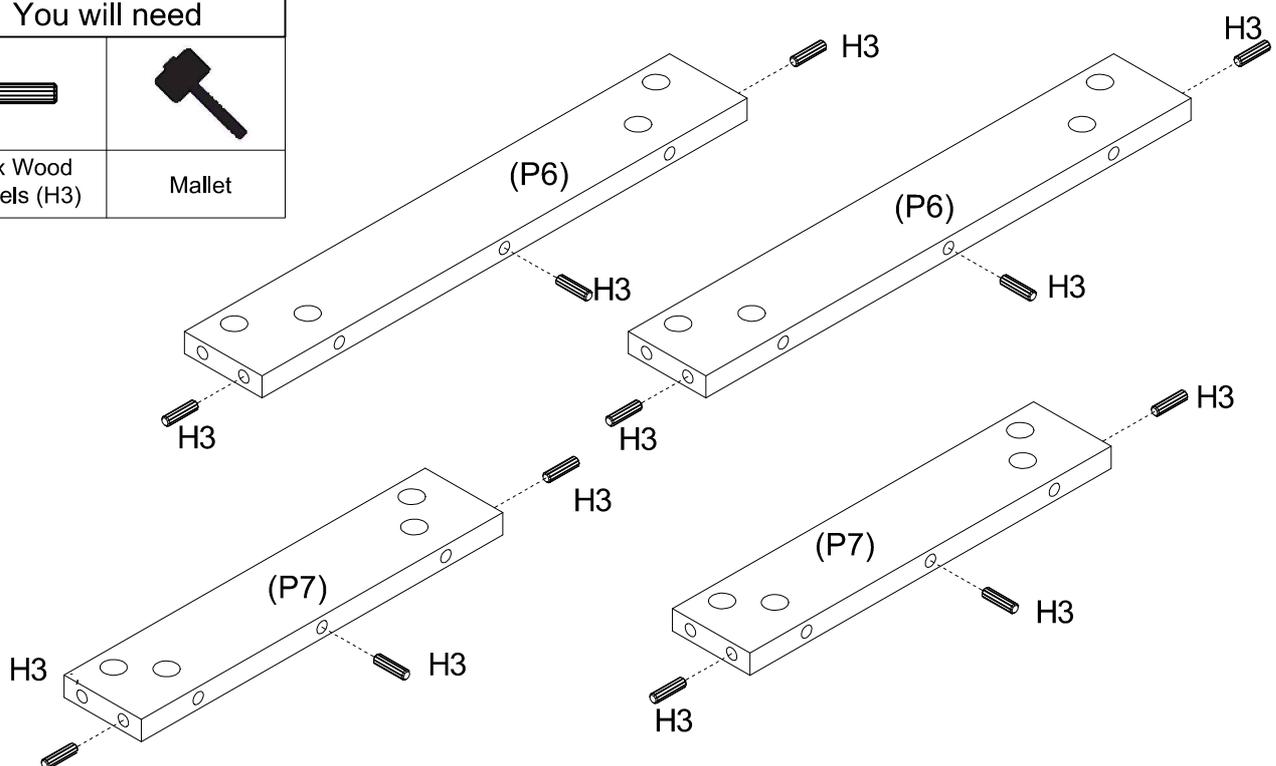

Insert each 3 x Wood Dowels (H3) into Short Rails (P7) and Long Rails (P6).

Step 3

You will need	
	
8 x Cam Bolts (H1)	4 x Felt Feet (H4)
	
Phillips head screwdriver	




Screw each 2 x Cam Bolts (H1) into 4 x Legs (P8).
Attached 4 x Felt Feet (H4) to Legs (P8).



Step 4

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

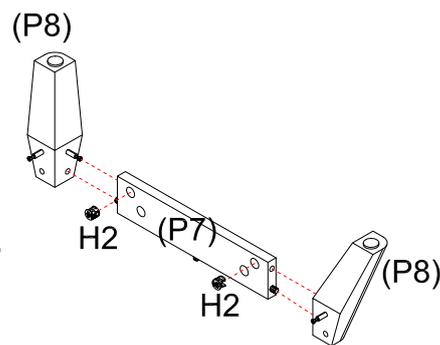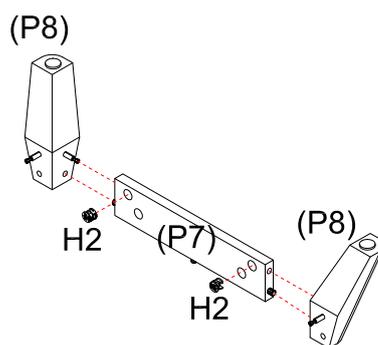


Attach Leg (P8) to Short Rail (P7).
Insert each 2 x Big Cam Nuts (H2) into Short Rails (P7).
Rotate the cam nuts so the arrows point towards the incoming cam bolt.
Push Leg (P8) into place and tighten the cam nuts.

Step 5

You will need	
	
4 x Big Cam Bolts (H2)	Flat head screwdriver

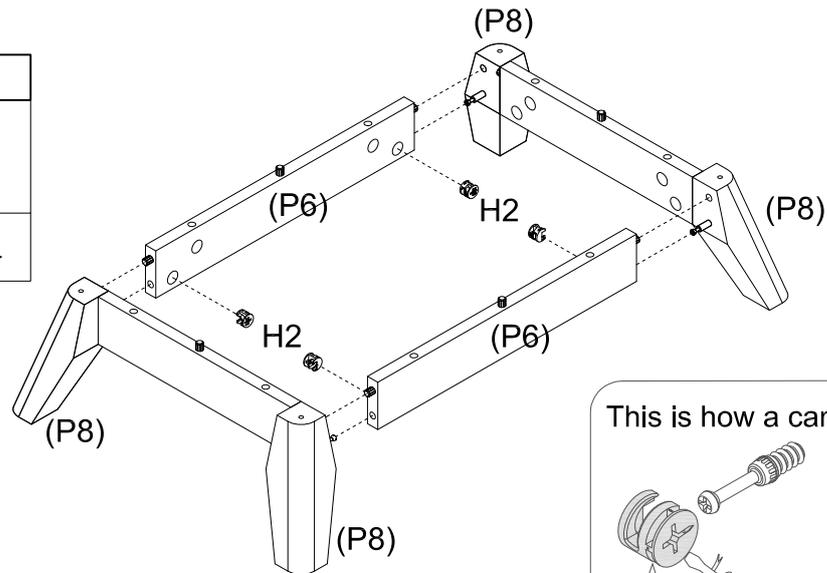

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Leg (P8) to Long Rail (P6).

Insert 4 x Big Cam Nuts (H2) into Long Rails (P6) and turn clockwise to lock.

Step 6


You will need	
	
8 x Big Cam Bolts (H2)	Flat head screwdriver

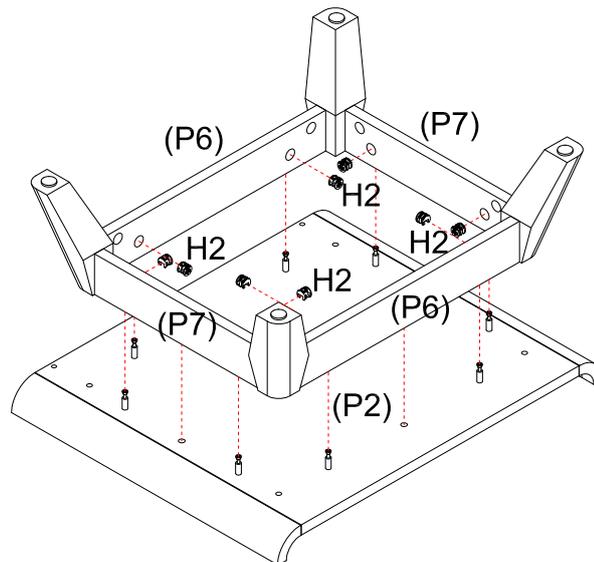


Attach Short Rails (P7) and Long Rails (P6) to Bottom Panel (P2).

Insert 8 x Big Cam Nuts (H2) into Rails (P6) & (P7) and turn clockwise to lock.

Step 7


You will need	
	
4 x Screws (H8)	4 x Cam Bolts (H1)
	
Phillips head screwdriver	

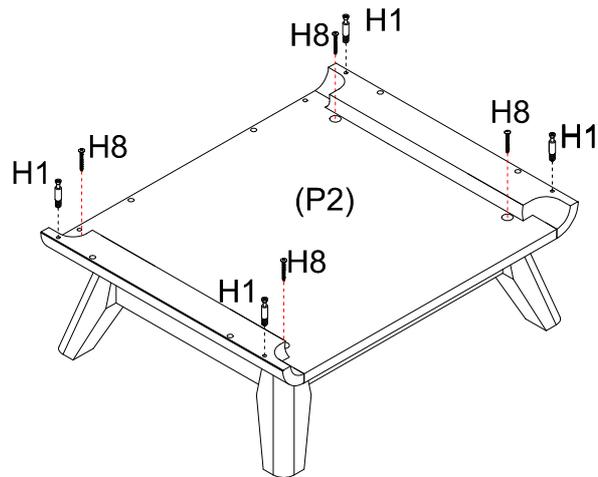


Turn over carefully.

Screw 4 x Cam Bolts (H1) into place using a phillips head screwdriver.
Use 4 x Screws (H8) through Bottom Panel (P2) to connect Leg (P8) with a phillips head screwdriver.

Step 8

You will need	
	
2 x Cam Bolts (H1)	8 x Wood Dowels (H3)
	
Phillips head screwdriver	Mallet

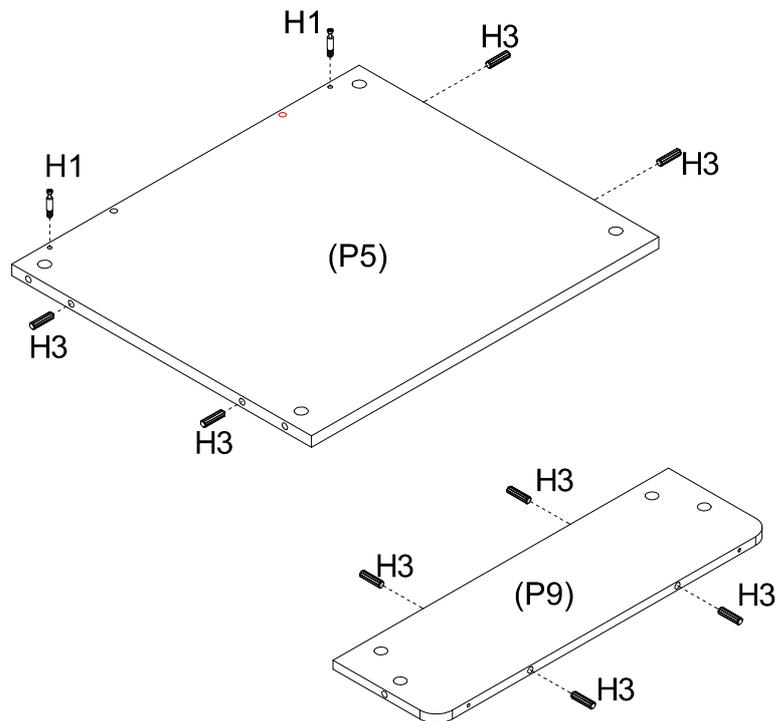


Insert each 4 x Wood Dowels (H3) to Back Panel (P9) and Shelf (P5).
Screw 2 x Cam Bolts (H1) into Shelf (P5) using a phillips head screwdriver.


Step 9

You will need	
	
2 x Big Cam Bolts (H2)	Flat head screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

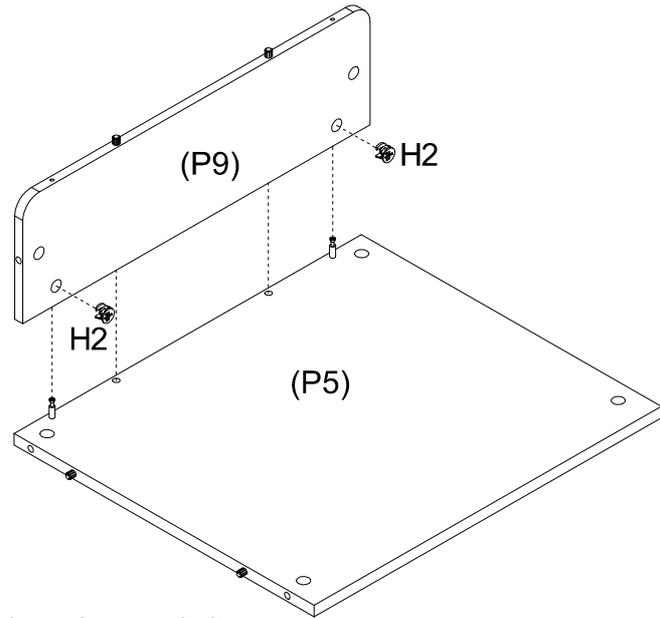


Attach Back Panel (P9) to Shelf (P5).


Insert 2 x Big Cam Nuts (H2) into Back Panel (P9).

Rotate the cam nuts so the arrows point towards the incoming cam bolt.

Push Back Panel (P9) into place and tight the cam nuts.

Step 10

You will need	
	
6 x Cam Bolts (H1)	8 x Wood Dowels (H3)
	
Phillips head screwdriver	Mallet



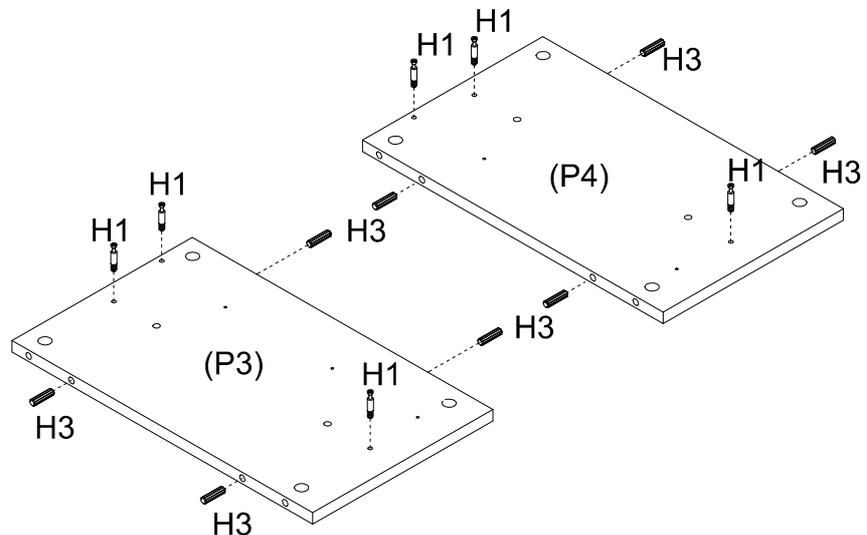


Insert each 4 x Wood Dowels (H3) to Side Panels (P3) & (P4).

Insert each 3 x Cam Bolts (H1) to Side Panels (P3) & (P4).

Step 11

You will need	
1 x Left Runner Track (H11)	1 x Right Runner Track (H13)
6 x Screws (H6)	Phillips head screwdriver

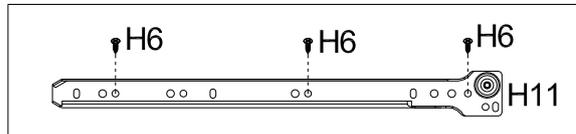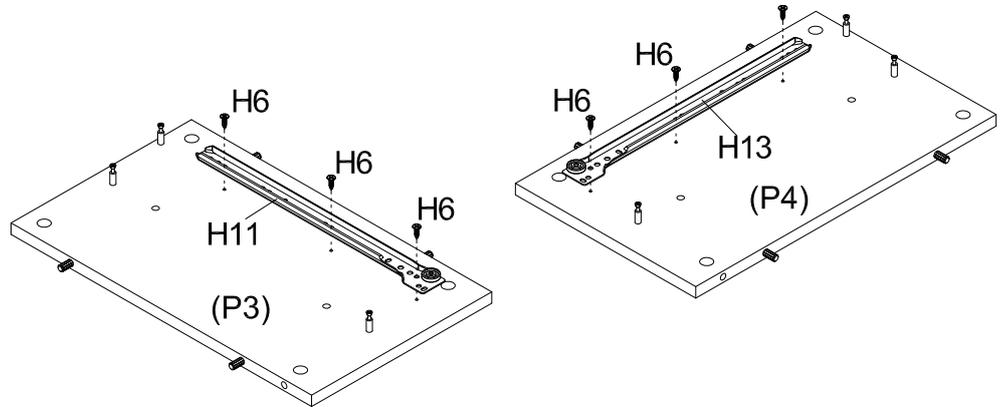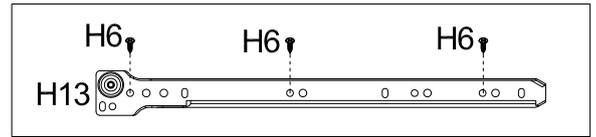

Attach 1 x Left Runner Track (H11) to Left Side Panel (P3) with 3 x Screws (H6).
 Attach 1 x Right Runner Track (H13) to Right Side Panels (P4) with 3 x Screws (H6).


Step 12

You will need	
3 x Big Cam Nuts (H2)	Flat head screwdriver


TWO PEOPLE



This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

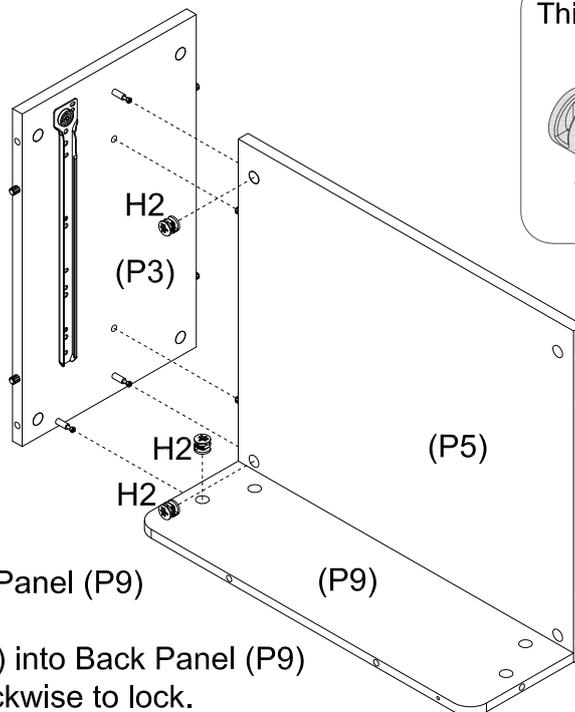


Attach Shelf (P5) and Back Panel (P9) to Left Side Panel (P3).
 Insert 3 x Big Cam Nuts (H2) into Back Panel (P9) and Shelf (P5) and turn clockwise to lock.


Step 13

You will need	
	
3 x Big Cam Nuts (H2)	Flat head screwdriver

TWO PEOPLE

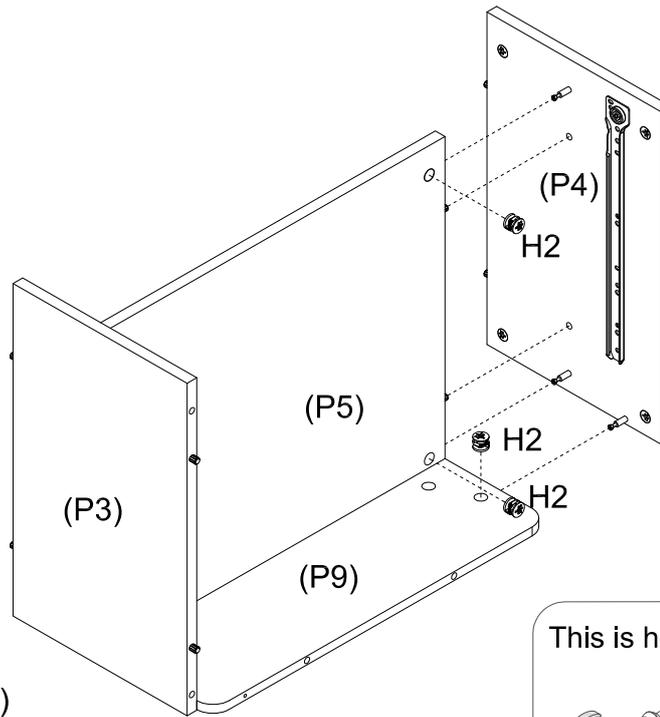

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Right Side Panel (P4) to Back Panel (P9) and Shelf (P5).
 Insert 3 x Big Cam Nuts (H2) into Back Panel (P9) and Shelf (P5) and turn clockwise to lock.

Step 14


You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver


TWO PEOPLE

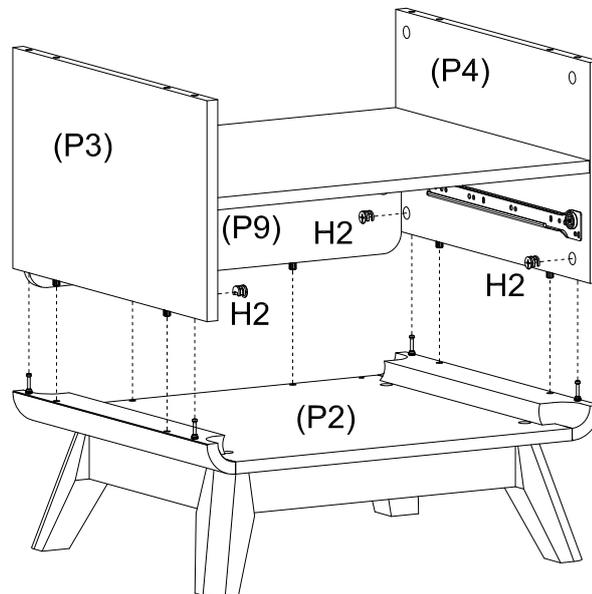

Attach Side panels (P3) & (P4) and Back Panel (P9) to Bottom Panel (P2).
 Insert 4 x Big Cam Nuts (H2) into Side Panels (P3) and (P4), turn clockwise to lock.


Step 15


You will need	
	
2 x Screws (H7)	Phillips head screwdriver

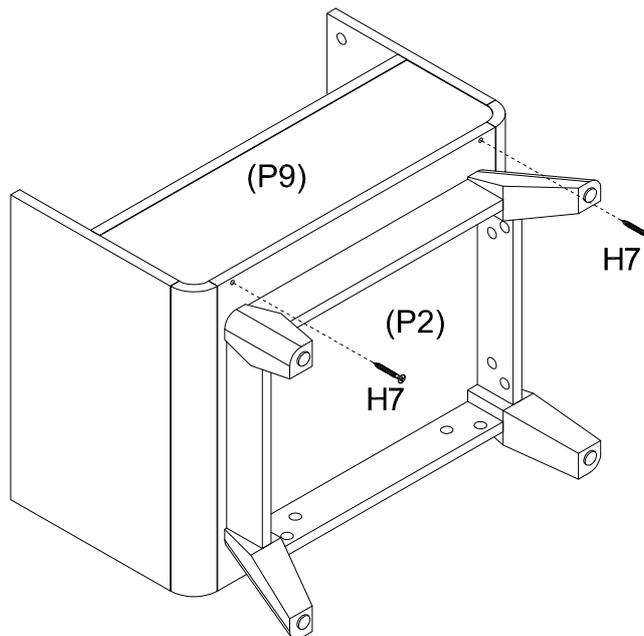

Use 2 x Screws (H7) through Bottom Panel (P2) to connect Back Panel (P9) with a phillips screwdriver.

Step 16


You will need	
	
4 x Cam Bolts (H1)	Phillips head screwdriver

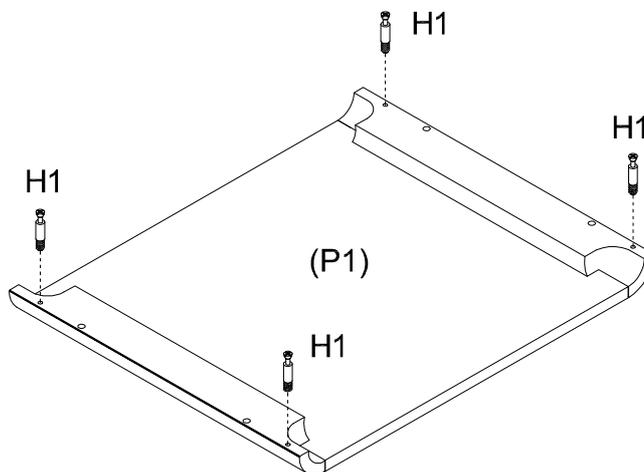


Screw 4 x Cam Bolts (H1) into place using a phillips head screwdriver.

Step 17

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

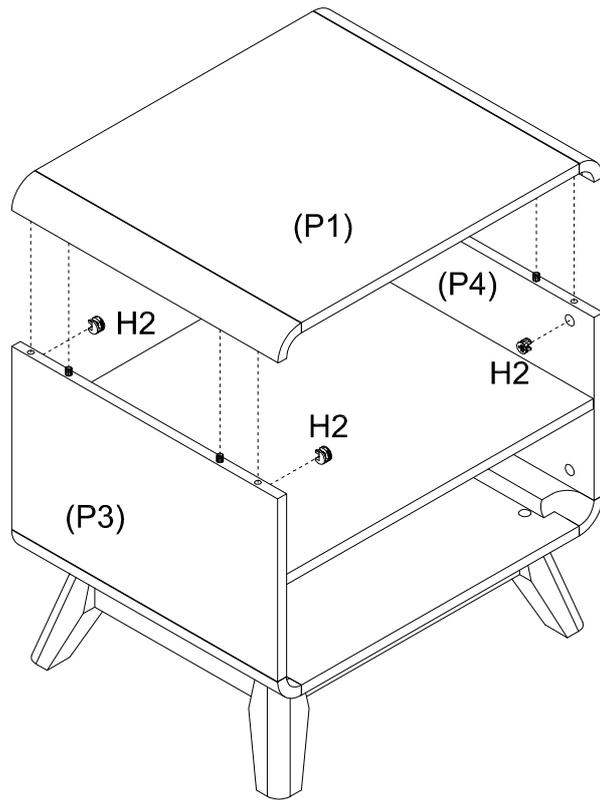

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Top Panel (P1) to Side Panels (P3) & (P4).
Insert 4 x Big Cam Nuts (H2) into Side Panels (P3) & (P4), turn clockwise to lock.


Step 18


You will need	
	
4 x Screws (H7)	Phillips head screwdriver

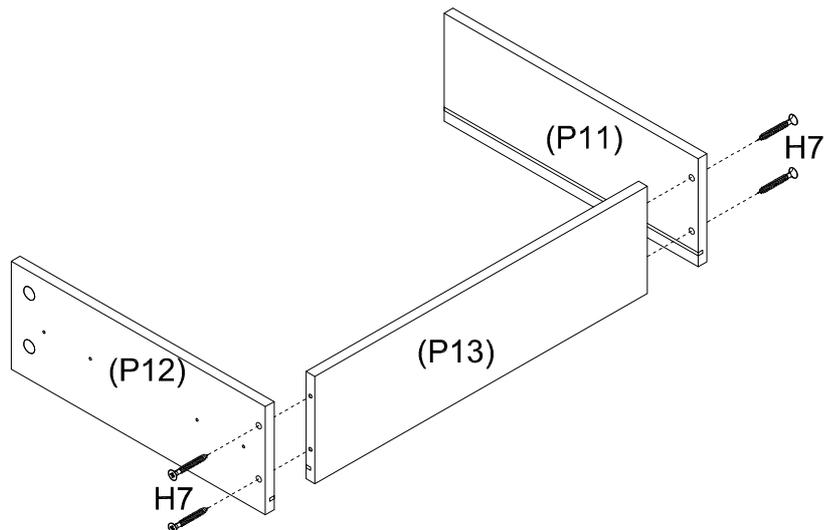

Attach Drawer Side Panels (P11) and (P12) to Drawer Back (P13) with 4 x Screws (H7).


Step 19

You will need	
	
4 x Cam Bolts (H1)	Phillips head screwdriver

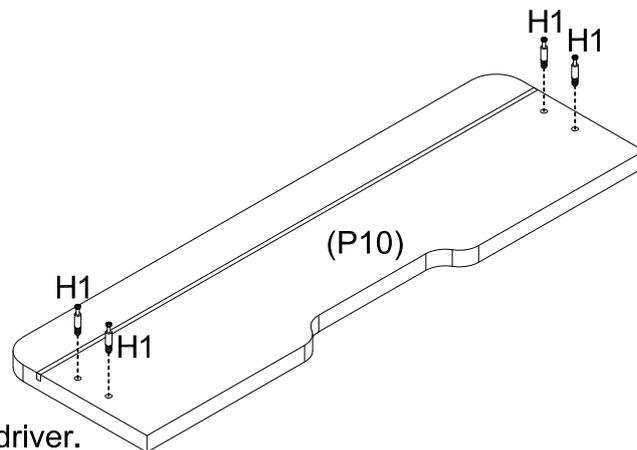

Screw 4 x Cam Bolts (H1) into Drawer Front (P10) using a Phillips head screwdriver.

Step 20

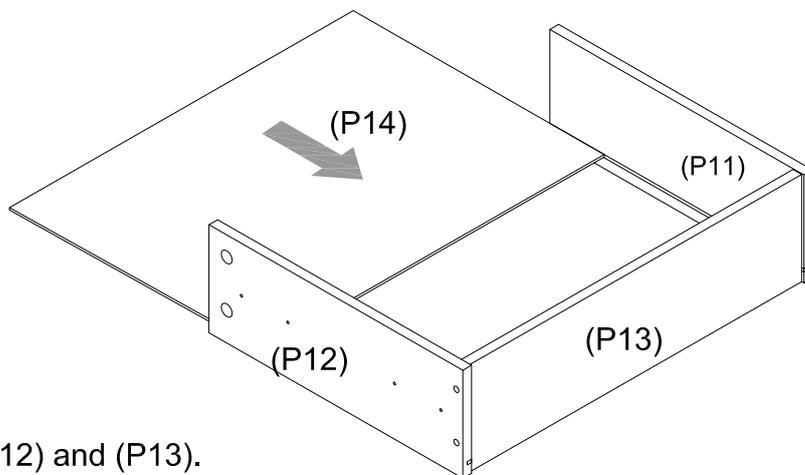


Slide Drawer Base (P14) into the groove in Drawer Panels (P11), (P12) and (P13).


Step 21

You will need	
	
4 x Small Cam Nuts (H5)	Flat head screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

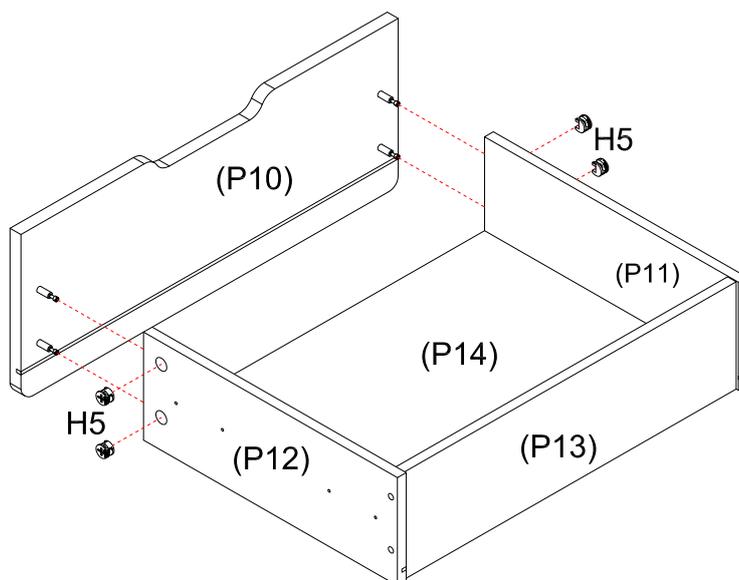

Attach Drawer Front (P10) to Drawer Sides (P11) & (P12).
 Insert 4 x Small Cam Nuts (H5) into Drawer Sides (P11) & (P12).
 Rotate the cam nuts so the arrows point towards the incoming cam bolt.
 Push Drawer Front (P10) into place and turn the cam nuts clockwise to lock.

Step 22


You will need	
1 x Left Runner (H12)	1 x Right Runner (H14)
8 x Screws (H6)	Phillips head screwdriver

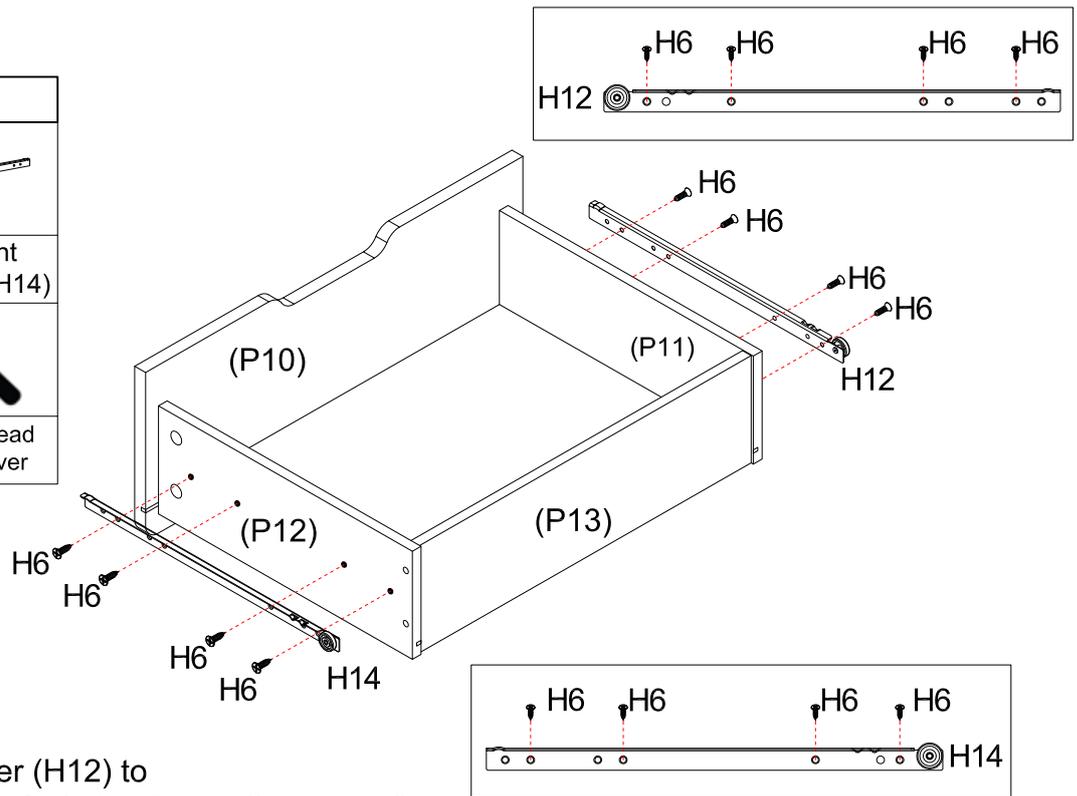

Attach 1 x Left Runner (H12) to Drawer Left Side Panel (P11) with 4 x Screws (H6).


Attach 1 x Right Runner (H14) to Drawer Right Side Panel (P12) with 4 x Screws (H6).

Step 23

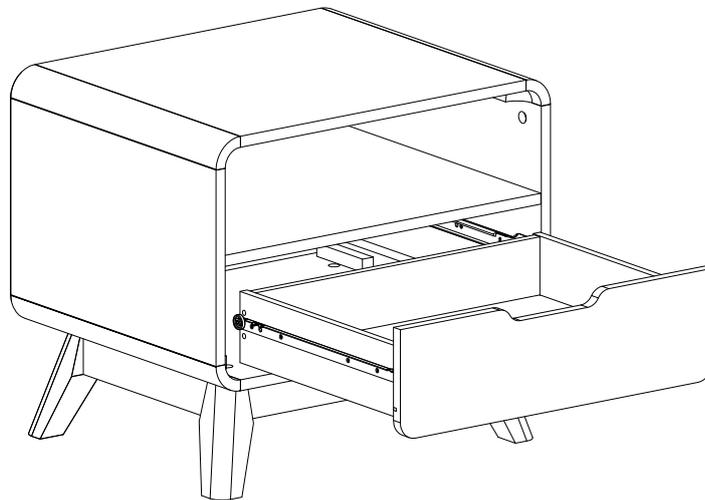

Slide the Drawer into the Frame.

Step 24

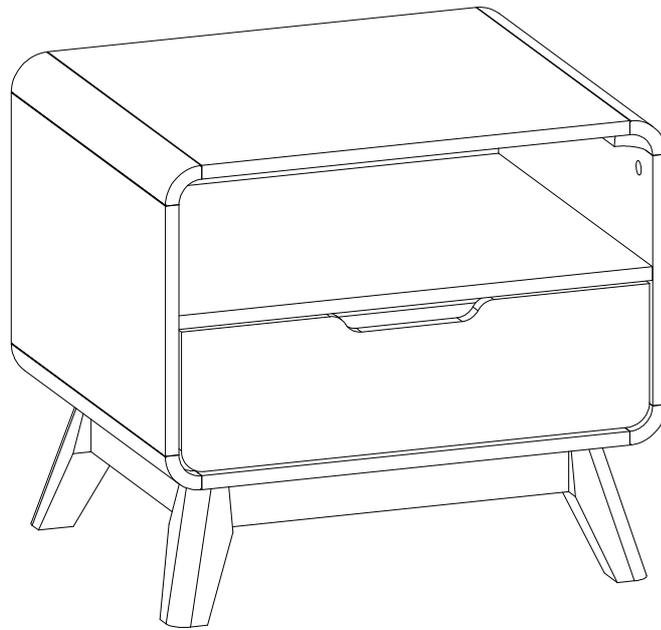

Job Complete !

In the interest of our environment please dispose of all packaging thoughtfully.