





**Fantastic  
Furniture**

Version 1.0

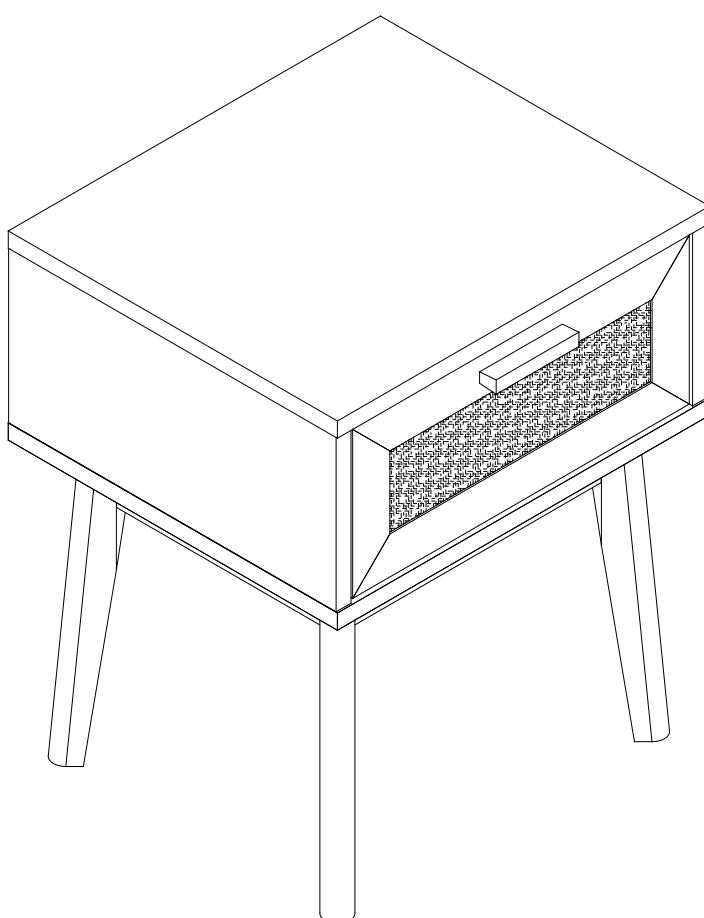

**Two People**



**Required**

**Java**  
Lamp Table 1 Drawer  
[fantasticfurniture.com.au](http://fantasticfurniture.com.au)



## **Warning: Ensure the wall strap is attached to avoid serious injury**

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

## **Rattan**

Rattan is a natural material that will respond to humidity in the environment. Low humidity may cause the rattan to shrink. High humidity may cause the rattan to absorb moisture and expand, causing the weaving to look loose and wavy.

This is a natural phenomenon and not a defect.

## **Looks like you've found your Fantastic!**

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



# **Fantastic Furniture**

## **Love it? Share it!**

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!  
**@fantasticfurniture**


# Assembly Checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

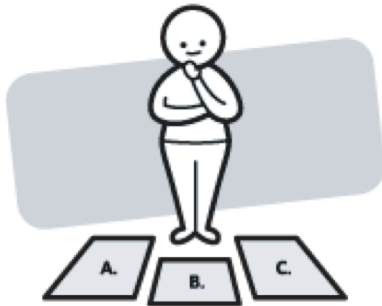

Identify and lay out all of the components before you begin assembly.

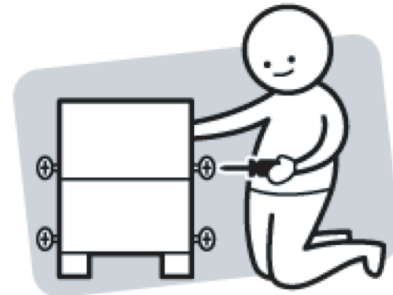

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need

## to assemble the product




DO NOT USE



### Other tools you need


Flat Head Screwdriver;  
Phillips Head Screwdriver;  
Mallet

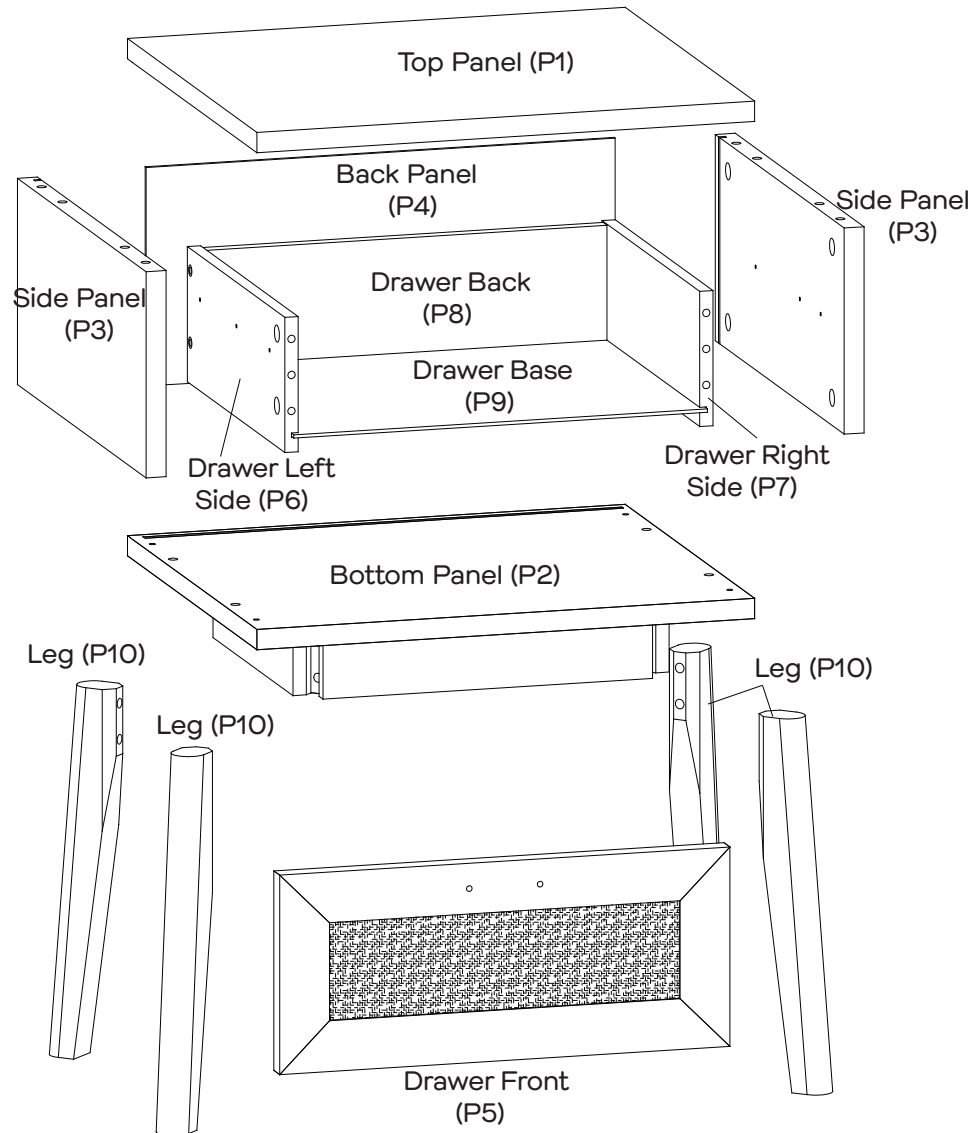

### Parts list

- 1 x Top Panel (P1)
- 1 x Bottom Panel (P2)
- 2 x Side Panels (P3)
- 1 x Back Panel (P4)
- 1 x Drawer Front (P5)
- 1 x Drawer Left Side (P6)
- 1 x Drawer Right Side (P7)
- 1 x Drawer Back (P8)
- 1 x Drawer Base (P9)
- 4 x Legs (P10)

## Hardware Pack



12 x Cam Bolts  
(H1)



8 x Large Cam  
Nuts (H2)



8 x Dowels ø8mm  
(H3)



1 x Handle  
(H4)



4 x Felt Feet  
(H5)



4 x Screws 16mm  
(H6)



4 x Back Panel  
Connectors (H7)




8 x Bolts  
(H8)



10 x Flat Washers  
(H9)




8 x Spring  
Washers (H10)



2 x Screws 28mm  
(H11)



1 x Allen Key  
(H12)




1 x Wall Strap  
(H13)




1 x Screw 25mm  
(H14)



4 x Small Cam  
Nuts (H15)



2 x Dowels ø6mm  
(H16)



4 x Screws 38mm  
(H17)




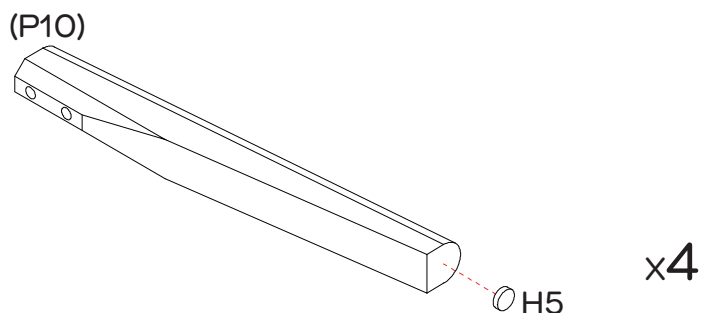
12 x Screws 12mm  
(H18)



2 x Slides  
(H19)





# Step 1



You will need	
	
4 x Felt Feet (H5)	



Attach 1 x felt foot (H5) onto each leg (P10) as shown.



# Step 2


You will need	
	
8 x Bolts (H8)	8 x Flat Washers (H9)
	
8 x Spring Washers (H10)	1 x Allen Key (H12)

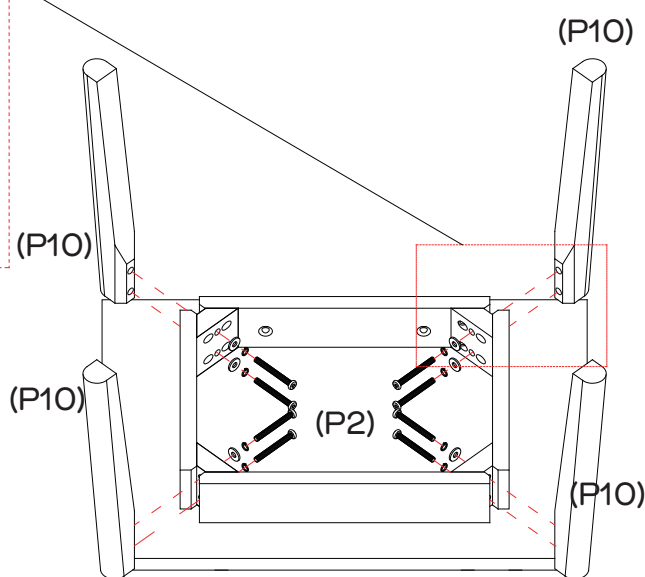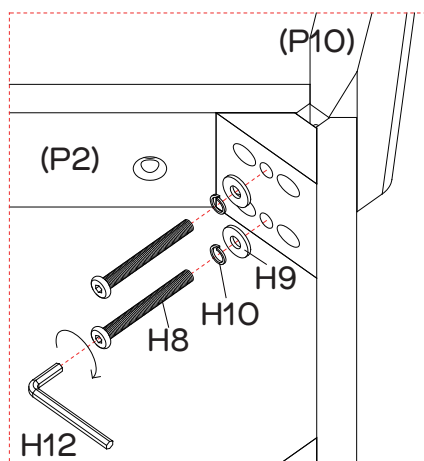

Attach 1 x leg (P10) onto bottom panel (P2), using 2 x bolts (H8), 2 x flat washers (H9) and 2 x spring washers (H10). Tighten the bolts with allen key (H12). Repeat this step for the other 3 x legs (P10). Turn the assembled unit over.





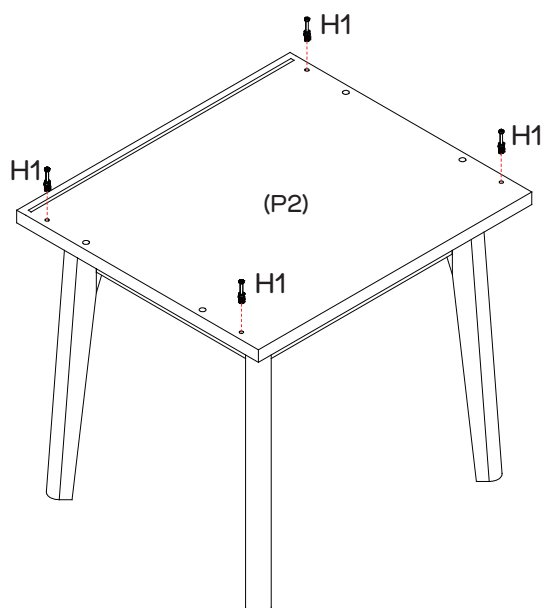
# Step 3

You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver





Screw 4 x cam bolts (H1) into bottom panel (P2), using a phillips head screwdriver.


# Step 4

You will need	
	
2 x Slides (H19)	6 x Screws 12mm (H18)
	
Phillips Head Screwdriver	8 x Dowels ø8mm (H3)
	
Mallet	

Separate the 2 x slide runners (H19-2) and slide tracks (H19-1) from the slides (H19) by following the steps below:  
 Extend the slide runner (H19-2) all the way out.  
 Press down the plastic release lever on the slide and pull out the slide runner (H19-2) completely.

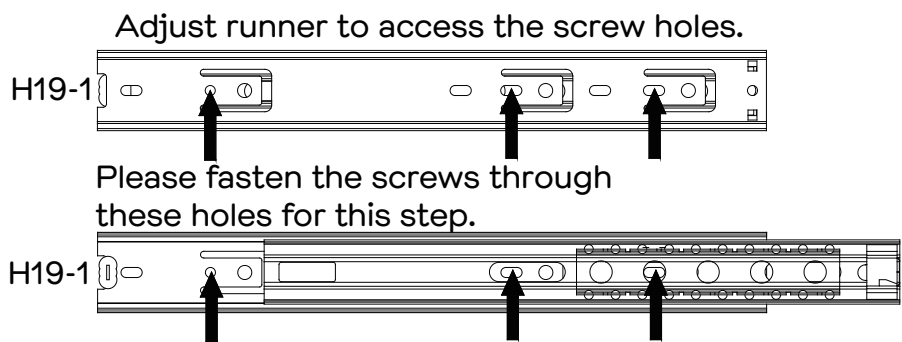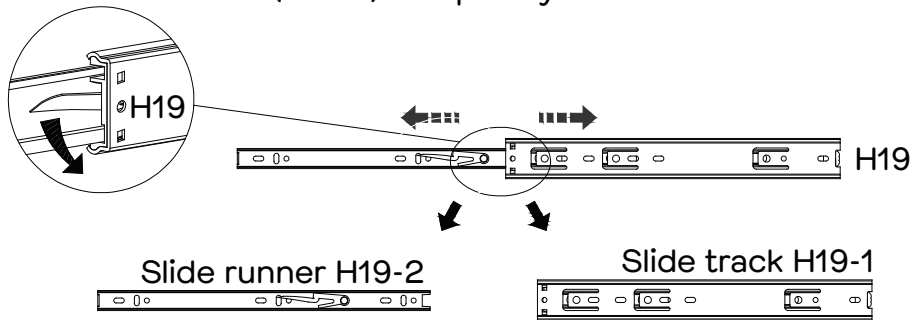

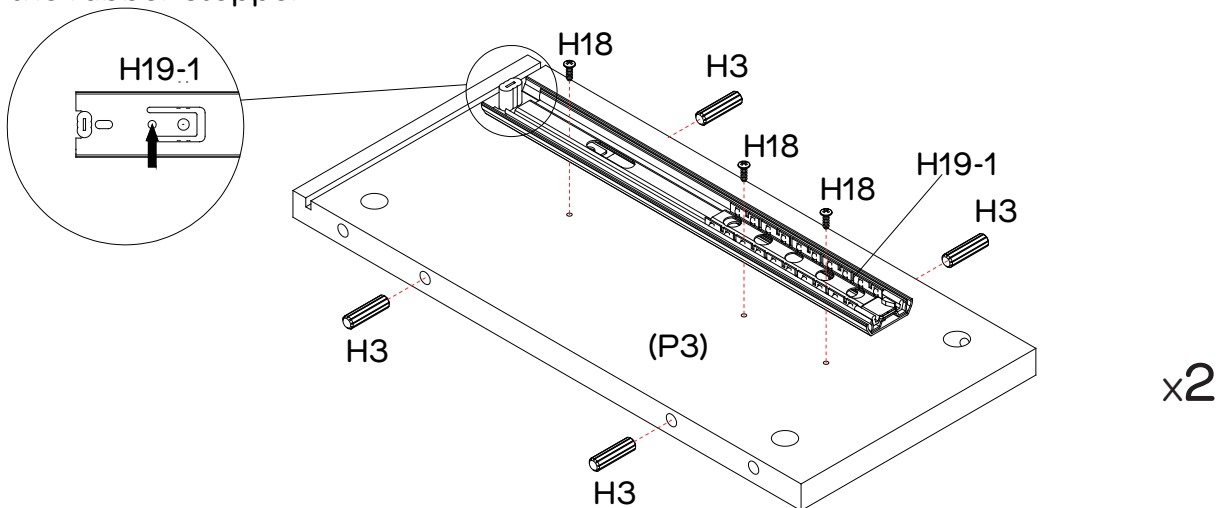

Note the position of the rubber stopper




Attach 2 x separated slide tracks (H19-1) onto 2 x side panels (P3) with 6 x screws (H18), using a phillips head screwdriver as shown.  
 Ensure the slide tracks (H19-1) are attached so the rubber stopper is near the grooves on the panels.

Insert 4 x dowels (H3) into each panel (P3) as shown.  
 Use a mallet to gently tap the dowels into place if needed.


## Step 5

You will need	
	
4 x Large Cam Nuts (H2)	Flat Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

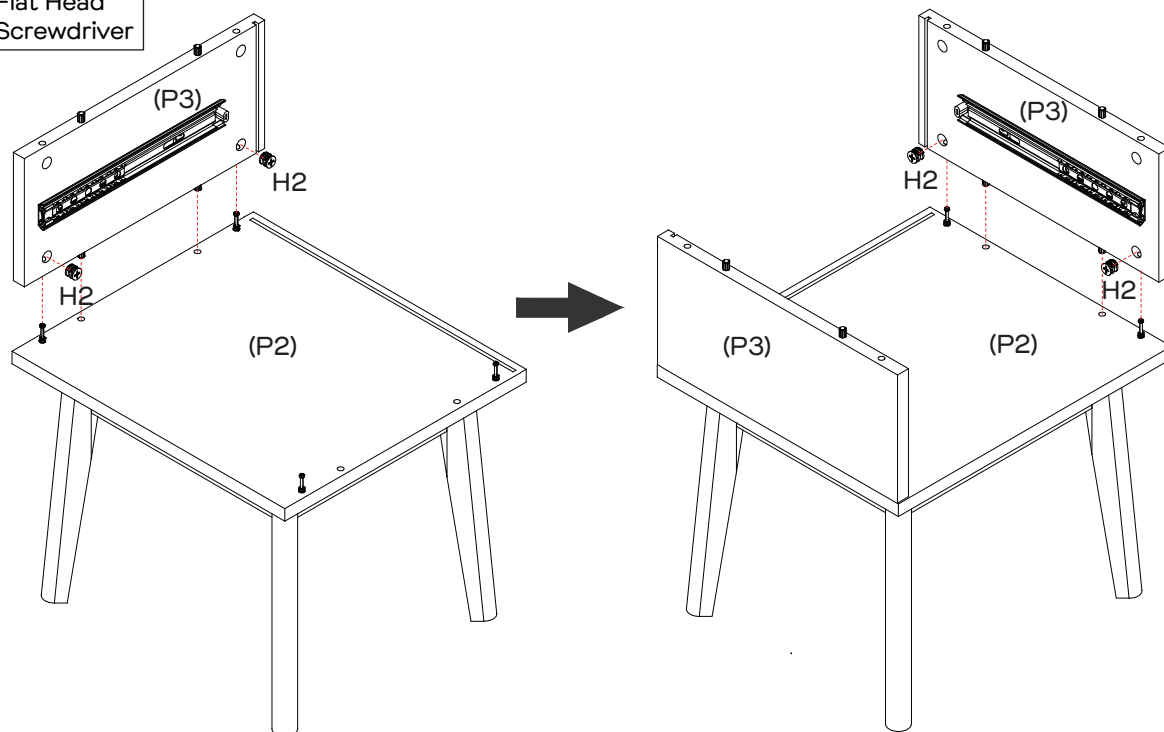

Position the 2 x side panels (P3) onto bottom panel (P2), making sure the grooves on side panels and bottom panel are on the same side.

Insert 4 x large cam nuts (H2) into side panels (P3). Rotate the cam nuts so the arrows point towards the incoming cam bolts. Using a flat head screwdriver, turn clockwise to lock.



## Step 6

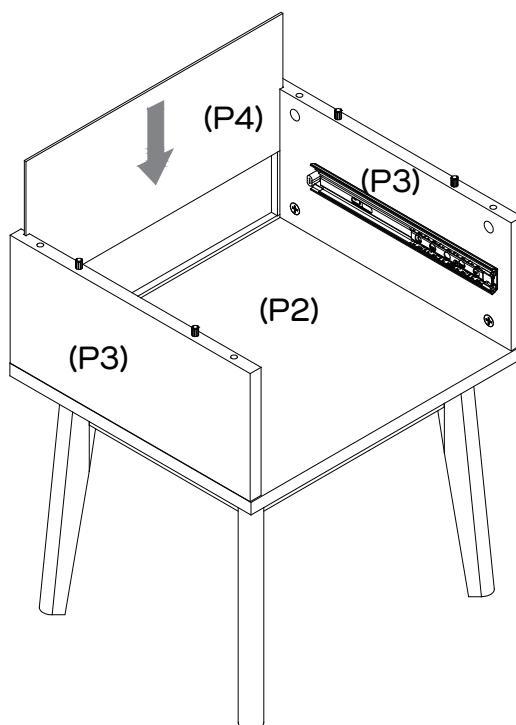


Slide back panel (P4) into the grooves of the side panels and bottom panel (P3, P2).





## Step 7

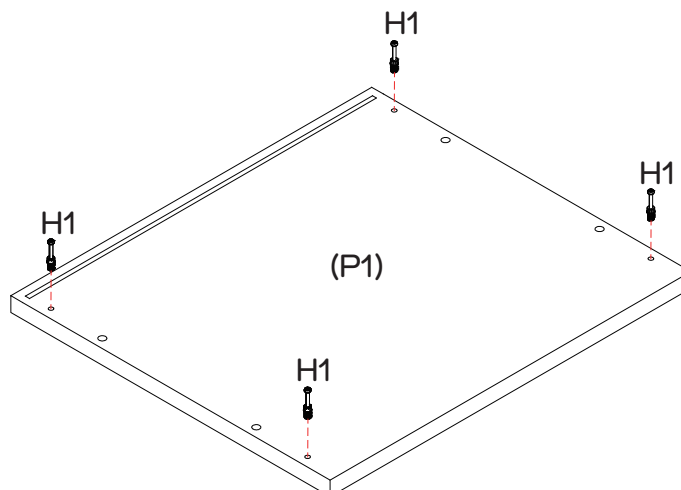
You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver



Screw 4 x cam bolts (H1) into top panel (P1), using a phillips head screwdriver.

## Step 8

You will need	
	
4 x Large Cam Nuts (H2)	Flat Head Screwdriver

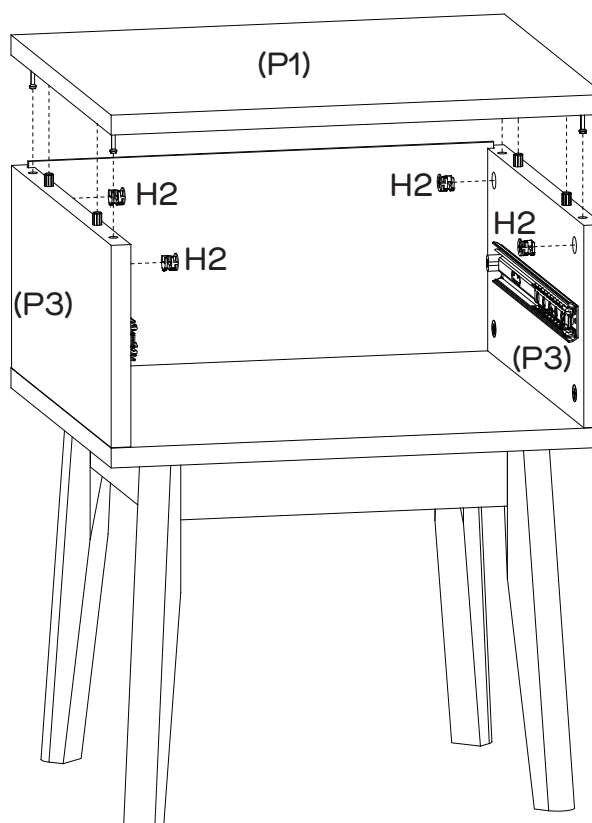




Position top panel (P1) onto assembled unit as shown.




Insert 4 x large cam nuts (H2) into panels (P3).

Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Using a flat head screwdriver, turn clockwise to lock.

## Step 9

You will need	
	
4 x Screws 16mm (H6)	4 x Back Panel Connectors (H7)
	
Phillips Head Screwdriver	

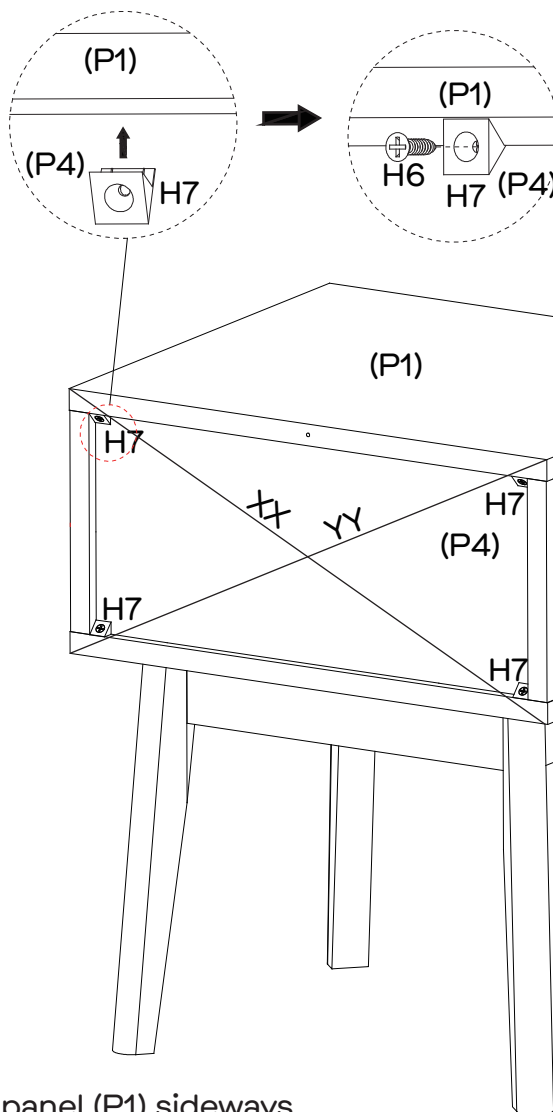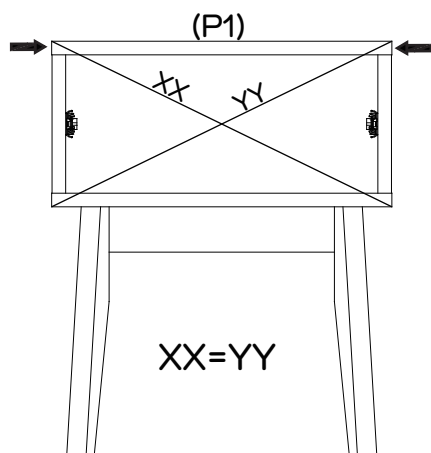



Two People  
Required


If necessary, gently adjust the top panel (P1) sideways in either direction until XX and YY are equal.

Holding it in place, fix 4 x back panel connectors (H7)

to assembled unit with 4 x screws (H6) as shown, using a phillips head screwdriver.



## Step 10

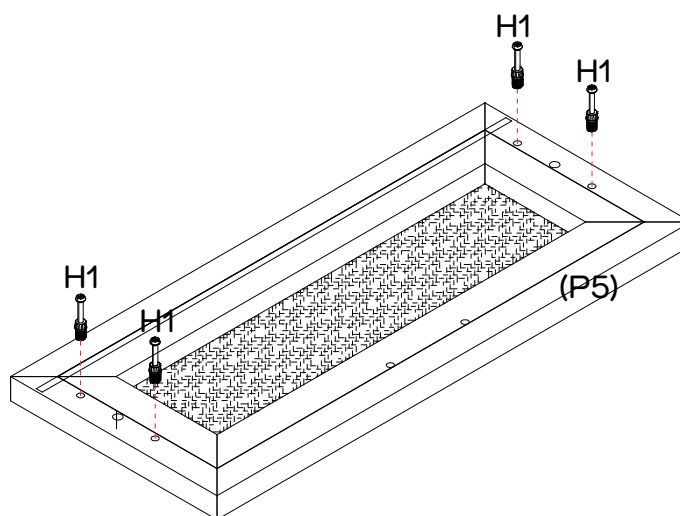
You will need	
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver



Screw 4 x cam bolts (H1) into drawer front (P5), using a phillips head screwdriver as shown.



## Step 11

You will need	
	
2 x Dowels ø6mm (H16)	Mallet

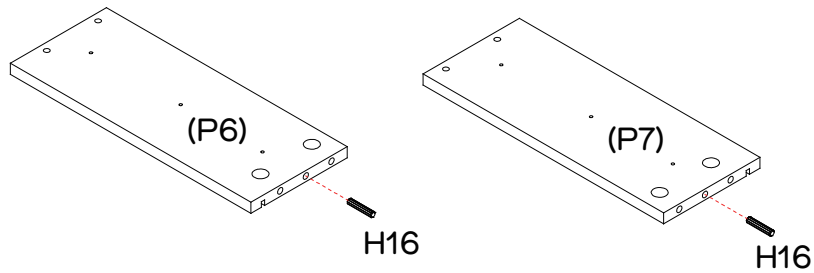


Insert 2 x dowels (H16) into drawer side panels (P6, P7) as shown.  
Use a mallet to gently tap the dowels into place if needed.

## Step 12


You will need	
	
4 x Small Cam Nuts (H15)	Flat Head Screwdriver

Position drawer sides (P6, P7)  
onto drawer front (P5).  
Insert 4 x small cam nuts (H15)  
into drawer sides (P6, P7).  
Rotate the cam nuts so the arrows  
face incoming cam bolts.  
Using a flat head screwdriver turn clockwise to lock.

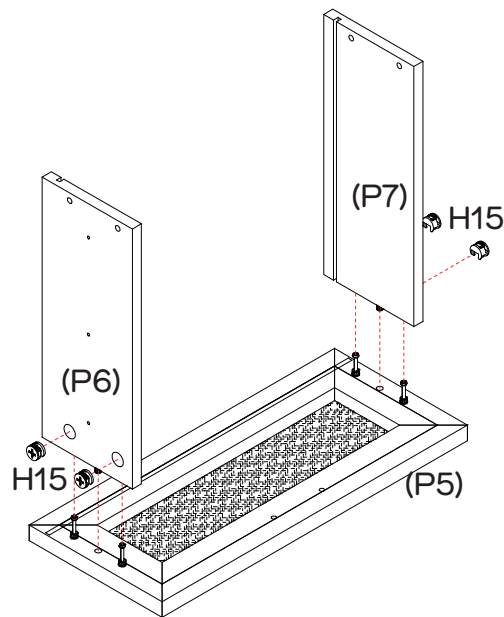



## Step 13


Slide drawer base (P9) into  
the grooves of panels (P5, P6, P7).

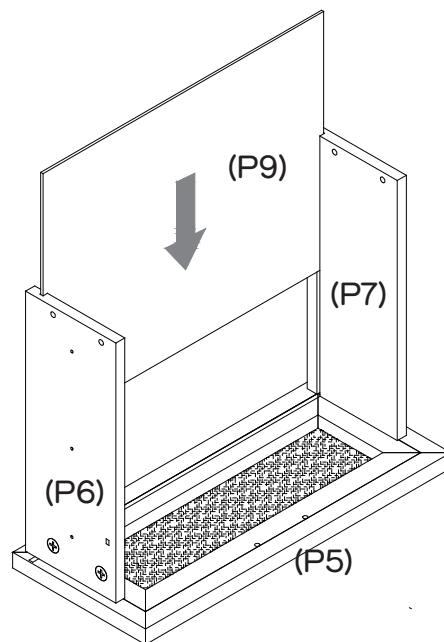

## Step 14




You will need	
	
4 x Screws 38mm (H17)	Phillips Head Screwdriver

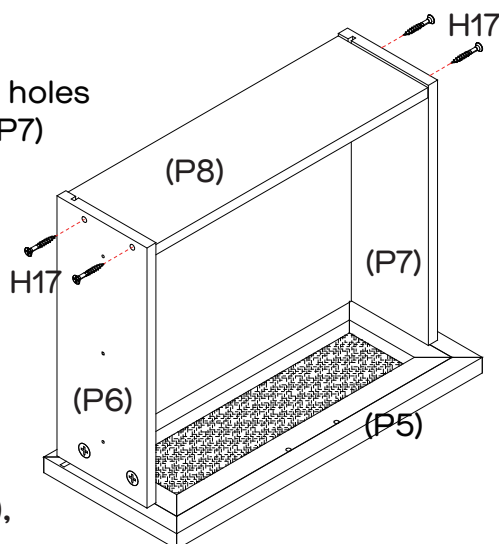Ensure the pre-drilled holes on drawer sides (P6, P7) align with the holes on drawer back (P8).




Attach drawer back (P8) to assembled drawer (P5, P6, P7) with 4 x screws (H17), using a phillips head screwdriver as shown.

## Step 15




You will need	
	
2 x Slide Runners (H19-2)	6 x Screws 12mm (H18)
	
Phillips Head Screwdriver	

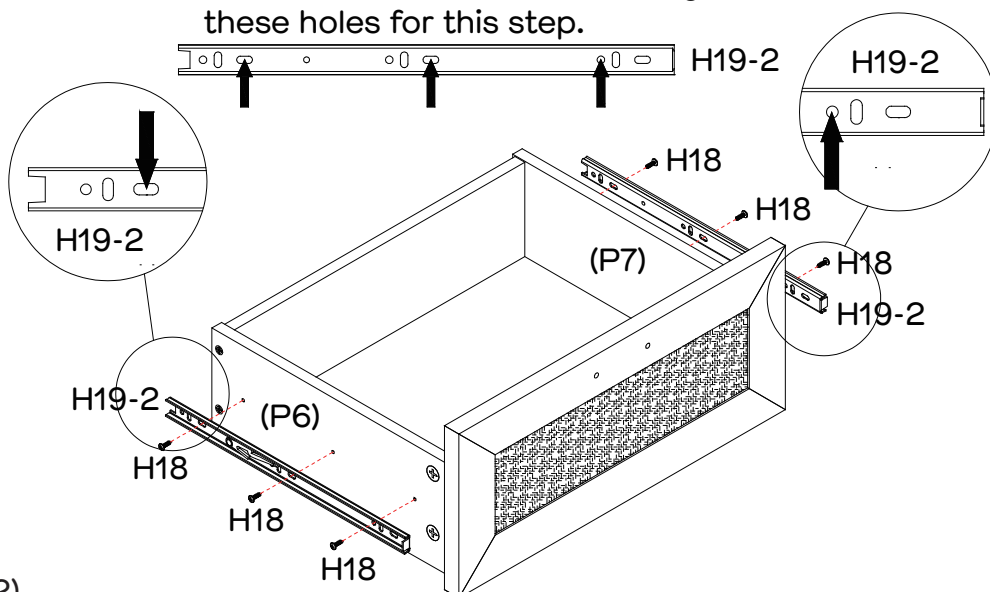
Please fasten the screws through these holes for this step.



Attach 1 x slide runner (H19-2) to each drawer side (P6, P7) with 3 x screws (H18), using a phillips head screwdriver as shown.




## Step 16

You will need	
	
2 x Screws 28mm (H11)	1 x Handle (H4)
	
Phillips Head Screwdriver	

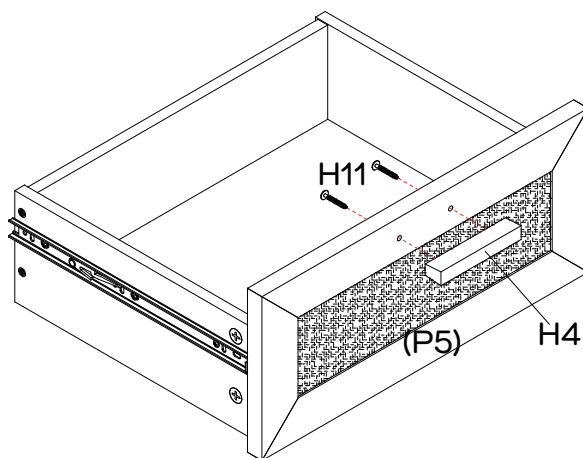


Attach 1 x handle (H4) onto drawer front (P5) with 2 x screws (H11), using a phillips head screwdriver as shown.


## Step 17

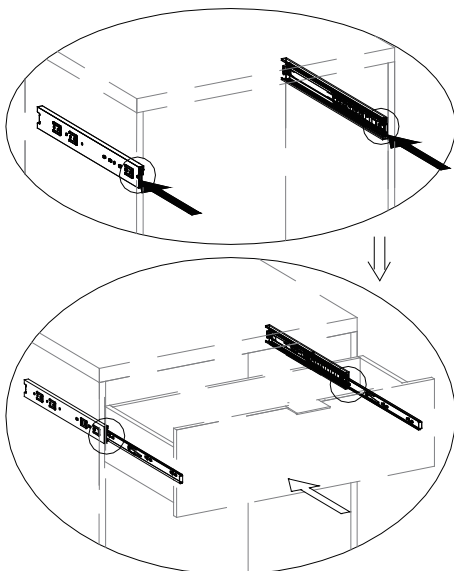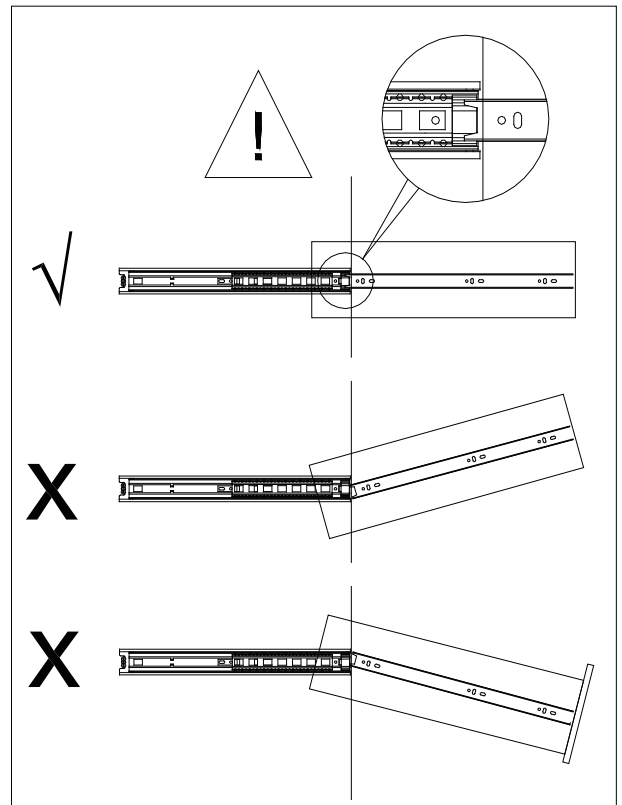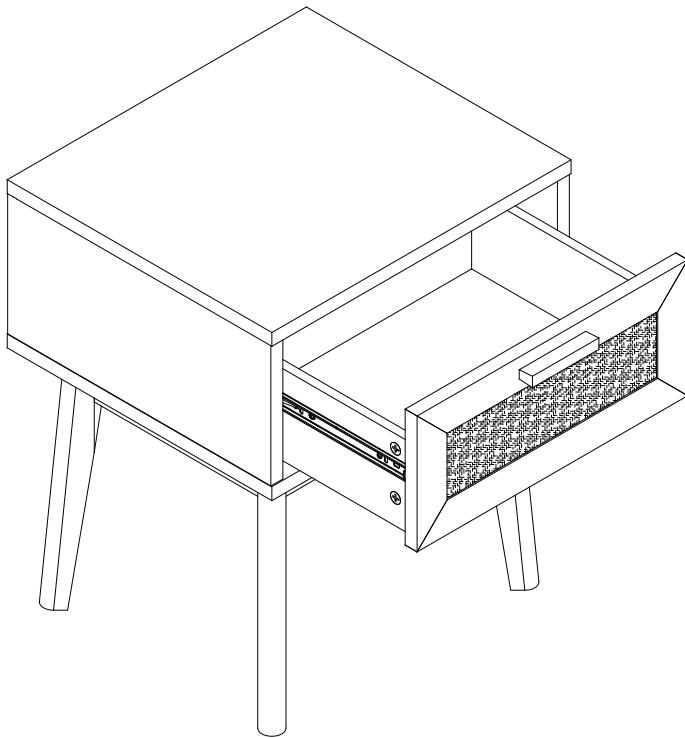

Move inner ball bearing track to front of slide track (H19-1).





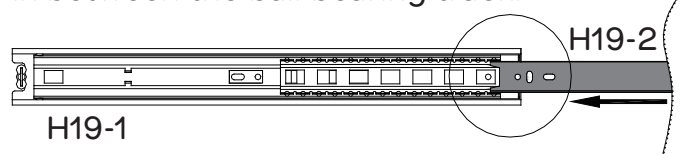

Gently insert drawer slide runner (H19-2) in between the ball bearing track.




Position drawer so that slide runners (H19-2) align with slide tracks (H19-1) as shown. Gently push drawer into the closed position.

## Step 18



You will need	
	
1 x Flat Washer (H9)	1 x Screw 25mm (H14)
	
1 x Wall Strap (H13)	Phillips Head Screwdriver

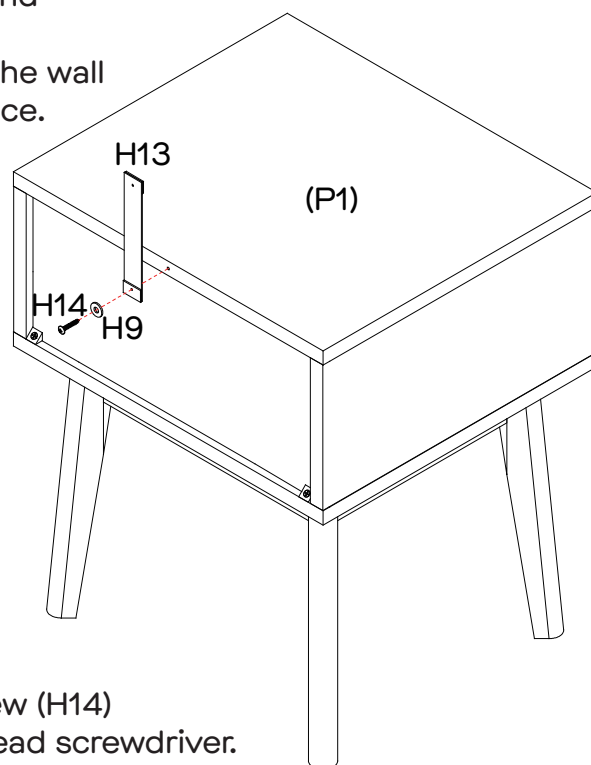We strongly recommend that this product is permanently fixed to the wall or other suitable surface.




Fix 1 x wall strap (H13) to top panel (P1) with 1 x screw (H14) and 1 x flat washer (H9) as shown, using a phillips head screwdriver.


## Step 19

You will need	
	
1 x Flat Washer (H9)	Phillips Head Screwdriver


Two People



Required




**Seek advice from a qualified trades person on how to attach this wall strap to your specific wall.**

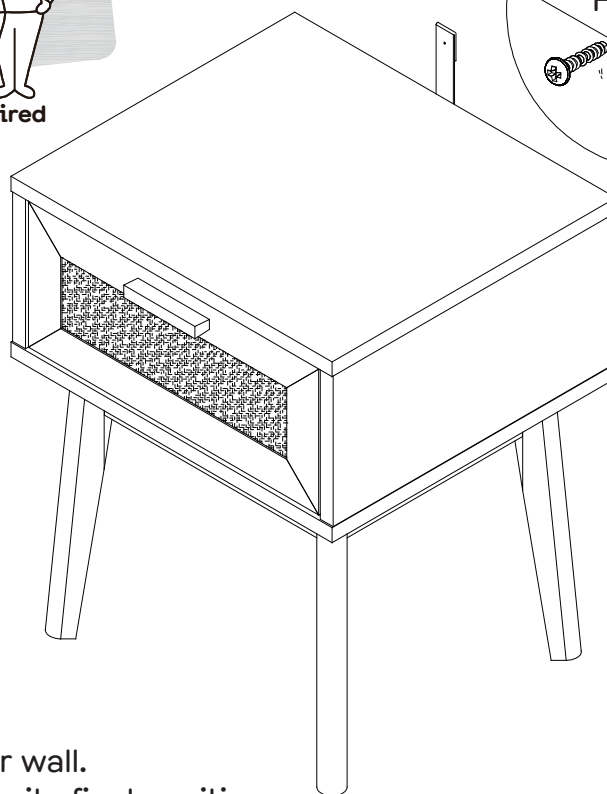

Screw and wall plug are not included.  
Please use appropriate fixtures for your wall.  
With assistance, move the lamp table to its final position.  
Attach the wall strap to the wall.  
Make sure it is firmly attached and secure .

## Step 20

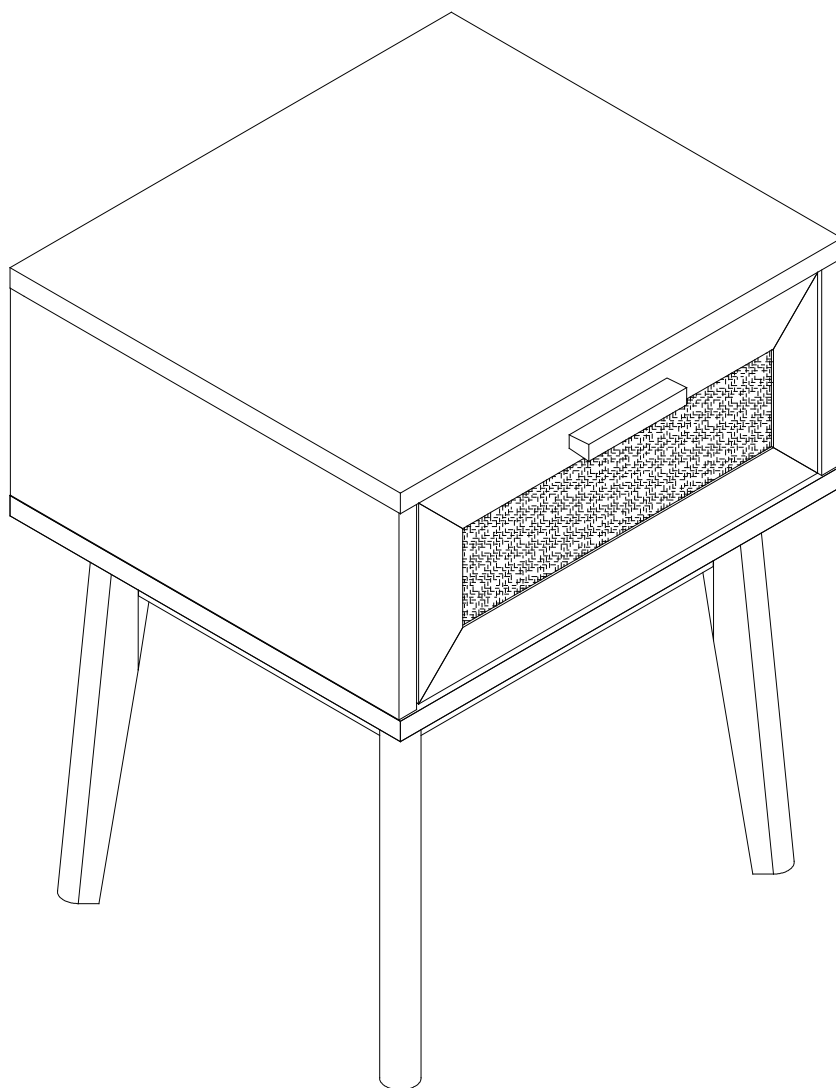

## Job complete!

In the interest of our environment please dispose of all packaging thoughtfully.