




**Fantastic  
Furniture**

Version 1.1

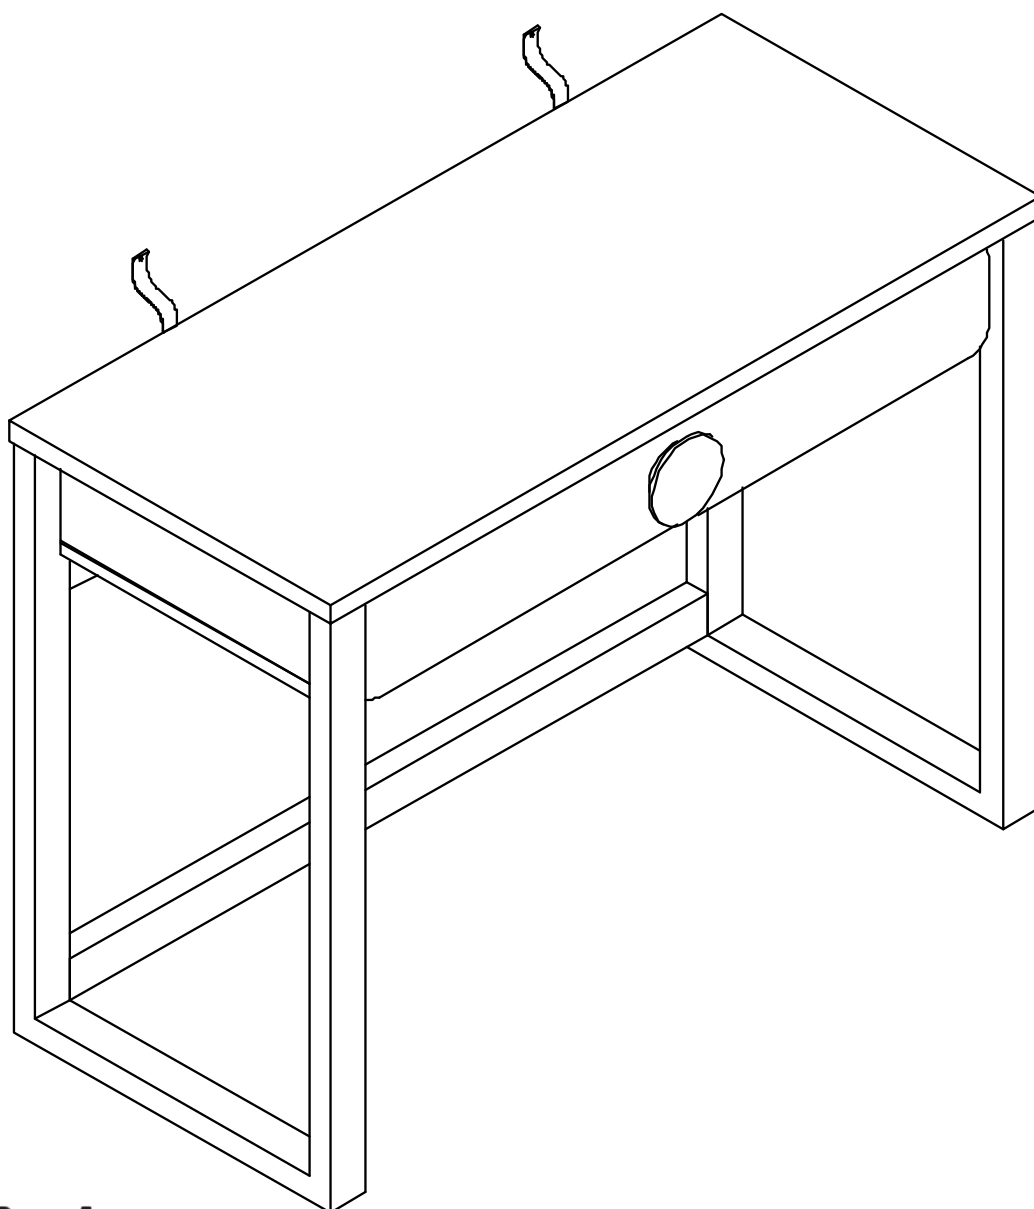

**Two People**



**Required**


**Lunar**

**Desk 1 Drawer**

[fantasticfurniture.com.au](http://fantasticfurniture.com.au)

# Secure it!

Reduce the risk of furniture tip-over accidents

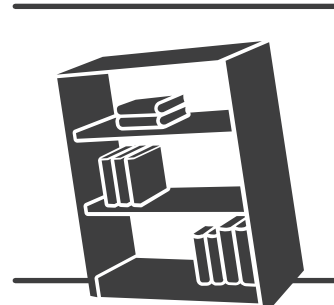

## WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY OR DEATH.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

**Recommended weight capacity : 60kg on Top  
10kg/Drawer**

To reduce the risk of furniture tipover:




- Do not allow children to stand, climb or hang on furniture. It may topple and cause serious injury or death.
- Do not place toys or other child appealing items on top of this furniture, and place heaviest items towards the bottom of the furniture.




- Do not open more than one drawer at the time.
- Anchoring this product to a wall or other suitable surface is recommended. Check anchors regularly.
- Avoid putting a TV on this product.

## Wall attachment guide




**For plasterboard**  
(without available wood stud)

**Securing method:**  
Self drilling plasterboard anchor.



**For plasterboard**  
(with available wood stud)

**Securing method:**  
Screw inserted directly into stud.



**For masonry wall**

**Securing method:**  
Solid wall: Plug with screw  
Hollow wall: Spring toggle

Please seek professional advice if you are in doubt of what fixing device to use.

# Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture  
to help create a home you'll love!



## Fantastic Furniture

### Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for  
your chance to win a \$250 Fantastic Furniture Gift Card!

**@fantasticfurniture**


# Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.

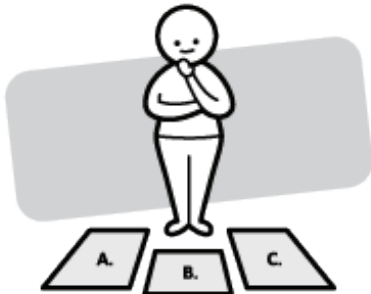

Identify and lay out all of the components before you begin assembly.

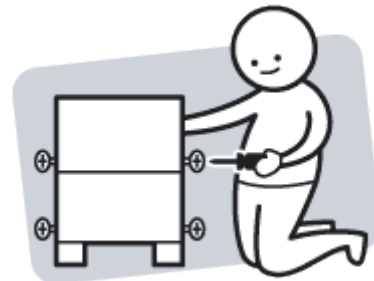

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

# What you need

## to assemble the product



DO NOT USE




### Other tools you need

Phillips Head screwdriver; Hammer

### Parts list

#### Box 1:



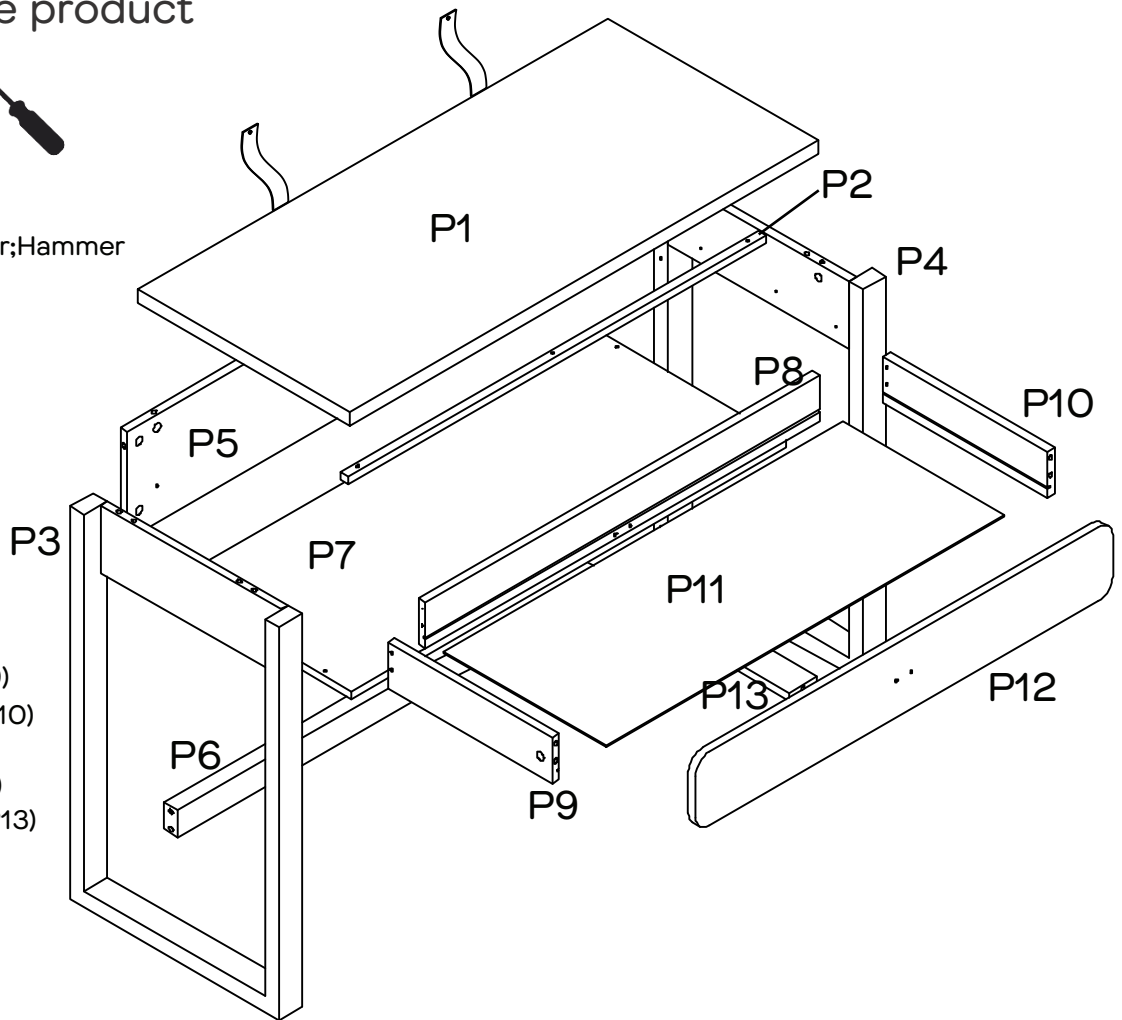

- Top Panel (P1)
- Steel Bar (P2)
- Left Side Panel (P3)
- Right Side Panel (P4)
- Back Panel (P5)
- Support Panel (P6)
- Base Panel (P7)
- Drawer Back Panel (P8)
- Drawer Side Panel (L) (P9)
- Drawer Side Panel (R) (P10)
- Drawer Base Panel (P11)
- Drawer Front Panel (P12)
- Drawer Support Panel (P13)




### Hardware Pack :

16 x Cam Bolts (H1)	16 x Dowels (H2)	4 x Feet Glides (H3)	16 x Cam Nuts (H4)	12 x Runner Screws (H6)
CL RunnerTrack (H7)	DL Runner (H8)	CR Runner Track (H9)	DR Runner (H10)	16 x Drawer Screws (H11)
Handle (H12)	2 x Handle Screws (H13)	2 x Washers (H14)		



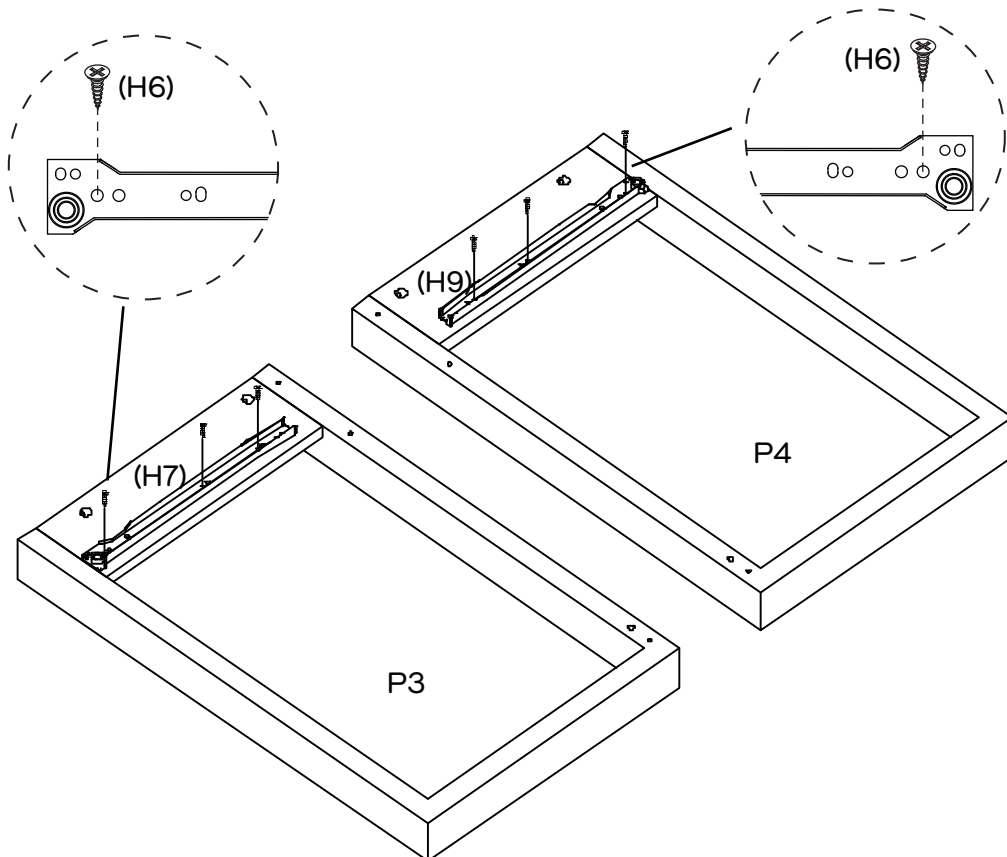


## Step 1


You will need	
	
CL Runner Track (H7)	CR Runner Track (H9)
	
6 x Runner Screws (H6)	Phillips Head Screwdriver



Attach CL Runner Track (H7) to the Left Side Panel (P3) with 3 x Runner Screws (H6), by tightening with a Phillips Head Screwdriver.  
Repeat process to attach CR Runner Track (H9) to the Right Side Panel (P4).



## Step 2

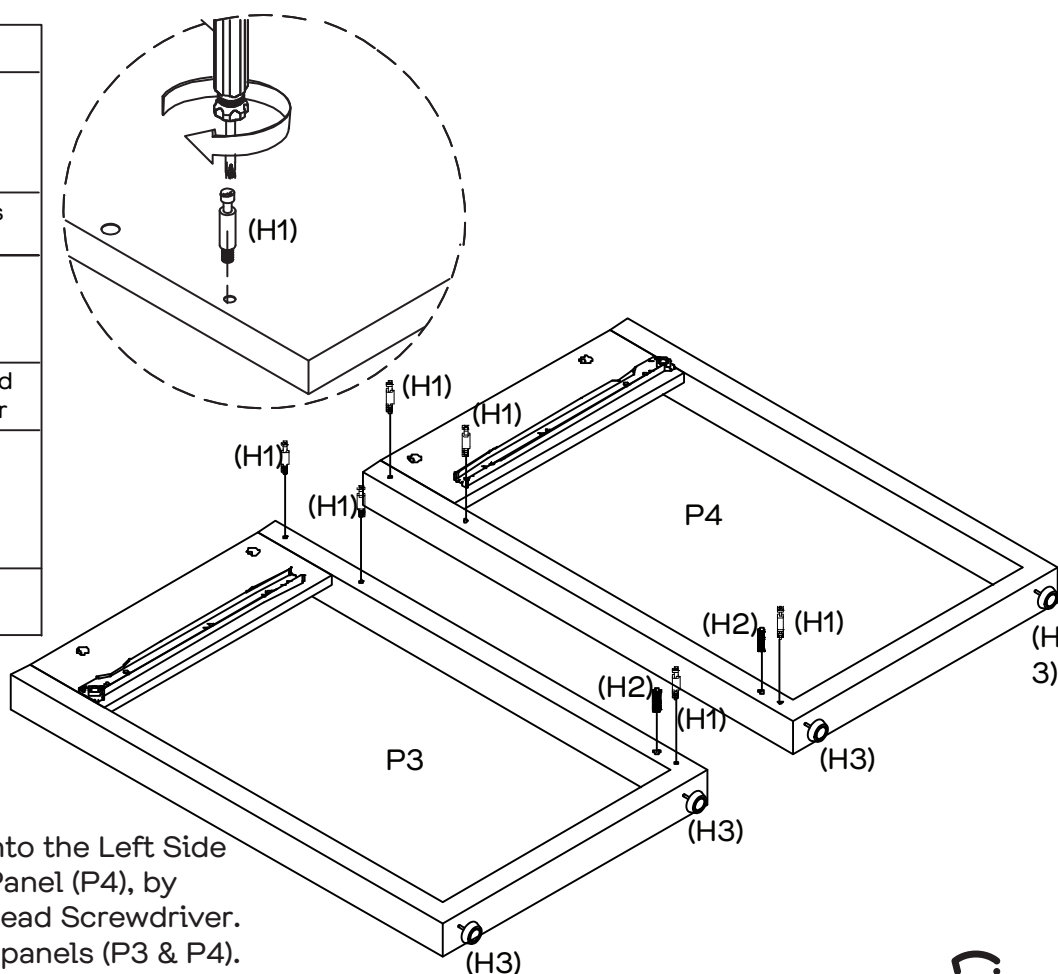
You will need	
	
4 x Feet Glides (H3)	2 x Dowels (H2)
	
6 x Cam Bolts (H1)	Phillips Head Screwdriver
	
Hammer	



Insert 6 x Cam Bolts (H6) into the Left Side Panel (P3) and Right Side Panel (P4), by tightening with a Phillips Head Screwdriver.  
Insert 2 x Dowels (H2) into panels (P3 & P4).  
Insert 4 x Feet Glides (H3) on to the underside of the legs by gently using a Hammer as shown.




# Step 3


You will need	
	
3 x Drawer Screws (H11)	Phillips Head Screwdriver

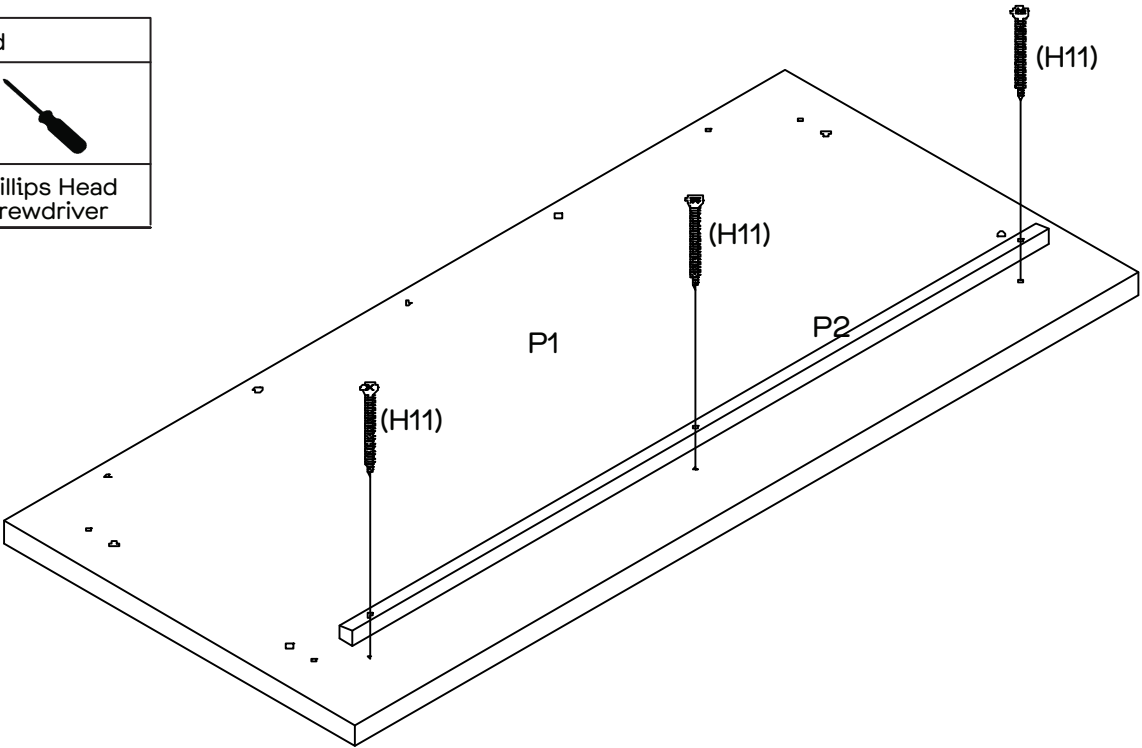

Add the Steel Bar (P2) to the underside of the Top Panel (P1) with 3 x Drawer Screws (H11), by tightening with the Phillips Head Screwdriver.



# Step 4

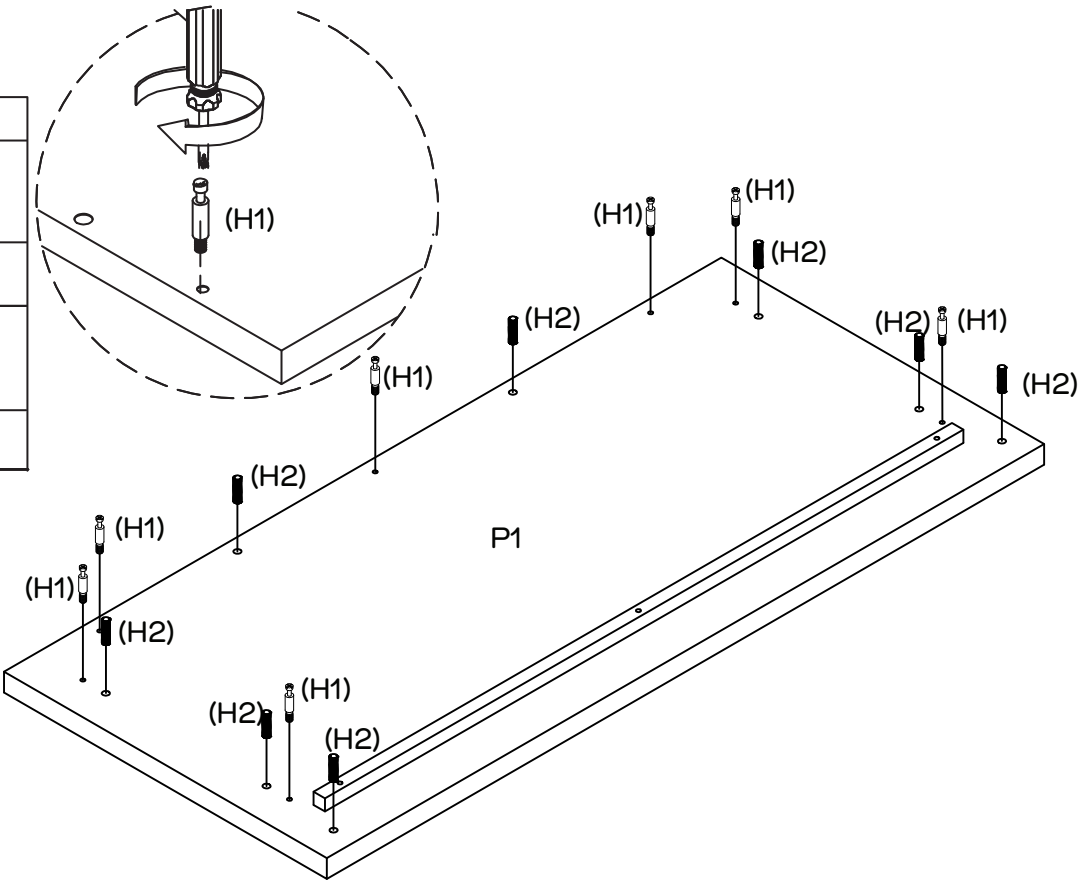You will need	
	
8 x Dowels (H2)	7 x Cam Bolts (H1)
	
Phillips Head Screwdriver	



Insert 8 x Dowels (H2) into the Top Panel (P1).  
Insert 7 x Cam Bolts (H1) into the Top Panel (P1), by tightening with a Phillips Head Screwdriver.

## Step 5

You will need	
	
6 x Cam Nuts (H4)	Phillips Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

**Two People**



**Required**

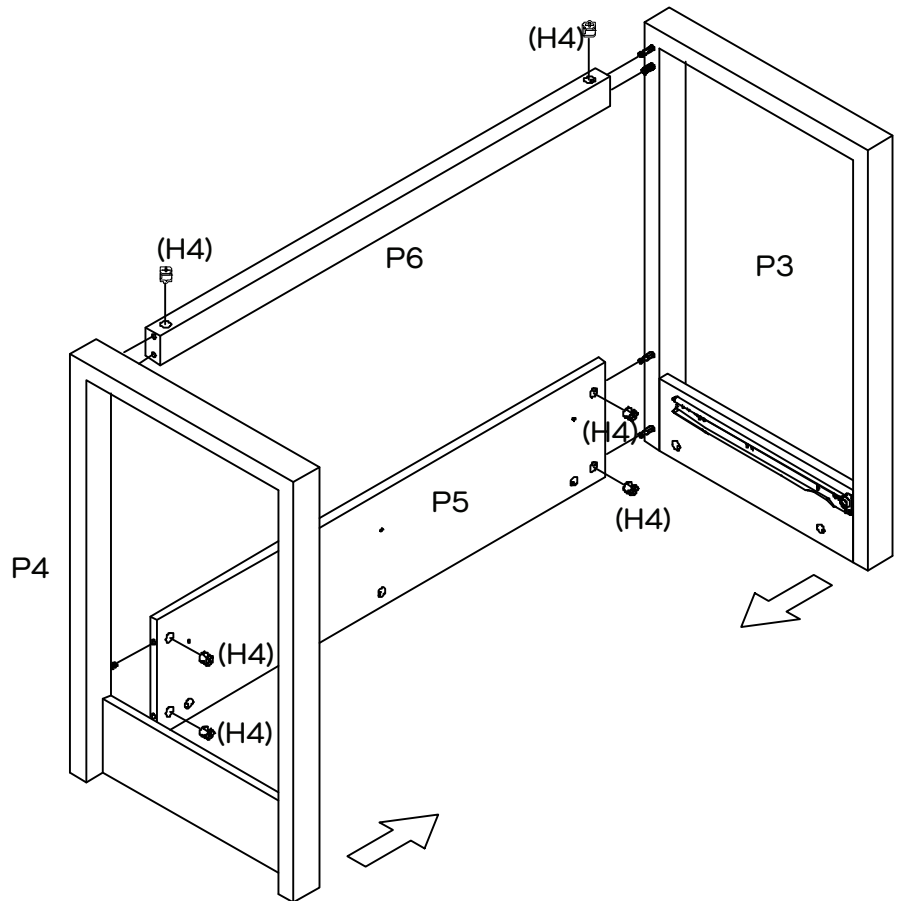

Insert 6 x Cam Nuts (H4) into the Back Panel (P5) and Support Panel (P6). Rotate the Cam Nuts so the arrows point towards the incoming cam bolts. Attach the Base Panel (P5) and Support Panel (P6) to the Left Side Panel (P3) and Right Side Panel (P4), by tightening all Cam Nuts with the Phillips Head Screwdriver.

## Step 6

You will need	
	
7 x Cam Nuts (H4)	Phillips Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

**Two People**






**Required**

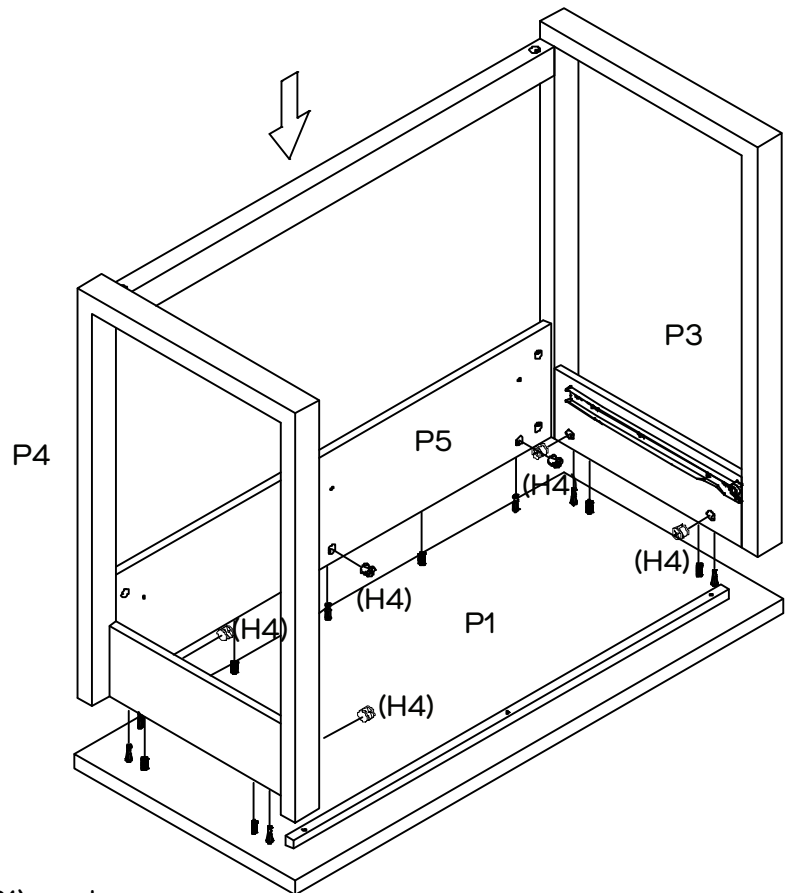


Carefully lift the unit onto the Top Panel (P1) as shown. Insert the 7 x Cam Nuts into panels (P3, P4 & P5) as shown. Rotate the Cam Nuts so the arrows point towards the incoming cam bolts. Attach panels (P3, P4 & P5) to the Top Panel (P1), by tightening all Cam Nuts with the Phillips Head Screwdriver.



## Step 7




You will need	
	
7 x Drawer Screws (H11)	4 x Dowels (H2)
	
Phillips Head Screwdriver	

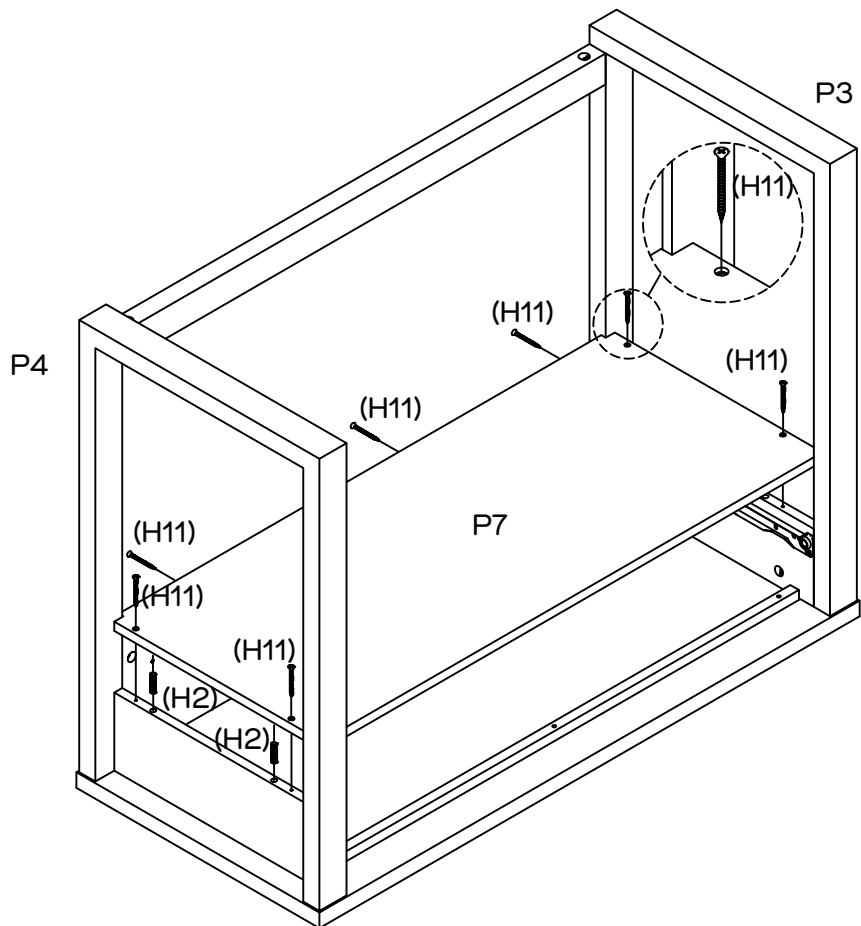


Insert 4 x Dowels (H2) into panels (P3 & P4).

Attach the Base Panel (P7) to the panels (P3, P4 & P5) with 7 x Drawer Screws (H11), by tightening with the Phillips Head Screwdriver.



## Step 8

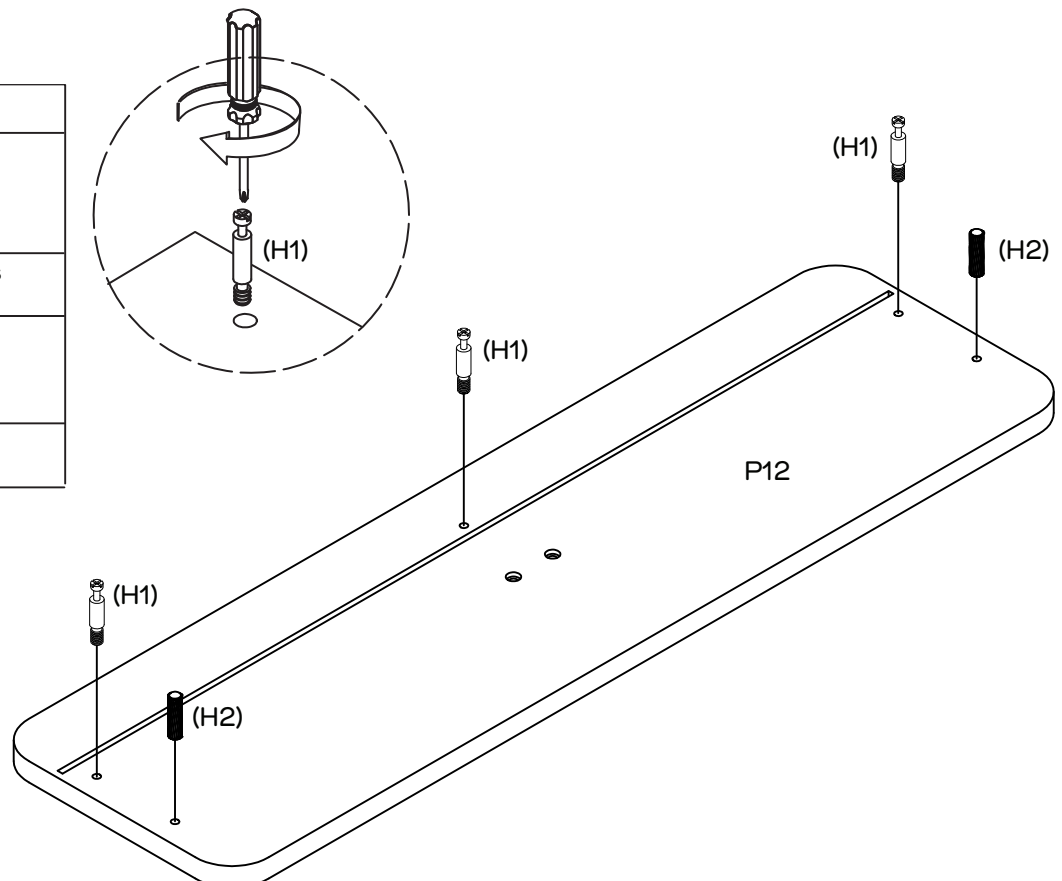You will need	
	
3 x Cam Bolts (H1)	2 x Dowels (H2)
	
Phillips Head Screwdriver	



Insert 3 x Cam Bolts (H1) into the Drawer Front Panel (P12), by tightening with a Phillips Head Screwdriver. Insert 2 x Dowels (H2) into the Drawer Front Panel (P12).


## Step 9

You will need	
	
3 x Cam Nuts (H4)	Phillips Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

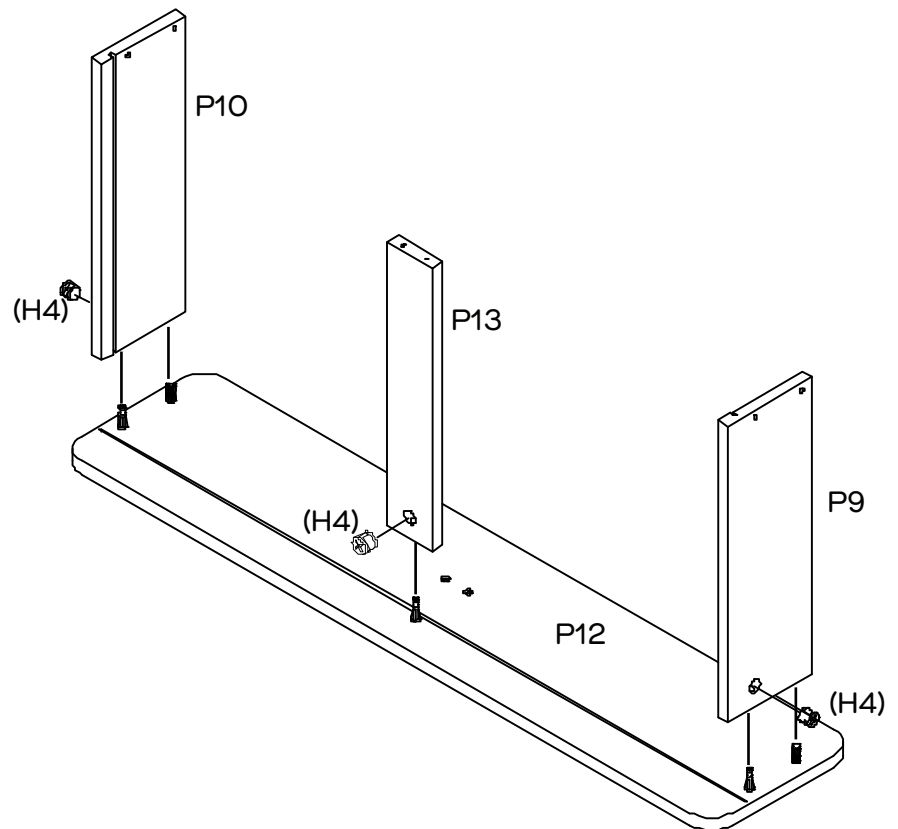



Insert 3 x Cam Nuts (H4) into the Drawer Side Panels (P9 & P10) and Drawer Support Panel (P13). Rotate the Cam Nuts so the arrows point towards the incoming cam bolts. Attach the Drawer Front Panel (P12) to the panels (P9, P10 & P13), by tightening Cam Nuts with Phillips Head Screwdriver.

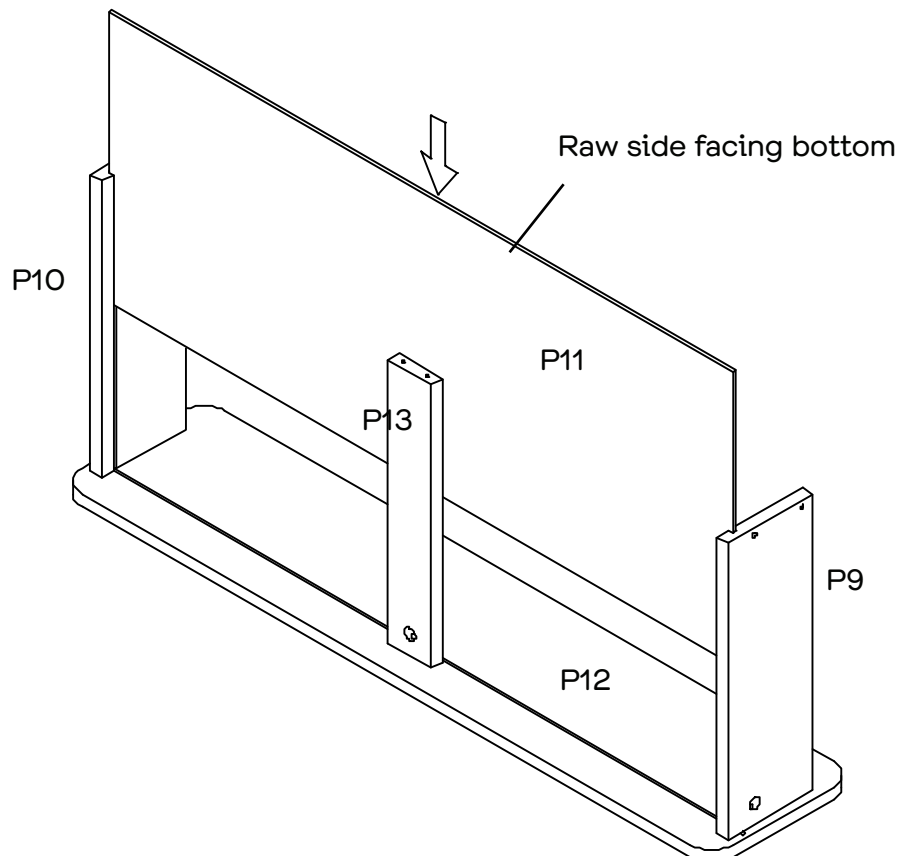
## Step 10



Slot in the Drawer Base Panel (P11) into the grooves of panels (P9, P10 & P11) as shown.




## Step 11

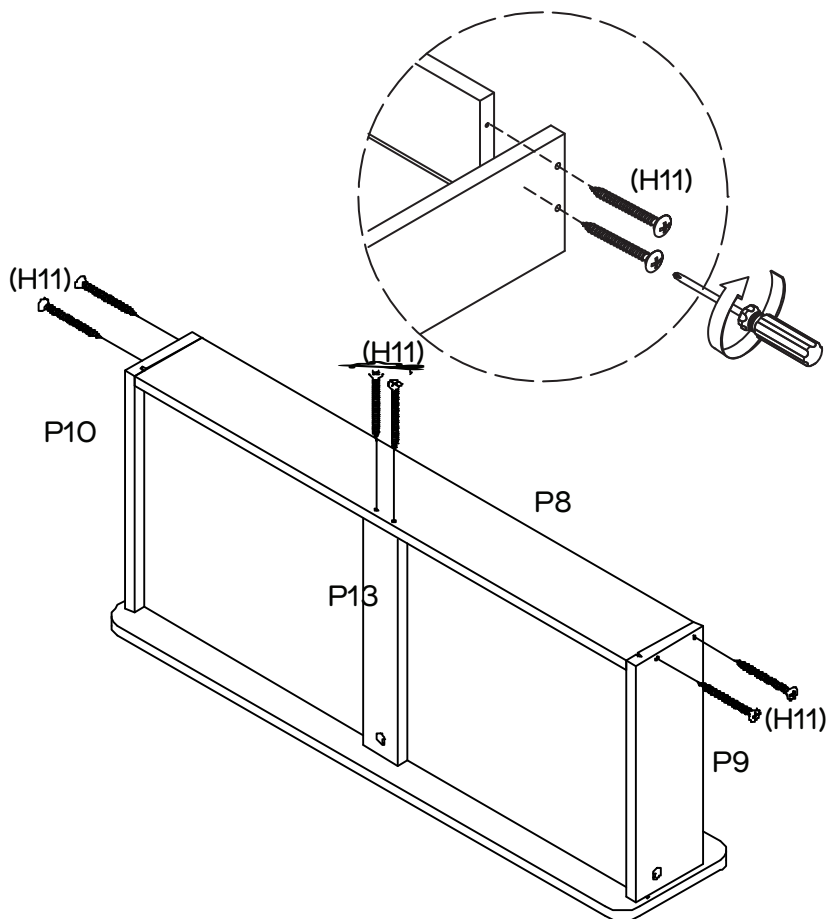
You will need	
	
6 x Drawer Screws (H11)	Phillips Head Screwdriver



Attach the Drawer Back Panel (P8) to the Drawer Side Panels (P9 & P10) and Drawer Support Panel (P13) with 6 x Drawer Screws (H11), by tightening with a Phillips Head Screwdriver.

## Step 12


You will need	
	
Handle (H12)	2 x Handle Screws (H13)
	
Phillips Head Screwdriver	

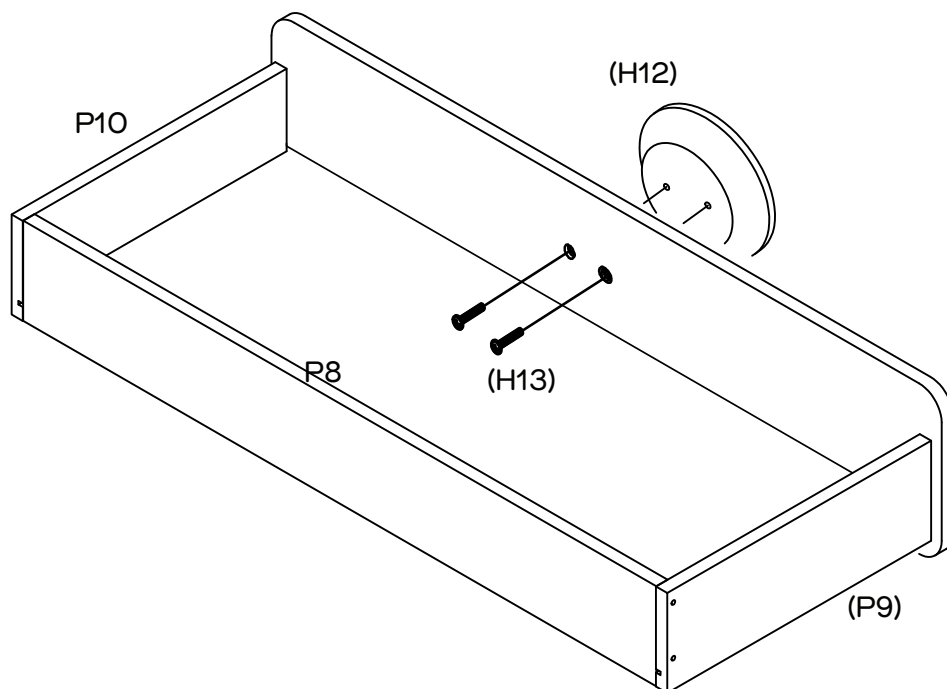

Attach the Handle (H12) to the Drawer Front (P12) with 2 x Handle Screws (H13), by tightening with a Phillips Head Screwdriver.


# Step 13

You will need	
DL Runner (H8)	DR Runner (H10)
6 x Runner Screws (H6)	Phillips Head Screwdriver

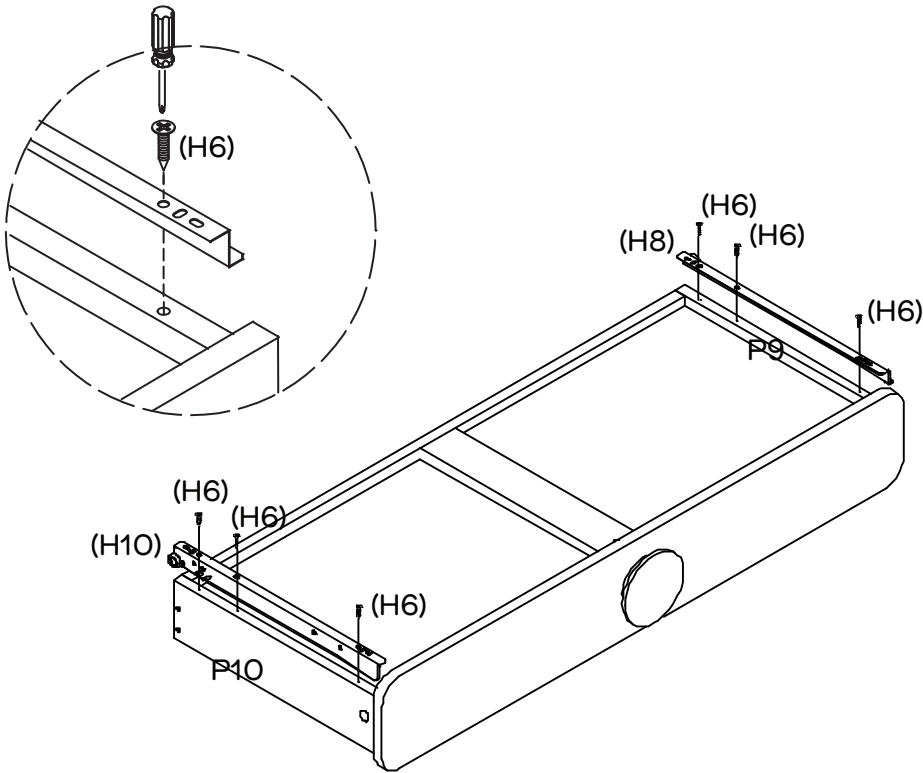


Attach 1 x DL Runner (H8) to the bottom of Drawer Side Panel L (P9) and 1 x DR Runner (H10) to the bottom of Drawer Side Panel R (P10) with 6 x Runner Screws (H6) by tightening with the Phillips Head Screwdriver.



# Step 14

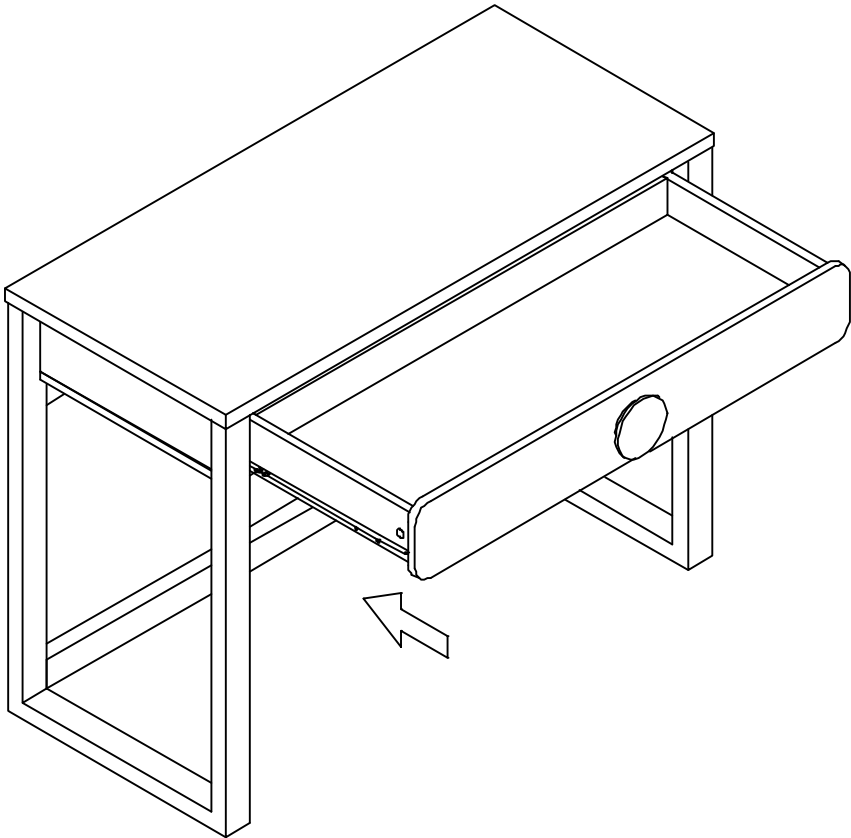

Insert the assembled drawer into the corresponding compartment as shown. Ensure the drawers slide easily along the rails.


# Step 15

You will need	
	
2 x Washers (H14)	
Screw and Wall Plug are not provided. Please use appropriate fixtures for your wall.	

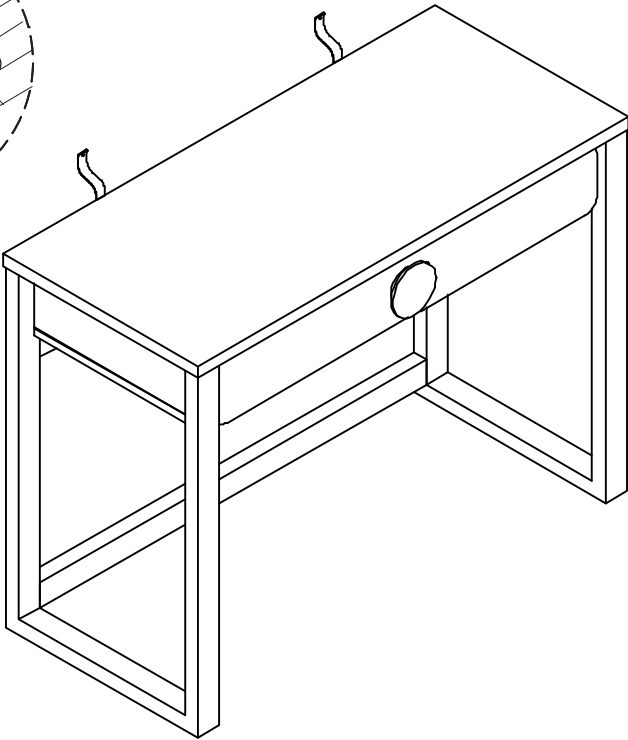

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

Move the unit to the final position, and attach the safety strap to the wall securely. Make sure it is firmly attached and snug fit.

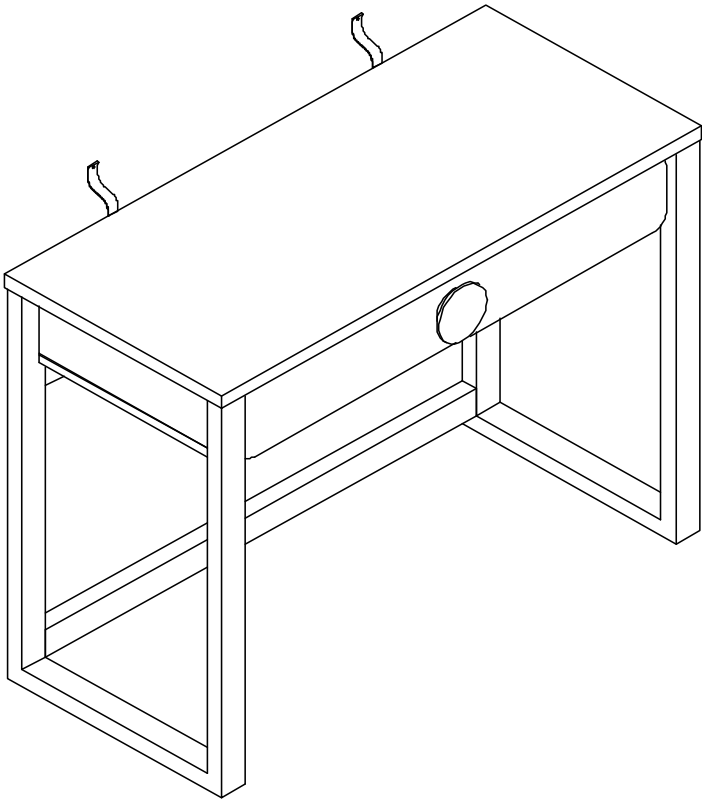

## Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.