





**Fantastic
Furniture**

Version 1.0

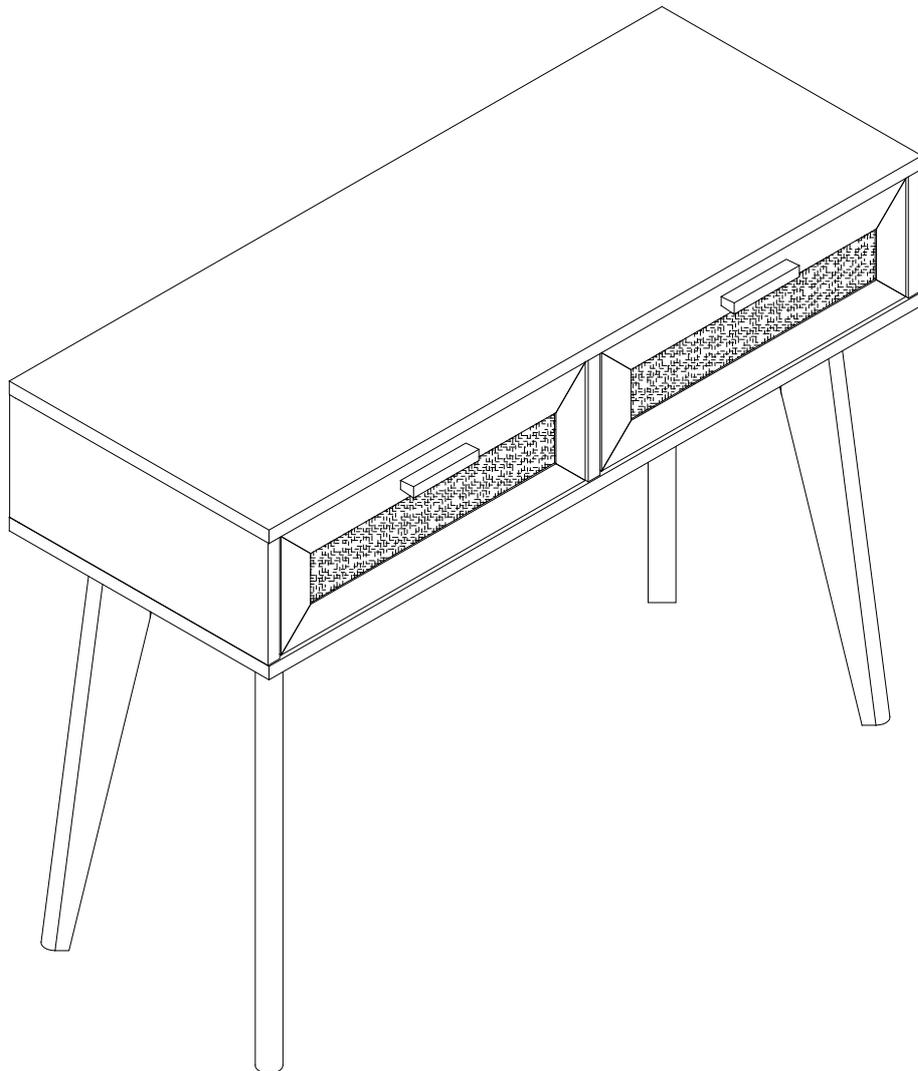

Two People



Required

Java
Console Table
fantasticfurniture.com.au



Warning: Ensure the wall strap is attached to avoid serious injury

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Rattan

Rattan is a natural material that will respond to humidity in the environment. Low humidity may cause the rattan to shrink. High humidity may cause the rattan to absorb moisture and expand, causing the weaving to look loose and wavy.

This is a natural phenomenon and not a defect.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



Fantastic Furniture


Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!
@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

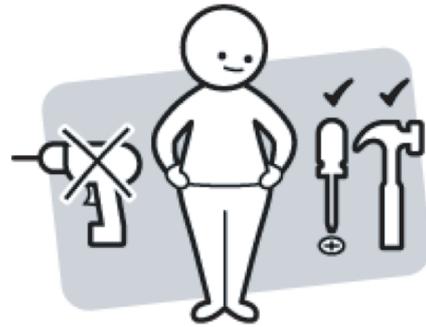

Make sure you have all the required tools. Never use power tools unless instructed.

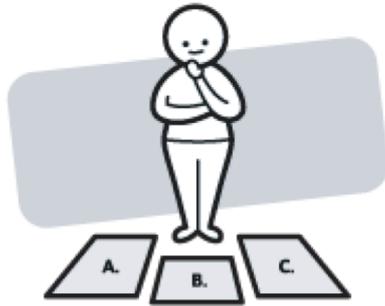

Identify and lay out all of the components before you begin assembly.

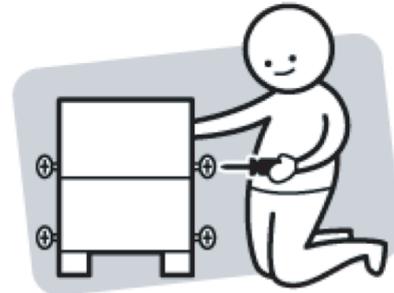

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product




DO NOT USE



Other tools you need

Flat Head Screwdriver;
Phillips Head Screwdriver;
Mallet

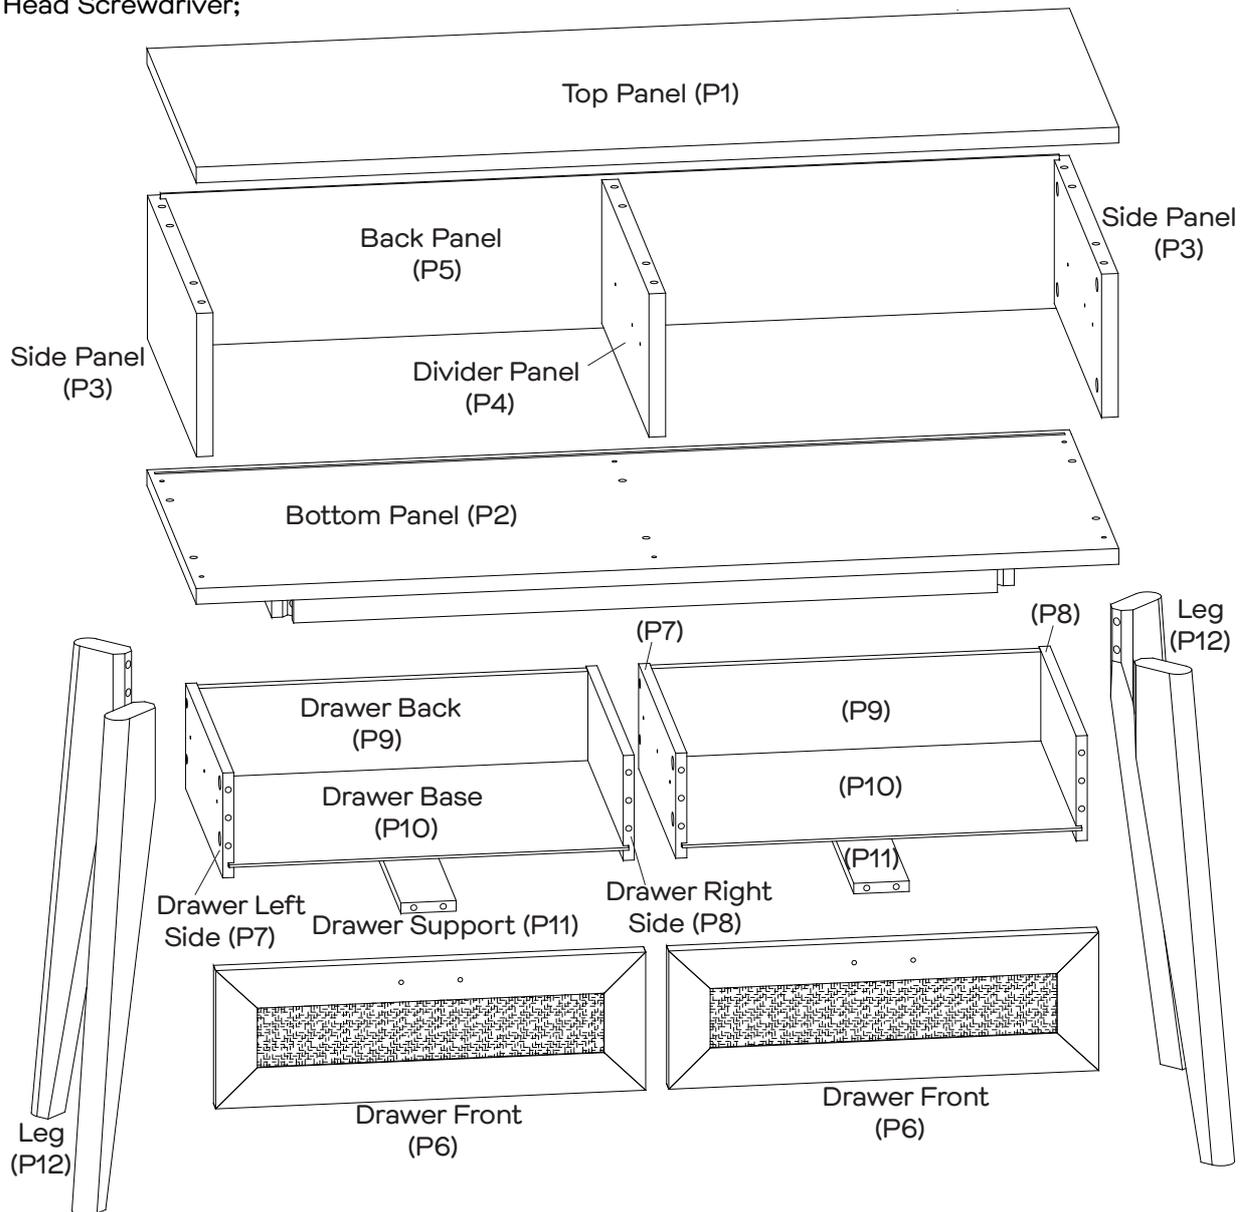

Parts list

- | | |
|------------------------|-----------------------------|
| 1 x Top Panel (P1) | 2 x Drawer Left Sides (P7) |
| 1 x Bottom Panels (P2) | 2 x Drawer Right Sides (P8) |
| 2 x Side Panels (P3) | 2 x Drawer Backs (P9) |
| 1 x Divider Panel (P4) | 2 x Drawer Bases (P10) |
| 1 x Back Panel (P5) | 2 x Drawer Supports (P11) |
| 2 x Drawer Fronts (P6) | 4 x Legs (P12) |

Hardware Pack



24 x Cam Bolts
(H1)



12 x Large Cam
Nuts (H2)



12 x Dowels \varnothing 8mm
(H3)



2 x Handles
(H4)



4 x Felt Feet
(H5)



4 x Screws 16mm
(H6)



4 x Back Panel
Connectors (H7)




8 x Bolts
(H8)



12 x Flat Washers
(H9)




8 x Spring
Washers (H10)




4 x Screws 28mm
(H11)



1 x Allen Key
(H12)




2 x Wall Straps
(H13)



2 x Screws 25mm
(H14)



12 x Small Cam
Nuts (H15)



4 x Dowels \varnothing 6mm
(H16)



12 x Screws 38mm
(H17)




24 x Screws 12mm
(H18)



4 x Slides
(H19)

Step 1


You will need	
4 x Felt Feet (H5)	

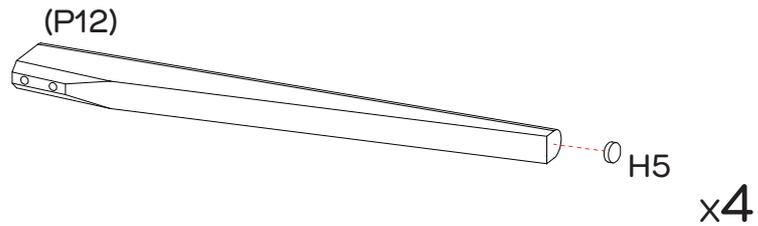

Attach 1 x felt foot (H5) onto each leg (P12) as shown.

Step 2

You will need	
8 x Bolts (H8)	8 x Flat Washers (H9)
8 x Spring Washers (H10)	1 x Allen Key (H12)

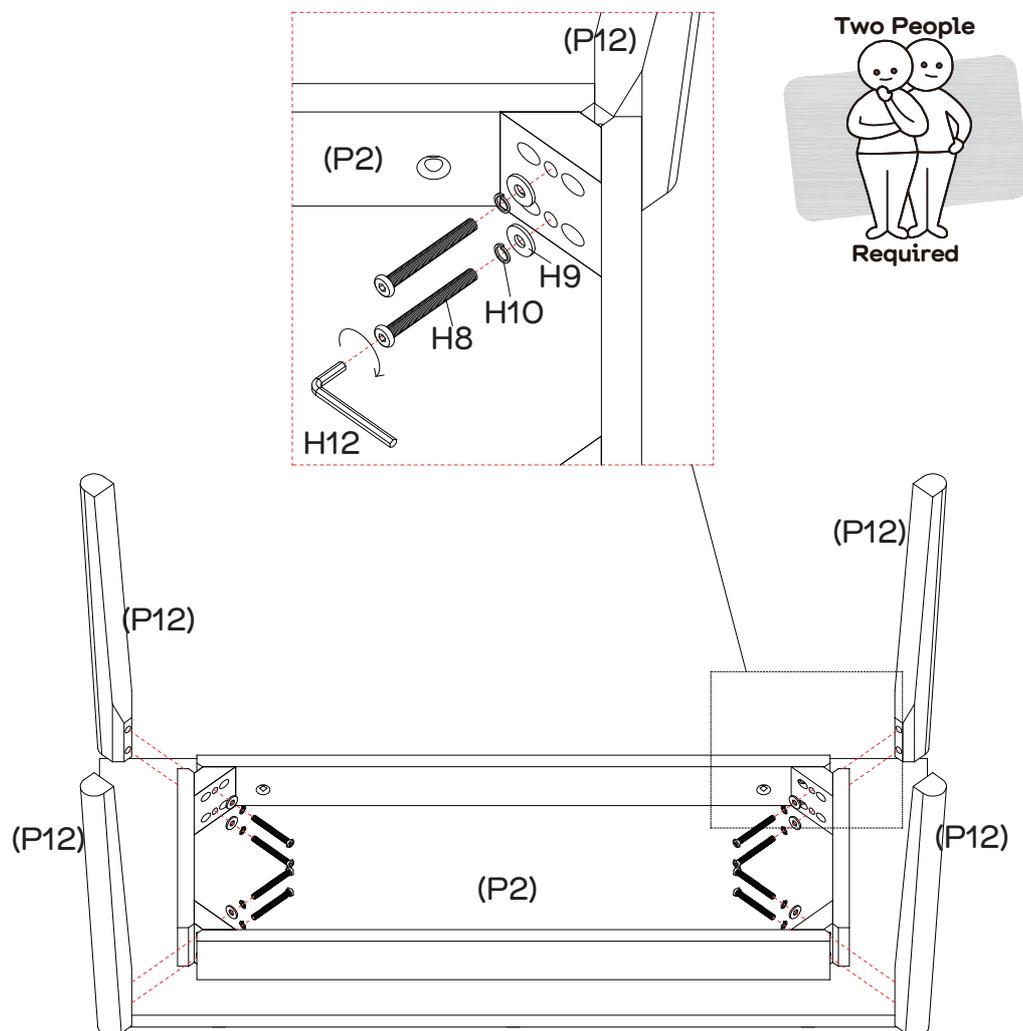


Attach 1 x leg (P12) onto bottom panel (P2), using 2 x bolts (H8), 2 x spring washers (H10) and 2 x flat washers (H9).


Tighten the bolts with allen key (H12).

Repeat this step for the other 3 x legs (P12).

With assistance, turn the assembled frame over.


Step 3


You will need	
	
6 x Cam Bolts (H1)	Phillips Head Screwdriver

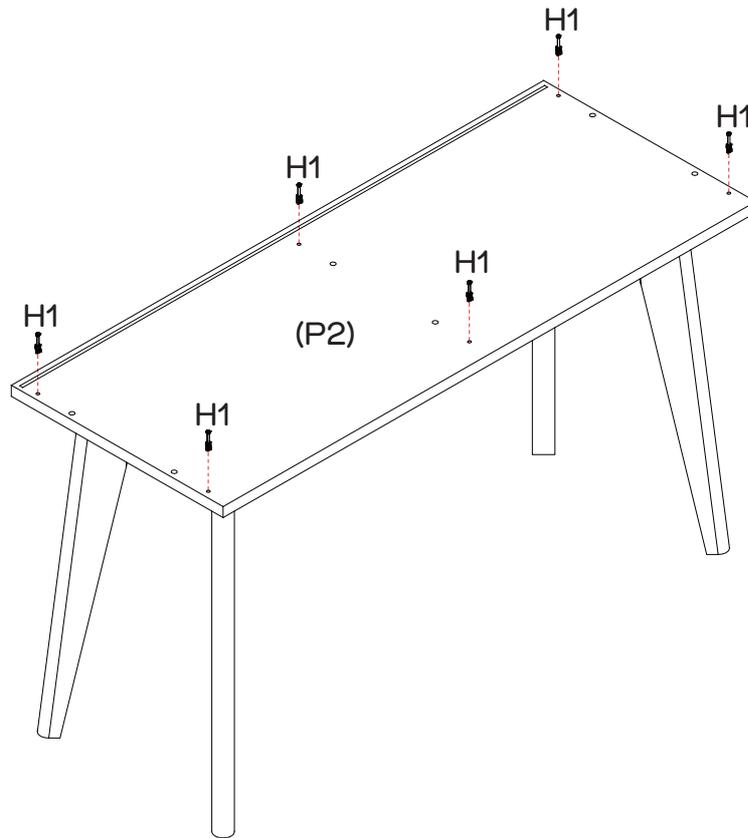

Screw 6 x cam bolts (H1) into bottom panel (P2), using a phillips head screwdriver.

Step 4

You will need	
	
6 x Cam Bolts (H1)	Phillips Head Screwdriver


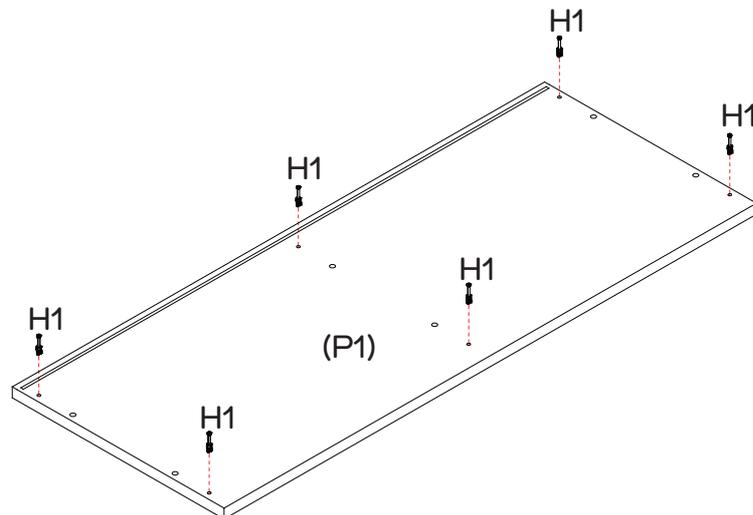


Screw 6 x cam bolts (H1) into top panel (P1), using a phillips head screwdriver.


Step 5

You will need	
	
4 x Slides (H19)	6 x Screws 12mm (H18)
	
Phillips Head Screwdriver	8 x Dowels ø8mm (H3)
	
Mallet	

Separate the slide runners (H19-2) and slide tracks (H19-1) from 4 x slides (H19) by following the steps below:
 Extend the slide runner all the way out.
 Press down the plastic release lever on the slide and pull out the slide runner (H19-2) completely.

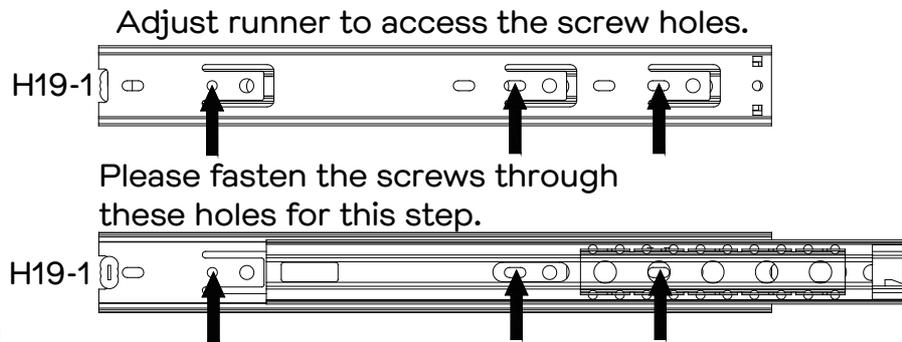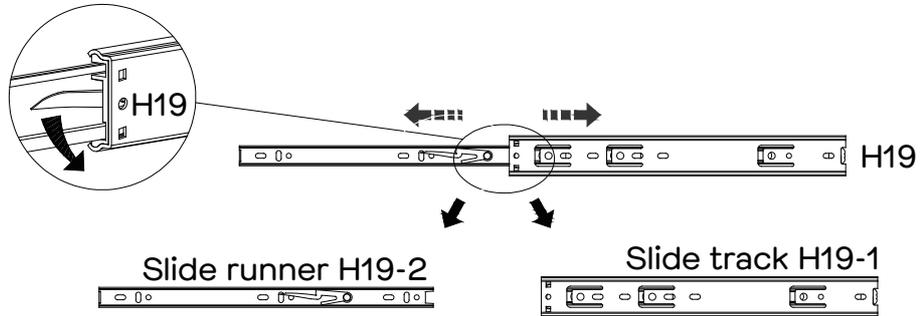

Note the position of the rubber stopper

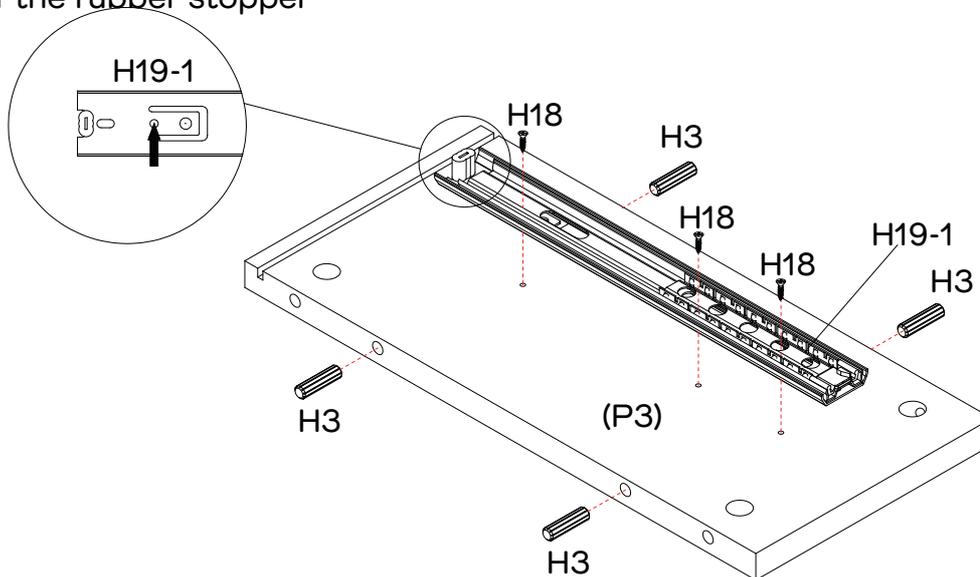




Attach 1 x separated slide track (H19-1) onto side panels (P3) with 3 x screws (H18), using a phillips head screwdriver as shown.
 Repeat this step for the other side panel (P3).
 Ensure the slide tracks (H19-1) are attached so the rubber stopper is positioned near the grooves on the side panel (P3).

Insert 4 x dowels (H3) into each panel (P3) as shown.
 If needed use a mallet to gently tap the dowels into place.



Step 6

You will need	
	
2 x Slide Tracks (H19-1)	6 x Screws 12mm (H18)
	
Phillips Head Screwdriver	4 x Dowels 30mm (H3)
	
Mallet	


Note the position of the rubber stopper

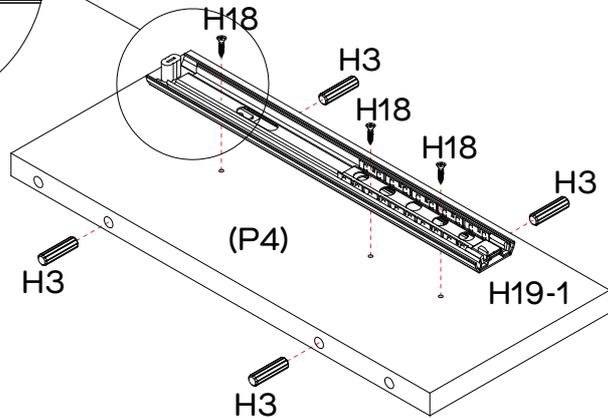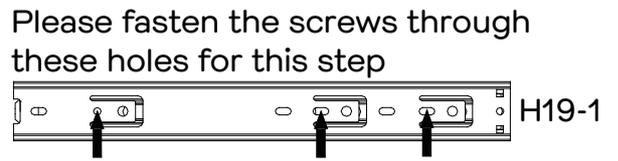

Important Note:
The screws need to be fixed into different holes compared to the other side.

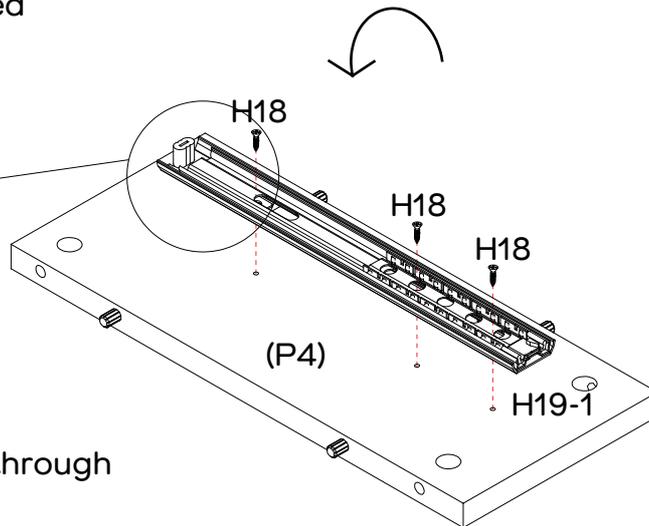

Please fasten the screws through these holes for this step



Insert 4 x dowels (H3) into divider panel (P4) as shown.
If needed use a mallet to gently tap the dowels into place.

Attach 1 x slide track (H19-1) onto the side of divider panel (P4) without cam nut holes using 3 x screws (H18) as shown.


Turn divider panel (P8) over.

Attach 1 x slide track (H19-1) onto divider panel (P4) with 3 x screws (H18) as shown, using a phillips head screwdriver.
It is important to note that the screws on this side need to be fixed into different holes compared to the slide track (H19-1) on the other side of the divider panel (P4).


Step 7

You will need	
	
6 x Large Cam Nuts (H2)	Flat Head Screwdriver

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

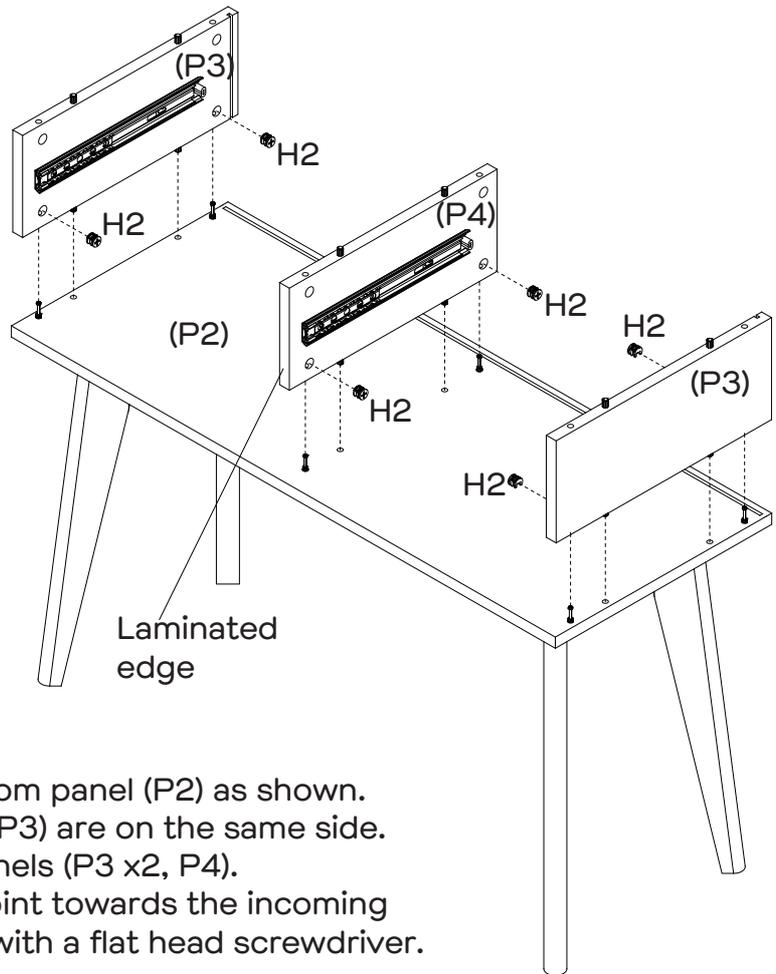

Position panels (P3 x 2, P4) onto bottom panel (P2) as shown. Make sure the grooves in panels (P2, P3) are on the same side. Insert 6 x large cam nuts (H2) into panels (P3 x2, P4). Rotate the cam nuts so the arrows point towards the incoming cam bolts and turn clockwise to lock with a flat head screwdriver.


Step 8

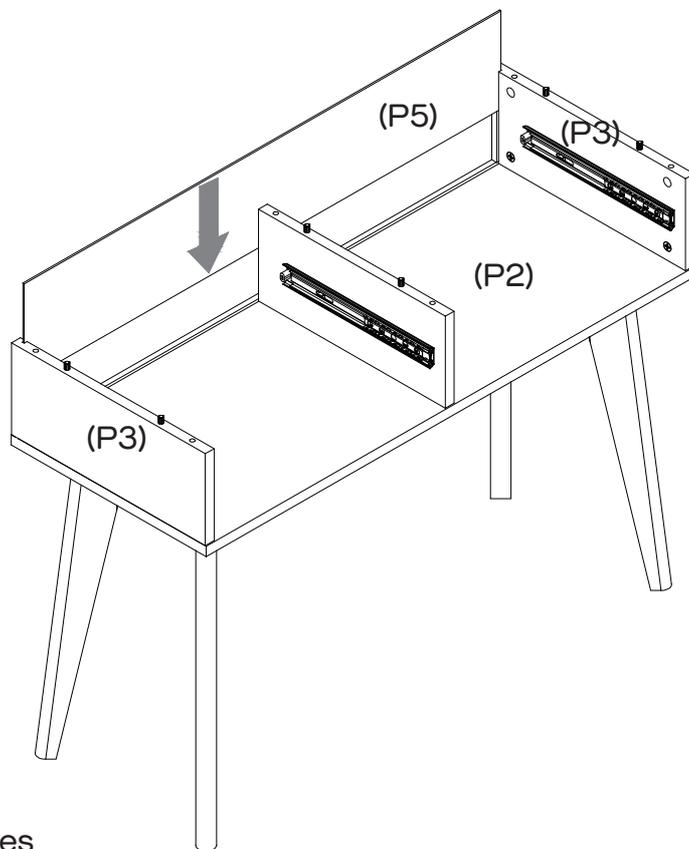

Slide back panel (P5) into the grooves on side panels (P3) and bottom panel (P2).

Step 9

You will need	
	
6 x Large Cam Nuts (H2)	Flat Head Screwdriver




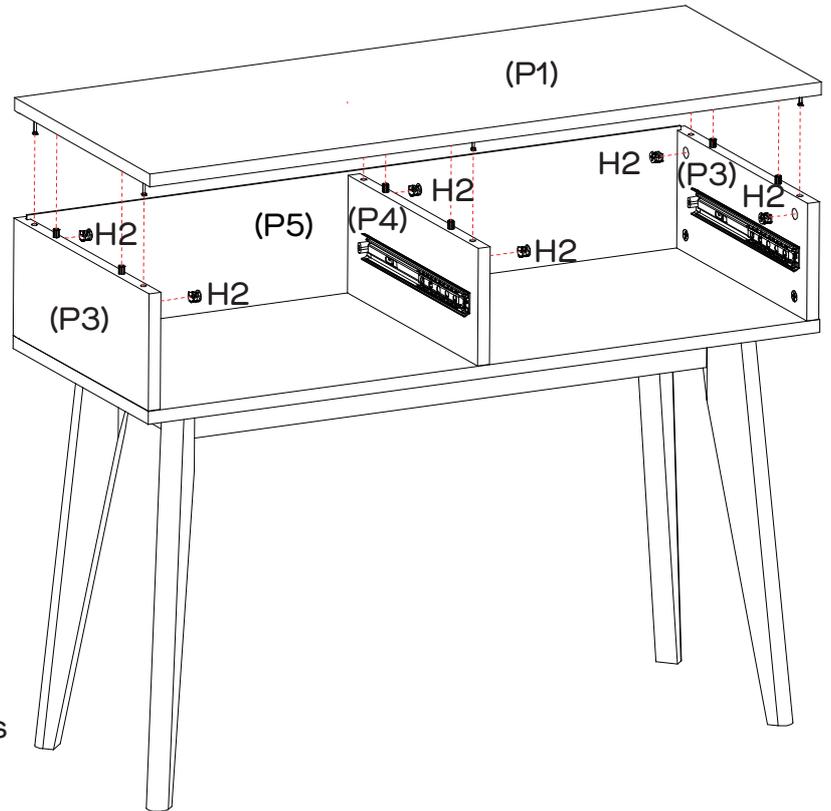


Position top panel (P1) onto panels (P3 x 2, P4) as shown. Make sure the groove in top panel (P1) is on the same side as the back panel (P5). Insert 6 x large cam nuts (H2) into panels (P3 x2, P4). Rotate the cam nuts so the arrows point towards the incoming cam bolts and turn clockwise to lock with a flat head screwdriver.

Step 10

You will need	
	
4 x Screws 16mm (H6)	4 x Back Panel Connectors (H7)
	
Phillips Head Screwdriver	

Two People

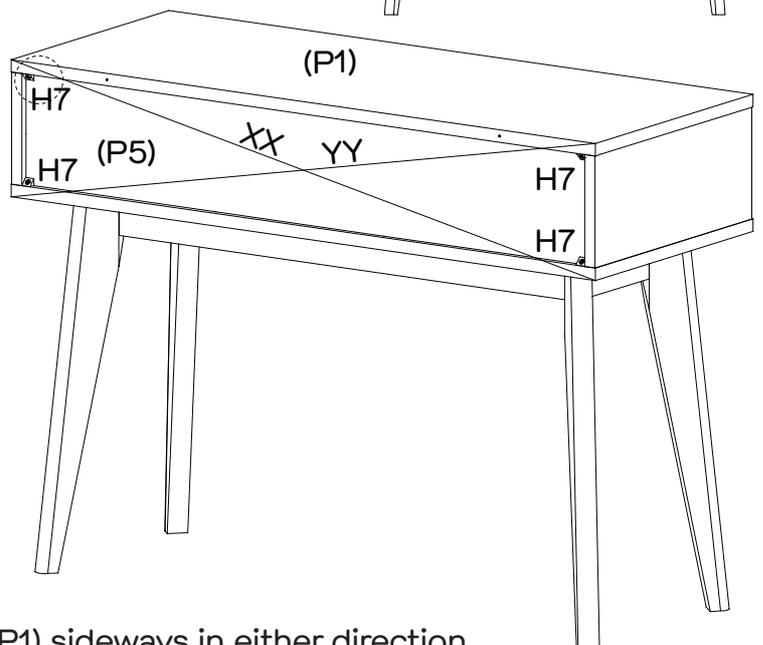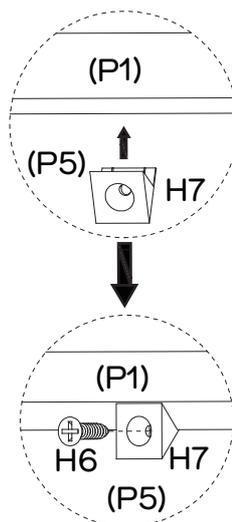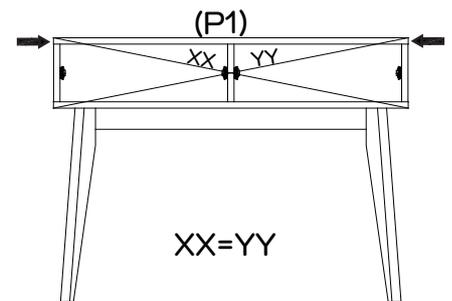


If necessary, gently adjust the top panel (P1) sideways in either direction until XX and YY are equal.

Holding it in place, fix 4 x back panel connectors (H7) to assembled unit with 4 x screws (H6) as shown, using a phillips head screwdriver.

Step 11


You will need	
	
4 x Dowels ø6mm (H16)	Mallet

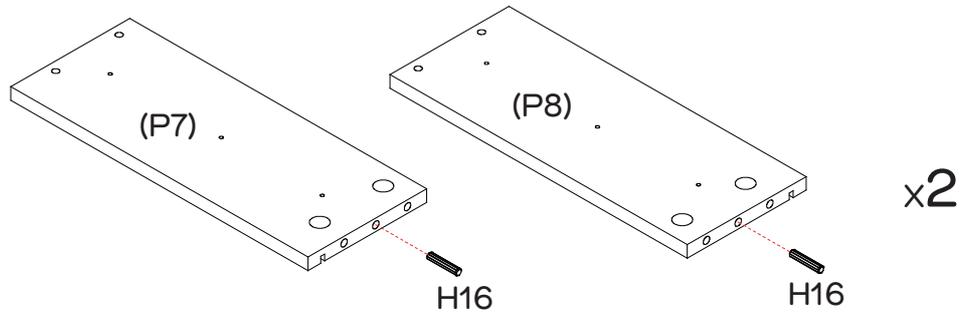

Insert 1 x dowel (H16) into each drawer side panel (P7, P8) as shown. Use a mallet to gently tap the dowels into place if needed.

Step 12


You will need	
	
12 x Cam Bolts (H1)	Phillips Head Screwdriver

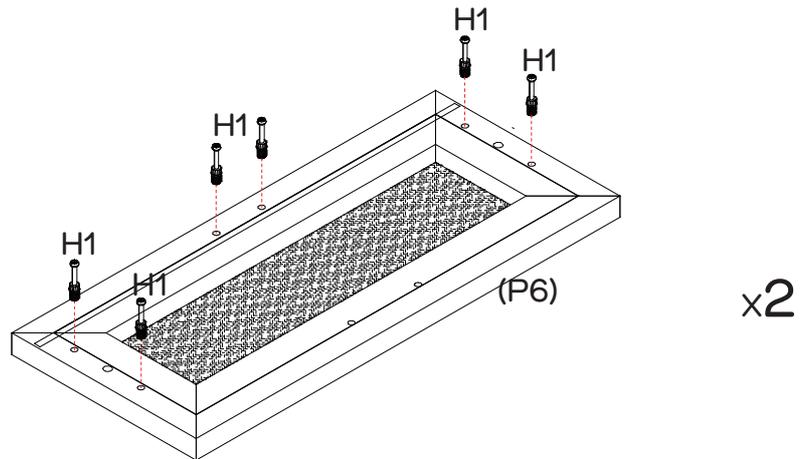

Screw 6 x cam bolts (H1) into each drawer front (P6), using a phillips head screwdriver.

Step 13

You will need	
	
12 x Small Cam Nuts (H15)	Flat Head Screwdriver

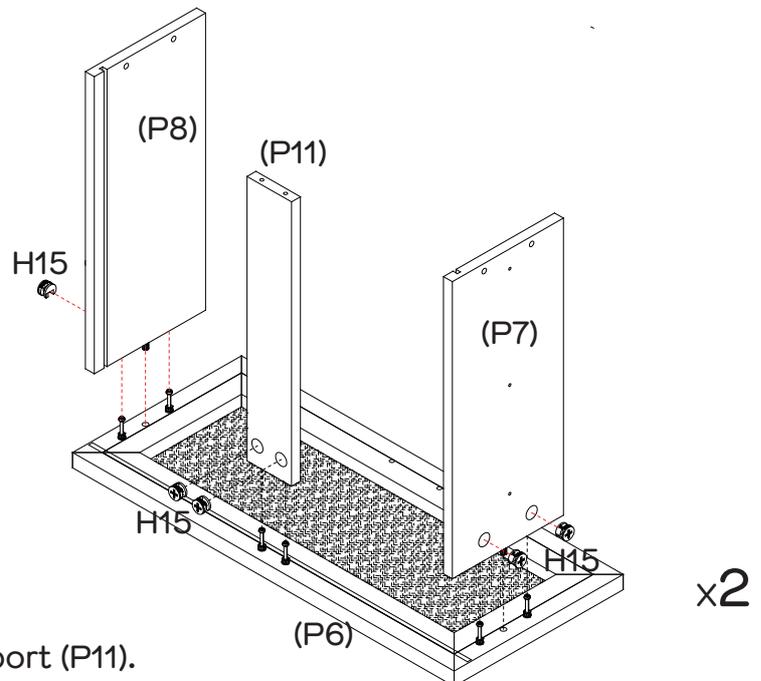


Position 1 x drawer left side (P7) and 1 x drawer right side (P8) and 1 x drawer support (P11) onto drawer front (P6) ensuring the grooves in each panel align.

Insert 6 x small cam nuts (H15) into drawer sides (P7, P8) and drawer support (P11).

Rotate the cam nuts so the arrows point towards the incoming cam bolts. Using a flat head screwdriver turn clockwise to lock.

Repeat this step for the other 1 x drawer left side (P7), 1 x drawer right side (P8) and 1 x drawer support (P11).

Step 14

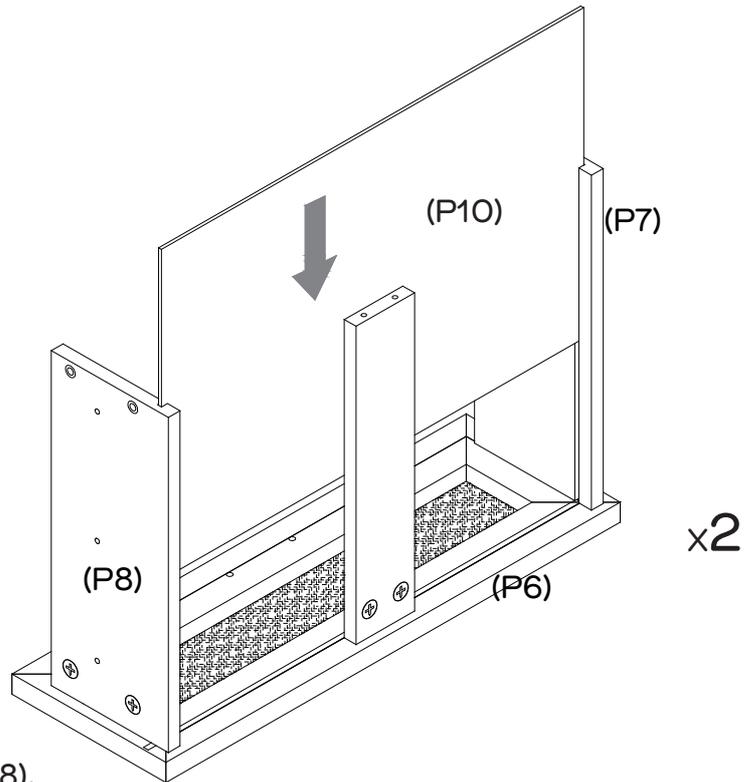


Slide drawer base (P10) into the grooves on panels (P6, P7, P8).
Repeat this step for the other drawer assembly.

Step 15


You will need	
	
12 x Screws 38mm (H17)	Phillips Head Screwdriver

Ensure the pre-drilled holes on drawer sides (P7, P8) align with holes on back panel (P9), and the holes on back panel (P9) align with the holes on drawer support (P11).


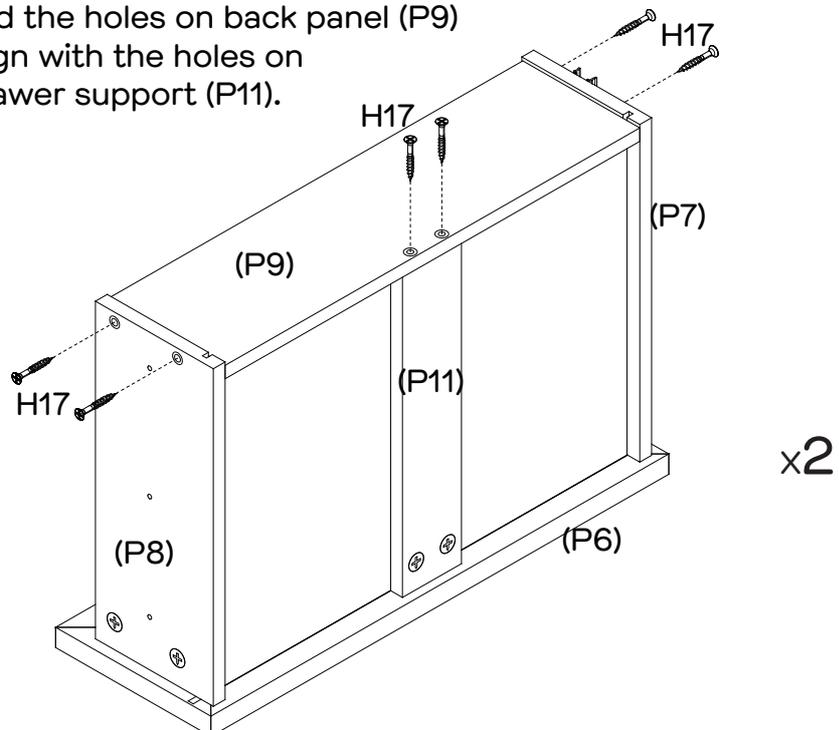


Slide drawer base (P10) into the grooves on panels (P6, P7, P8).
Attach drawer back (P9) to an assembled drawer with 6 x screws (H17), using a phillips head screwdriver as shown.
Repeat this step for the other drawer assembly.

Step 16


You will need	
	
4 x Slide Runners (H19-2)	12 x Screws 12mm (H18)
	
Phillips Head Screwdriver	


Please fasten the screws through these holes for this step.

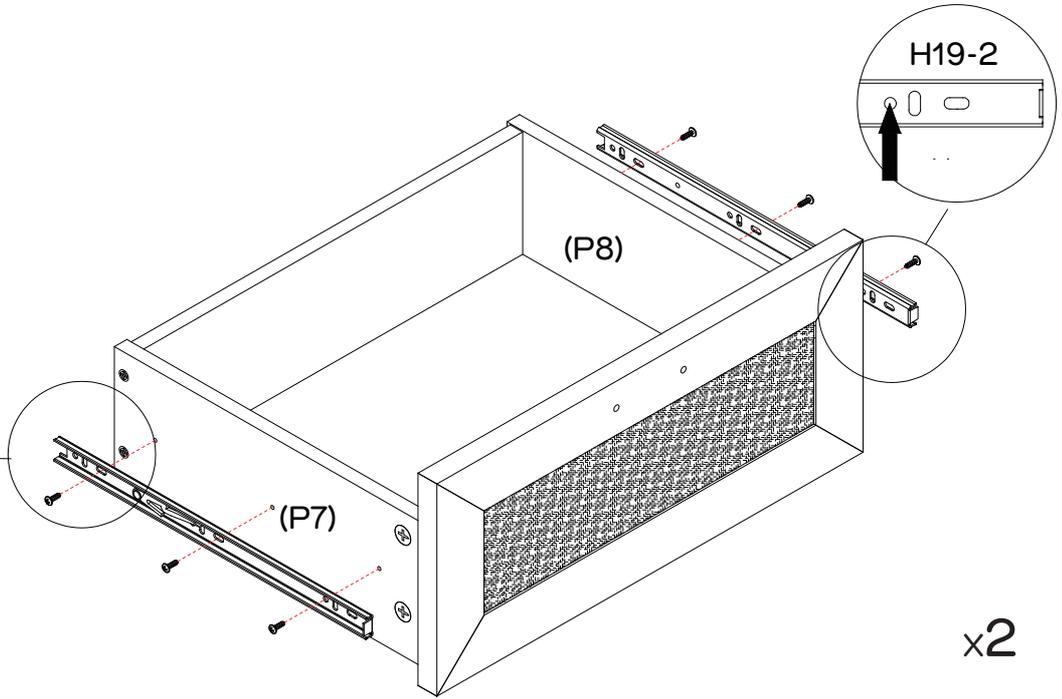

Attach 1 x slide runner (H19-2) to each drawer left side (P7) and drawer right side (P8) with 3 x screws (H18), using a phillips head screwdriver as shown. Repeat this step for the other drawer assembly.




Step 17

You will need	
	
4 x Screws 28mm (H11)	2 x Handles (H4)
	
Phillips Head Screwdriver	

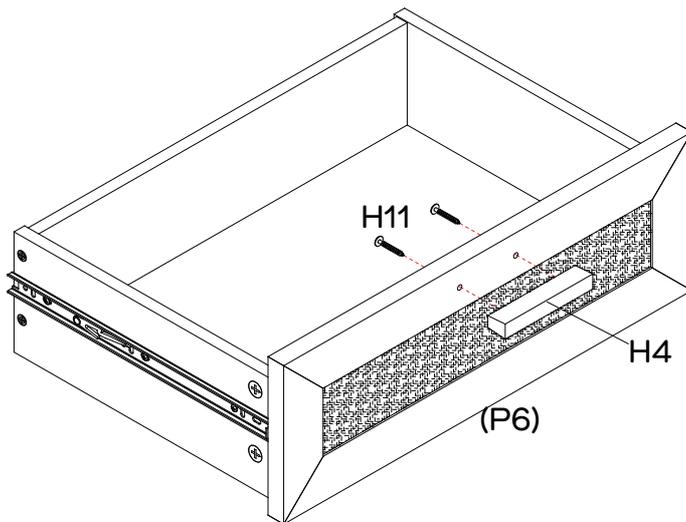


Attach 1 x handle (H4) onto a drawer front (P6) with 2 x screws (H11), using a phillips head screwdriver as shown. Repeat this step for the other drawer assembly.


Step 18

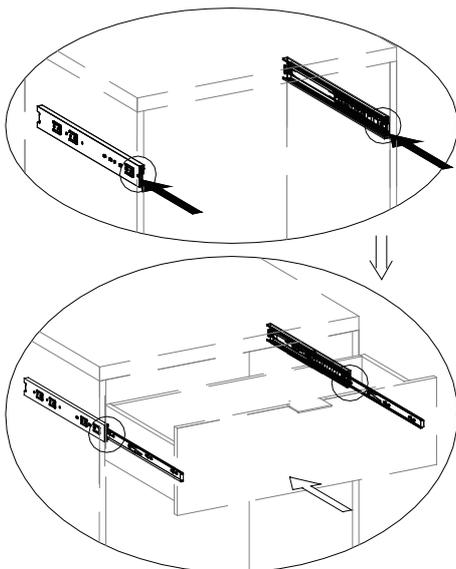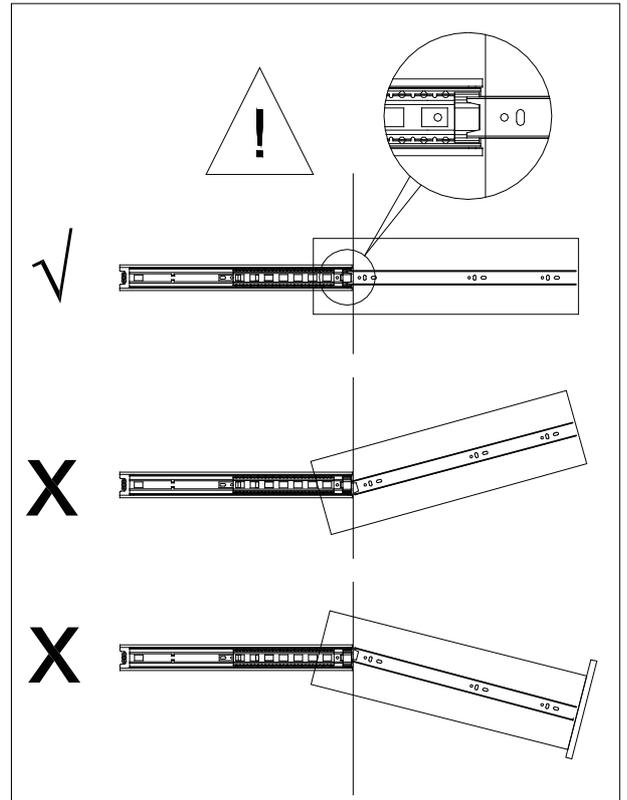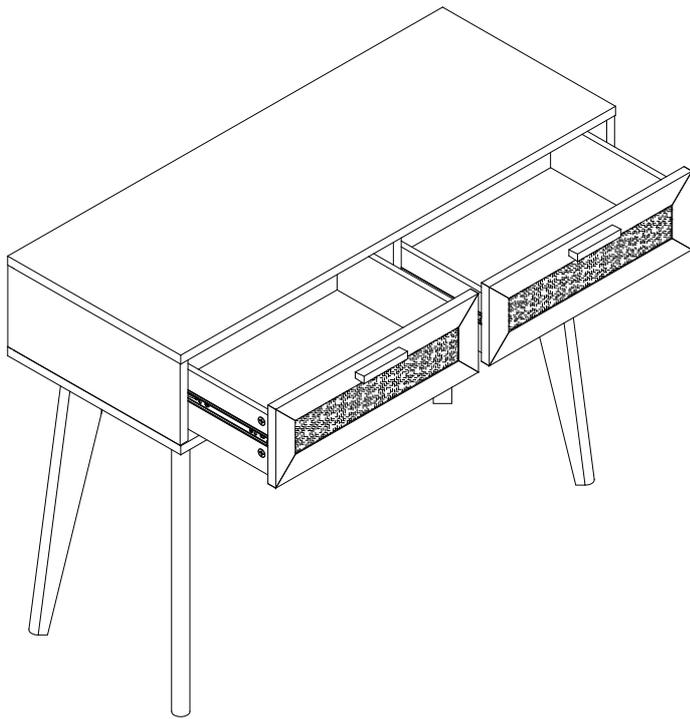

Move inner ball bearing track to front of slide track (H19-1).




Gently insert drawer slide runner (H19-2) in between the ball bearing track.

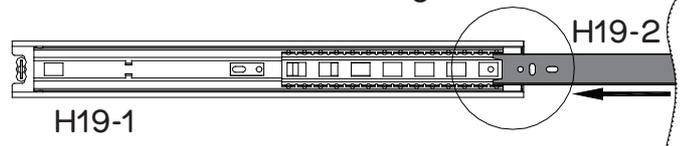


Position drawer so that slide runners (H19-2) align with slide tracks (H19-1) as shown. Gently push drawer into the closed position.

Step 19

We strongly recommend that this product is permanently fixed to the wall or other suitable surface.


You will need	
	
2 x Flat Washers (H9)	2 x Screws 25mm (H14)
	
2 x Wall Straps (H13)	Phillips Head Screwdriver

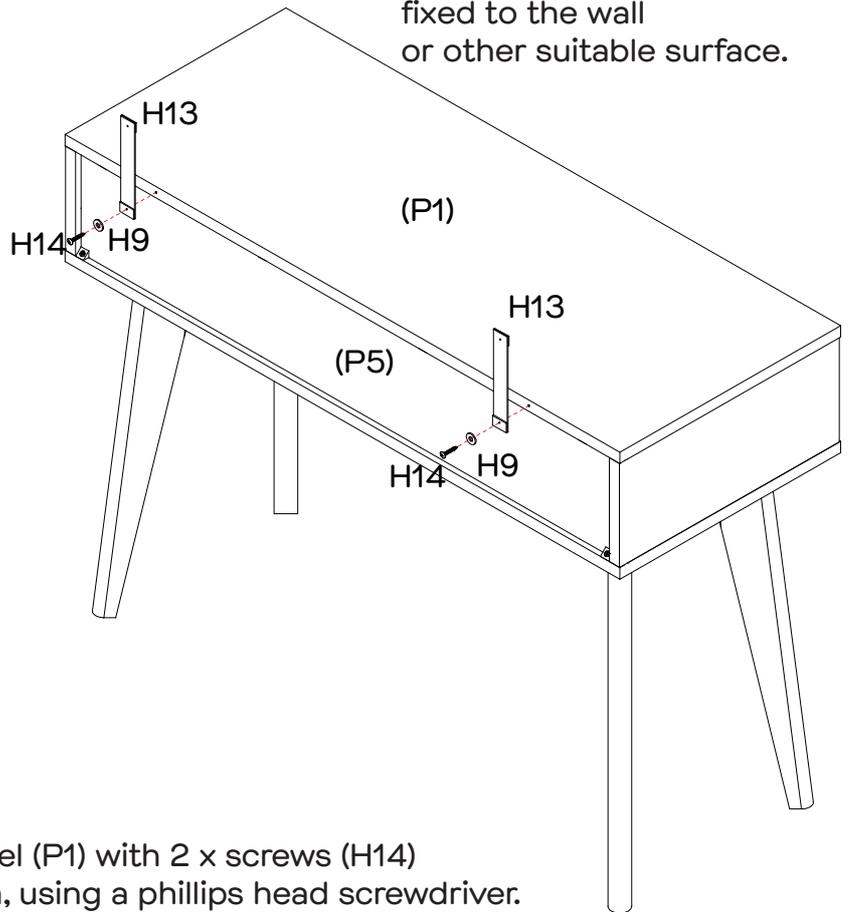

Fix 2 x wall straps (H13) to top panel (P1) with 2 x screws (H14) and 2 x flat washers (H9) as shown, using a phillips head screwdriver.


Step 20

Two People



You will need	
	
2 x Flat Washer (H9)	Phillips Head Screwdriver


Seek advice from a qualified trades person on how to attach this wall strap to your specific wall.

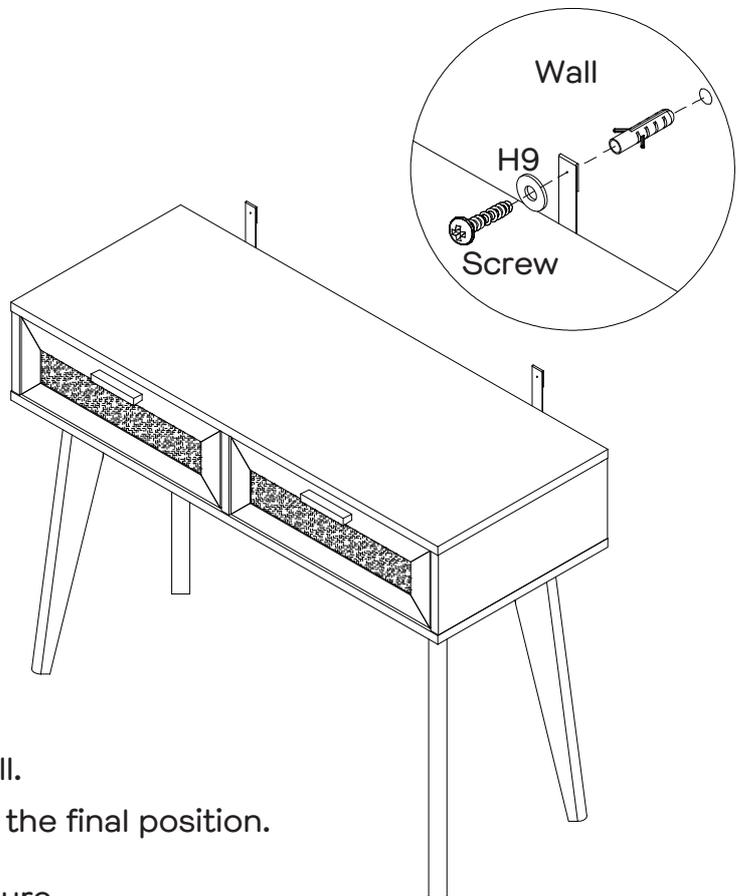

Screw and wall plug are not included. Please use appropriate fixtures for your wall.

With assistance, move the console table to the final position. Attach the wall straps to the wall. Make sure they are firmly attached and secure.

Step 21

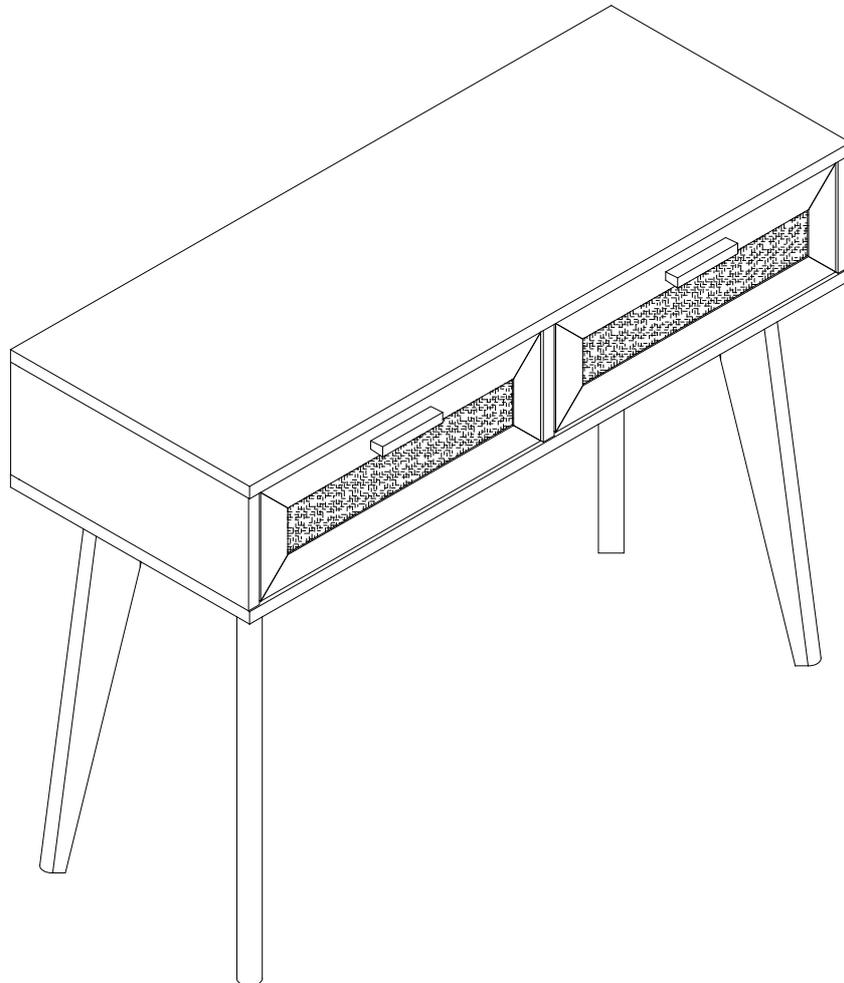

Job complete!

In the interest of our environment please dispose
of all packaging thoughtfully.