





**Fantastic
Furniture**

Version 1.0

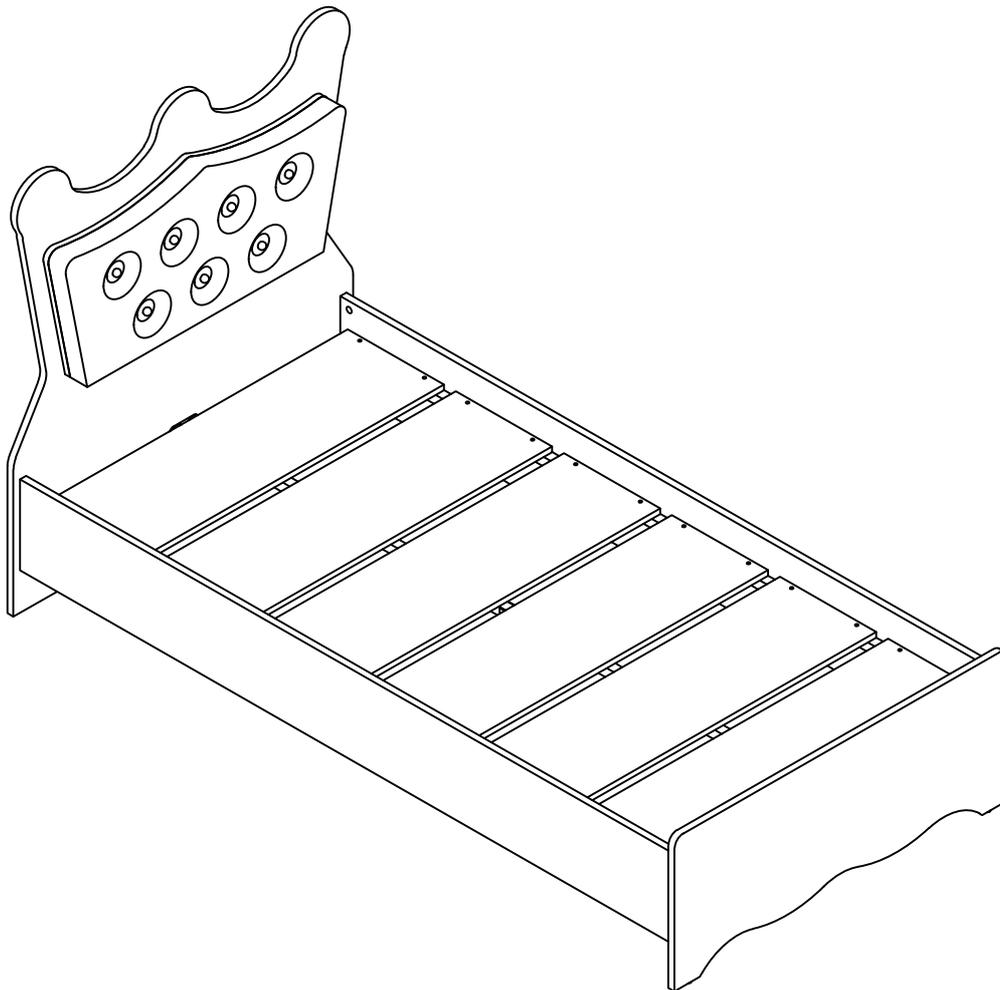

Two People



Required

Amirah

Bed Single

fantasticfurniture.com.au



WARNING: Do not drag this bed

To move this bed it must be lifted and moved. The bed has a centre rail and a support leg that may be damaged when dragged, which may in turn damage the bed frame.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly checklist




Read through the instructions carefully before you begin.

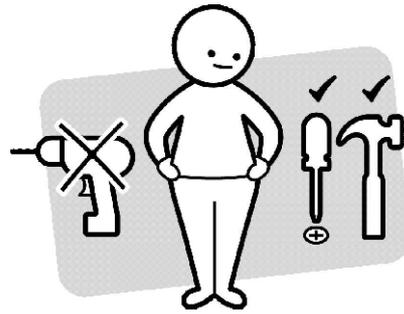

Make sure you have all the required tools. Never use power tools unless instructed.

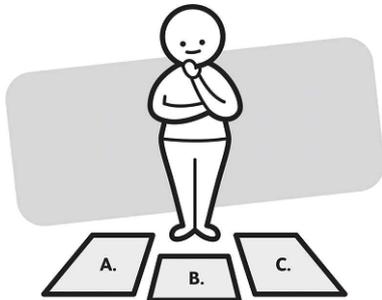

Identify and lay out all of the components before you begin assembly.

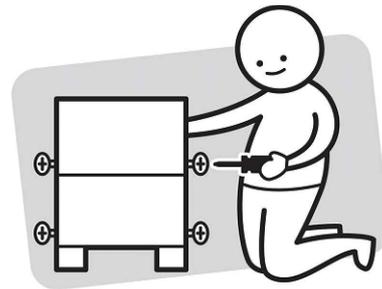

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE



Other tools you need

Phillips head screwdriver, soft headed mallet.

Parts list

Box 1:


Head Board (P1);
Foot Board (P4);
Support Leg (P7);
Hardware.

Box 2:

6 x Base Panels (P5).

Box 3:


Side Panel L (P2);
Side Panel R (P3);
Centre Support (P6).

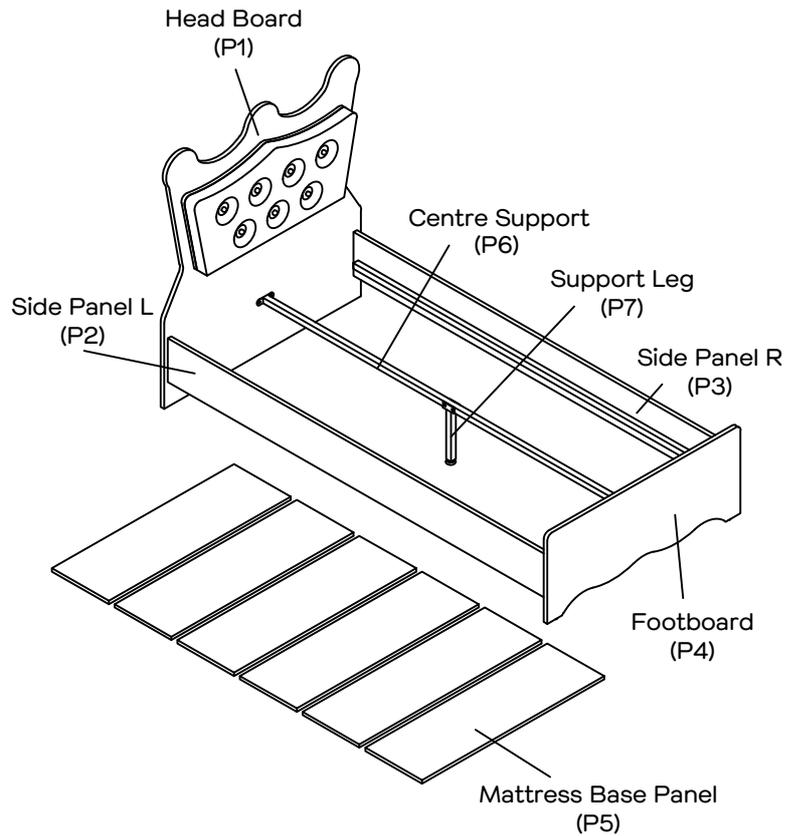

1 x Allen Key
(H1)



4 x Cam Nuts
(H2)



8 x Wood Dowels
(H3)



30 x Large Screws
(H4)



26 x Hex Nuts
(H5)



26 x Washers
(H6)



4 x Small Screws
(H7)



1 x Spanner
(H8)



4 x Cam Bolts
(H9)



8 x Bolts
(H10)




4 x Barrel Nuts
(H11)



Fantastic
Furniture

Step 1


You will need	
	
4 x Cam Bolts (H9)	Phillips Head Screwdriver

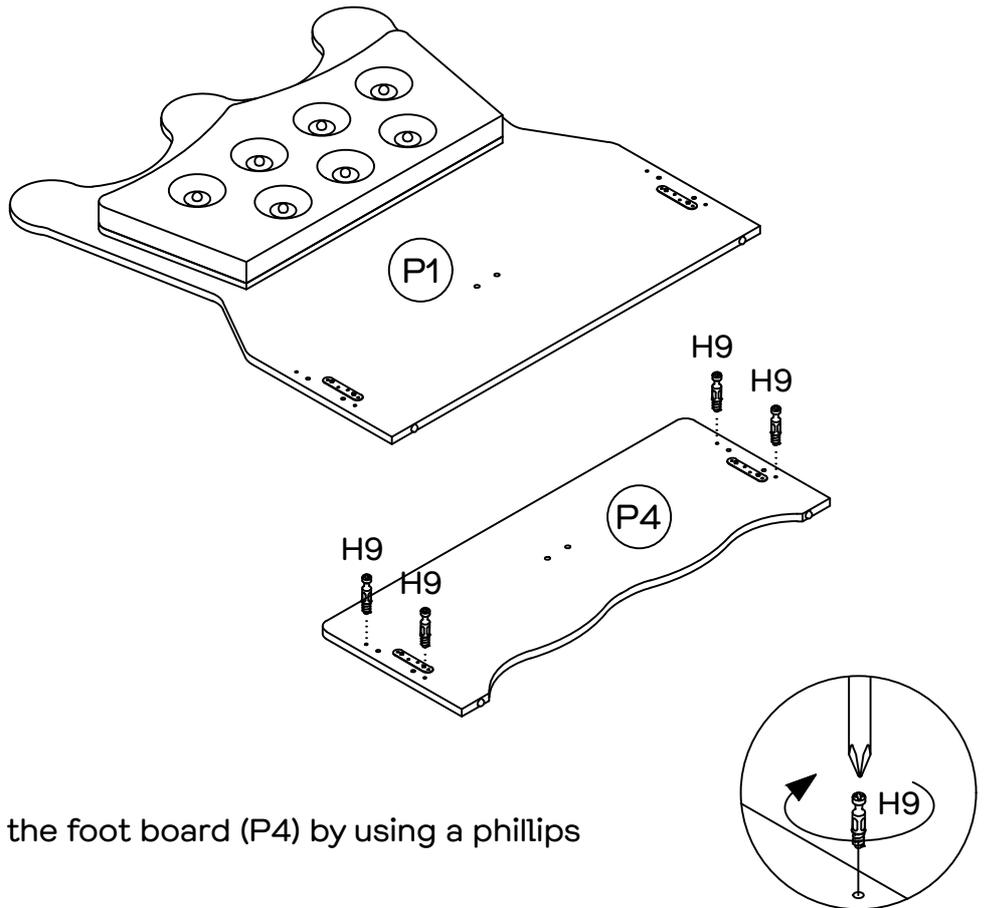

Screw 4 x cam bolts (H9) into the foot board (P4) by using a phillips head screwdriver.

Step 2

You will need	
	
1 x Allen Key (H1)	2 x Large Screws (H4)
	
2 x Hex Nut (H5)	2 x Washer (H6)
	
1 x Spanner (H8)	

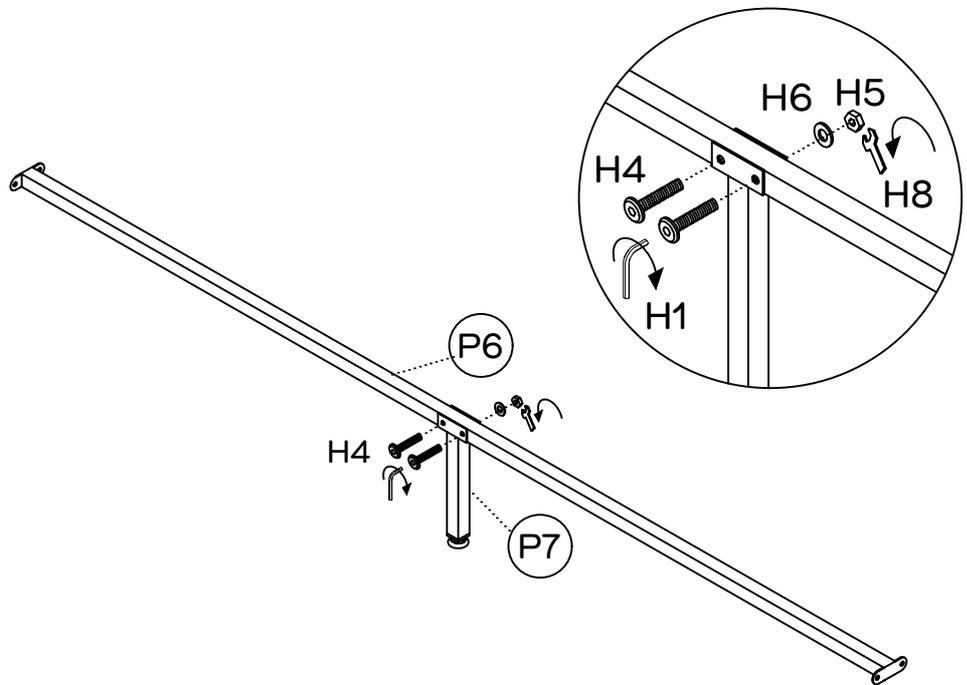


Attach the support leg (P7) to the centre support (P6) with 2 x large screws (H4), 2 x washers (H6) and 2 x hex nuts (H5) using an allen key (H1) and spanner (H8) as shown.

Step 3

You will need

	
4 x Cam Nuts (H2)	
	
8 x Wood Dowels (H3)	
	
4 x Barrel Nuts (H11)	Soft Headed Mallet

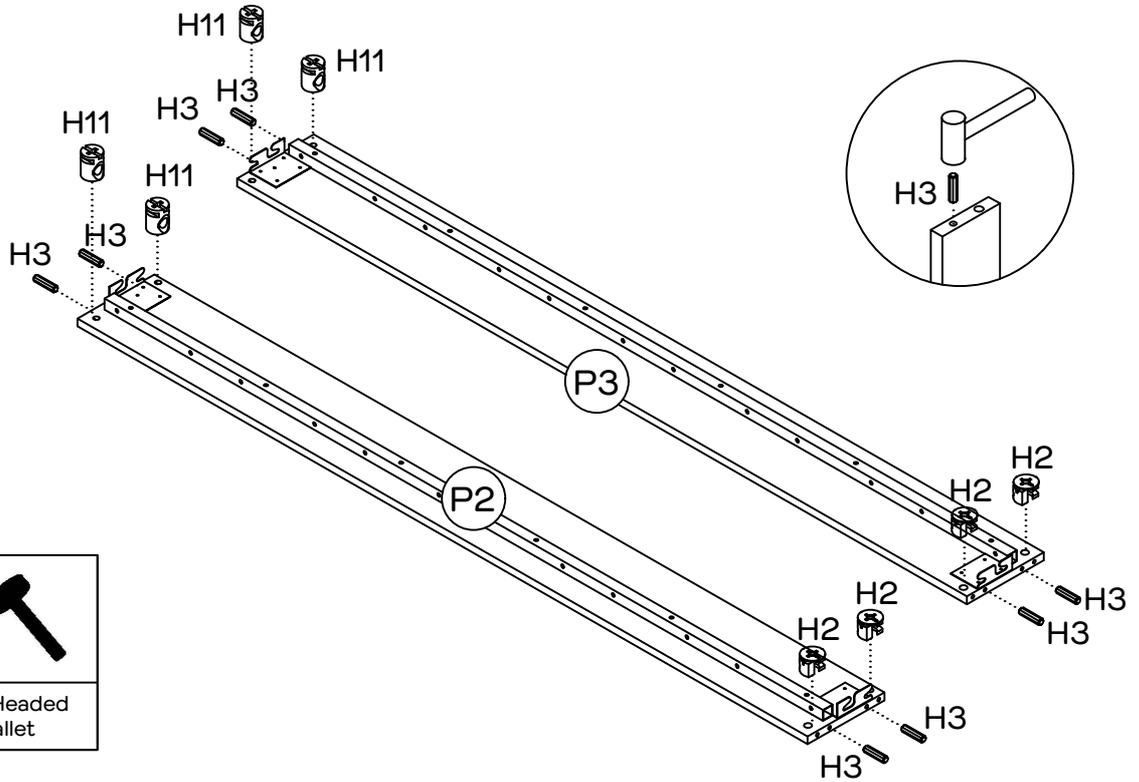

Insert 4 x cam nuts (H2) into the side rails (P2) & (P3). Rotate the cam nuts (H2) so the arrows point towards the incoming cam bolts.


Insert 8 x dowels (H3) into the side rails (P2 & P3) by hand or gently using a soft headed mallet.

Insert 4 x barrel nuts (H11) into side rails (P2) & (P3). Ensure the opening of the nuts face the incoming screws.

Step 4

You will need

	
4 x Bolts (H10)	4 x Large Screws (H4)
	
1 x Allen Key (H1)	

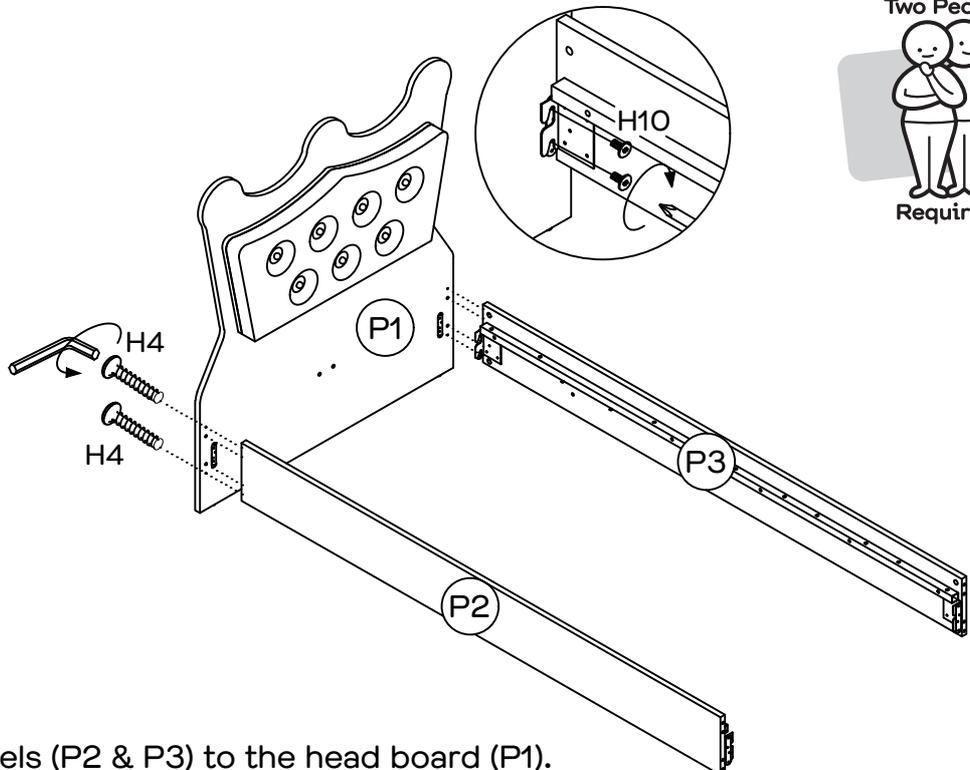

Attach the side rail panels (P2 & P3) to the head board (P1).

Align the dowels (H3) in the side panels with the holes on the


head board (P1). Fix the side rails (P2 & P3) with 4 x screws (H4) through the head board and rotate clockwise to tighten with an allen key (H1).

Then fix the side rails (P2 & P3) to the head board (P1) with 4 x bolts (H10) using a phillips head screwdriver.


Step 5

You will need	
	
4 x Bolts (H10)	Phillips Head Screwdriver

This is how a cam nut works.....





The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

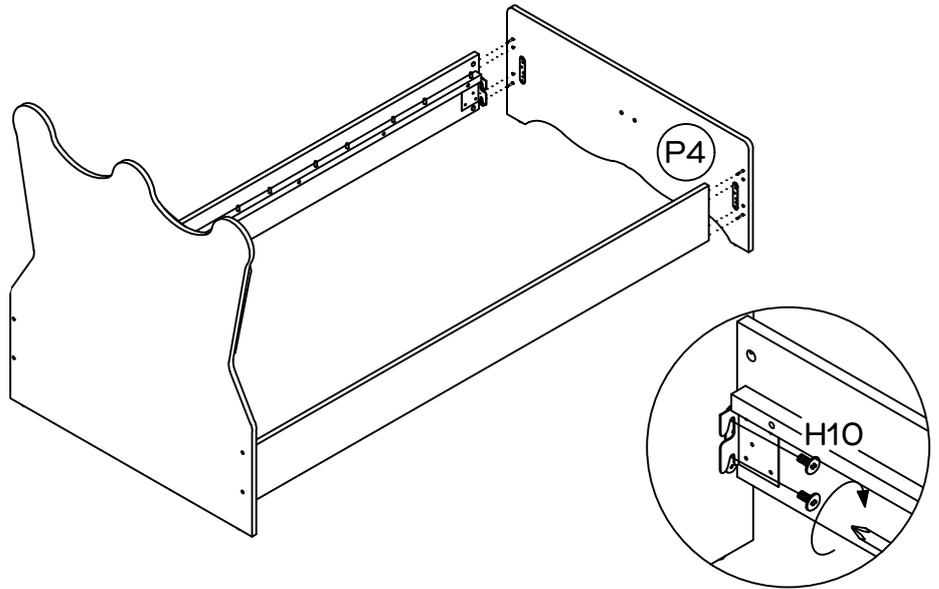

Attach the side rails (P2 & P3) to the foot board (P4).
 Align the dowels (H3) in the side panels with the holes on the foot board (P4).
 Turn the cam nuts (H2) on the side panels (P2 & P3) clockwise with a Phillips head screwdriver to lock into position.
 Then fix the side rails (P2 & P3) to the foot board (P4) with 4 x bolts (H10) using a Phillips head screwdriver.


Step 6

You will need	
	
4 x Small Screws (H7)	1 x Allen Key (H1)

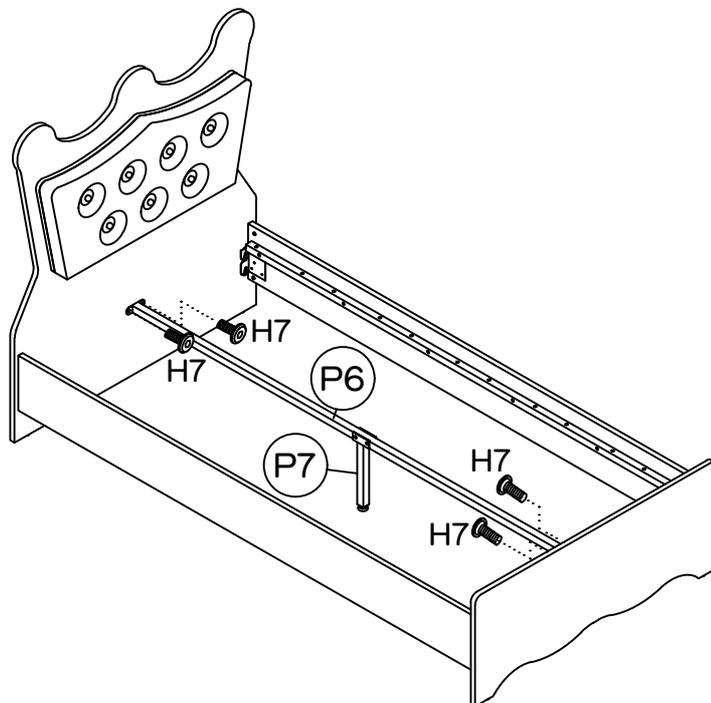

Attach the metal centre support (P6) to the head board (P1) and foot board (P4) with 4 x small screws (H7) using an Allen key.
 Ensure all bolts are fully tightened.


Step 7

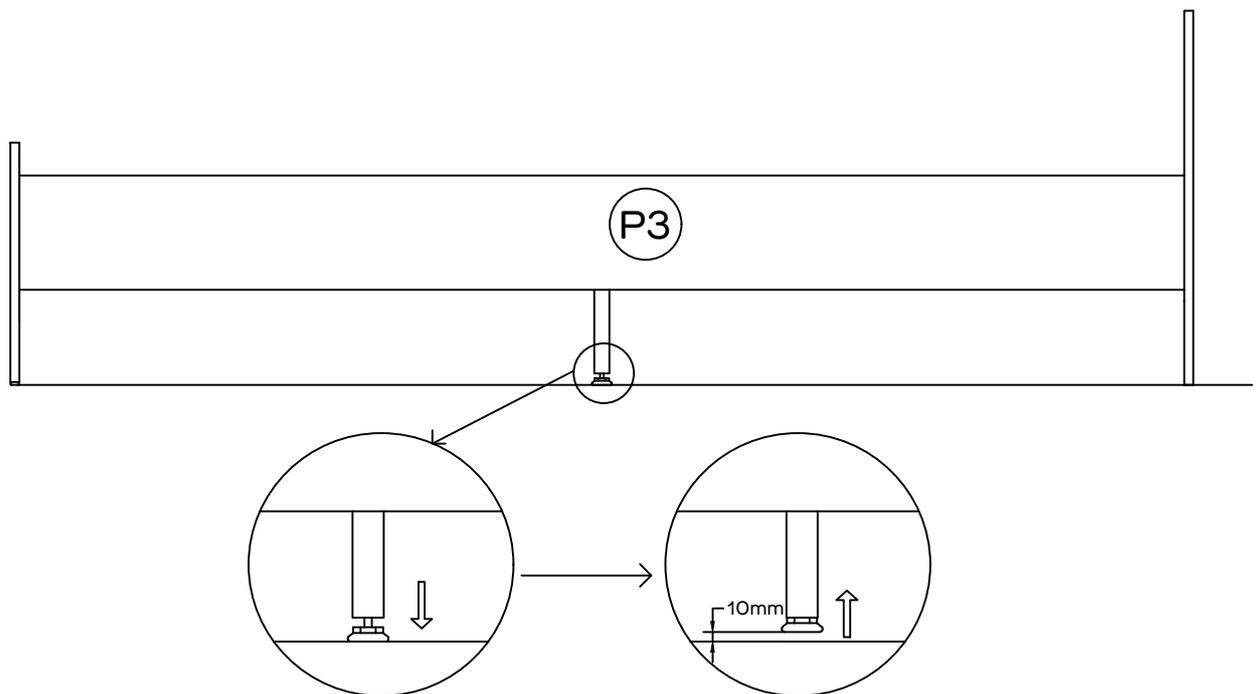


Use two people to lift and move this bed to its final resting position. Extend the adjustable foot so that it sits 10mm above the floor before you place the mattress on the bed.

Step 8

You will need	
1 x Allen Key (H1)	24 x Large Screws (H4)
24 x Hex Nuts (H5)	24 x Washers (H6)
1 x Spanner (H8)	

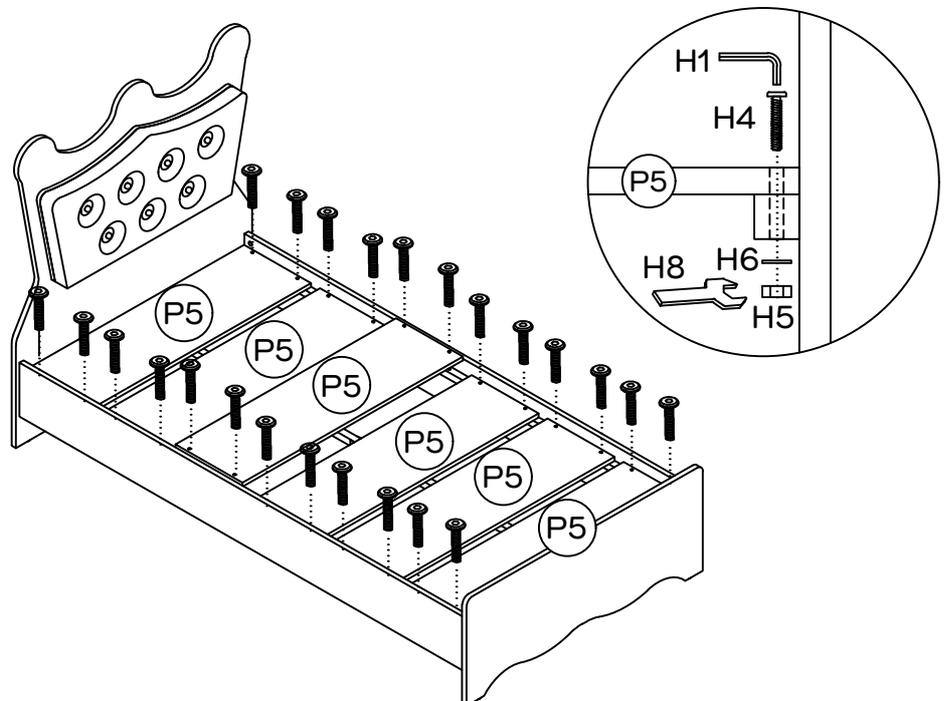

Secure the first base panel (P5) to the rails on the side panels (P2 & P3) in the position closest to the head board (P1) with 4 x large screws (H4), 4 x washers (H6), 4 x hex nuts (H5) using an allen key (H1) and spanner (H8) as shown. Repeat this process with 1 x base panel placed closest to the foot board (P4). Then repeat this process for the remaining 4 x base panels and place in the middle. Ensure bolts are fully tightend.

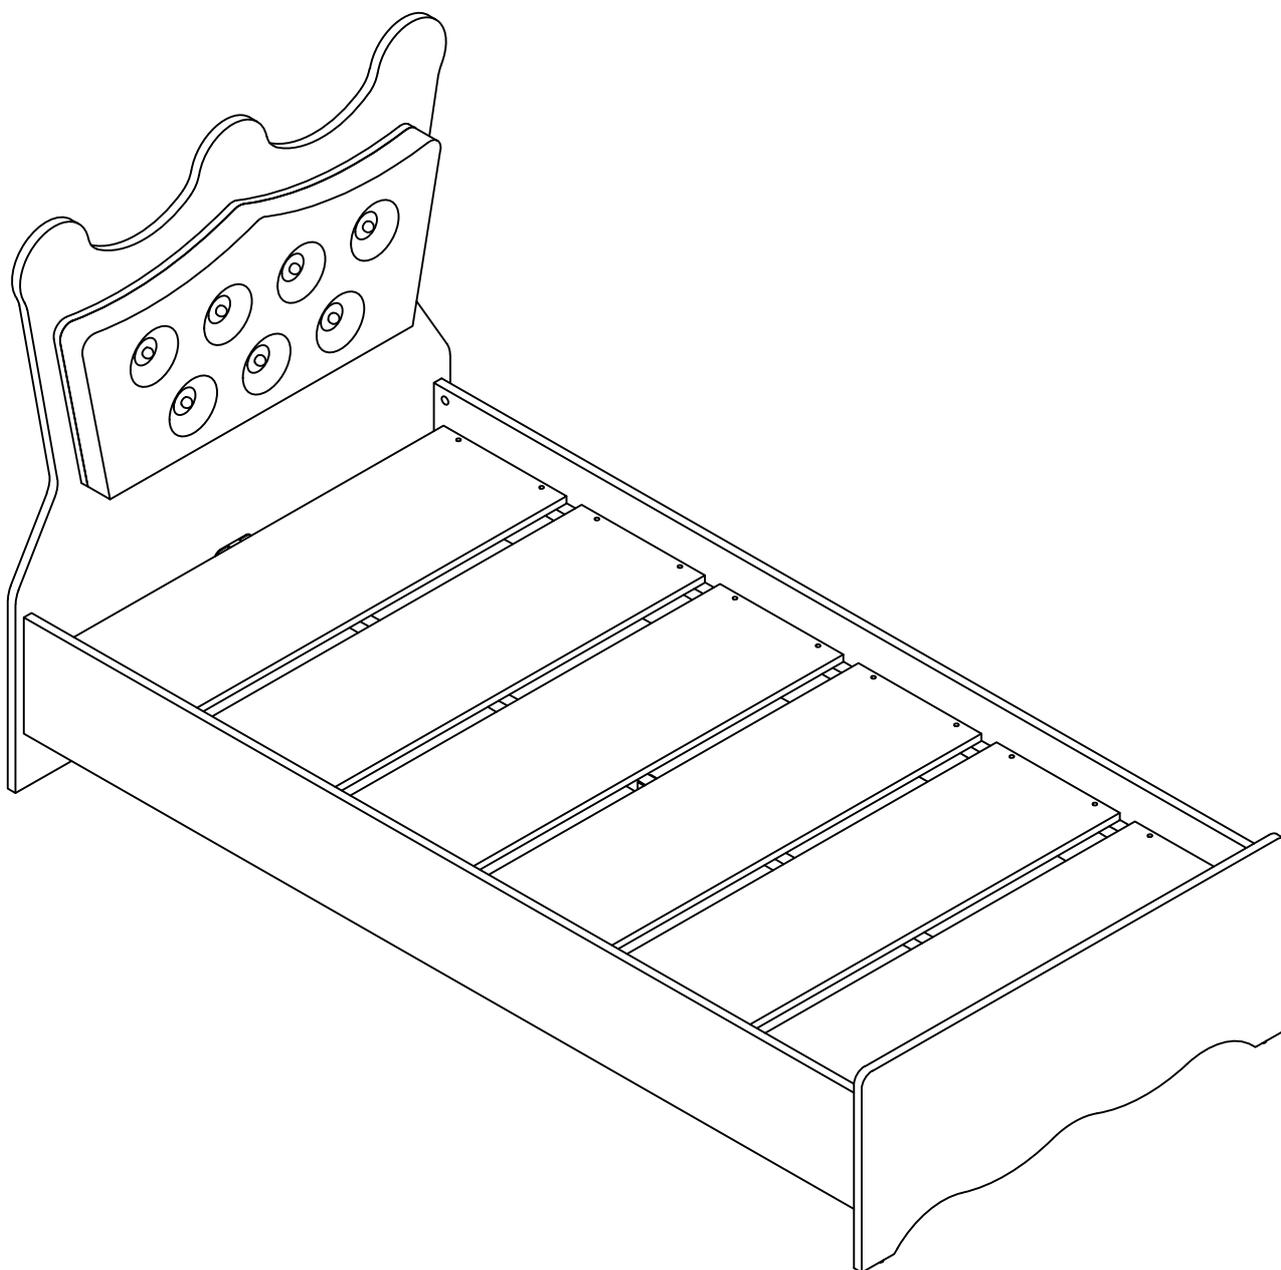


Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.




**Fantastic
Furniture**

Version 1.2

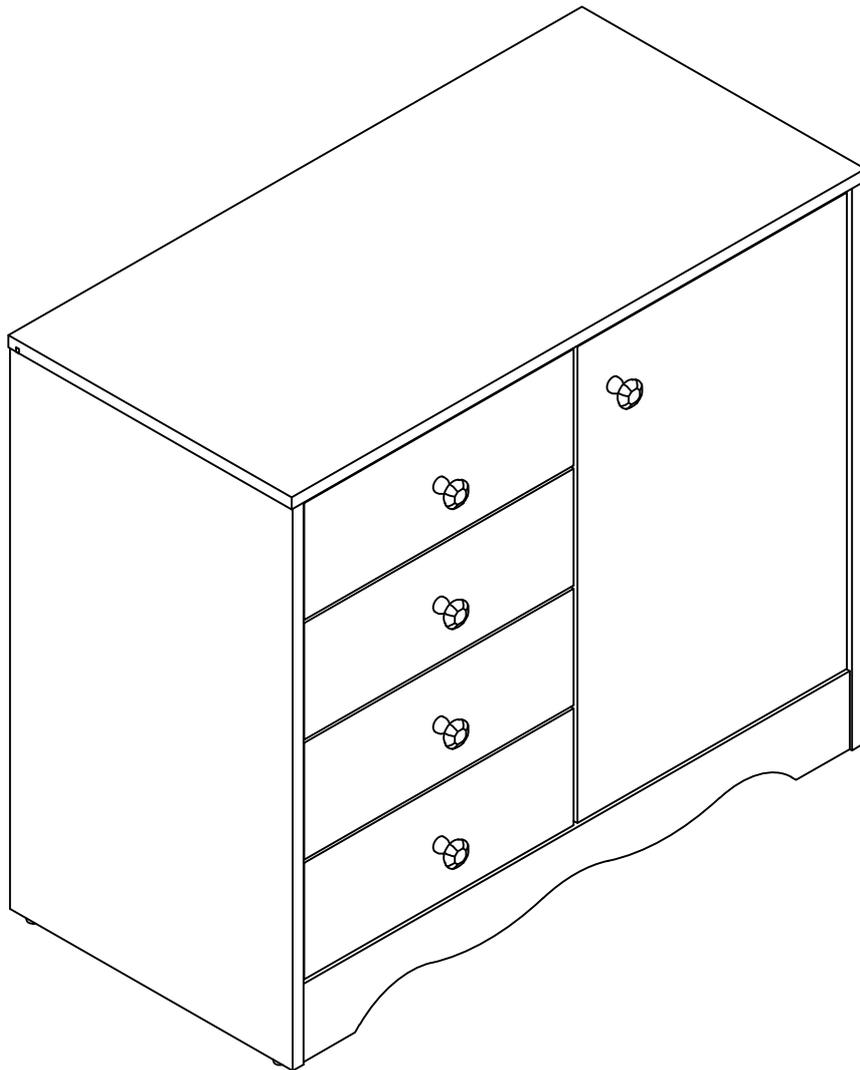

Two People



Required

Amirah

Dresser

fantasticfurniture.com.au



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY

To avoid the risks of injury, this product has been provided with wall straps to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.



WARNING: WEIGHT LIMIT ON TOP IS 80kg.
WARNING: WEIGHT PLACED IN DRAWER NOT TO EXCEED 10KG.
WARNING: WEIGHT ON INTERNAL SHELF NOT TO EXCEED 20KG.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



**Fantastic
Furniture**

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!


@fantasticfurniture




Assembly checklist




Read through the instructions carefully before you begin.

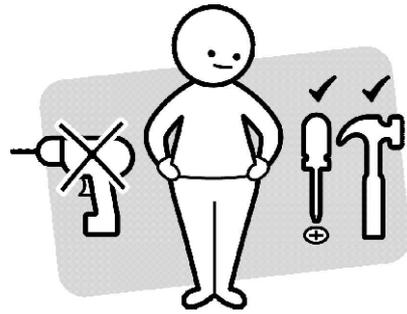

Make sure you have all the required tools. Never use power tools unless instructed.

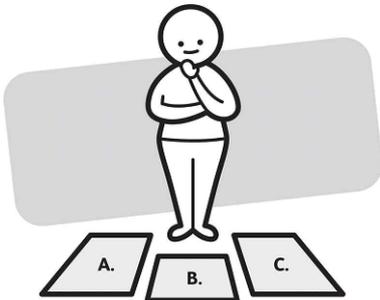

Identify and lay out all of the components before you begin assembly.

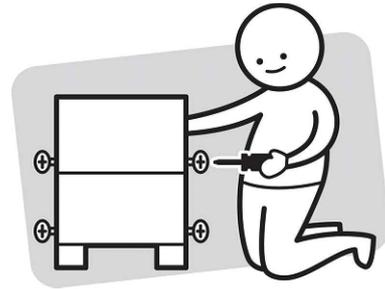

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful information


- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE




Other tools you need


Phillips head screwdriver, soft headed mallet.

Parts list


Top Panel (P1);
 Left Panel (P2);
 Right Panel (P3);
 Center Panel (P4);
 Shelf Panel (P5);
 Door (P6);
 Bottom Panel (P7);
 Back Plinth Panel (P8);
 Front Plinth Panel (P9);
 4 x Drawer Back Panel (P10);
 4 x Drawer Left Panel (P11);
 4 x Drawer Right Panel (P12);
 4 x Drawer Front Panel (P13);
 4 x Drawer Bottom Panel (P14);
 Right Back Panel (P15);
 Left Back Panel (P16).


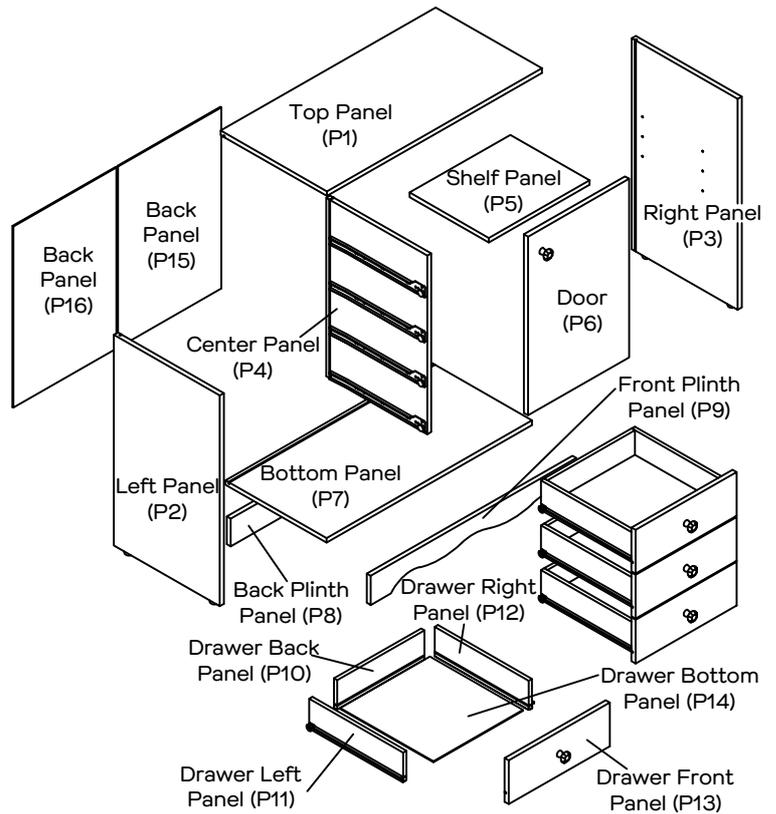


Hardware pack

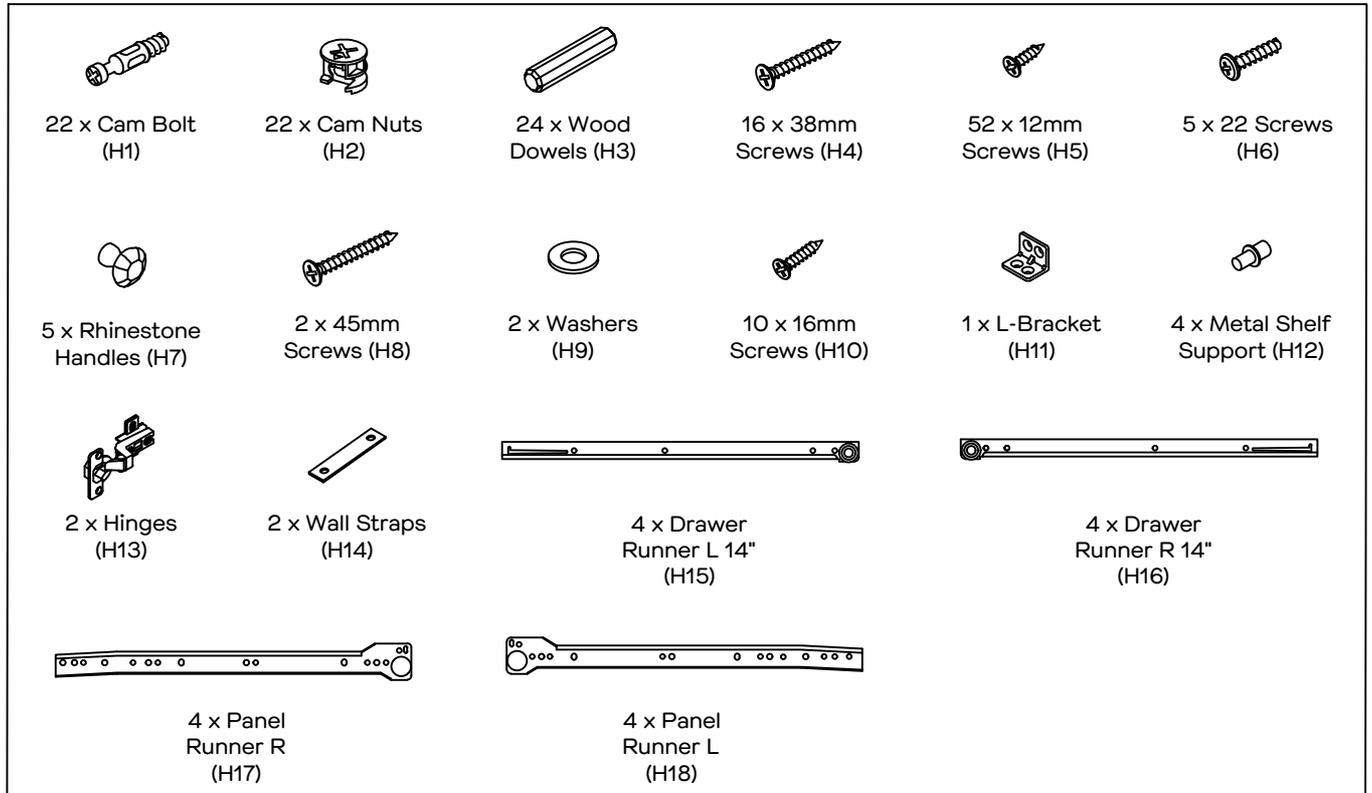

Step 1

You will need	
	
10 x Cam Nuts (H2)	12 x Wood Dowels (H3)
	
14 x Cam Bolts (H1)	Phillips Head Screwdriver
	
Soft Headed Mallet	

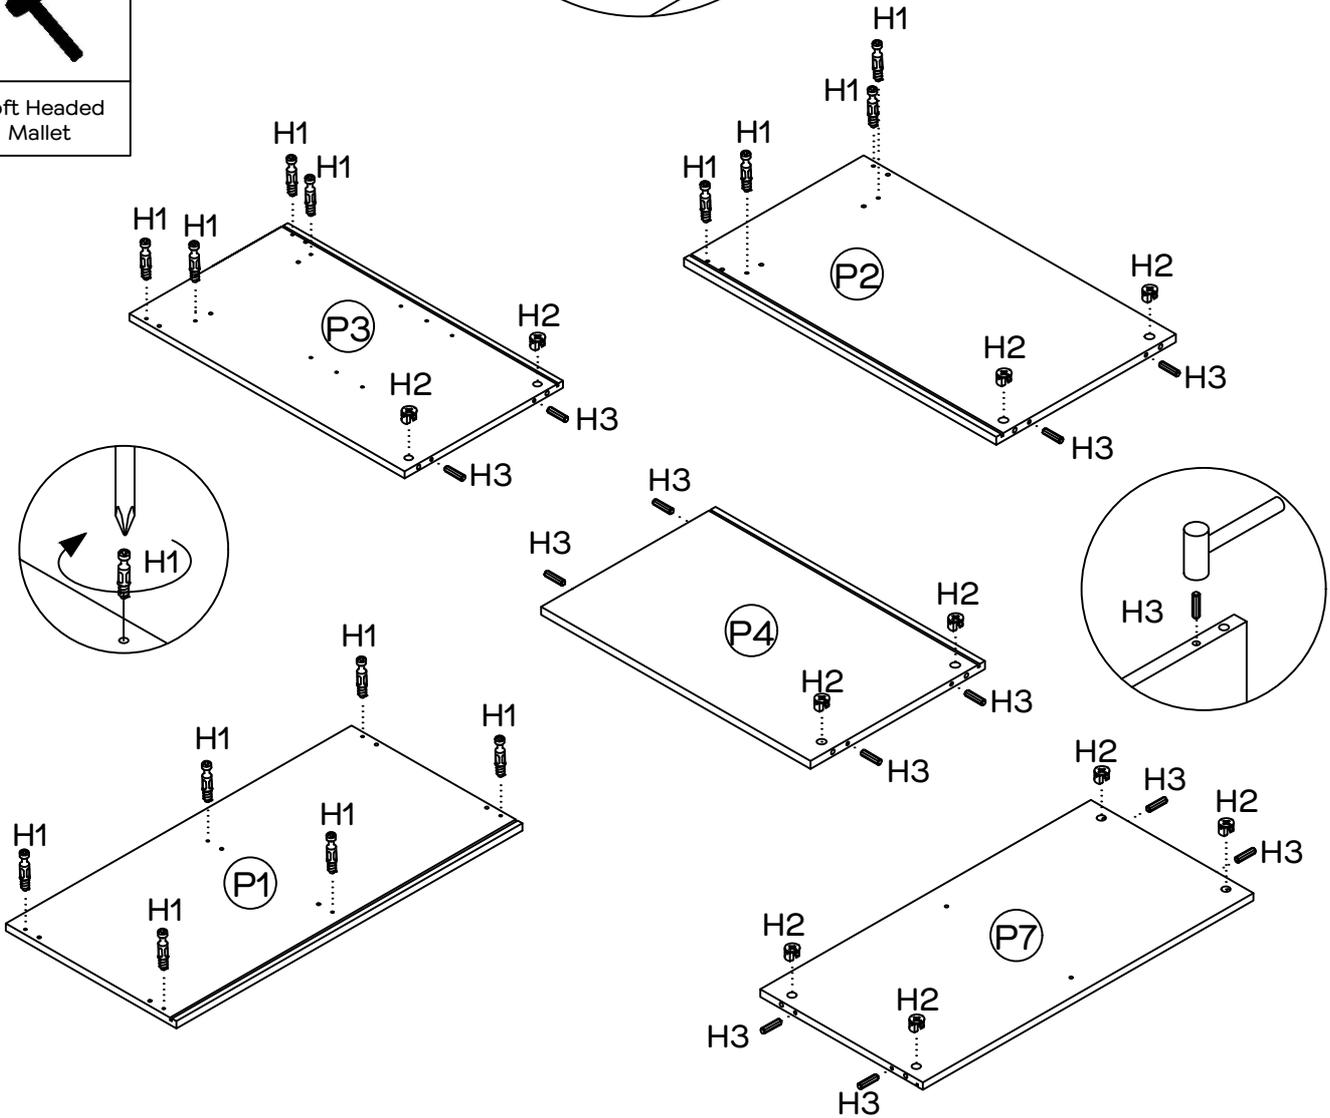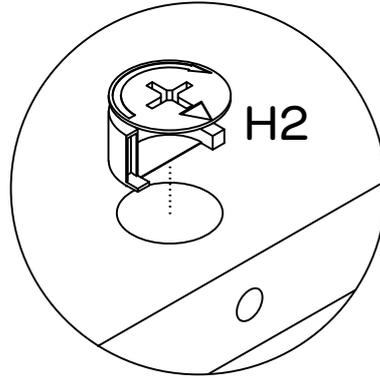

Prepare the frame:


Insert 10 x cam nuts (H2) into panels (P2), (P3), (P4) & (P7). Rotate the cam nuts so the arrows point towards the incoming bolt.



Insert 12 x dowels (H3) into panels (P2), (P3), (P4) & (P7) by hand or gently using a soft headed mallet.

Screw 14 x cam bolts (H1) into panels (P1), (P2) & (P3) using a phillips head screwdriver.



Step 2

You will need	
	
12 x Cam Nuts (H2)	12 x Wood Dowels (H3)
	
8 x Cam Bolts (H1)	Phillips Head Screwdriver
	
Soft Headed Mallet	

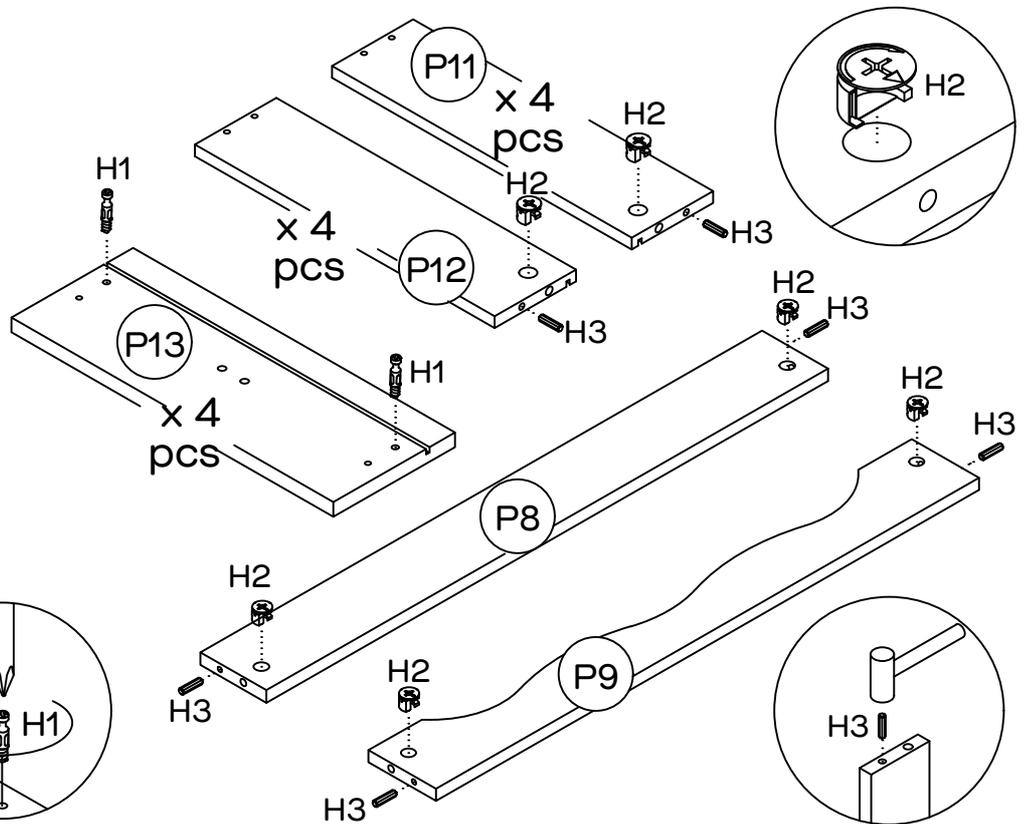


Insert 12 x cam nuts (H2) into panels (P8), (P9), (P11) & (P12). Rotate the cam nuts so the arrows point towards the incoming bolt.

Insert 12 x dowels (H3) into panels (P8), (P9), (P11) & (P2) by hand or gently using a soft head mallet.

Screw 8 x cam bolts (H1) into panels (P13) using a phillips head screwdriver.

Step 3

You will need	
	
16 x 38mm Screws (H4)	4 x 22 Screws (H6)
	
4 x Rhinstone Handles (H7)	Phillips Head Screwdriver

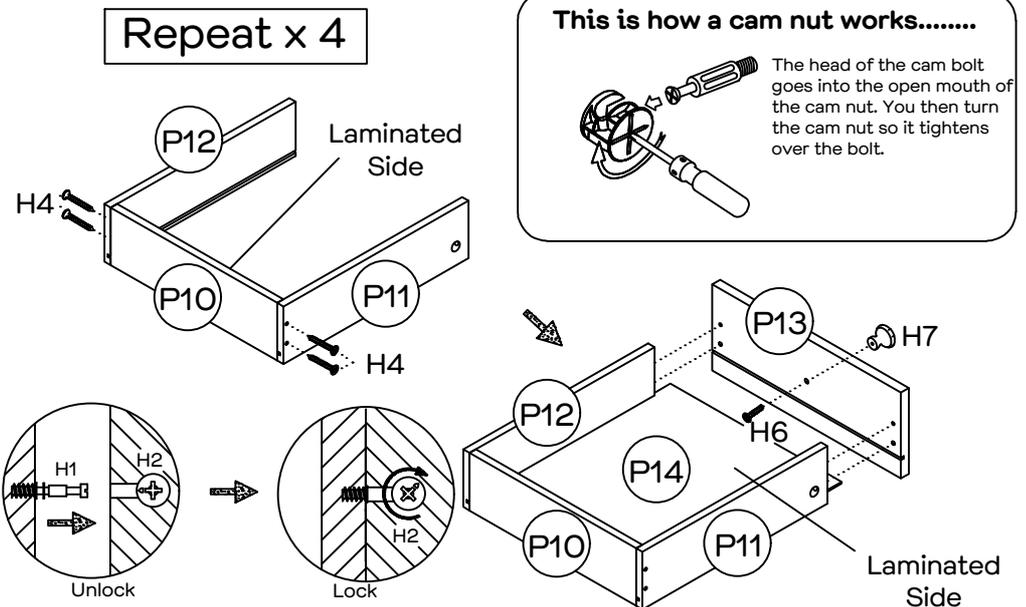

Begin assembling the drawers:

To attach panels (P11 & P12) to panel (P10), insert 4 x 38mm screws (H4) and tighten with a phillips head screwdriver.

Slide in the drawer bottom panel (P14) into the grooves of panels (P11, P12 & P10) with the laminated side facing up.

Attach the panel (P13) to panel (P11 & P12) and ensure the drawer bottom panel (P14) slides into the groove on panel (P13).


Turn the cam nuts on panels (P11 & P12) clockwise with a phillips head screwdriver to lock in position.

Attach the handle (H7) to panel (P13) with 1 x 22mm screw (H6) using a phillips head screwdriver.

Repeat this process for the remaining drawers.

Step 4

You will need	
	
24 x 12mm Screws (H5)	4 x Drawer Runners L (H15)
	
4 x Drawer Runners R (H16)	Phillips Head Screwdriver

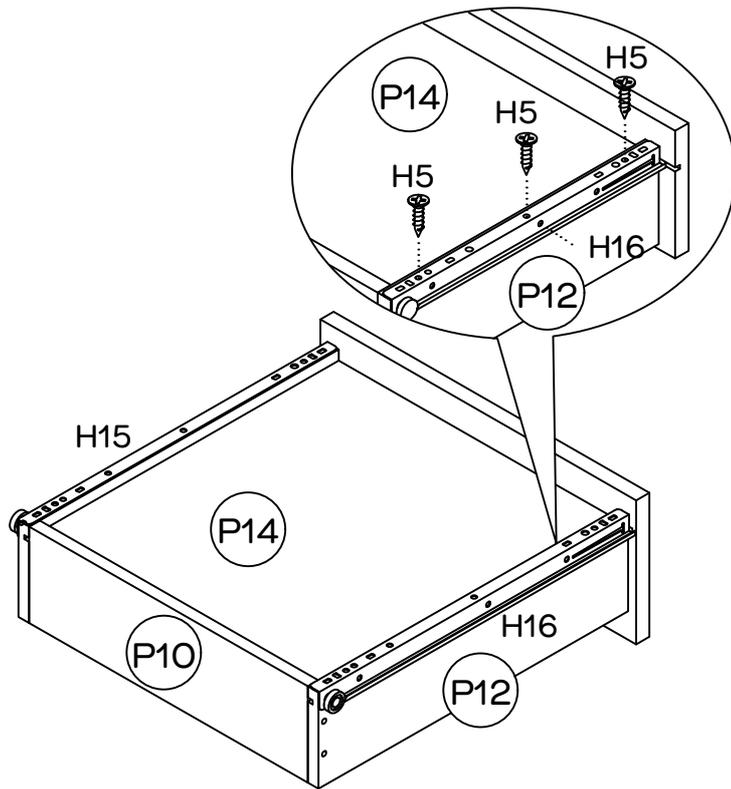


Repeat x 4

Attach the drawer runner L (H15) and the drawer runner R (H16) to the underside of the drawer with 6 x 12mm screws (H5) using a phillips head screwdriver. Repeat this process for the other 3 drawers.

Step 5

You will need	
	
24 x 12mm Screws (H5)	4 x Panel Runners R (H17)
	
4 x Panel Runners L (H18)	Phillips Head Screwdriver

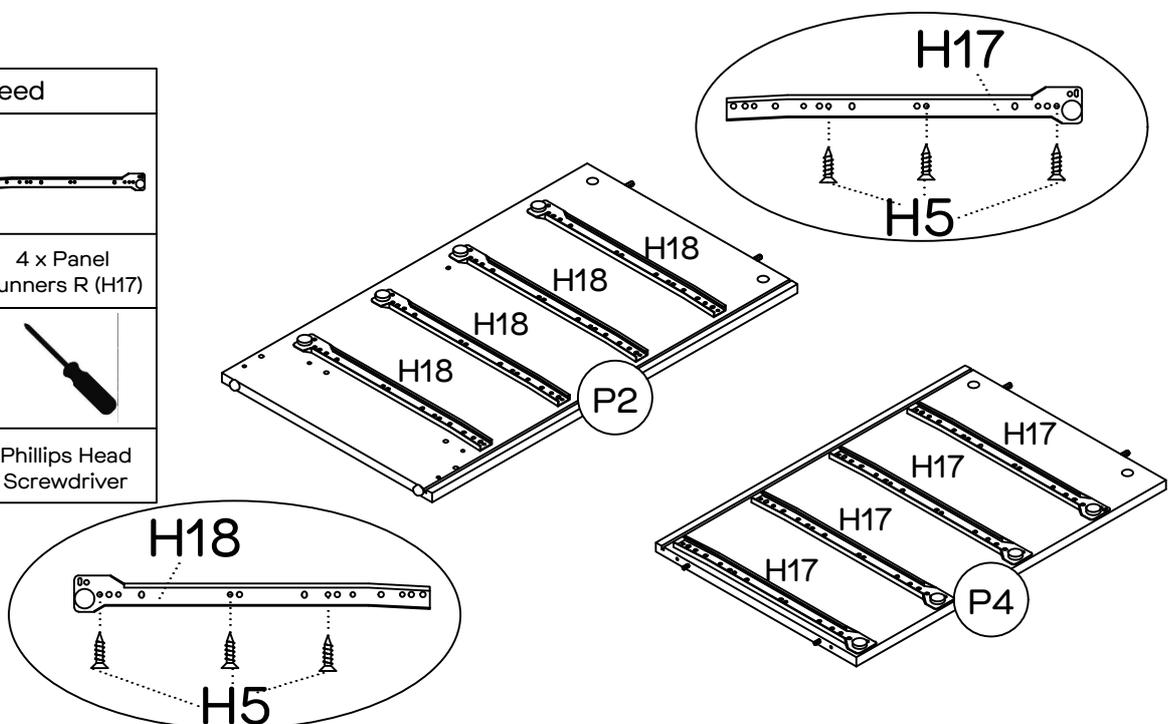

Attach 4 x panel runners R (H17) to the right side panel (P4) with 3 x 12mm screws (H5) using a phillips head screwdriver.
 Attach 4 x panel runners L (H18) to the left side panel (P2) with 3 x 12mm screws (H5) using a phillips head screwdriver.


Step 6

You will need




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

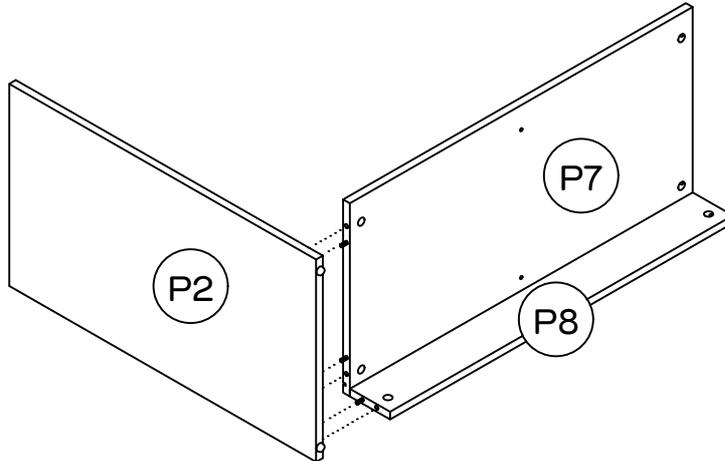

Attach panels (P7), (P8) to panel (P2) by aligning the dowels & cam bolts with the corresponding holes.

Turn the cam nut on panels (P7), (P8) clockwise motion with a phillips head screwdriver to lock in position.


Step 7

You will need




Phillips Head
Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

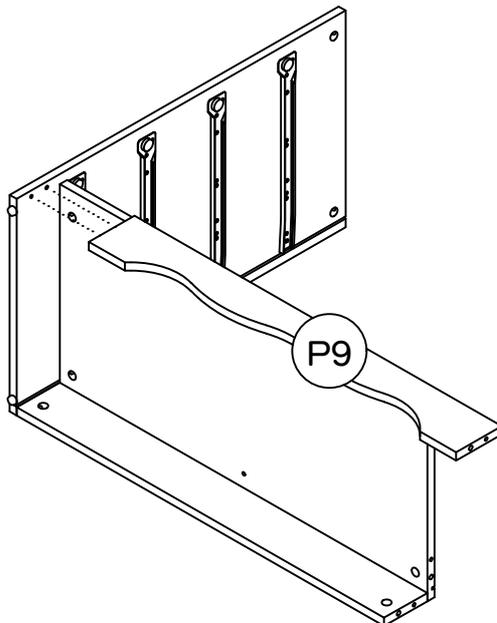

Attach panel (P9) to panel (P2) by aligning the dowels & cam bolts with the corresponding holes.


Turn the cam nut on panel (P9) clockwise motion with a phillips head screwdriver to lock in position.

Step 8


You will need



Phillips Head
Screwdriver

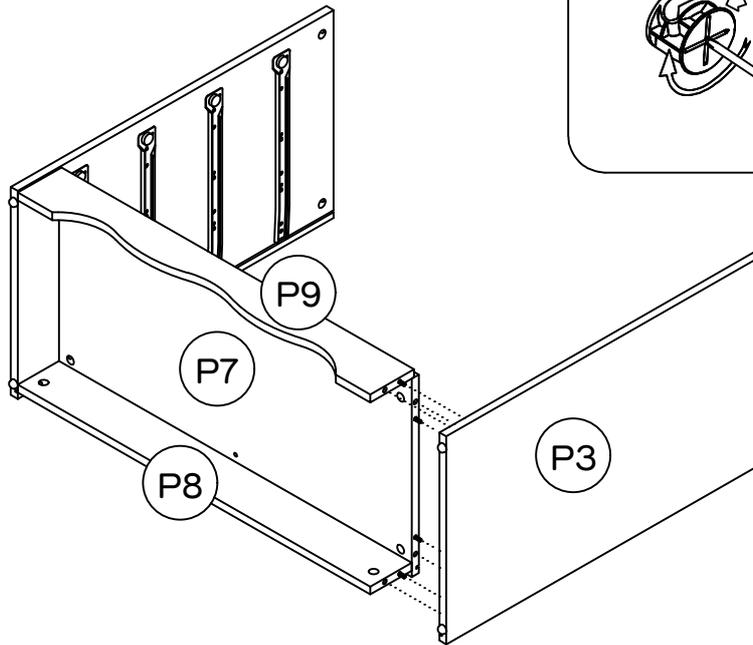

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach panel (P3) to panels (P7), (P8) & (P9).

Turn the cam nut on panels (P7), (P8) & (P9) clockwise motion with a phillips head screwdriver to lock in position.

Step 9

You will need



4 x 12mm
Screws (H5)




2 x 45mm
Screws (H8)




1 x L-Bracket
(H11)



Phillips Head
Screwdriver

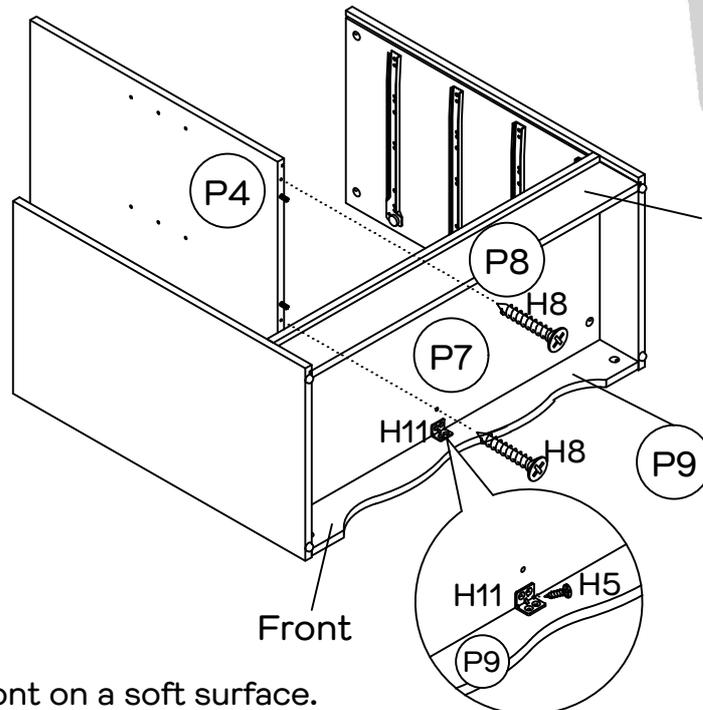

Two People



Required

Back

Front

Begin with frame lying on its front on a soft surface.

Attach panel (P4) to panel (P7) by aligning the dowels to the holes.

Insert 2 x 45mm screws (H8) using a phillips head screwdriver.

Secure 1 x L-bracket to (P7) & (P9) with 4 x 12mm screws (H5) using a phillips head screwdriver.


Two People



Required

Step 10

Warning Label
at the back
and top of unit

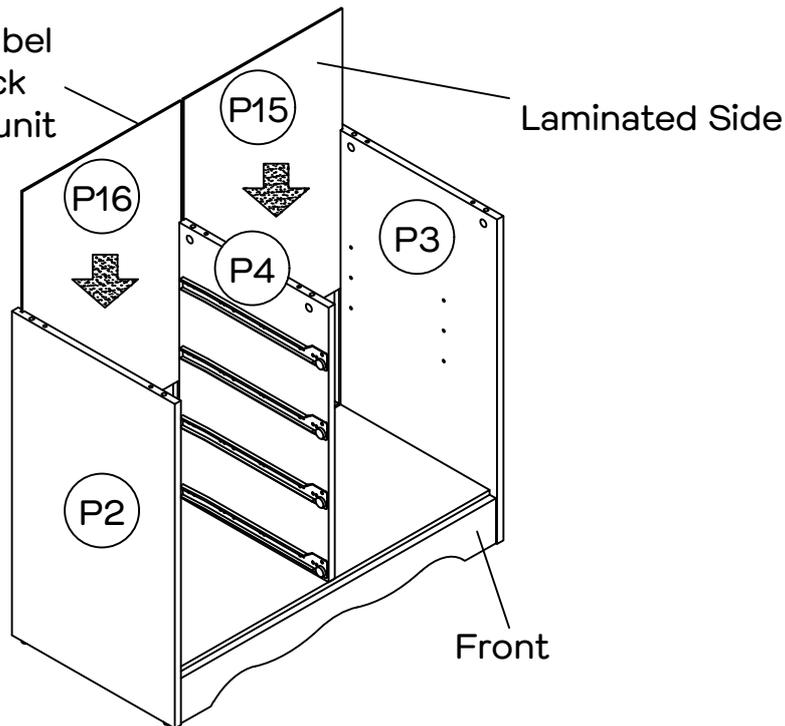

Slide panels (P15) & (P16) into the grooves in panels (P2), (P3) & (P4) with the laminated side facing the front for panel (P15).


Step 11

You will need




Phillips Head
Screwdriver

Two People




Required

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

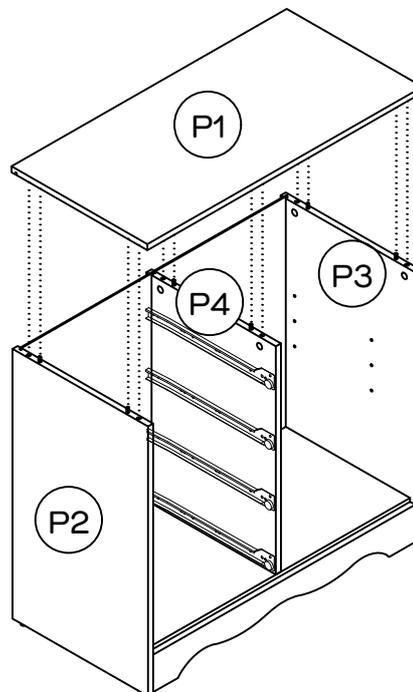

Attach panel (P1) to panels (P2), (P3) & (P4) by aligning the dowels and cam bolts to the holes.

Ensure the back panels (P16) & (P15) slide in the groove of panel (P1).


Turn the cam nuts on panels (P2), (P3) & (P4) clockwise with a phillips head screwdriver to lock in position.

fantasticfurniture.com.au



Step 12


You will need	
	
4 x 16mm Screws (H10)	2 x Hinges (H13)
	
Phillips Head Screwdriver	

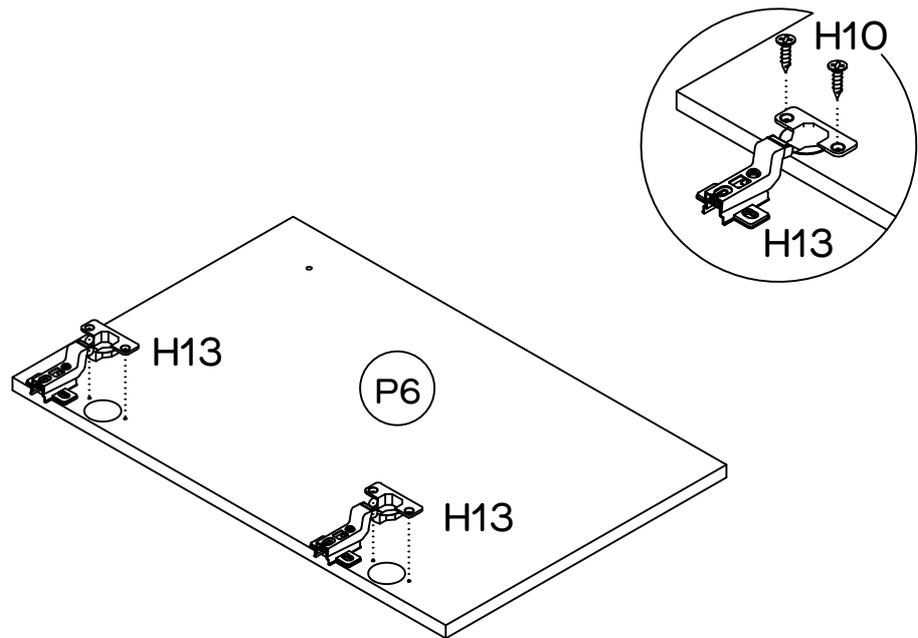


Attach 2 x hinges (H13) to door panel (P6) with 4 x 16mm screws (H10) using a phillips head screwdriver.

Step 13

You will need	
	
4 x 16mm Screws (H10)	Phillips Head Screwdriver

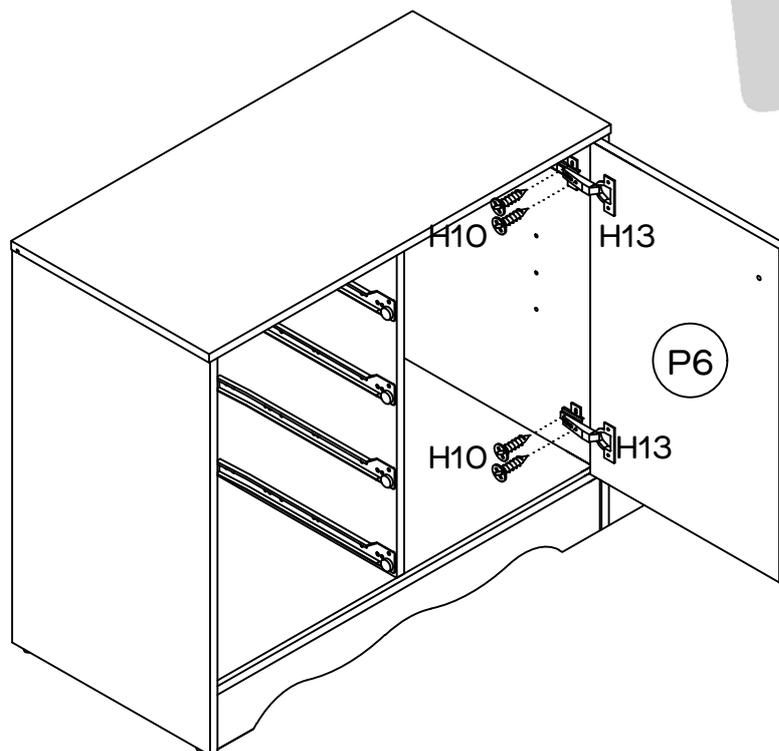

Two People




Required

Attach the door (P6) to side panel (P3) by attaching the hinges to panel (P3) with 4 x 16mm screws (H10) using a phillips head screwdriver.

Step 14


You will need	
	
1 x 22mm Screw (H6)	1 x Rhinstone Handle (H7)
	
4 x Metal Shelf Support (H12)	Phillips Head Screwdriver

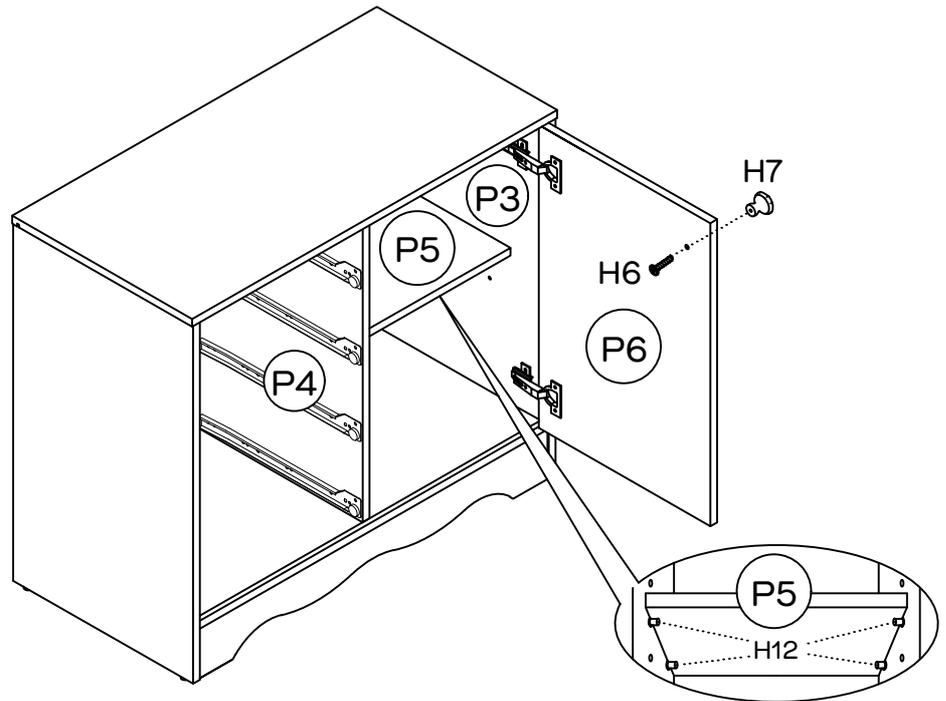

Attach the handle (H7) to panel (P6) with 1 x 22mm screw (H6) using a phillips head screwdriver.

Insert 4 x shelf support (H12) into desired holes in panels (P3) & (P4).
Place adjustable shelf (P5) onto shelf support.

Step 15

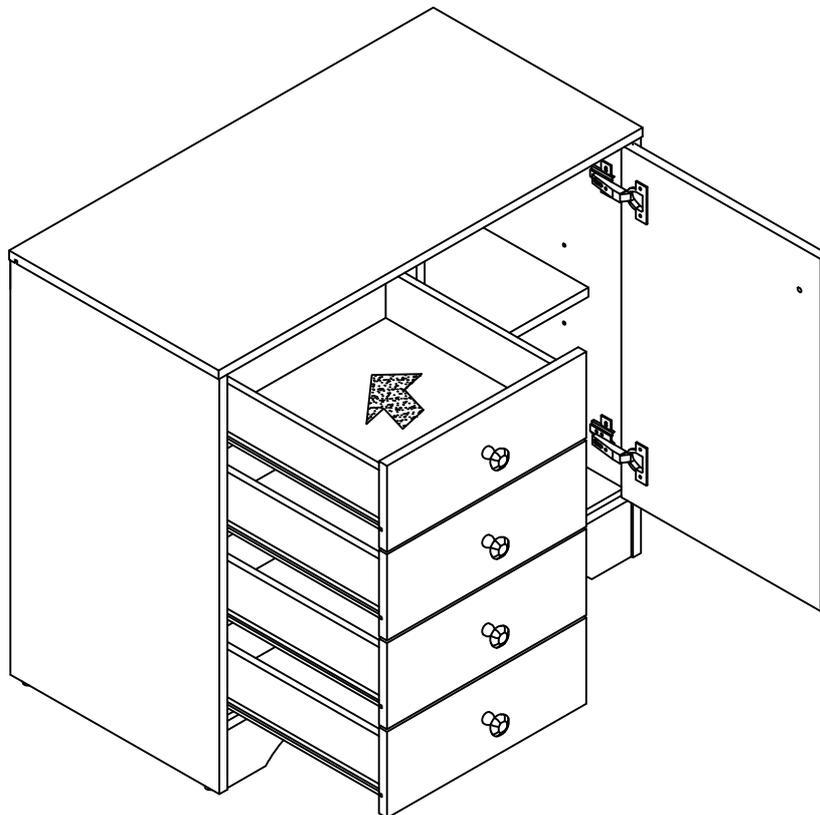


Put in the drawers one at a time, starting at the bottom.

Step 16

TO ADJUST THE DOORS TO MAKE THE GAPS MORE EVEN (OPTIONAL).

Step 16a


Adjust the door move in or out a little.

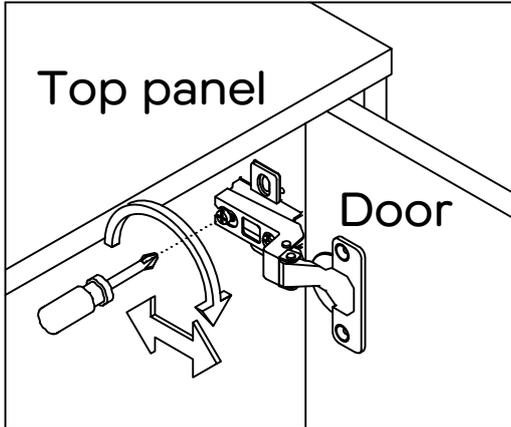

Loosen the screw indicated a little, adjust the hinge to right position, then tighten the screw.

Step 16b

Move Door In

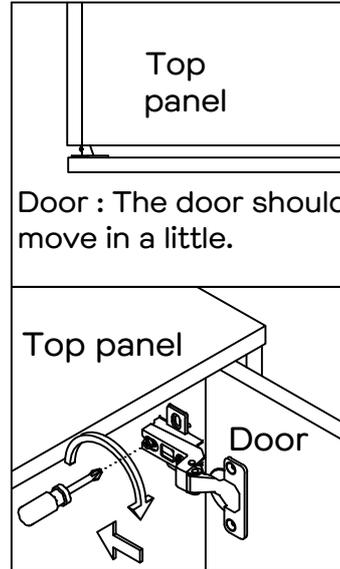


Door : The door should move in a little.

Push the hinge back a little.

Step 16c

Move Door Out

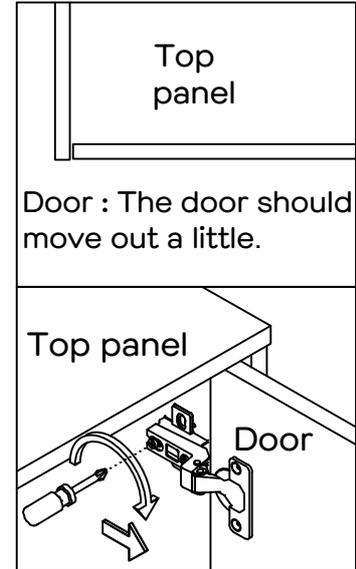


Door : The door should move out a little.

Push the hinge forward a little.

Step 16d


To adjust the gap between door and side.

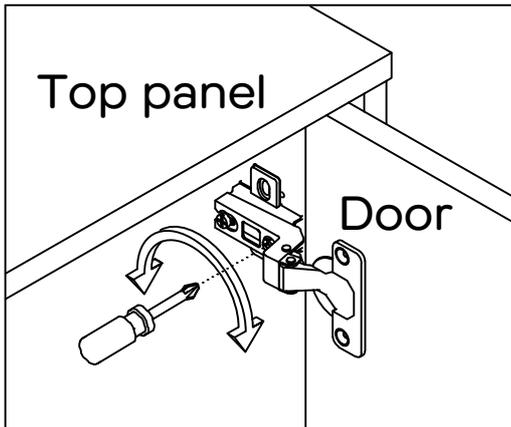

Loosen or tighten the screw indicated a little to adjust the gap between door and leg.

Step 16e


Move Door Right

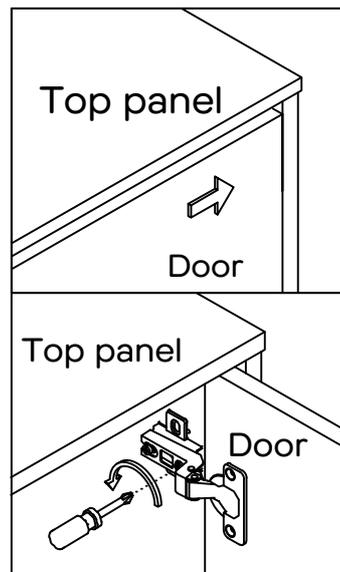

Turn the screw clockwise a little as shown to make the gap big.

Step 16f


Move Door Left

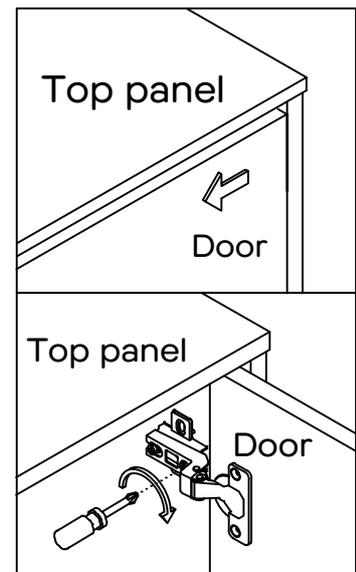

Turn the screw counterclockwise a little as shown to make the gap small.

Step 17

You will need	
	
2 x Wall Straps (H14)	2 x 16mm Screws (H10)
	
2 x Washers (H9)	Phillips Head Screwdriver

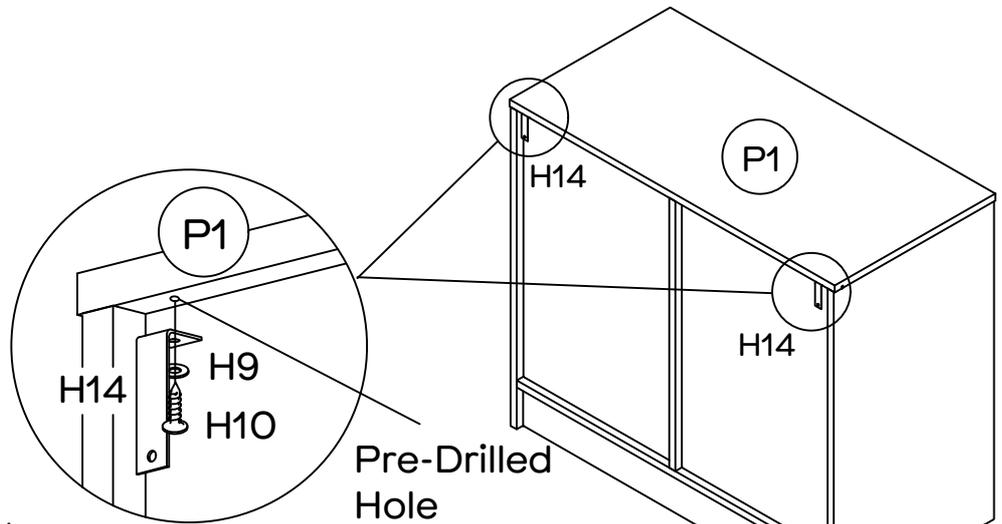

We strongly advise that you use the wall safety strap provided to prevent the unit toppling over.


Attach wall fixing strap to panel (P1) with 2 x 16mm screws (H10) and 2 x washers (H9) using a phillips head screwdriver. There are pre-drilled holes on the bottom of panel (P1) to insert the screws.

Move the chest to the final position.

Attach the safety strap to the wall. Make sure it is firmly attached and make sure it is a snug fit.

The screws and wall plug are not provided. Please use appropriate fixtures for your wall.

Seek advice from a qualified trades person on how to attach these wall straps to your specific wall.

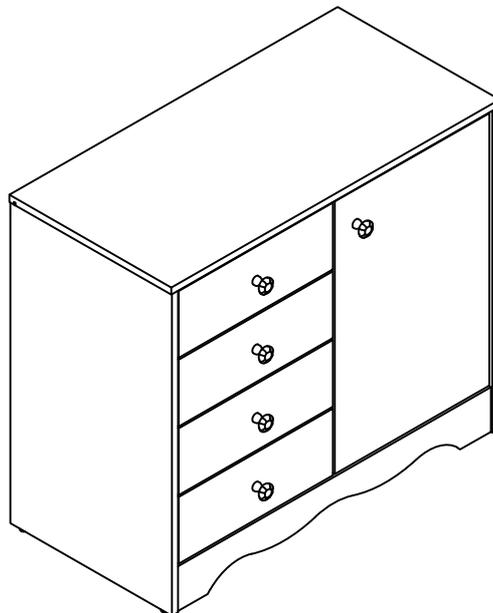


Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.



**Fantastic
Furniture**

Version 1.2

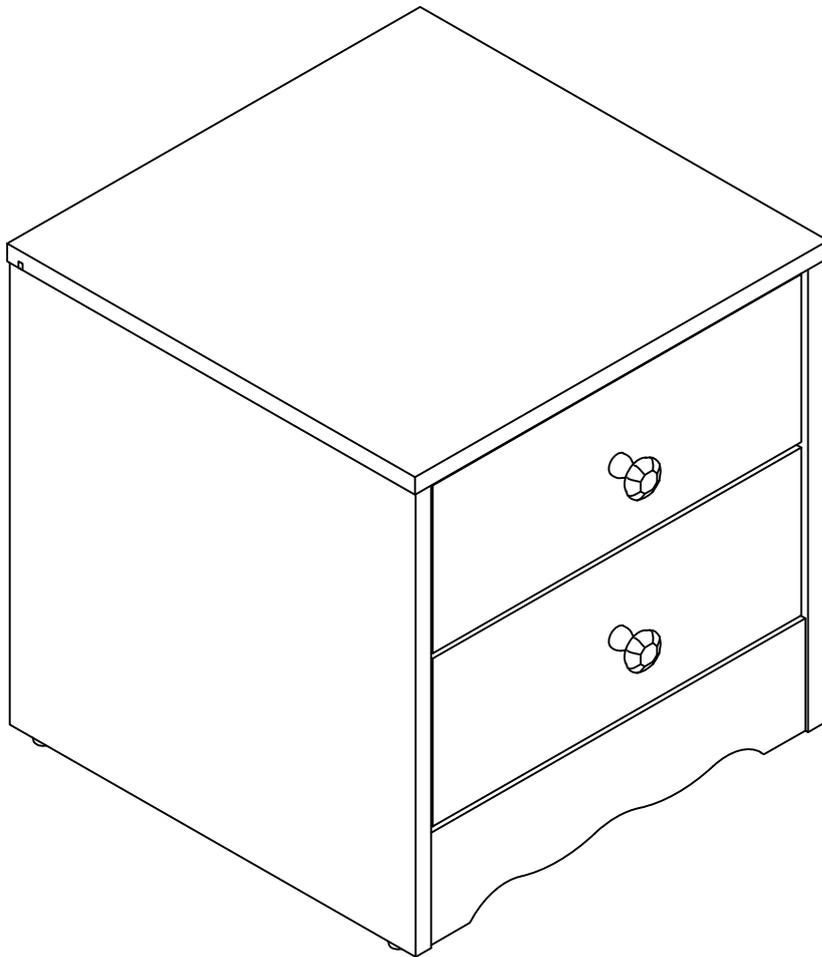

Amirah

Bedside

fantasticfurniture.com.au



WARNING: ENSURE THE WALL STRAP IS ATTACHED TO AVOID SERIOUS INJURY

To avoid the risks of injury, this product has been provided with wall straps to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.



**WARNING: WEIGHT LIMIT ON TOP IS 40KG.
WARNING: WEIGHT PLACE IN DRAWER NOT TO EXCEED 10KG.**

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



**Fantastic
Furniture**

Love it? Share it!

Fantastic buy! Share how it looks at home on Instagram for your chance to win a \$250 Fantastic Furniture Gift Card!


@fantasticfurniture




Assembly checklist




Read through the instructions carefully before you begin.

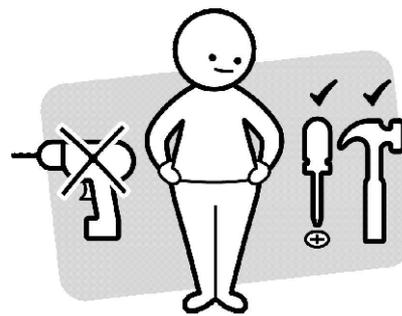

Make sure you have all the required tools. Never use power tools unless instructed.

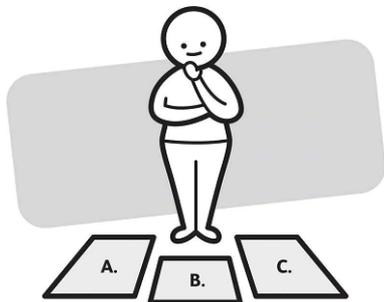

Identify and lay out all of the components before you begin assembly.

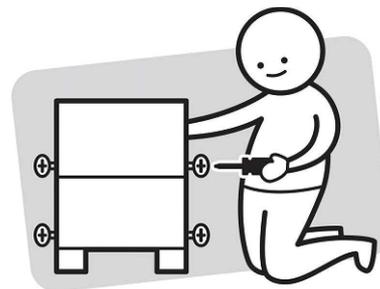

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE




Other tools you need

Phillips head screwdriver, soft headed mallet.

Parts list

Box 1:

- Top Panel (P1);
- Left Side Panel (P2);
- Right Side Panel (P3);
- Back Support Panel (P4);
- Plinth Panel (P5);
- 2 x Drawer Back Panel (P6);
- 2 x Drawer Left Panel (P7);
- 2 x Drawer Right Panel (P8);
- 2 x Drawer Front Panel (P9);
- 2 x Drawer Bottom Panel (P10);
- Back Panel (P11);
- Hardware.

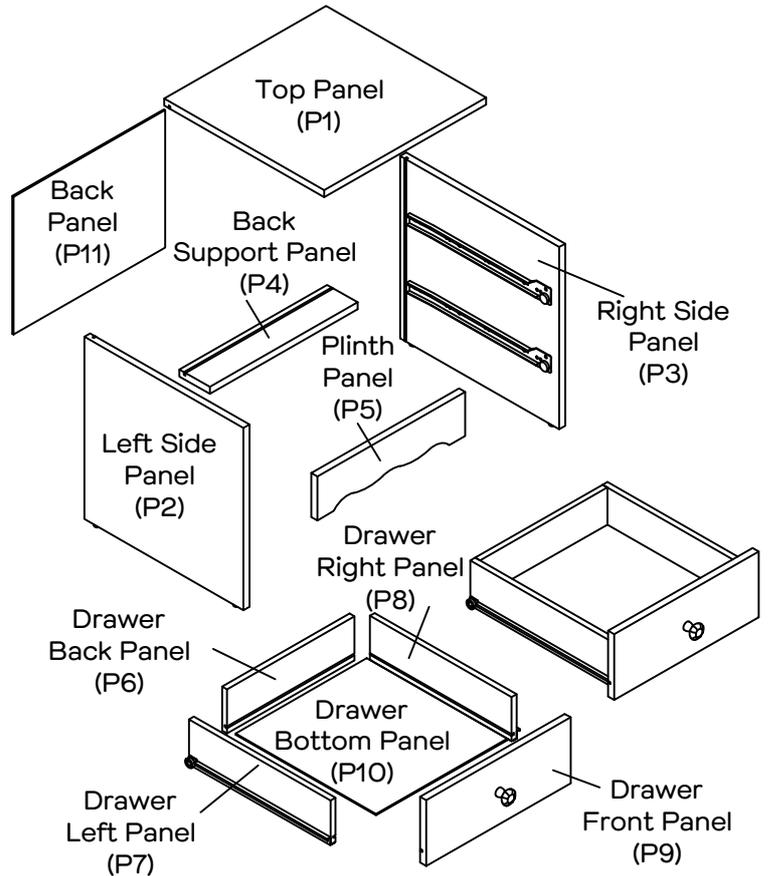


Hardware pack



12 x Cam Bolts
(H1)



12 x Cam Nuts
12mm (H2)



12 x Wood Dowels
(H3)



8 x CSK Screws
38mm
(H4)




24 x CSK Screws
12mm
(H5)




2 x T/MS Screws
(H6)



2 x Rhinestone
Handles (H7)



2 x Drawer
Runner L 14"
(H8)



2 x Drawer
Runner R 14"
(H9)



2 x Runner
Track R 14"
(H10)



2 x Runner
Track L 14"
(H11)



2 x Wall Fixing Strap
(H12)




2 x Washers
(H13)





2 x CSK Screws
16mm
(H14)



Step 1


You will need	
	
8 x Cam Nuts 12mm (H2)	8 x Wood Dowels (H3)
	
Phillips Head Screwdriver	Soft Headed Mallet

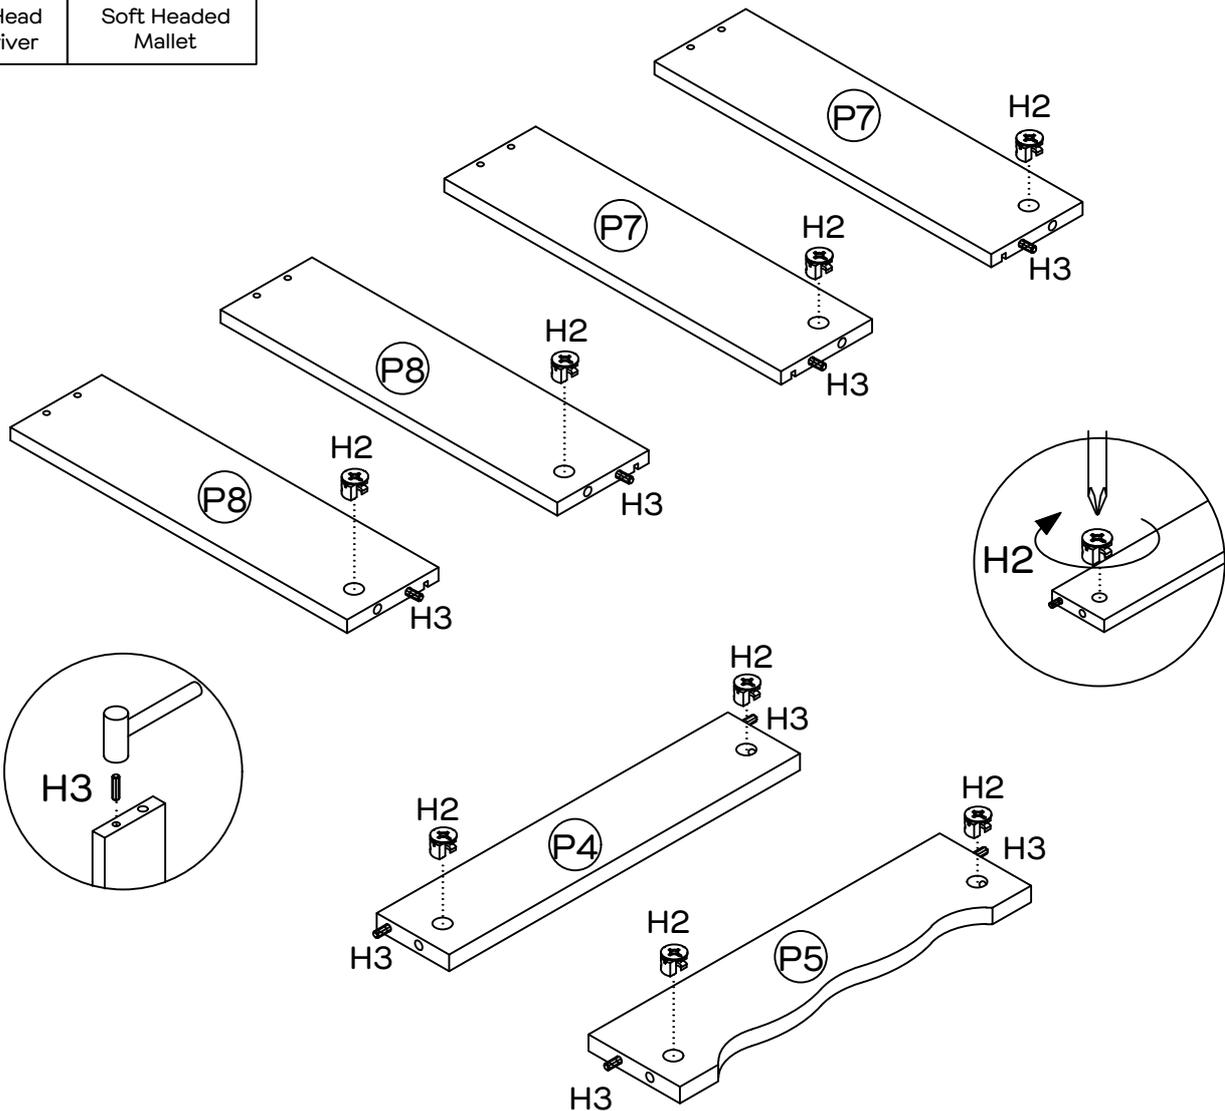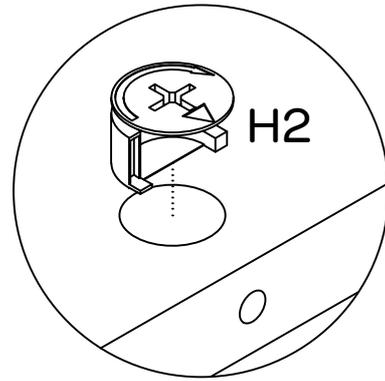


Insert 8 x cam nuts (H2) into panels (P4), (P5), (P7) & (P8) using a phillips head screwdriver. Rotate the cam nuts (H2) so the arrow points towards the incoming bolts.

Insert 8 x dowels (H3) into panels (P4), (P5), (P7) & (P8) by hand or gently using a soft headed mallet.

Step 2


You will need	
	
4 x Cam Nuts 12mm (H2)	4 x Wood Dowels (H3)
	
4 x Cam Bolts (H1)	Phillips Head Screwdriver
	
Soft Headed Mallet	

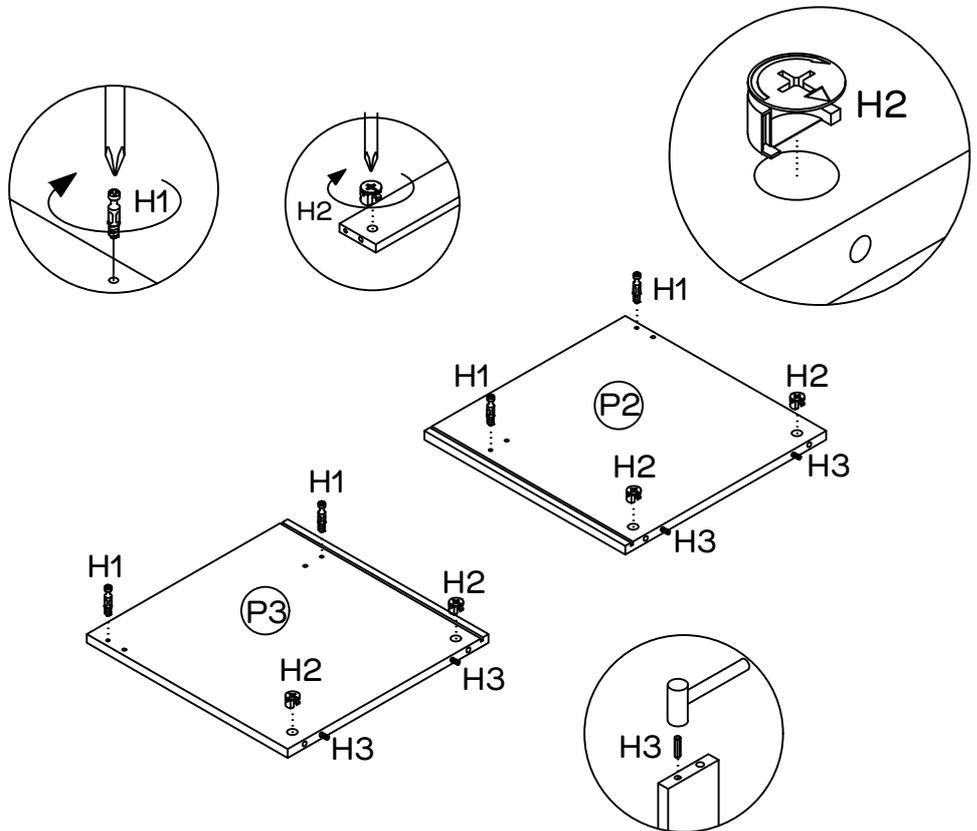

Insert 4 x cam nuts (H2) into panels (P2) & (P3). Rotate the cam nuts (H2) so the arrows point towards the incoming bolts.
 Insert 4 x dowels (H3) into panels (P2) & (P3), by hand or gently using a soft headed mallet.
 Screw 4 x cam bolts (H1) into panels (P2) & (P3) using a phillips head screwdriver.

Step 3

You will need	
	
8 x Cam Bolts (H1)	Phillips Head Screwdriver

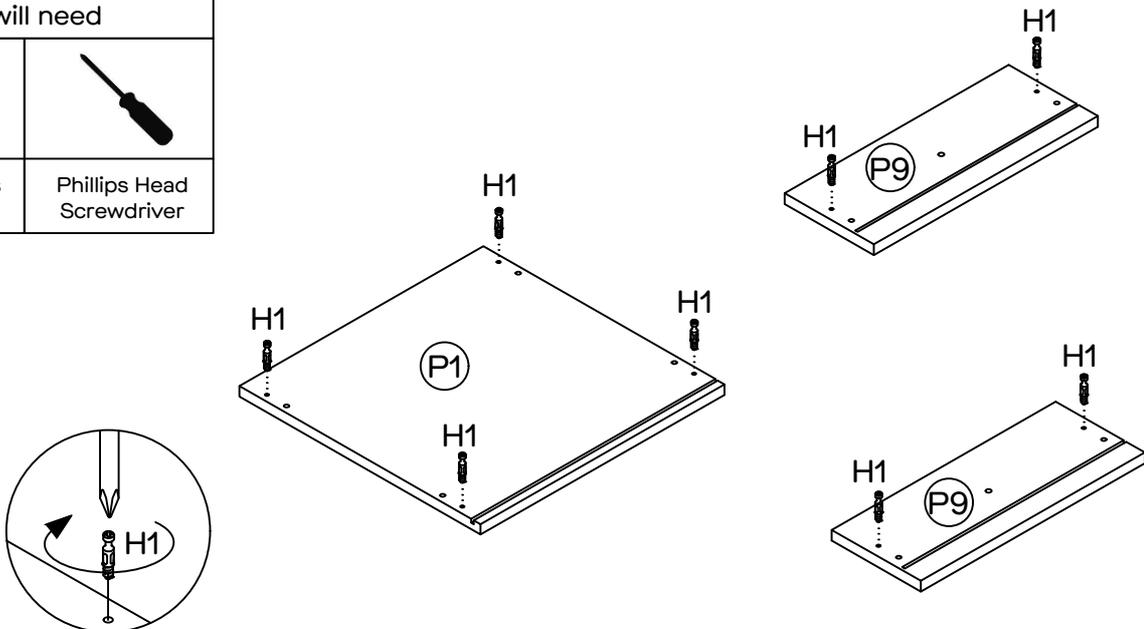


Screw 8 x cam bolts (H1) into panels (P1) & (P9) using a phillips head screwdriver.

Step 4



You will need	
	
8 x CSK Screws 38mm (H4)	2 x T/MS Screws (H6)
	
2 x Rhinestone Handles (H7)	Phillips Head Screwdriver

This is how a cam nut works.....



The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Repeat x 2

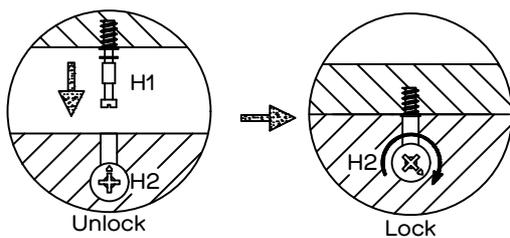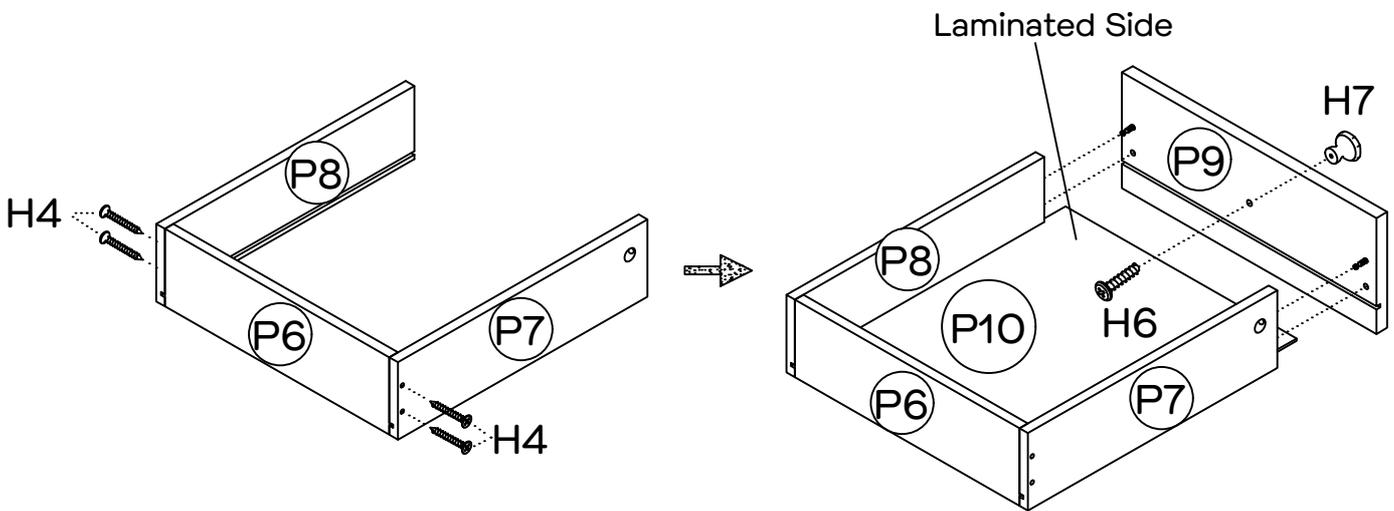

To attach panels (P7) & (P8) to panel (P6), insert 4 x CSK screws (H4) and tighten with a phillips head screwdriver.

Slide in the drawer bottom panel (P10) into the grooves of panels (P7, P8 & P6) with the laminated side facing up.

Attach the panel (P9) to panel (P7 & P8) and ensure the drawer bottom panel (P10) slides into the groove.


Turn the cam nuts on panel (P7 & P8) clockwise with a phillips head screwdriver.

Attach the handle (H7) to panel (P9) with 1 x T/MS screw (H6) using a phillips head screwdriver.

Repeat this process for the remaining drawer.

Step 5


You will need	
	
12 x CSK Screws 12mm(H5)	2 x Drawer Runner L 14" (H8)
	
2 x Drawer Runner R 14" (H9)	Phillips Head Screwdriver

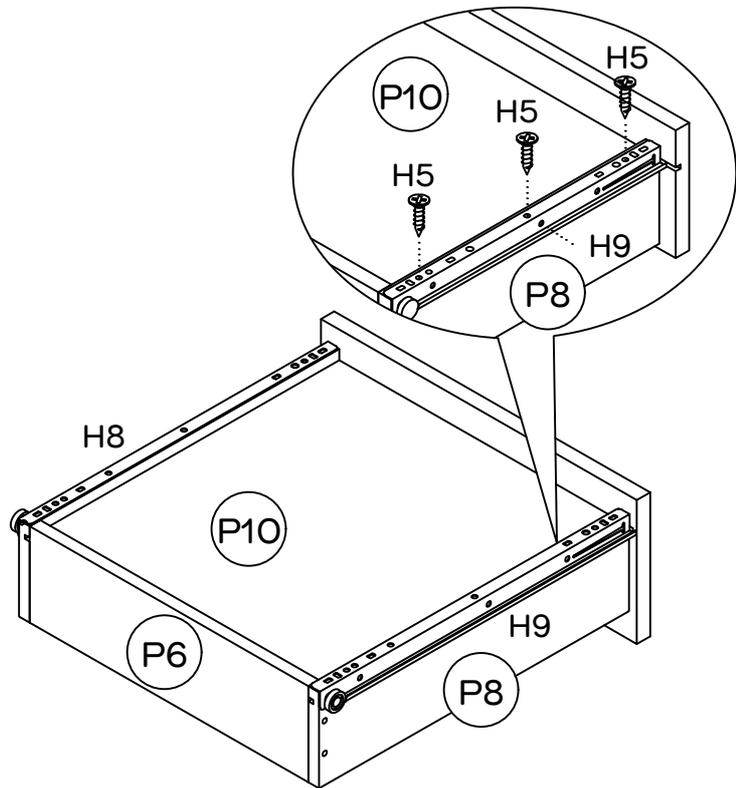

Attach the drawer L (H8) and the drawer runner R (H9) to the underside of the drawer with 6 x CSK screws (H5) using a phillips head screwdriver. Repeat this process for the other drawer.

Step 6

You will need	
	
12 x CSK Screws 12mm(H5)	2 x Runner Track R 14" (H10)
	
2 x Runner Track L 14" (H11)	Phillips Head Screwdriver

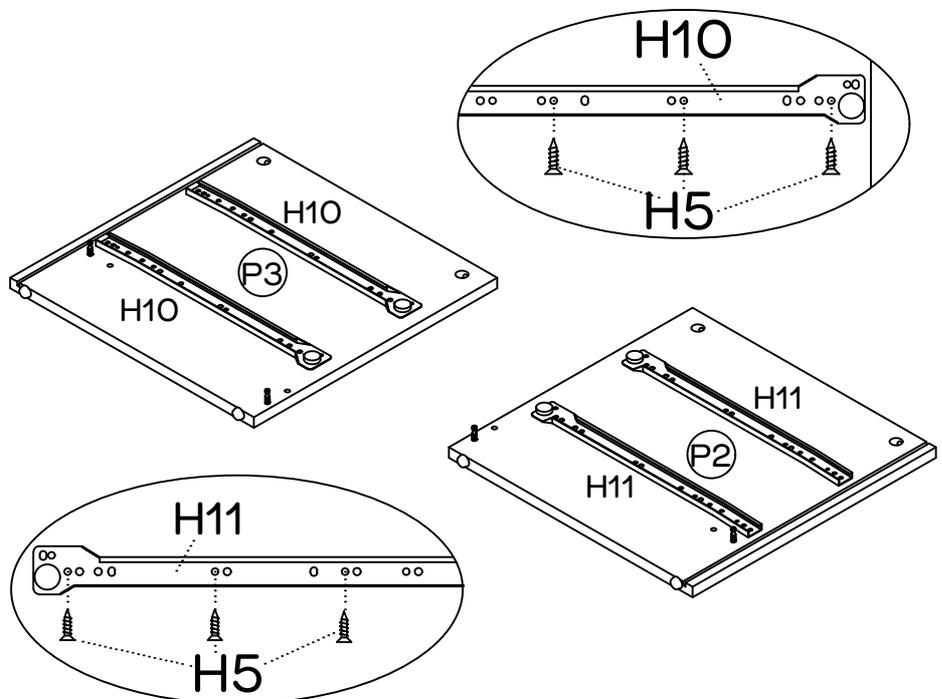



Attach 2 x panel runners L (H11) to the left side panel (P2) with 6 x CSK screws using a phillips head screwdriver.
Attach 2 x panel runners R (H10) to the right panel (P3) with 6 x CSK screws using a phillips head screwdriver.

Step 7

You will need




Phillips Head
Screwdriver

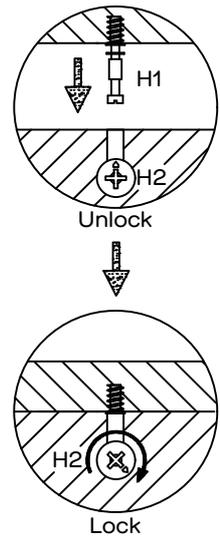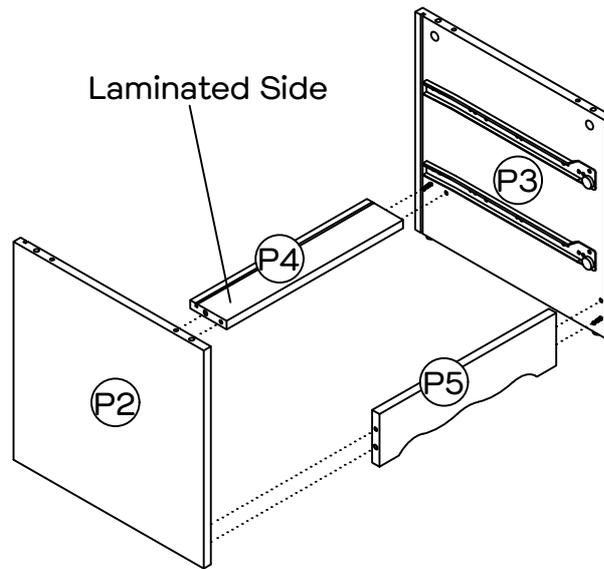

Attach panels (P4) & (P5) to panels (P2) & (P3).
Turn the cam nuts on (P4) & (P5) clockwise with a phillips head screwdriver to lock in position.

Step 8

Warning Label at the
back and top of the
unit

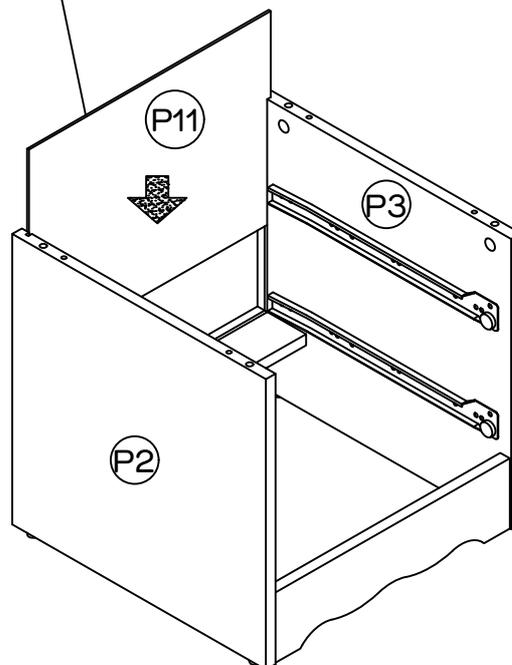



Slide panel (P11) into the groove in panels (P2) & (P3).

Step 9

You will need




Phillips Head
Screwdriver

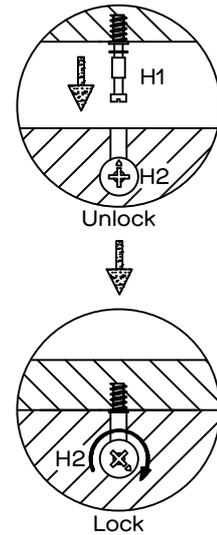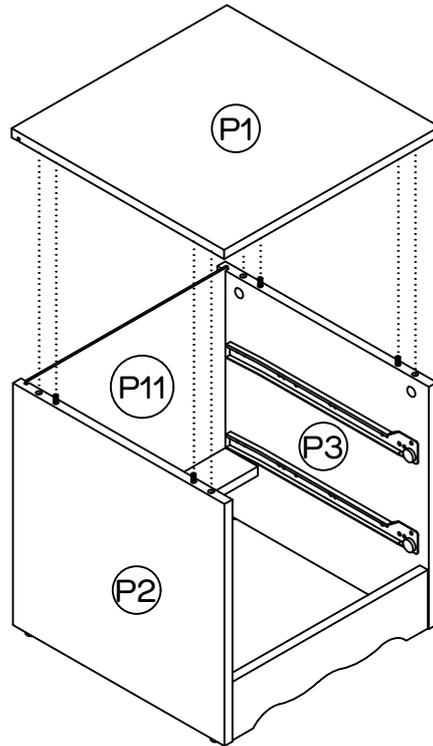

To attach panel (P1) to panels (P2 & P3), align the dowels (H3) and cam bolts (H2) to the holes and make sure the back panel (P11) slides into the groove. Turn the cam nuts on panels (P2 & P3) clockwise with a phillips head screwdriver to lock in position.


Step 10

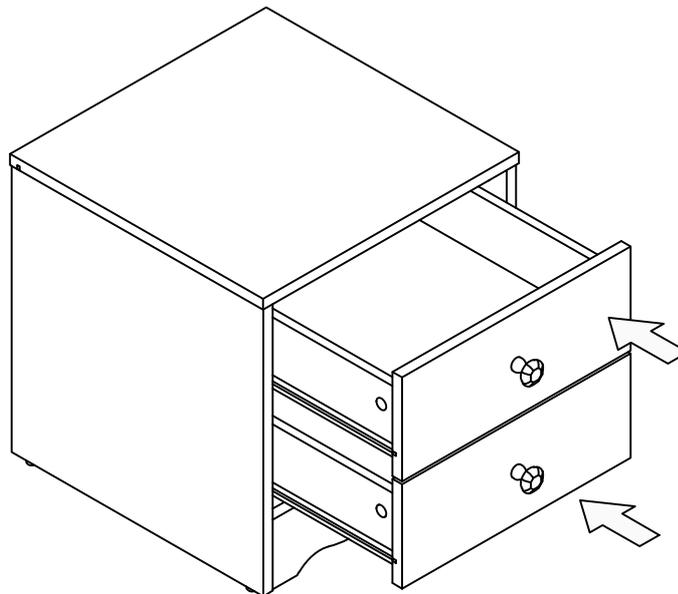

Put the drawers into the frame one at a time.

Step 11

You will need	
	
2 x Wall Fixing Strap (H12)	2 x Washers (H13)
	
2 x CSK Screws 16mm (H14)	Phillips Head Screwdriver

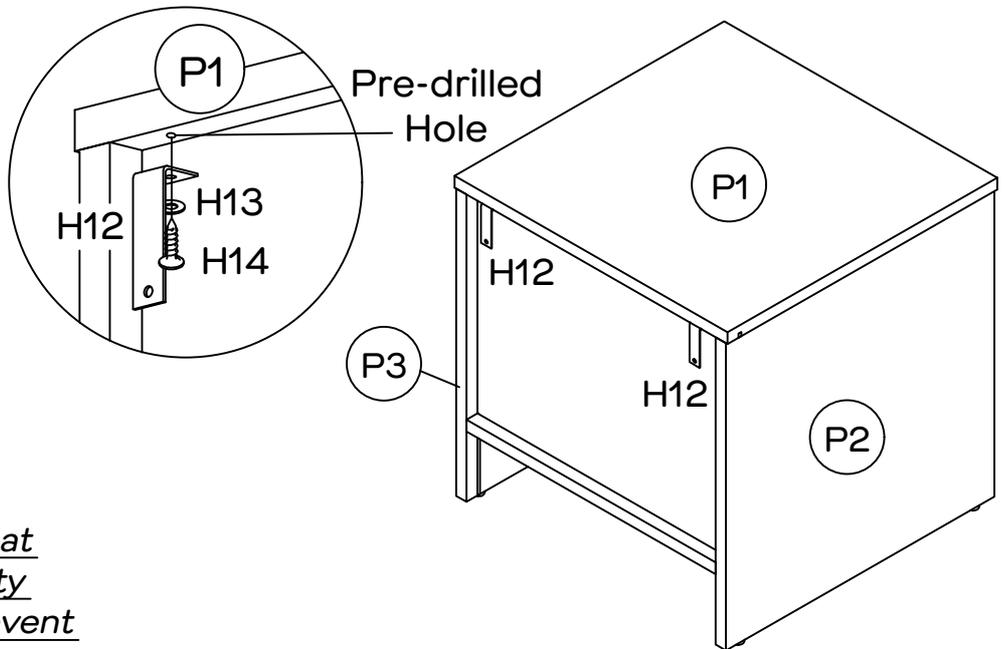

We strongly advise that you use the wall safety strap provided to prevent the unit toppling over.


Attach wall fixing strap to panel (P1) with 2 x CSK screws (H14) and 2 x washers (H13) using a phillips head screwdriver. There are pre-drilled holes on the bottom of panel (P1) to insert the screws.

Move the bedside to the final position. Attach the safety strap to the wall.

Make sure it is firmly attached and make sure it is snug fit.

The screws and wall plugs are not provided. Please use appropriate fixtures for your wall.

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

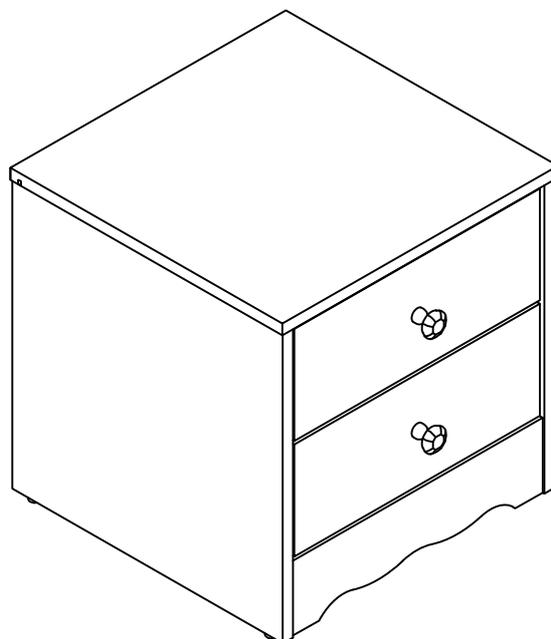

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.