




**Fantastic
Furniture**

Version 1.0

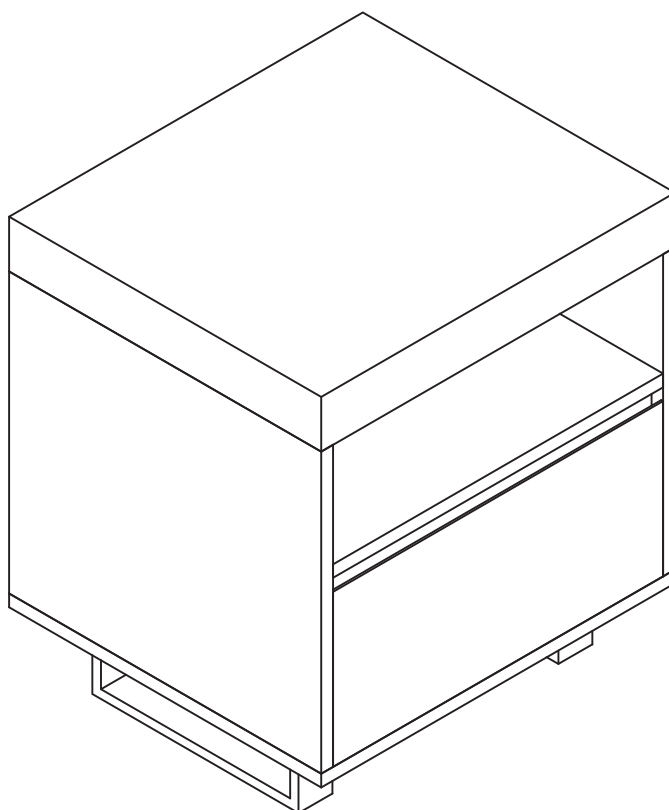

Bridge

Bedside 1 Drawer Oak

fantasticfurniture.com.au



Warning: Ensure the wall strap is attached to avoid serious injury.

To avoid any serious or fatal injury, a wall strap has been provided with this product to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

Looks like you've found your Fantastic!

We're thrilled you've chosen Fantastic Furniture
to help create a home you'll love!



Fantastic Furniture

Love it? Share it!


Fantastic buy! Share how it looks at home on Instagram for
your chance to win a \$250 Fantastic Furniture Gift Card!

@fantasticfurniture


Assembly Checklist




Read through the instructions carefully before you begin.

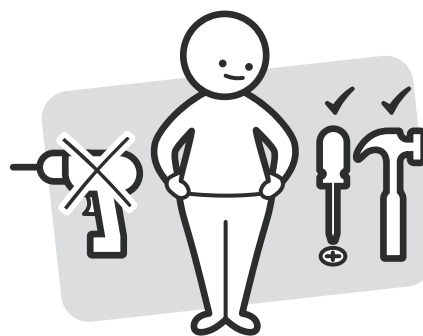

Make sure you have all the required tools. Never use power tools unless instructed.

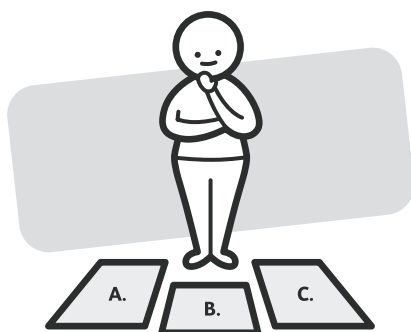

Identify and lay out all of the components before you begin assembly.

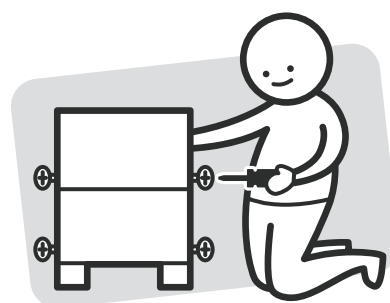

Unless instructed, do not fully tighten screws until the item is fully assembled.

Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.
- ! Please see page 2 for any safety requirements or weight restrictions.

What you need

to assemble the product



DO NOT USE




Other tools you need:







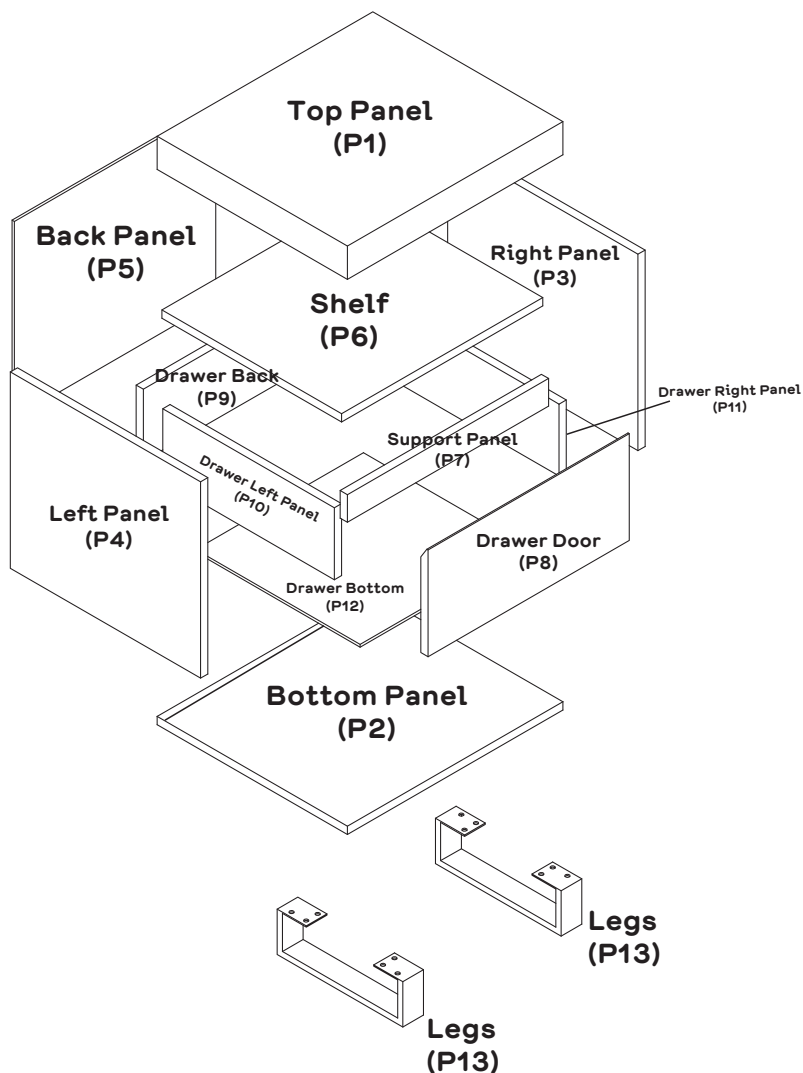




Phillips head screwdriver;
Hammer

Parts list

Top Panel (P1)
Bottom Panel (P2)
Right Panel (P3)
Left Panel (P4)
Back Panel (P5)
Shelf (P6)
Support Panel (P7)
Drawer Door (P8)
Drawer Back (P9)
Drawer Left Panel (P10)
Drawer Right Panel (P11)
Drawer Bottom (P12)
2 x Legs (P13)








Hardware Pack

| | | | | | | |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| 16 x Cam Bolts (H1) | 16 x Cam Nuts (H2) | 16 x Dowels (H3) | 12 x Washers (H4) | 12 x Bolts (H5) | 12 x Screws (H6) | 1 x Allen Key (H7) |
|  |  |  |  |  |  |  |
| 4 x Levelling Feet (H8) | 1 x Left Runner Track (H9-1) | 1 x Right Runner Track (H9-2) | 1 x Left Runner (H9-3) | 1 x Right Runner (H9-4) | 4 x Long Screws (H10) | 2 x Washers (H11) |
|  |  |  | | | | |
| 1 x Wall Strap (H12) | 1 x Medium Screw (H13) | 4 x Wedges (H14) | | | | |

Step 1

You will need:

| | |
|---|---|
|  |  |
| 12 x Washers (H4) | 12 x Bolts (H5) |
|  |  |
| 1 x Allen Key (H7) | 4 x Levelling Feet (H8) |

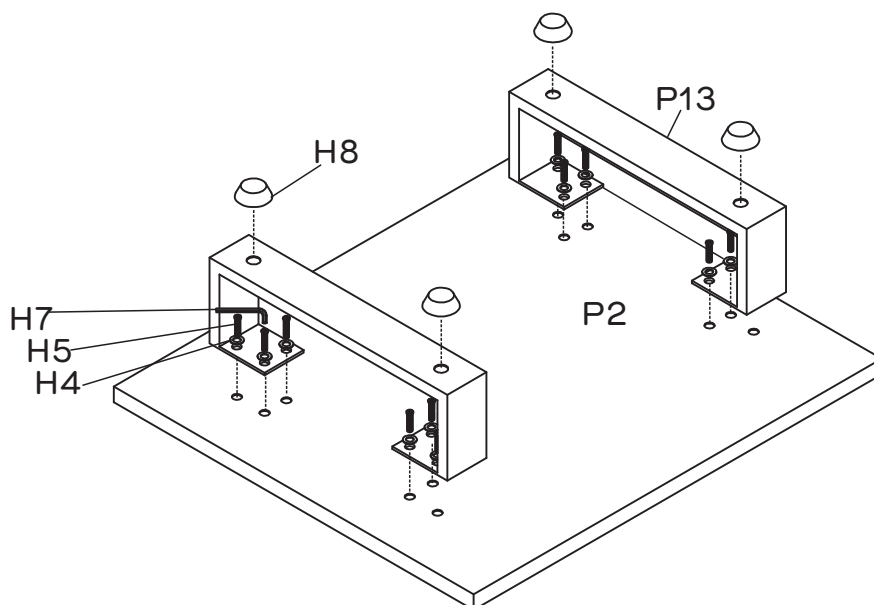

Attach the 2 x legs (P13) to the bottom panel (P2) using 12 x bolts (H5) and 12 x washers (H4), completely tightening using the allen key (H7).


Screw in the 4 x levelling feet (H8) into the 2 x legs (P13) as shown.

Ensure they are secure. These can be adjusted after the bedside is assembled to ensure the unit is level.

Step 2

You will need:


| | |
|---|---|
|  |  |
| 8 x Cam Bolts (H1) | 8 x Dowels (H3) |
|  | |
| Phillips Head Screwdriver | |

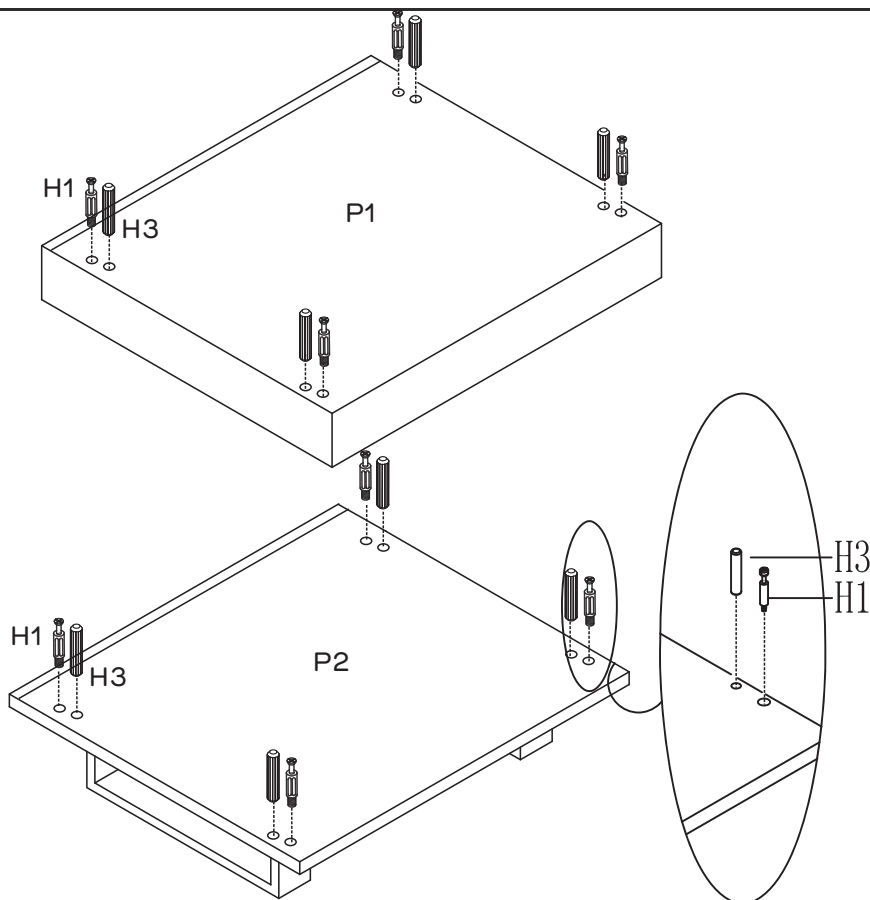

Insert 4 x dowels (H3) into the bottom panel (P2). Secure 4 x cam bolts (H1) into the bottom panel, tightening using a phillips head screwdriver. Repeat this step for the top panel (P1).



Step 3
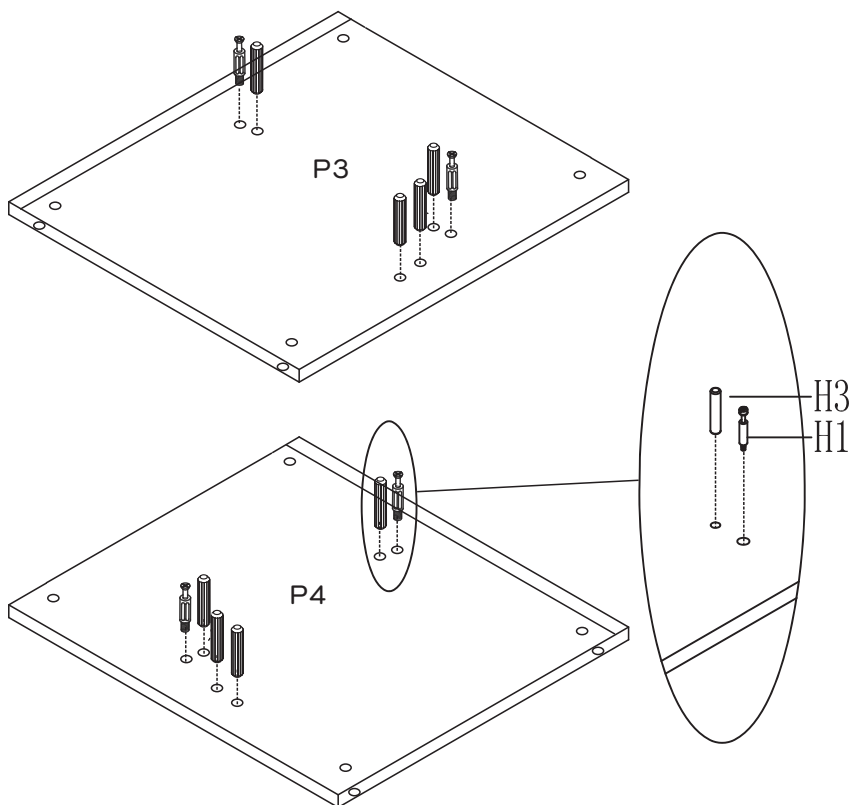
| | |
|---|---|
| You will need: | |
|  |  |
| 4 x Cam Bolts (H1) | 8 x Dowels (H3) |
|  | |
| Phillips Head Screwdriver | |



Insert 4 x dowels (H3) into right panel (P3) and secure 2 x cam bolts (H1) to right panel (P3), tightening using a phillips head screwdriver. Repeat this step for the left panel (P4).


Step 4

| | |
|---|---|
| You will need: | |
|  |  |
| 4 x Cam Nuts (H2) | Phillips Head Screwdriver |

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

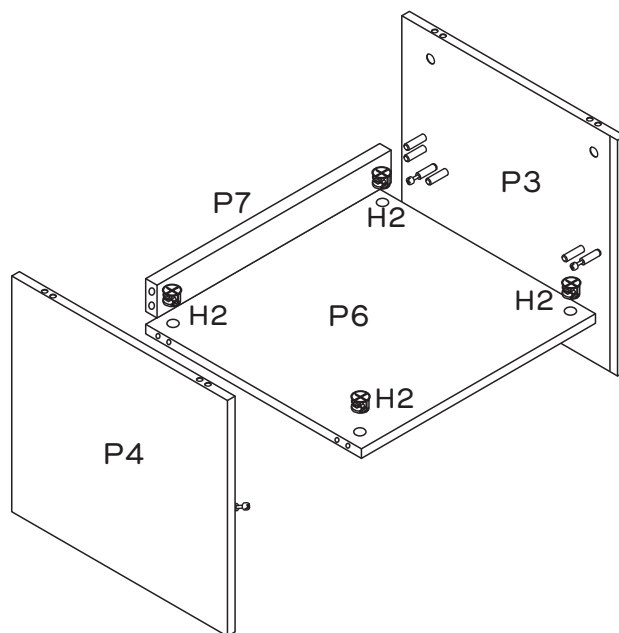

Align and attach the shelf (P6) and support panel (P7) between the right and left panel (P3, P4) as shown.



Carefully turn the unit upside down.

Insert 4 x cam nuts (H2) into the shelf (P6) as shown. Rotate the cam nuts so the arrows point towards the incoming cam bolts.

Secure the panels together (P3, P4, P6, P7) by tightening the 4 x cam nuts (H2) using a phillips head screwdriver.


Step 5

| | |
|---|---|
| You will need: | |
|  |  |
| 4 x Cam Nuts (H2) | Phillips Head Screwdriver |

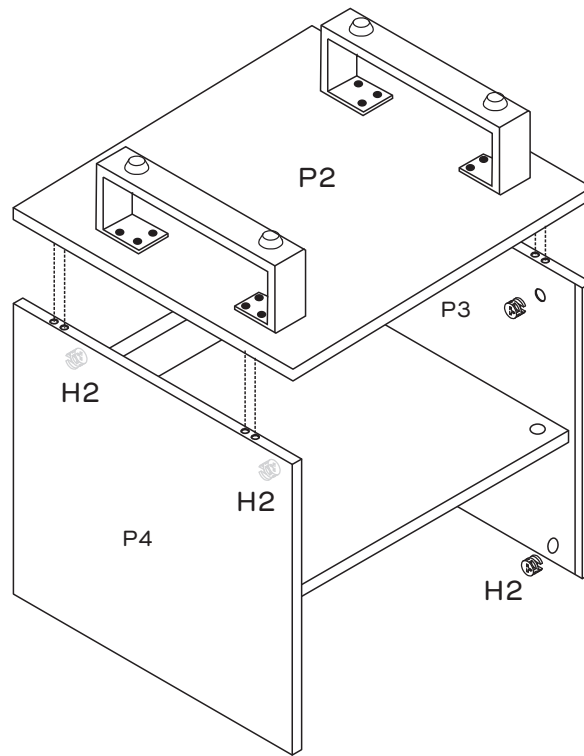



Align and attach the assembled frame onto the bottom panel (H2) as shown, ensuring the grooves on the right panel (P3), left panel (P4) and bottom panel (P2) align. Insert 4 x cam nuts (H2) into the top of the right panel (P3) and left panel (P4), rotating the cam nuts so the arrow points towards the incoming cam bolt. Secure the frame to the bottom panel (P2) by tightening the cam nuts (H2) using a phillips head screwdriver.


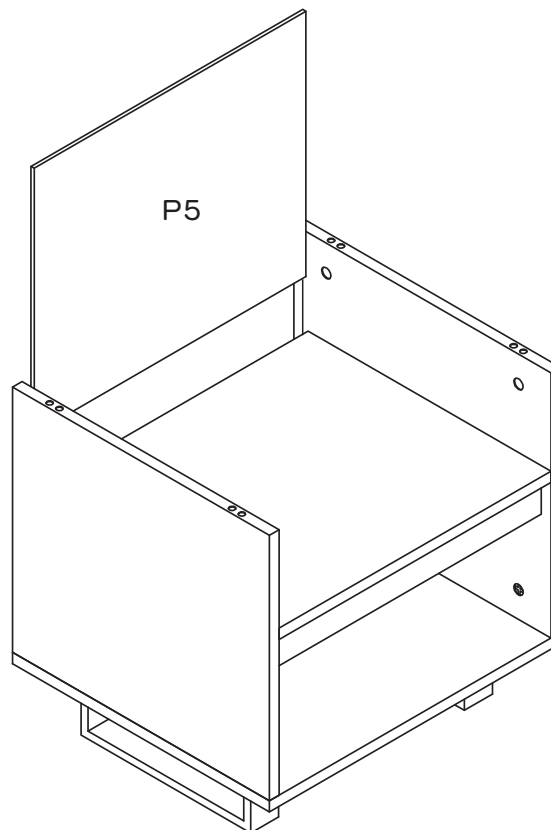
Step 6



Slide back panel (P5) into the groove of right panel (P3), left panel (P4) and bottom panel (P2) as shown.



Step 7

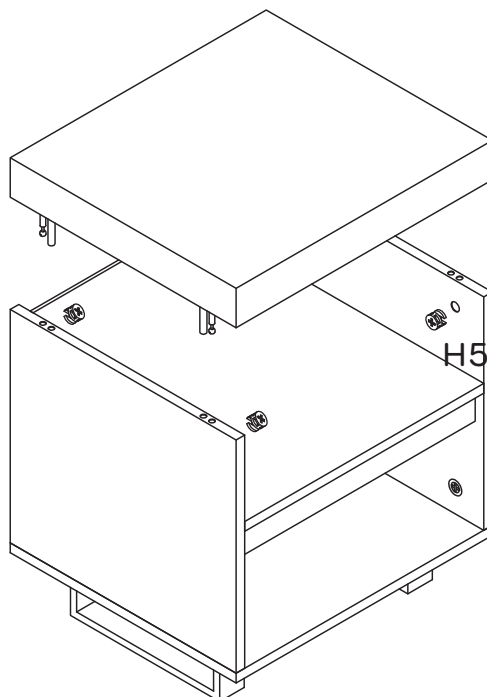
| | |
|---|---|
| You will need: | |
|  |  |
| 4 x Cam Nuts (H2) | Phillips Head Screwdriver |



Align and attach the top panel (P1) onto the assembled frame as shown. Insert 4 x cam nuts (H2) into the top of the right panel (P3) and left panel (P4), rotating the cam nuts so the arrow points towards the incoming cam bolts. Secure the top panel (P1) to the assembled frame by tightening the cam nuts (H2) using a phillips head screwdriver.

Step 8

| | |
|---|---|
| You will need: | |
|  |  |
| 4 x Cam Bolts (H1) | Phillips Head Screwdriver |

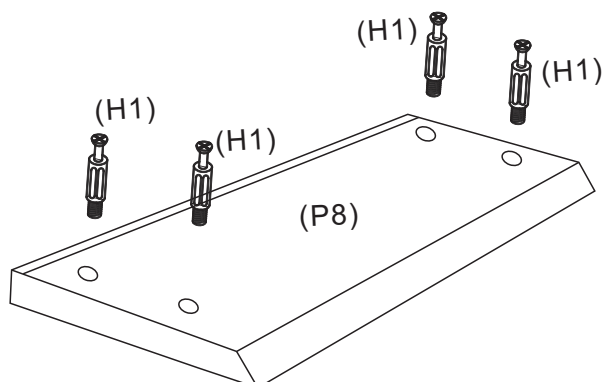

Secure 4 x cam bolts (H1) to drawer door (P8) , tightening using a phillips head screwdriver


Step 9

| You will need: | |
|---|---|
|  |  |
| 4 x Cam Nuts (H2) | Phillips Head Screwdriver |

This is how a cam nut works.....



The head of the bolt goes into the wide mouth of the cam nut. You then turn the nut so the narrow part closes over the bolt.

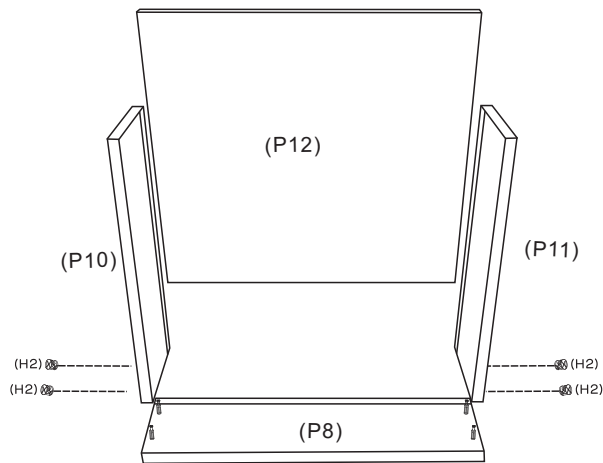

Attach drawer left panel (P10) and drawer right panel (P11) to drawer door (P8), ensuring the grooves on all the panels align as shown.


Slide the drawer bottom (P12) through the grooves on all drawer panels (P10, P11, P8) as shown.

Insert 4 x cam nuts (H2) into the drawer left panel (P10) and drawer right panel (P11), rotating the cam nut (H2) so the arrow points towards the incoming cam bolt.

Secure the panels (P10, P11, P8) together by tightening the cam nuts (H2) using a phillips head screwdriver.

Step 10


| You will need: | |
|---|---|
|  |  |
| 4 x Long Screws (H10) | Phillips Head Screwdriver |

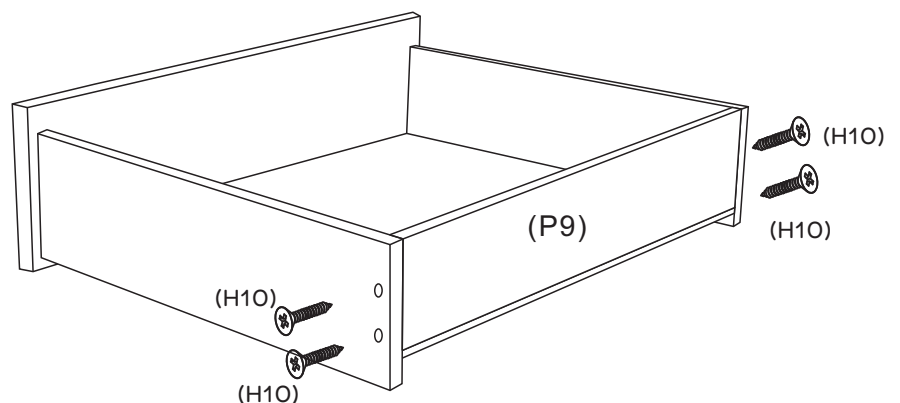

Align drawer back to the assembled drawer as show. Ensure the pre-drilled holes on the drawer left and right panels (P10, P11) align with the pre-drilled holes on the drawer back (P12). Secure together using 4 x long screws (H10), tightening using a phillips head screwdriver.

Step 11



| You will need: | |
|--------------------|---------------------------|
| | |
| Left Runner (H9-3) | Right Runner (H9-4) |
| | |
| 4 x Screws (H6) | Phillips Head Screwdriver |

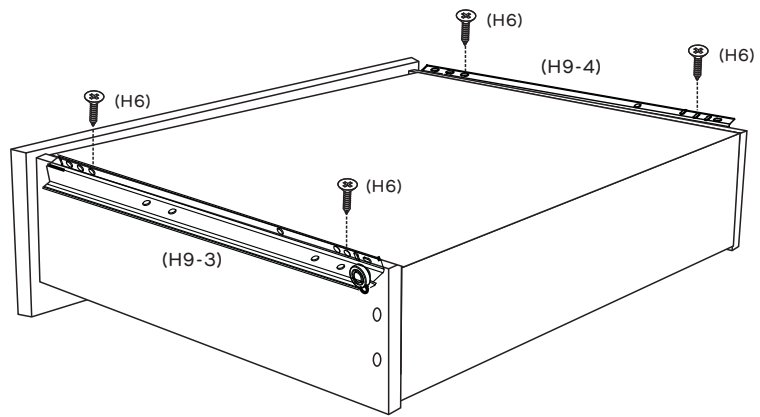

Secure the left runner (H9-3) and right runner (H9-4) to the assembled drawer using 4 x short screws, tightening using a phillips head screwdriver. Ensure the wheels on the runners are towards the back of the drawer as shown.


Step 12

| You will need: | |
|-------------------------------|------------------------------|
| | |
| 4 x Screw (H6) | 1 x Left Runner Track (H9-1) |
| | |
| 1 x Right Runner Track (H9-2) | Phillips Head Screwdriver |

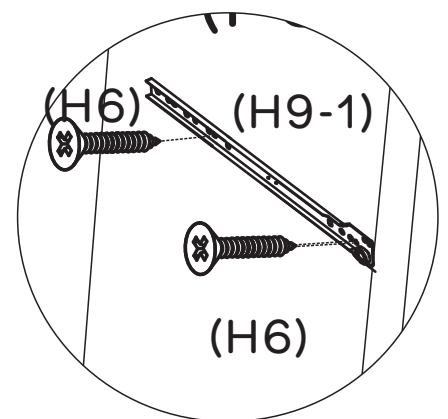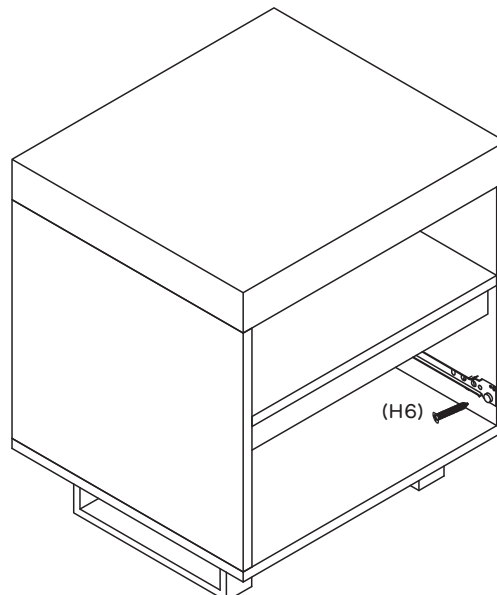




Secure the right runner track (H9-2) to the right panel (P3) using 2 x screws (H6), tightening using a phillips head screwdriver. Ensure the wheels on the track are towards the front of the bedside as shown. Repeat this step for the left runner track (H9-3)

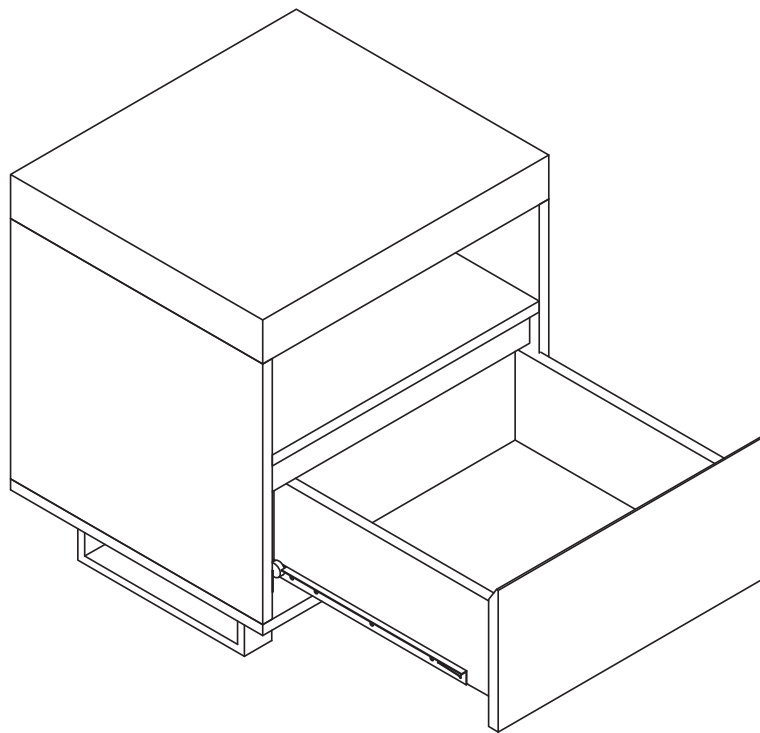
Step 13



Slide the assembled drawer into bedside

Step 14

| You will need: | |
|---|---|
|  |  |
| 4 x Wedges (H14) | 4 x Screws (H6) |
|  | |
| Phillips Head Screwdriver | |

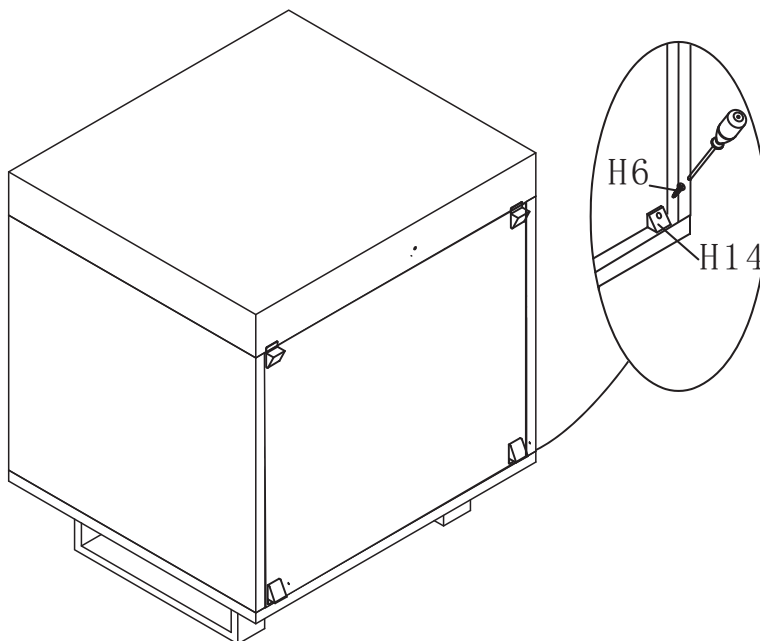

Insert 4 x wedges (H14) into the back of the unit as shown. Secure using 4 x screws (H6), tightening with the phillips head screwdriver.

Step 15





We strongly recommend this product is permanently fixed to the wall or other suitable surface.


TWO PEOPLE



REQUIRED

You will need:


| | |
|---|---|
|  |  |
| 1 x Medium Screw (H13) | 1 x Washer (H11) |
|  |  |
| 1 x Wall Strap (H12) | Phillips Head Screwdriver |


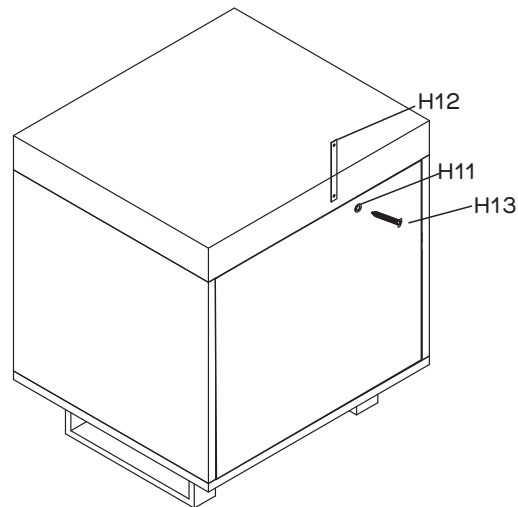


Attach wall strap (H12) to the top panel (P1) using washer (H11) and medium screw (H13). Tighten using the phillips head screwdriver.

Step 16

You will need:

| |
|---|
|  |
| 1 x Washer (H11) |

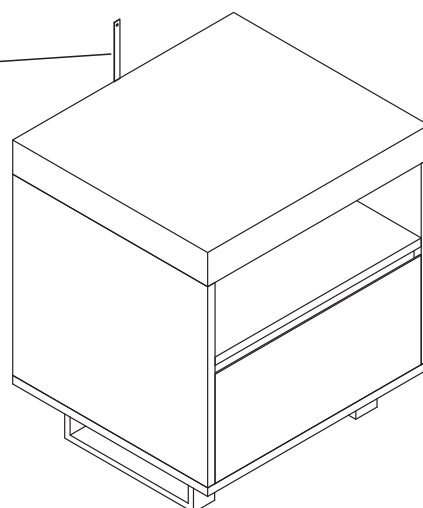

TWO PEOPLE



REQUIRED


Screws and wall plugs are not provided please use appropriate fixtures for your wall.

Seek advice from a qualified trades person on how to attach this to your specific wall.

With assistance, carefully move the bedside to its final position. Attach the wall strap (H12) to the wall, ensuring it is firmly attached and secure. If required, the levelling feet on the 2 x legs can be adjusted so the unit is level.



Step 17

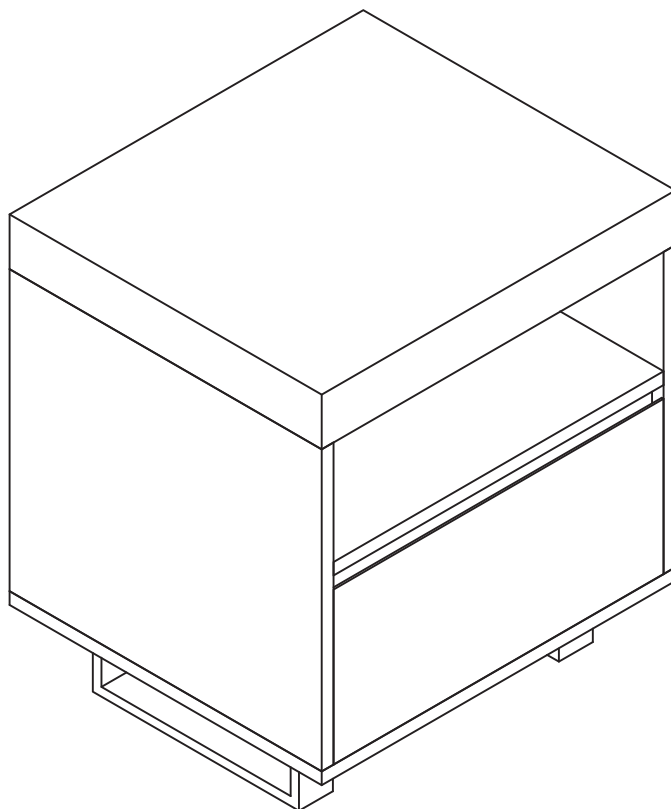

Job Complete!

In the interest of our environment please dispose of all packaging thoughtfully.