




Version 1.0



TWO PEOPLE

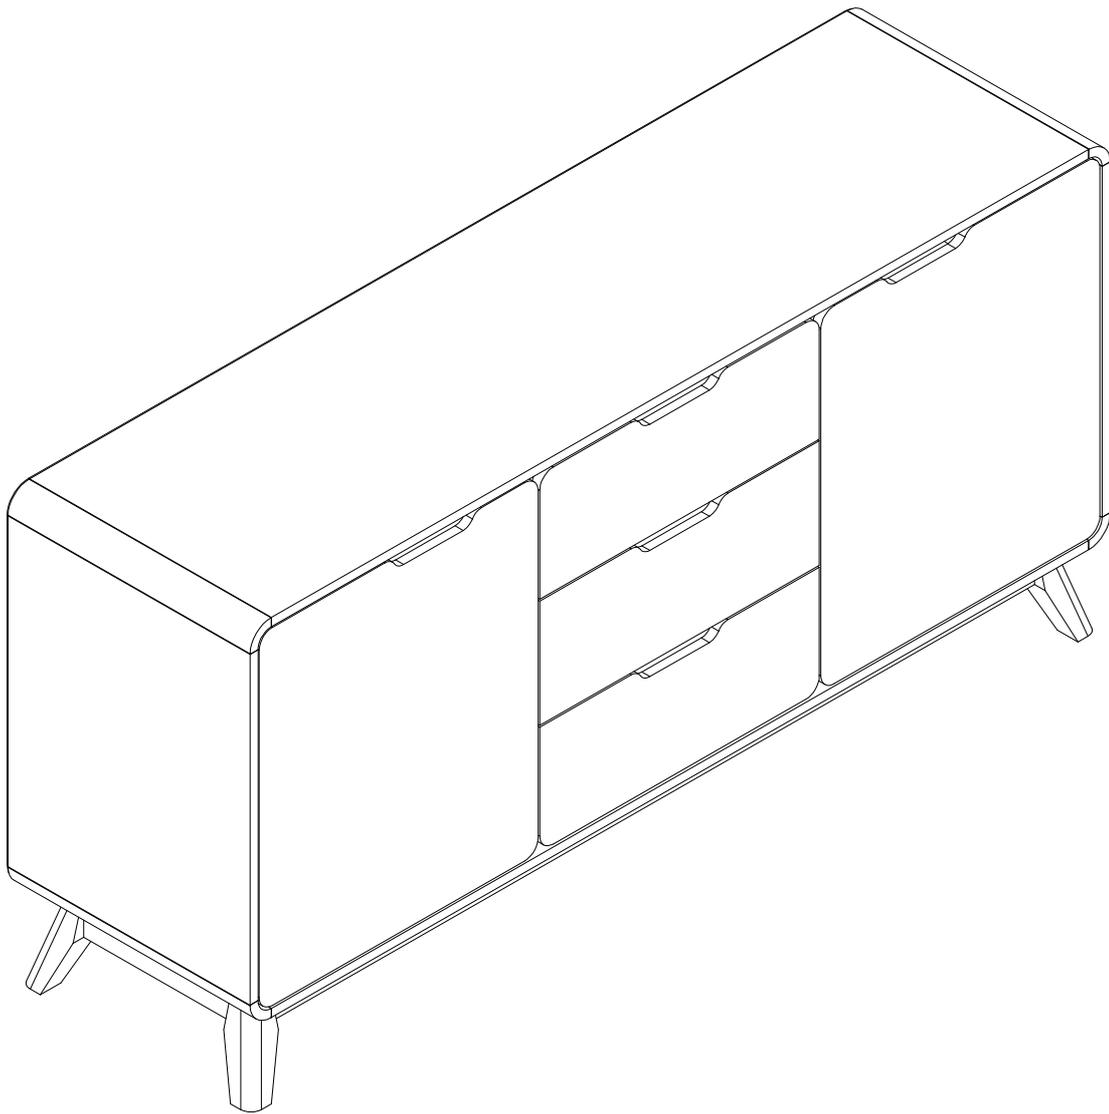

REQUIRED

**NIVA**  
Buffet 3 Drawer

[www.fantasticfurniture.com.au](http://www.fantasticfurniture.com.au)



**WARNING: ENSURE THE WALL STRAP IS ATTACHED  
TO AVOID SERIOUS INJURY.**

To avoid any serious or fatal injury, this product has been supplied with a wall strap to prevent toppling. We strongly recommend that this product is permanently fixed to the wall or other suitable surface. Wall fixing devices are not included since different surface materials require different attachments. Please seek professional advice if you are in doubt of what fixing device to use.

**Enjoy**  
Your purchase from  
Australia's Best Value Furniture Store



# Assembly checklist




Read through the instructions carefully before you begin.



Make sure you have all the required tools. Never use power tools unless instructed.



Identify and lay out all of the components before you begin assembly.

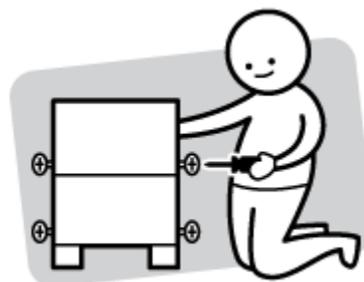

Unless instructed, do not fully tighten screws until the item is fully assembled.

## Useful Information

- ! Never use power tools unless specifically instructed. They can damage your components or hardware if used incorrectly.
- ! The most common mistakes made during assembly are using the wrong hardware or getting components back to front.
- ! Always use a soft surface (such as carpet or cardboard) when assembling your product to avoid scratching or damaging the surface of the product.
- ! Bulky items such as wardrobes and bunk beds should be assembled in the room they will be used in as they may not fit through a door once assembled.
- ! Never use any glue until you are certain that the parts belong together.
- ! Periodically check and re-tighten all fasteners. Check the product care label or website for product care instructions.
- ! If you are having any difficulties assembling your product, missing any hardware or components please visit our website Help Centre for further assistance.

# What you need

to assemble the product




DO NOT USE



## Other tools you need

Flat head screwdriver; Phillips head screwdriver; Hammer; Mallet

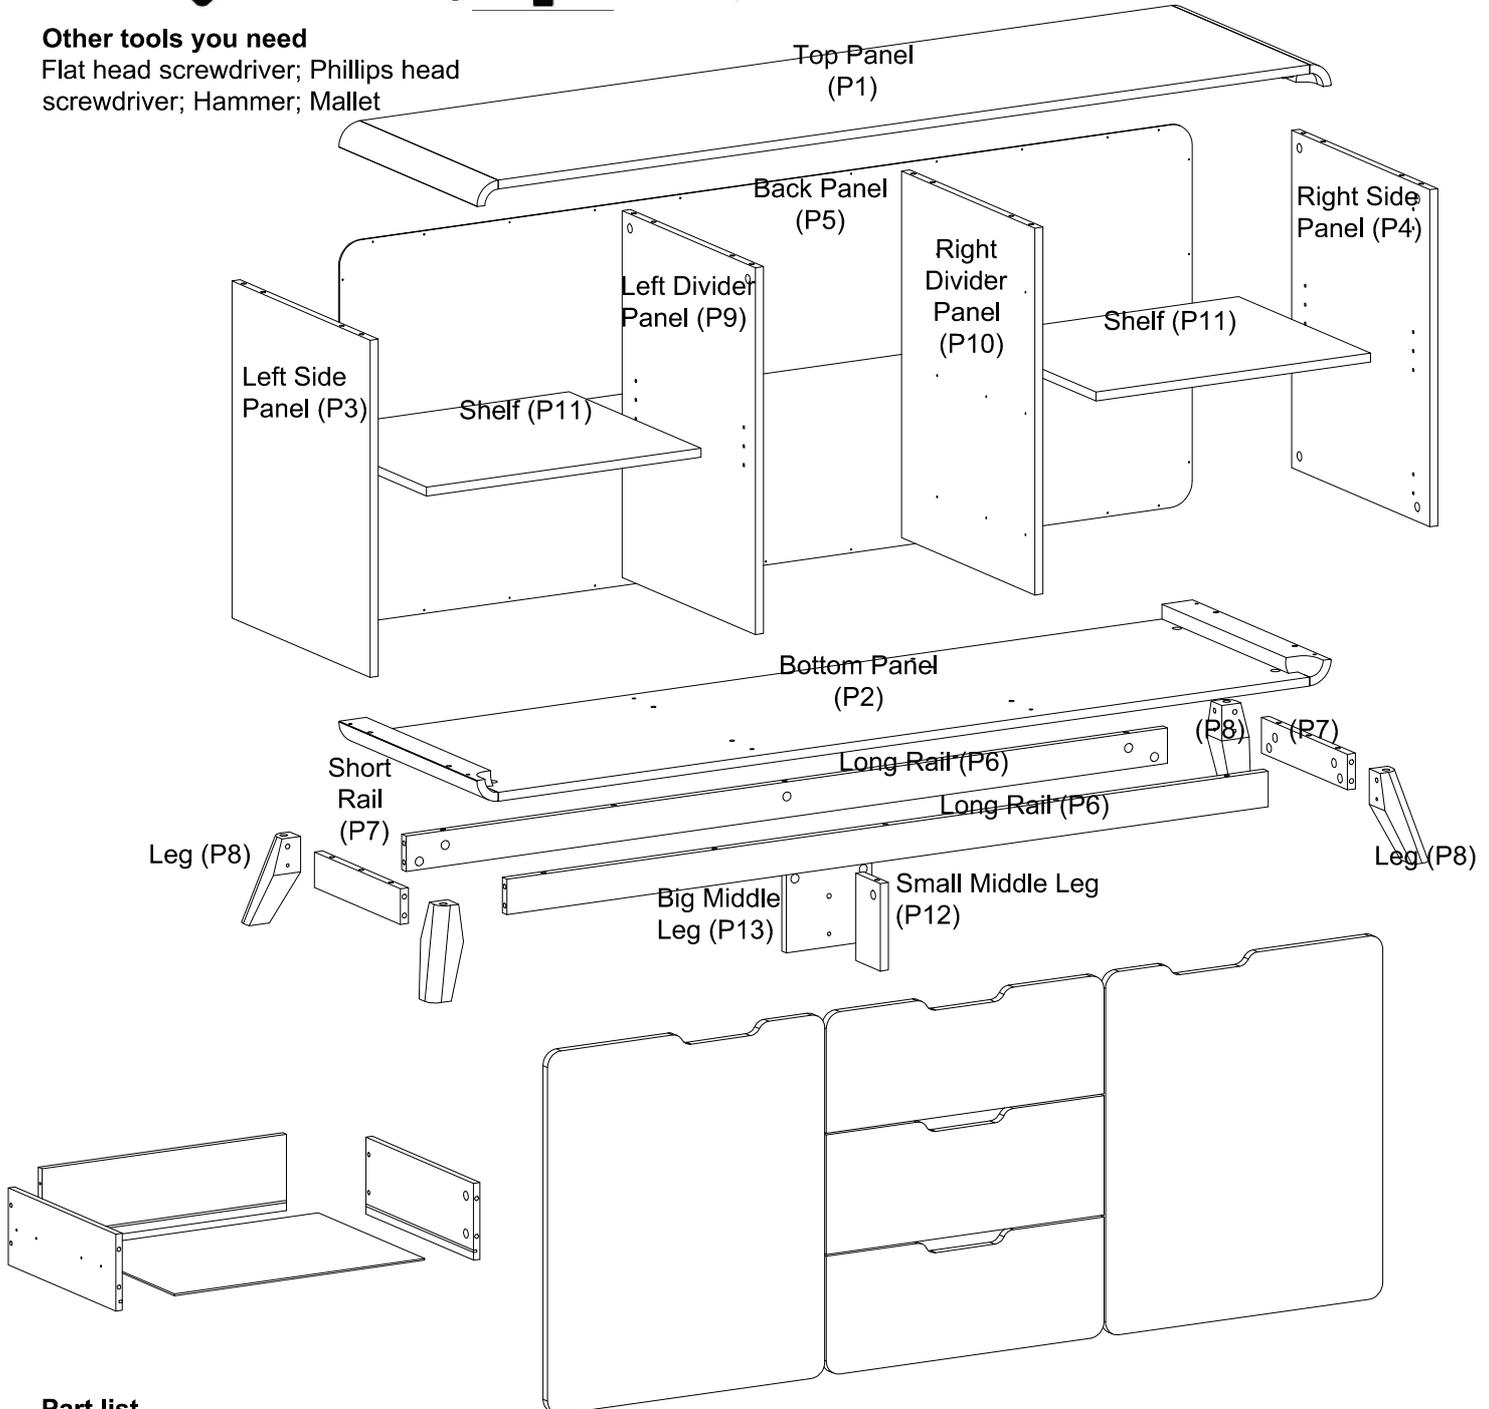


## Part list

**Box 1:** Top Panel (P1); Bottom Panel (P2); Back Panel (P5); Long Rail (P6); Leg (P8); Left Divider Panel (P9); Right Divide Panel (P10); Small Middle Leg (P12); Big middle Leg (P13); Drawer Back Panel (P14); Drawer Left Side (p16); Drawer Right Side (P17); Drawer Base (P15); Hardware Pack.

**Box 2:** Left Door (P18); Right Door (P19); Upper Drawer Front (P20); Middle Drawer Front (P21); Lower Drawer Front (P22); Short Rail (P7); Left Side Panel (P3); Right Side Panel (P4); Shelf (P11).

## Hardware pack



45 x Cam Bolts  
(H1)



33 x Big Cam Nuts  
(H2)



32 x Wood Dowels  
(H3)



12 x Small Cam  
Nuts (H4)



4 x Screws  
(H5)



42 x Screws  
(H6)




17 x Screws  
(H7)




36 x Nails  
(H8)




7 x Felt Feet  
(H9)




8 x Shelf Pins  
(H10)



3 x Left Runner  
Tracks (H11)



3 x Left Runners  
(H12)



3 x Right Runners  
Track (H13)



3 x Right Runners  
(H14)



10 x Pads  
(H15)



8 x Screws  
(H16)



4 x Hinge Bases  
(H17)



4 x Hinges  
(H18)



2 x Screws  
(H19)





2 x Wall Straps  
(H20)



4 x Flat Washers  
(H21)

# Step 1


You will need	
	
13 x Cam Bolts (H1)	Phillips head screwdriver

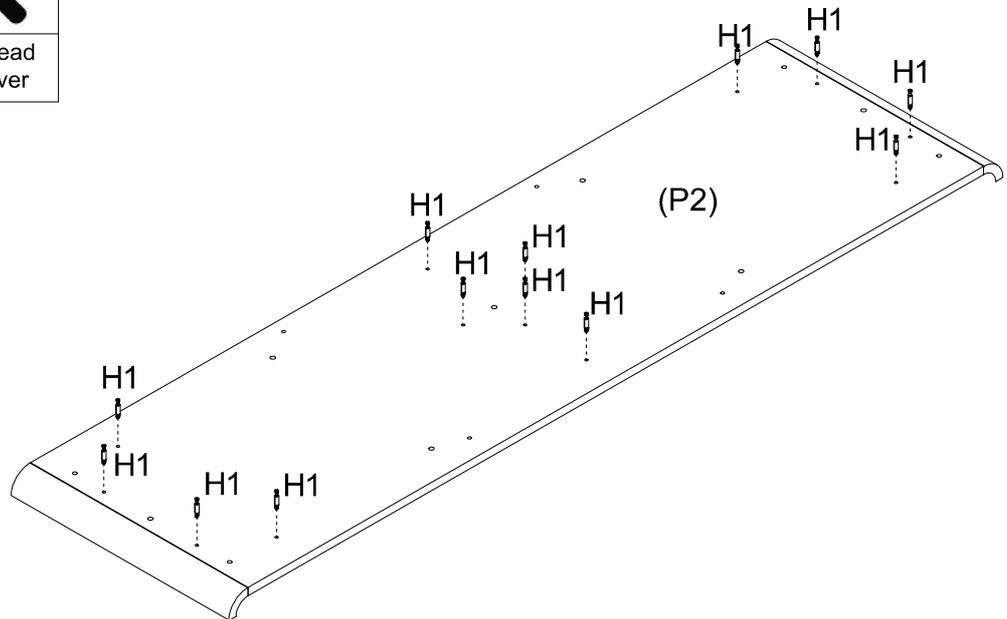

Screw 13 x Cam Bolts (H1) into Bottom Panel (P2) as shown.


# Step 2


You will need	
	
14 x Wood Dowels (H3)	Mallet

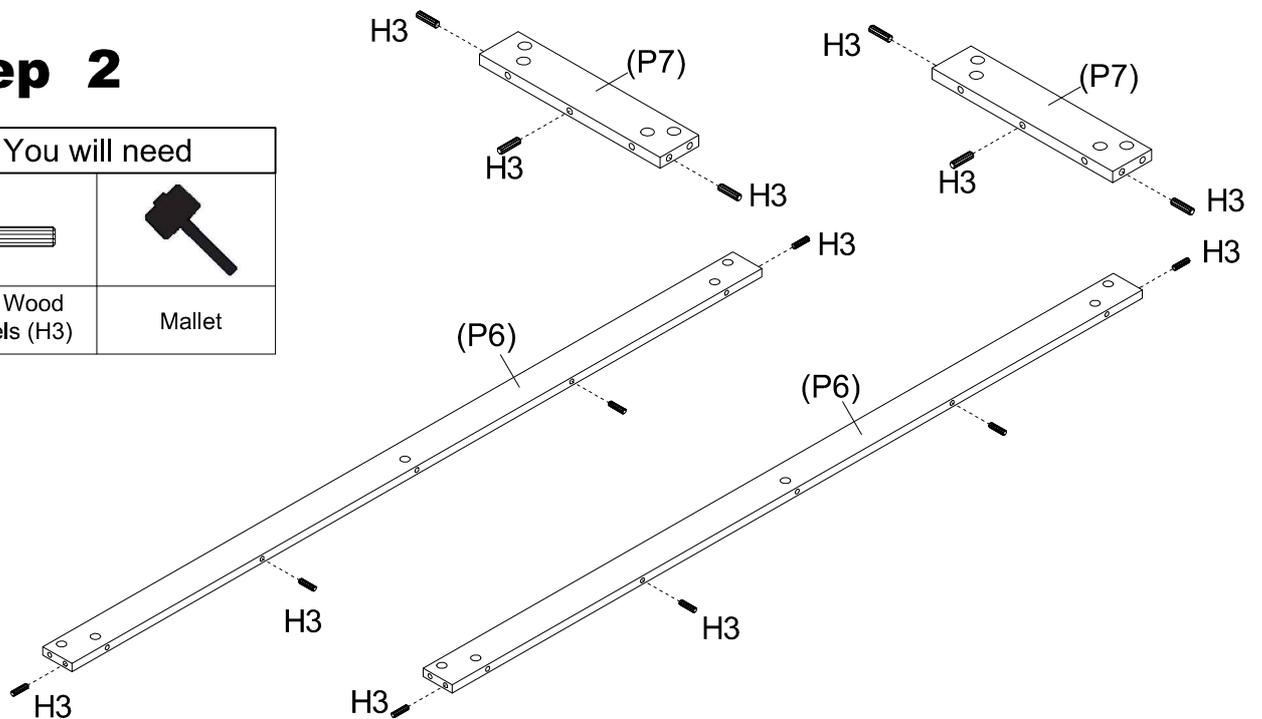

Insert each 3 x Wood Dowels (H3) into Short Rail (P7) and each 4 x Wood Dowels (H3) into Long Rail (P6).

## Step 3


You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver
	
4 x Felt Feet (H9)	

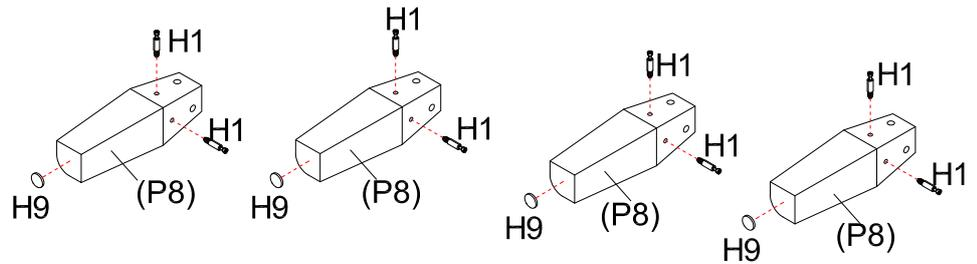


Screw each 2 x Cam Bolts (H1) into Leg (P8) using a phillips head screwdriver.  
Attached 4 x Felt Feet (H9) to Legs (P8).

## Step 4

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

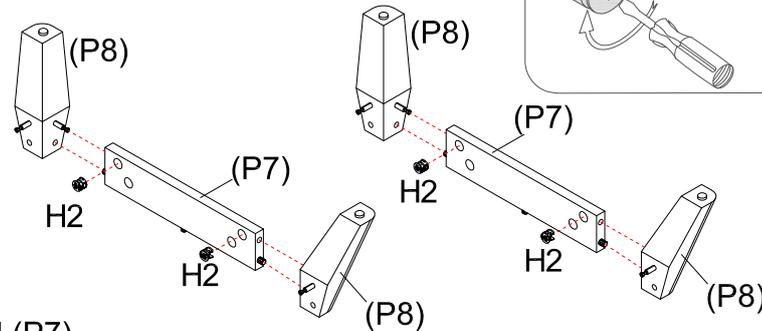

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Leg (P8) to Short Rail (P7).  
Insert each 2 x Big Cam Nuts (H2) into Short Rails (P7).  
Rotate the cam nuts so the arrows point towards the incoming cam bolt.  
Push Leg (P8) into place and tighten the cam nuts.

## Step 5

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

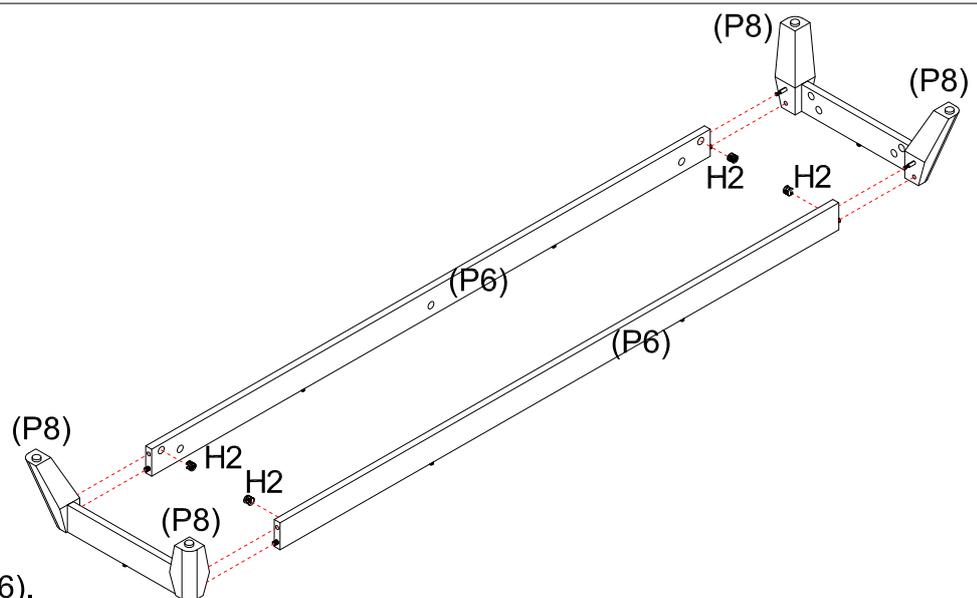


Attach Leg (P8) to Long Rail (P6).  
Insert 4 x Big Cam Nuts (H2) into Long Rails (P6) and turn clockwise to lock.


# Step 6

You will need	
	
10 x Cam Nuts (H2)	Flat head screwdriver

TWO PEOPLE

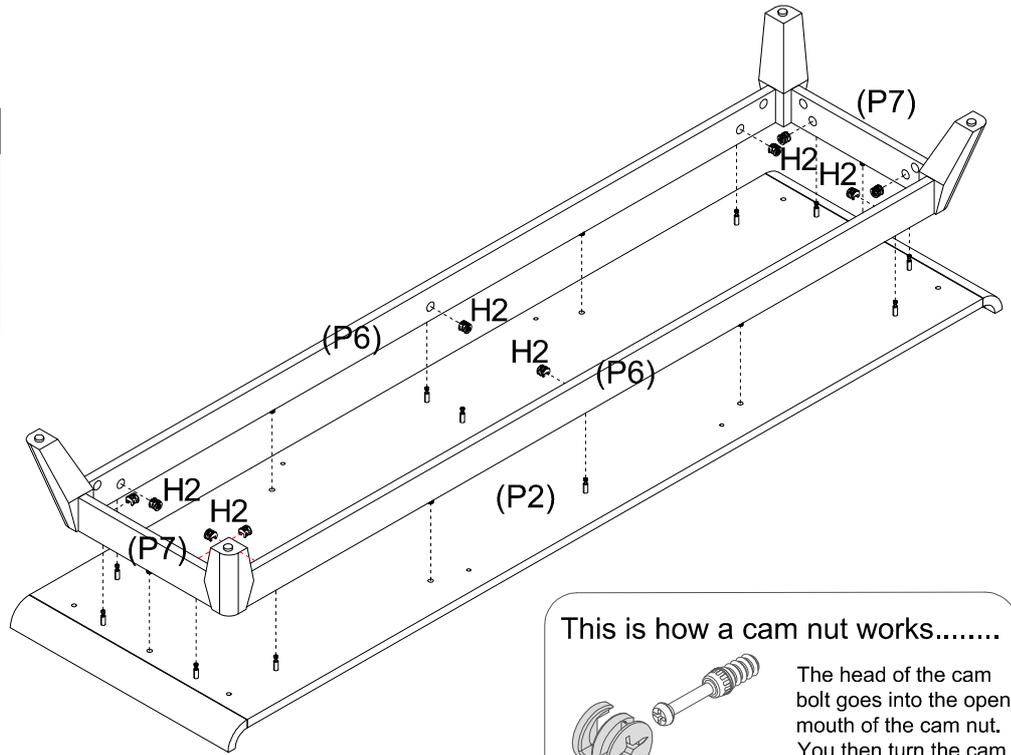

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Attach Short Rail (P7) and Long Rail (P6) to Bottom Panel (P2).  
 Insert 10 x Cam Nuts (H2) into Short Rails (P7) and Long Rails (P6) with the arrow pointing towards the incoming bolt, and turn clockwise to lock.

# Step 7


You will need	
	
2 x wood Dowels (H3)	Phillips head screwdriver
	
1 x Screw (H7)	Mallet

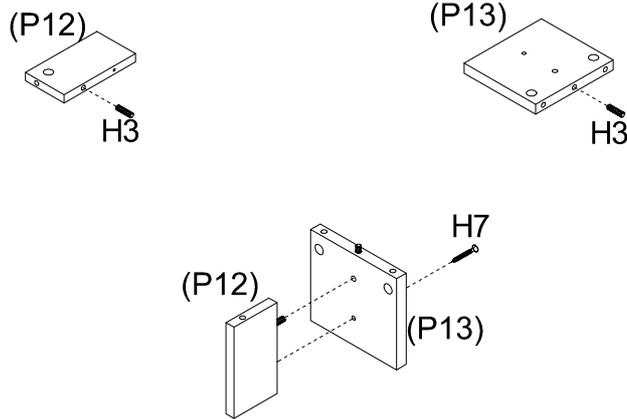


Insert 2 x Wood Dowels (H3) into Small Middle Leg (P12) and Big Middle Leg (P13).  
 Attach Small Middle Leg (P12) to Big Middle Leg (P13) with 1 x screw (H7).

## Step 8


You will need	
	
3 x Big Cam Nuts (H2)	Flat head screwdriver
	
3 x Felt Feet (H9)	

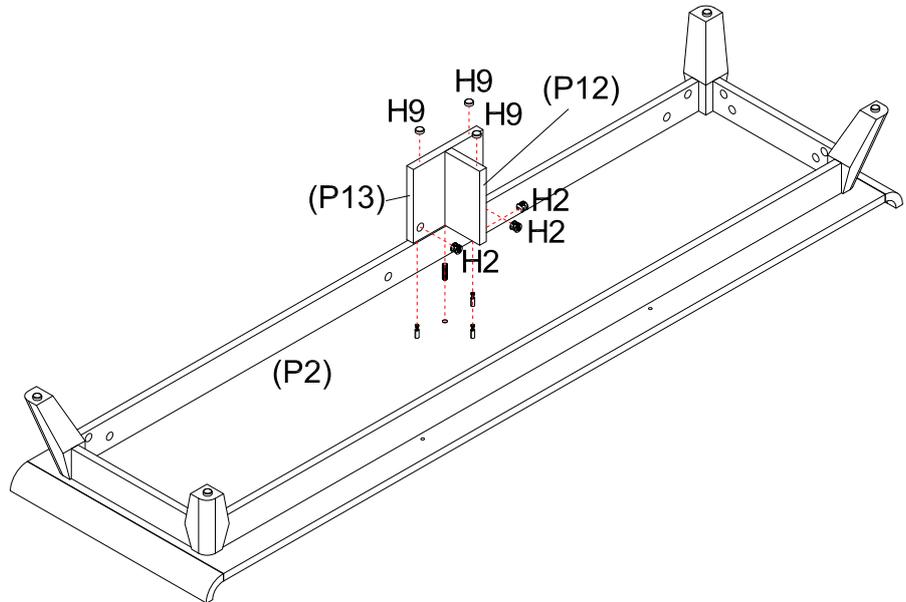


Attach Middle legs (P12) & (P13) to Bottom Panel (P2).  
 Insert 3 x Big Cam Nuts (H2) into Middle Legs (P12) & (P13).  
 Rotate the cam nuts so the arrows pointing towards the incoming cam bolts and turn clockwise to lock.  
 Attached 3 x Felt Feet (H9) to Middle Legs (P12) & (P13).

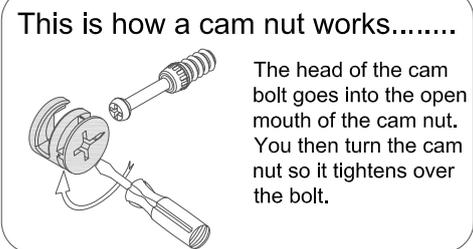

## Step 9


You will need	
	
4 x Cam Bolts (H1)	4 x Screws (H5)
	
Phillips head screwdriver	

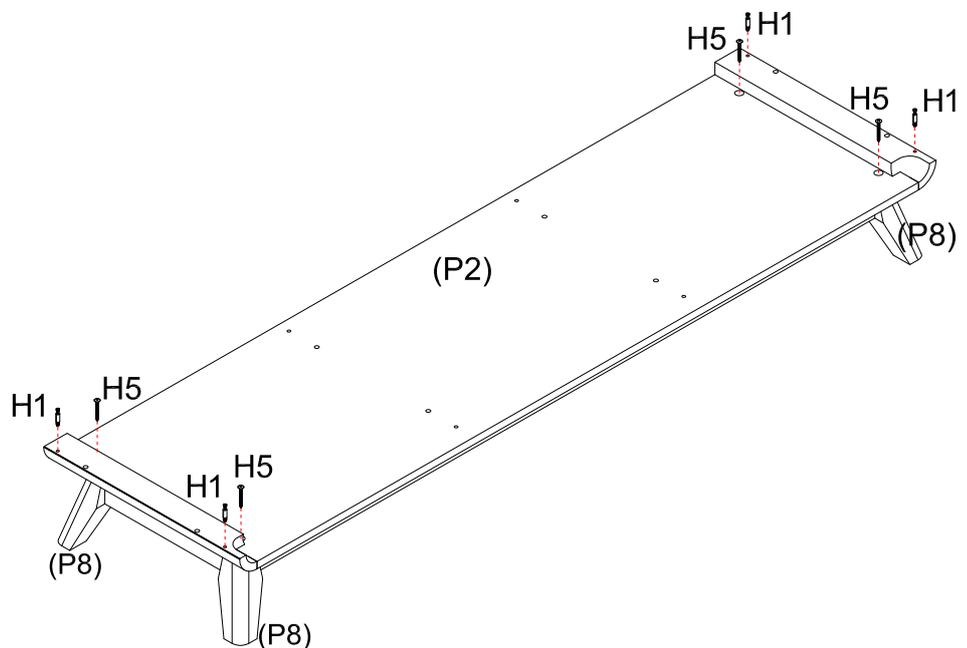

Screw 4 x Cam Bolts (H1) into Bottom Panel (P2) as shown.  
 Use 4 x Screws (H5) through Bottom Panel (P2) to connect Legs (P8).

# Step 10


You will need	
	
8 x Wood Dowels (H3)	Mallet

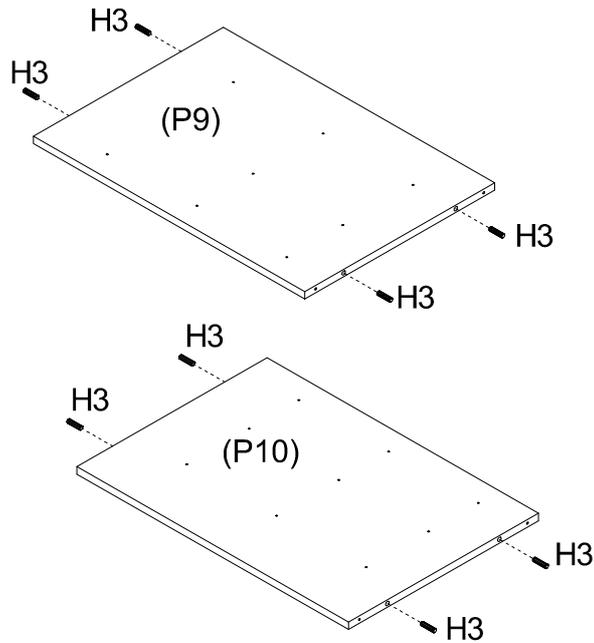

Insert 8 x Wood Dowels (H3) into Divider Panels (P9) and (P10).

# Step 11

You will need	
	
18 x Screws (H6)	3 x Left Runner Track (H11)
	
3 x Right Runner Track (H13)	Phillips head screwdriver

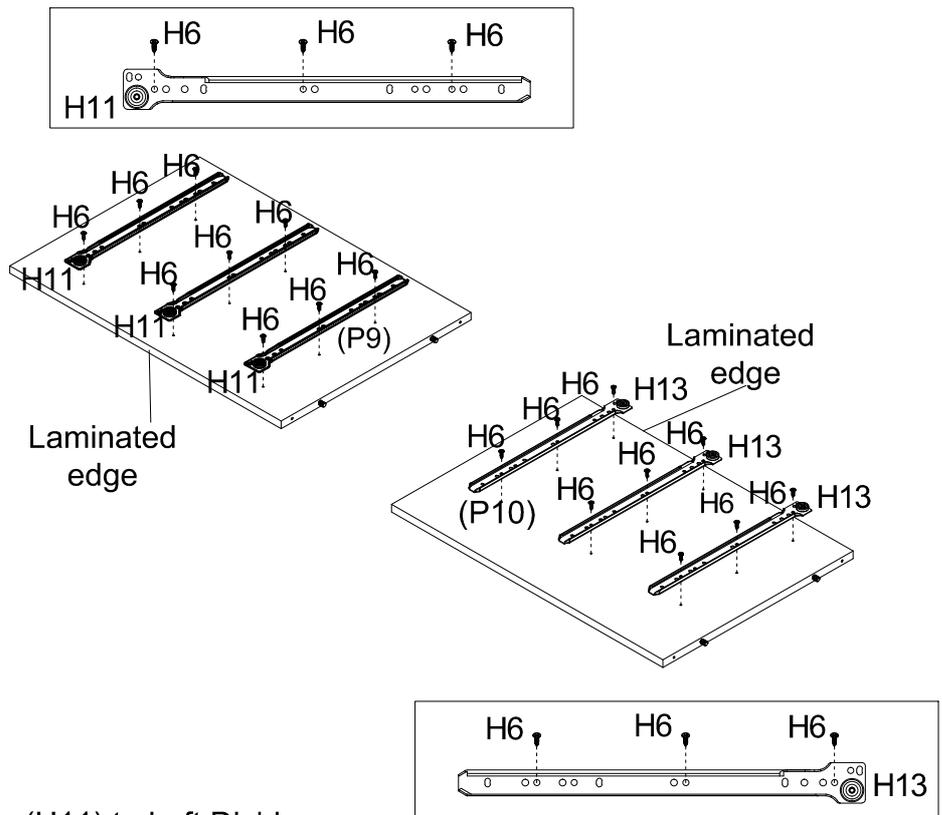

Attach 3 x Left Runner Tracks (H11) to Left Divider Panel (P9) with 9 x Screws (H6).  
 Attach 3 x Right Runner Tracks (H13) to Right Divider Panel (P4) with 9 x Screws (H6).


## Step 12

You will need	
	
4 x Screws (H7)	Phillips head screwdriver

Attach Divider Panels (P9) and (P10) to Bottom Panel (P2). Screw in 4 x Screws (H7) into Bottom Panel (P2).


Make sure the laminated edges of Bottom Panel (P2), Divider Panels (P9) and (P10) face all the same direction.

Make sure (P9) is on the left and (P10) is on the right, with the cam nut holes towards the top as shown.

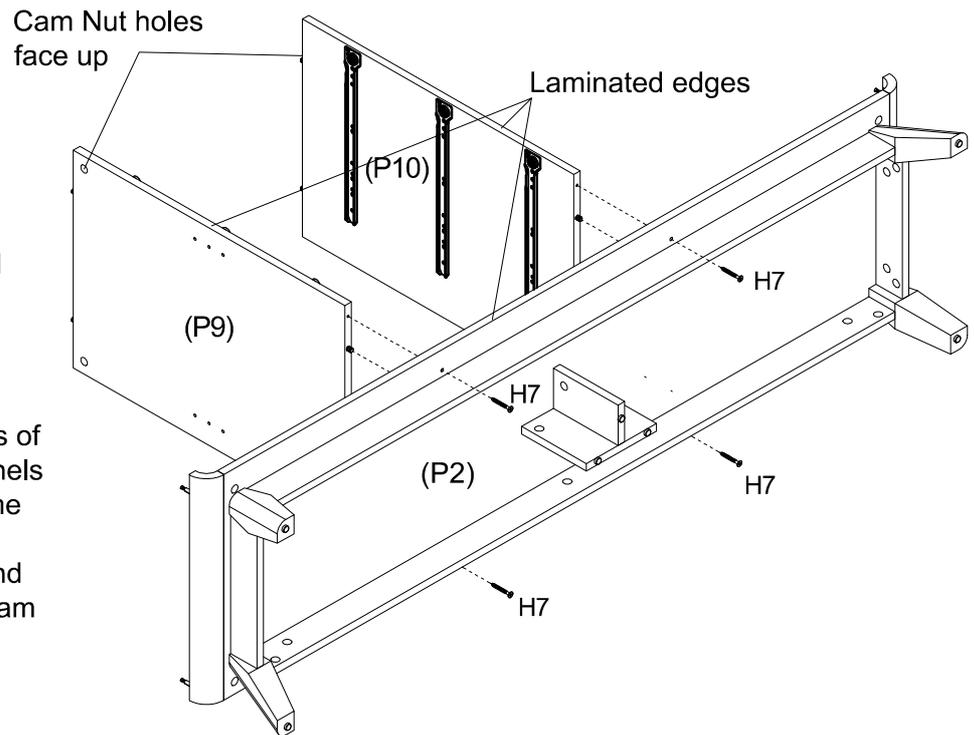

## Step 13


You will need	
	
8 x Wood Dowels (H3)	4 x Hinge Bases (H17)
	
Phillips head screwdriver	Mallet

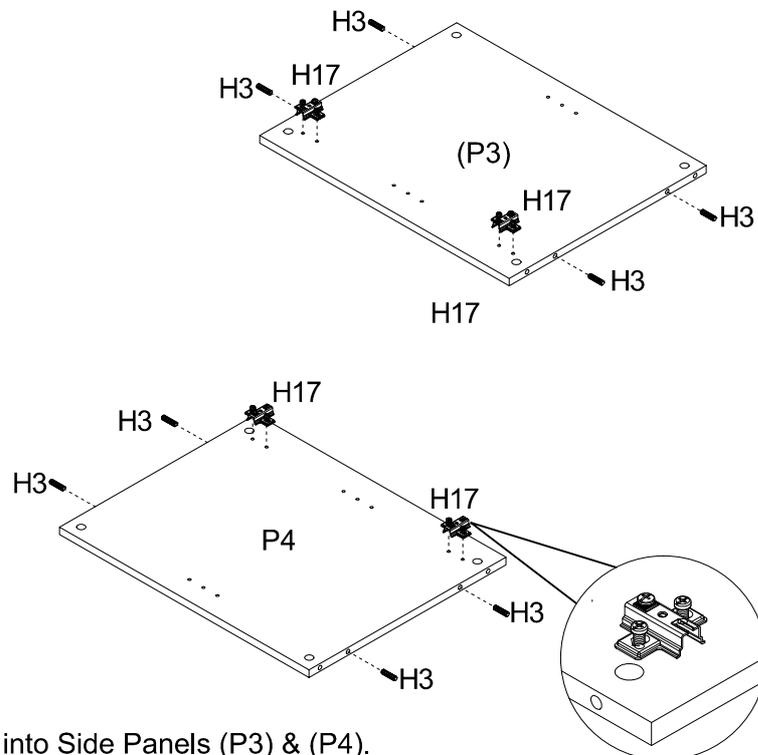

Insert 8 x Wood Dowels (H3) into Side Panels (P3) & (P4). Attach 4 x Hinge Bases (H17) to Side Panels, tighten all screws with a phillips head screwdriver.


# Step 14

You will need	
	
4 x Big Cam Nuts (H2)	Flat head screwdriver

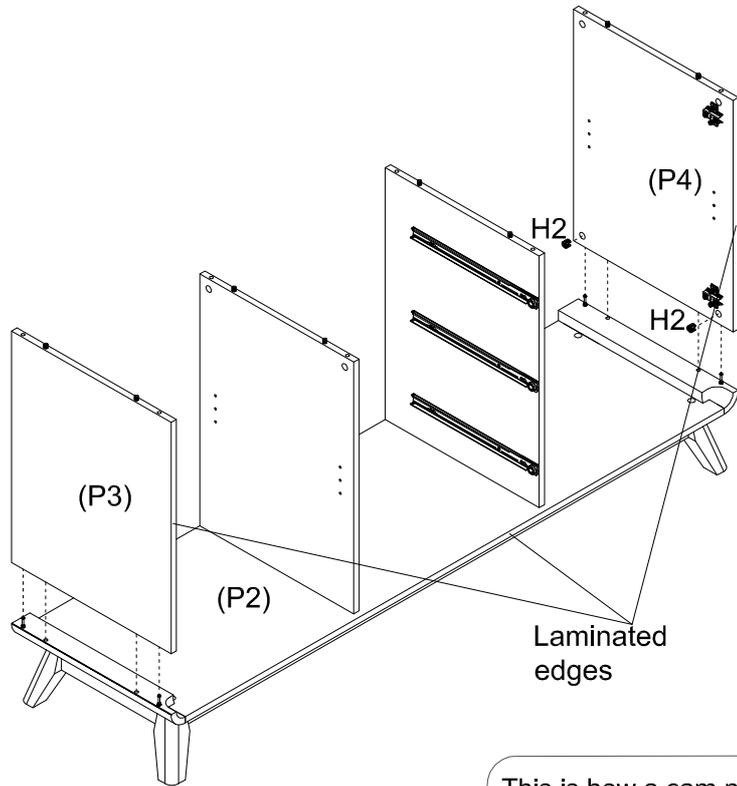

Attach Side Panels (P3) & (P4) to Bottom Panel (P2).  
 Insert 4 x Big Cam Nuts (H2) into Side Panels (P3) & (P4) and turn clockwise to lock.

This is how a cam nut works.....




The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

Make sure the laminated edges of Bottom Panel (P2), Side Panels (P3) and (P4) are facing the same direction.

# Step 15

You will need	
	
8 x Cam Bolts (H1)	Phillips head screwdriver

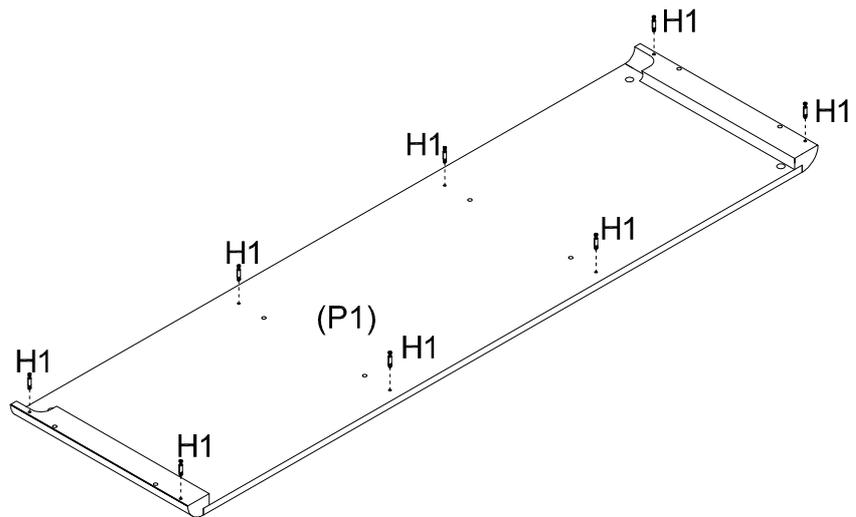

Screw 8 x Cam Bolts (H1) into Top Panel (P1) as shown.

# Step 16


TWO PEOPLE



You will need	
8 x Big Cam Nuts (H2)	Flat head screwdriver

This is how a cam nut works.....

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

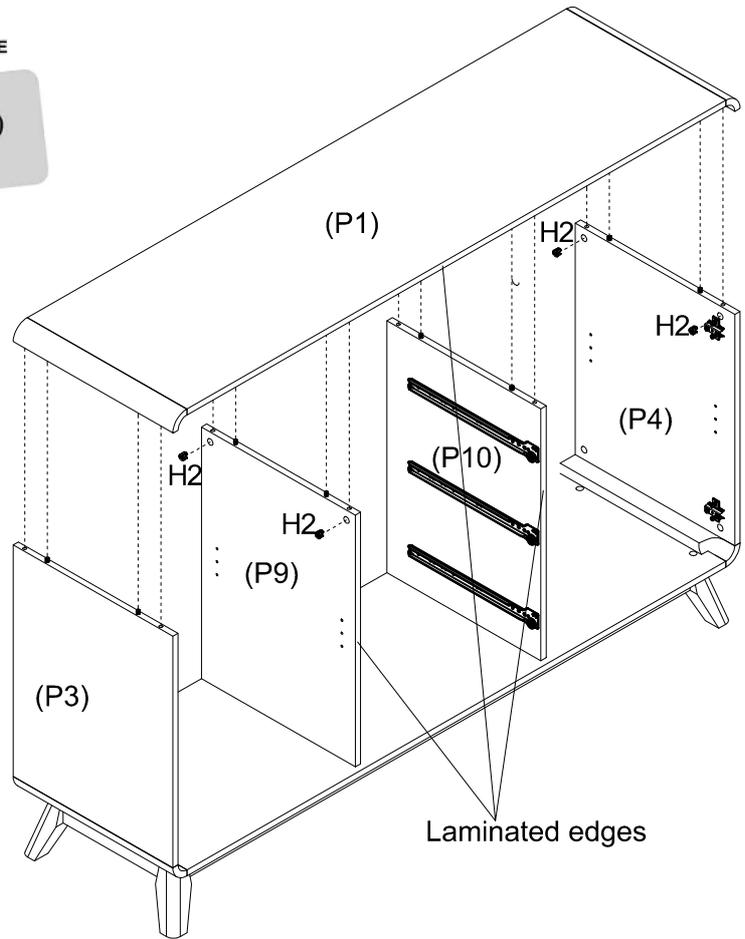


Attach Top Panel (P1) to Side Panels (P3) & (P4) and Divider Panels (P9) & (P10). Make sure the laminated edges of Top Panel (P1), Divider Panels (P9) and (P10) face all the same direction. Insert 8 x Big Cam Nuts (H2) into Side Panels (P3), (P4) and Divider Panels (P9), (P10) and turn clockwise to lock.

# Step 17


You will need	
36 x Nail (H8)	Hammer


TWO PEOPLE

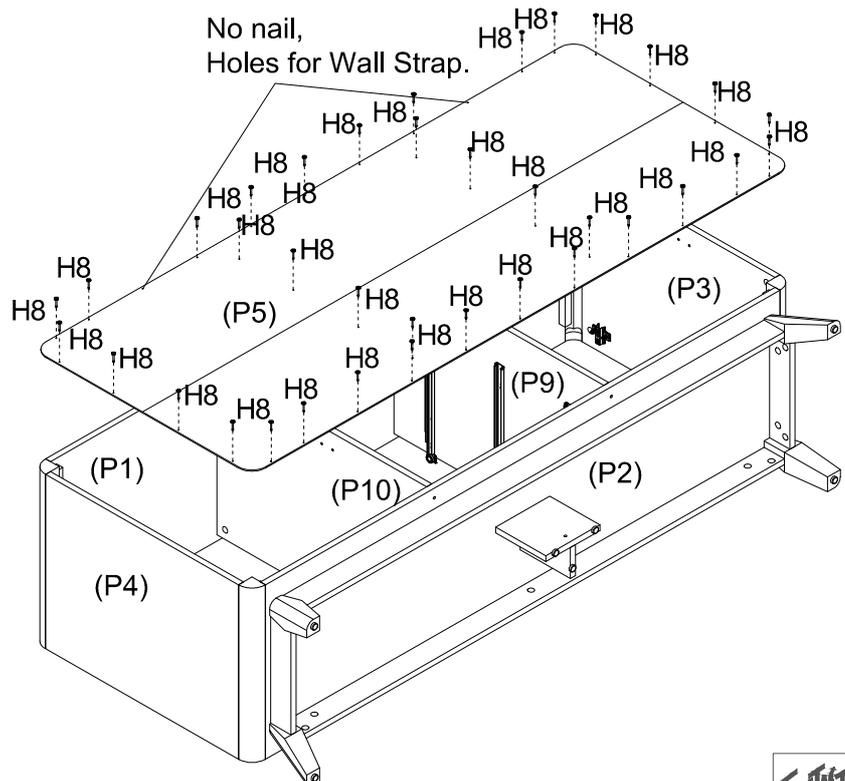

Attach Back Panel (P5) to Panels (P1) (P2) (P3) (P4) (P9) and (P10) with 36 x Nails (H8).

# Step 18


You will need	
	
12 x Cam Bolts (H1)	Phillips head screwdriver

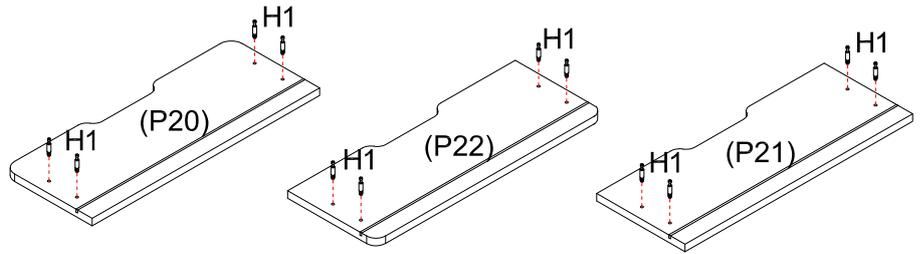

Screw each 4 x Cam Bolts (H1) into Drawer Fronts (P20) (P21) (P22) using a Phillips head screwdriver.

# Step 19

You will need	
	
24 x Screws (H6)	3 x Left Runner (H12)
	
3 x Right Runner (H14)	Phillips head screwdriver

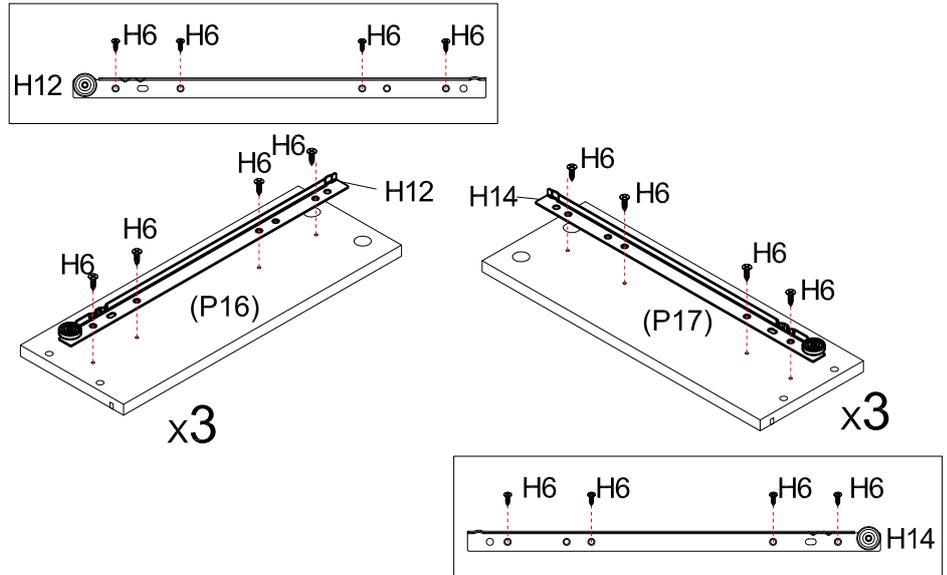


Attach each one Left Runner (H12) to Left Drawer Sides (P16) with 4 x Screws (H6). Repeat two times for all Left Drawer Sides (P16).

Attach each one Right Runner (H14) to Right Drawer Sides (P17) with 4 x Screws (H6). Repeat two times for all Right Drawer Sides (P17).


# Step 20

You will need	
	
12 x Screws (H7)	Phillips head screwdriver

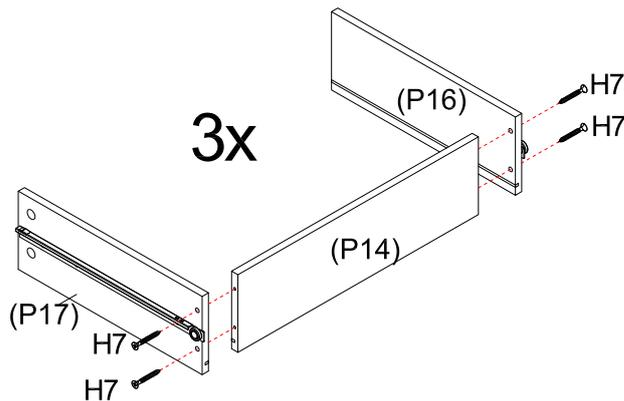

Attach each Drawer Side Panels (P16) and (P17) to each Drawer Back (P14) with 4 x Screws (H7). Repeat two times for all drawer panels.


# Step 21

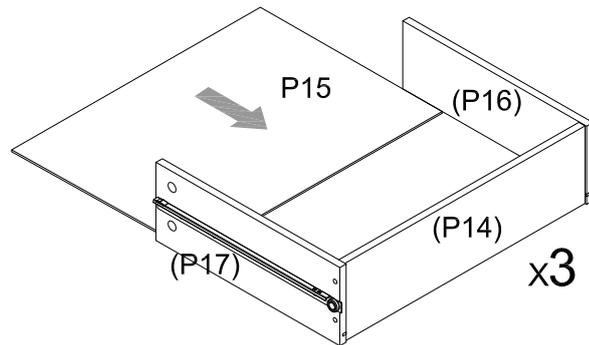

Slide each Drawer Base (P15) into the groove in the Drawer Panels (P17), (P16) and (P14). Repeat two times for all Drawer Bases (P15).



# Step 22

You will need	
12 x Small Cam Nuts (H4)	Flat head screwdriver

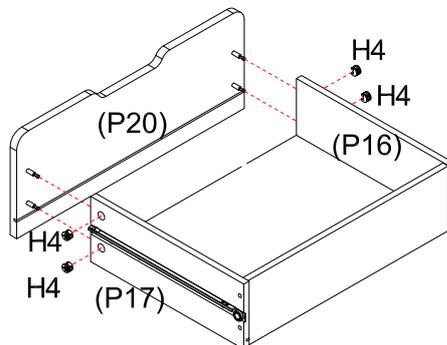

This is how a cam nut works.....

The head of the cam bolt goes into the open mouth of the cam nut. You then turn the cam nut so it tightens over the bolt.

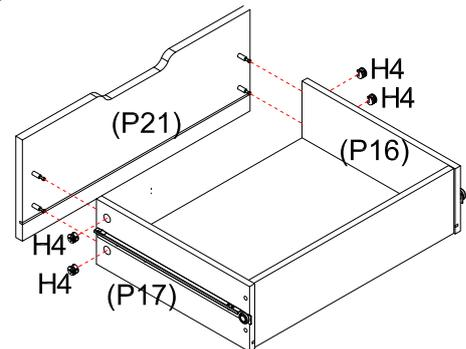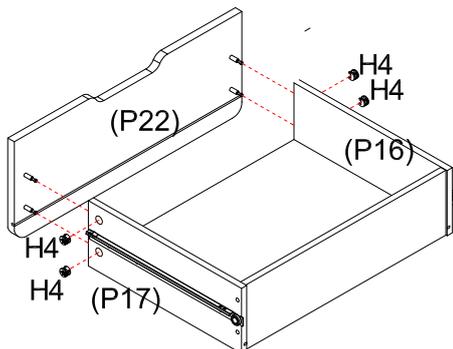

Attach Drawer Front (P20) to Drawer Sides (P17) & (P16). Insert 4 x Small Cam Nuts (H4) into Drawer Sides (P17) & (P16). Rotate the cam nuts so the arrows point towards the incoming cam bolt and turn clockwise to lock. Repeat for other Drawer Fronts (P21) & (P22).


## Step 23

You will need	
	
6 x Pads (H15)	

Insert drawers into cabinet carefully as shown.  
Slide drawers runners into position gently to avoid damaging runners.


Note: Follow the correct order of these three drawers as shown.

Attach 6 x Pads (H15) to Drawer Fronts (P20) (P21) (P22) as shown.

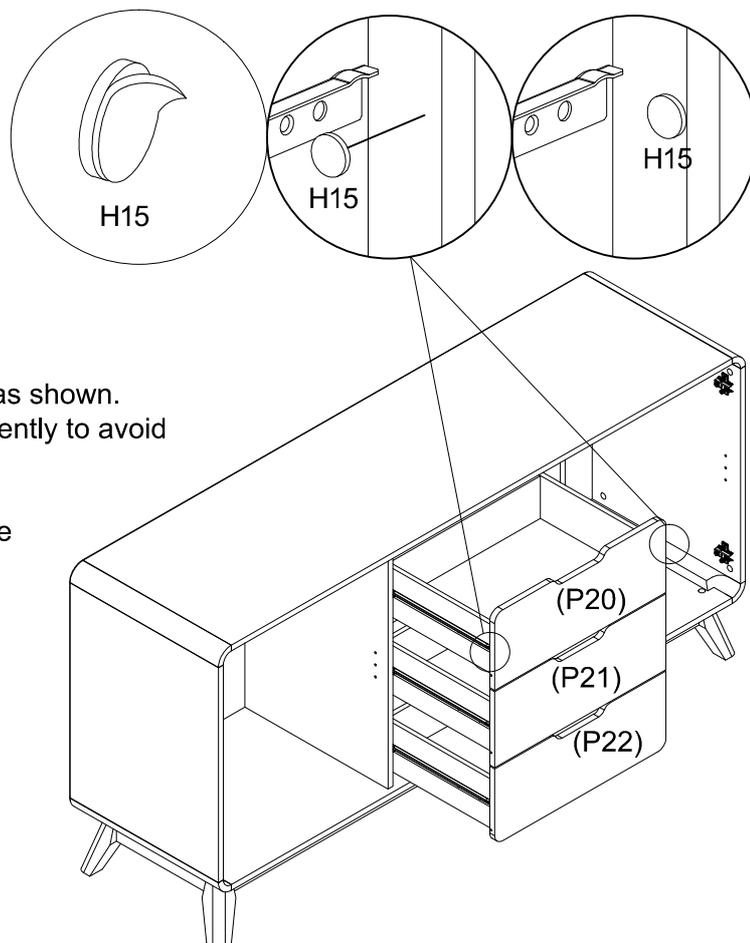

## Step 24


You will need	
	
8 x Shelf Pins (H10)	Mallet

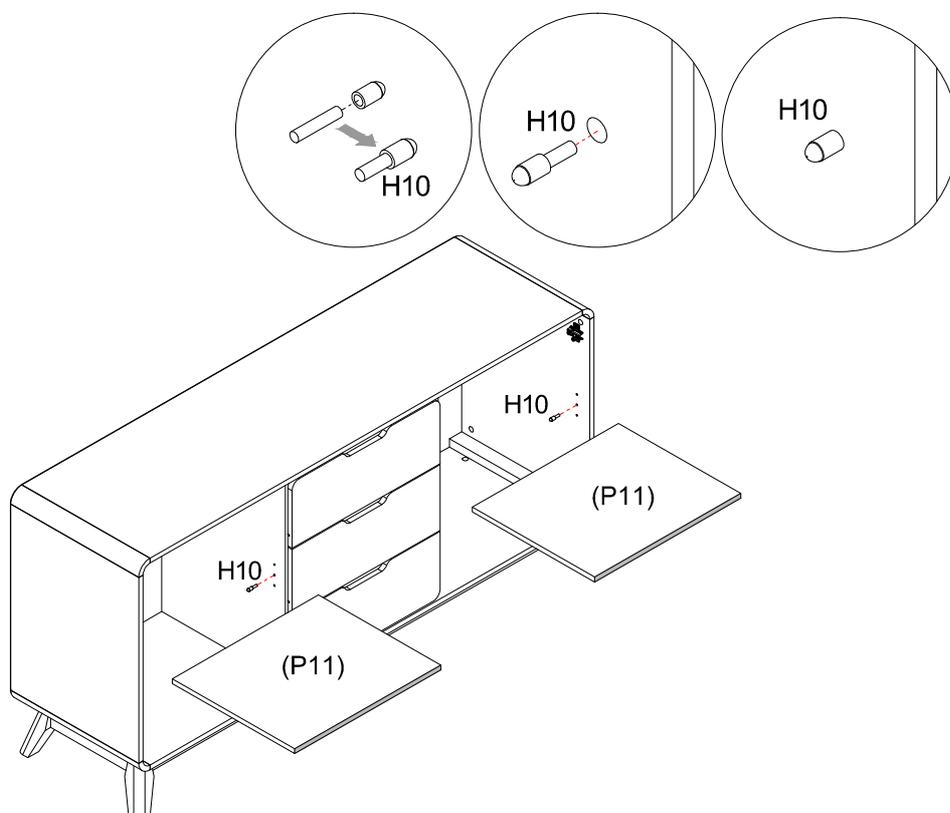

Insert 8 x Shelf Pins (H10) into desired holes in panels.  
Use a mallet to gently tap them into place if needed.  
Put Shelf Panels (P11) onto Shelf Pins (H10).

# Step 25


You will need	
	
8 x Screws (H16)	4 x Hinges (H18)
	
Phillips head screwdriver	

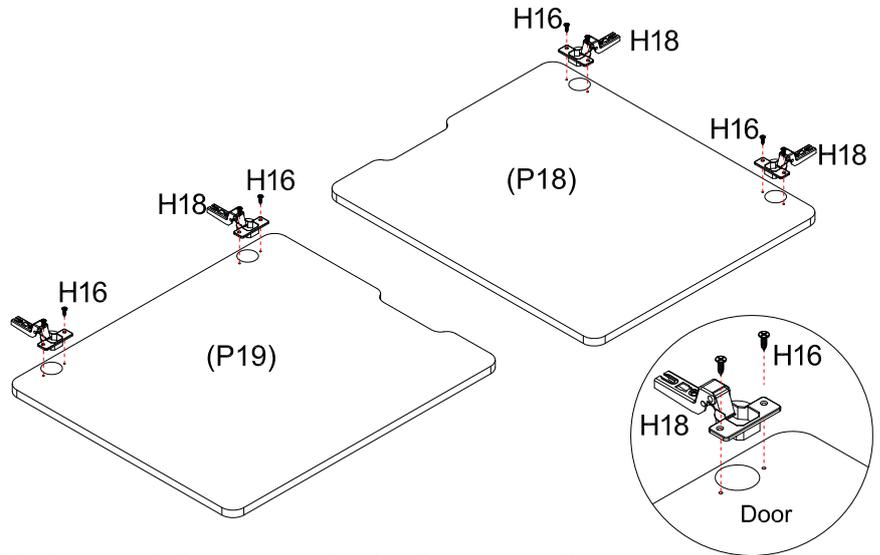

Insert 4 x Hinges (H18) into Doors (P18) and (P19). Attach with 8 x Screws (H16).

# Step 26

You will need	
	
4 x Pads (H15)	Phillips head screwdriver

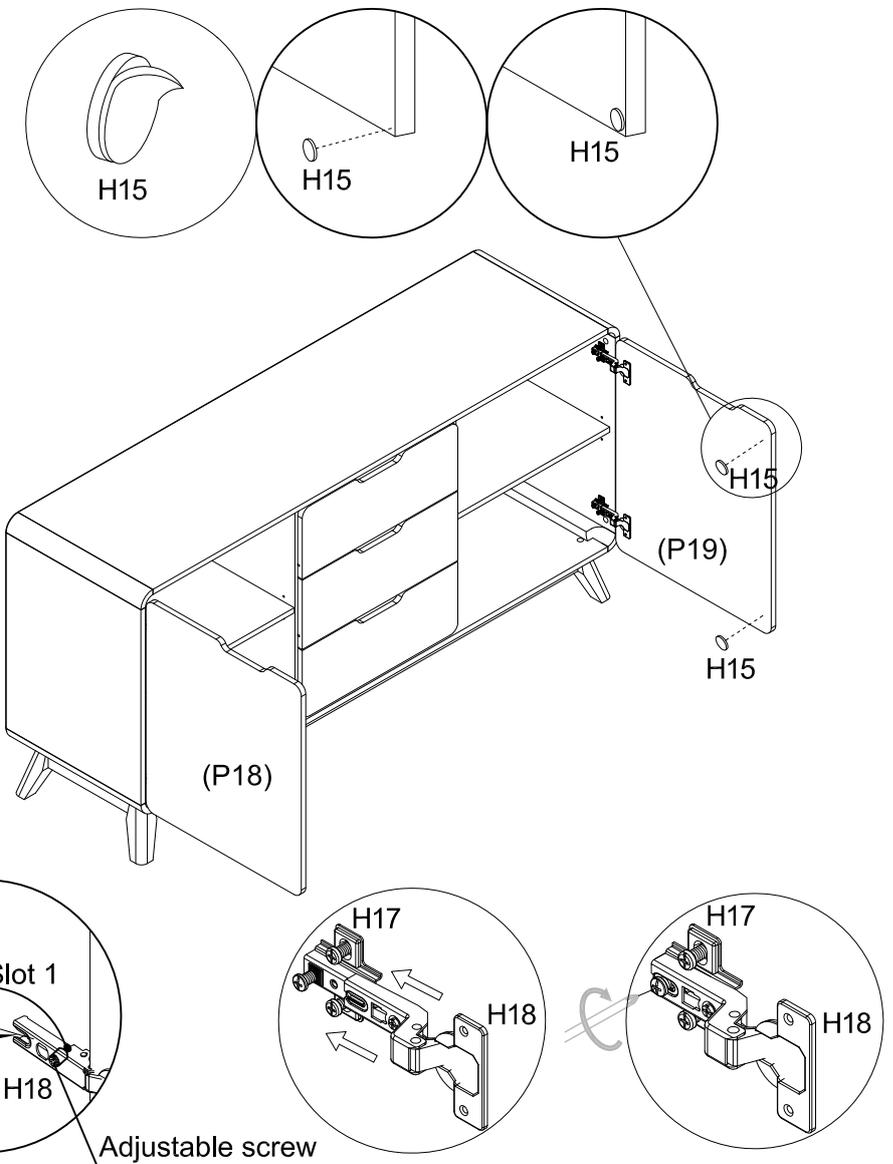


Attach doors onto cabinet as shown. Slide Hinge (H18) onto Hinge Base (H17), until each adjustable screw is in slot 1 and the lock screw is in the slot 2, then tighten lock screw. Attach 4 x Pads (H15) onto Doors (P15) and (P16).

# TO ADJUST YOUR DOORS TO MAKE THE GAPS MORE EVEN (OPTIONAL).


## STEP 1

Open the door.

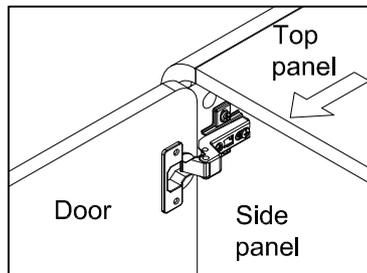


## STEP 2

Adjust the door panel to be flush with side panel and top panel edge.

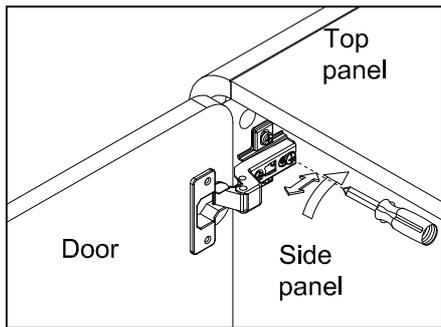


Loosen the screw indicated a little, adjust the hinge to right position (see step 2a & 2b), then tighten the screw.

### STEP 2a MOVE DOOR OUT

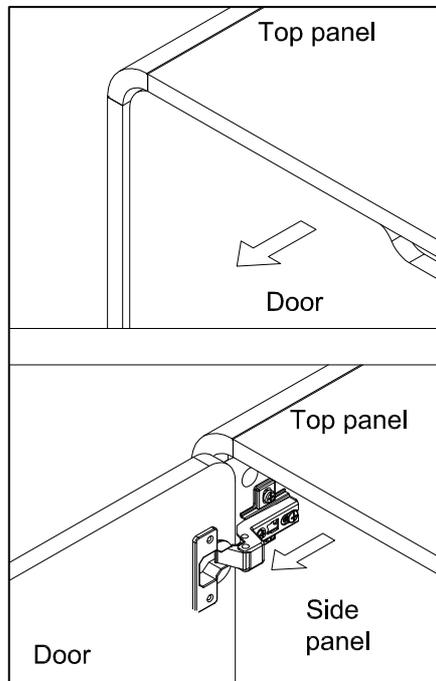

Pull the hinge forward a little.


### STEP 2a MOVE DOOR IN

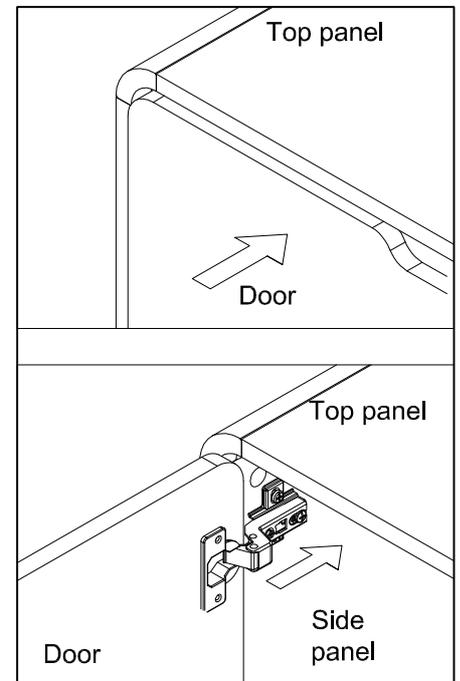

Push the hinge back a little.


## STEP 3

Adjust the gap between door panel and side panel.

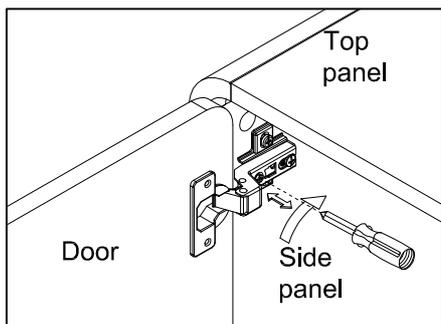


Loosen or tighten the screw indicated a little to adjust the gap between the door panels, adjust the hinge to right position (see step 3a & 3b).

### STEP 3a MOVE DOOR LEFT

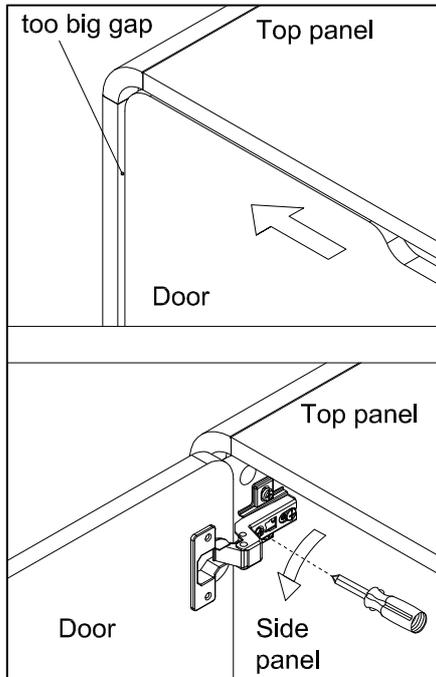

Turn the screw clockwise a little as shown to make the gap small.


### STEP 3a MOVE DOOR RIGHT

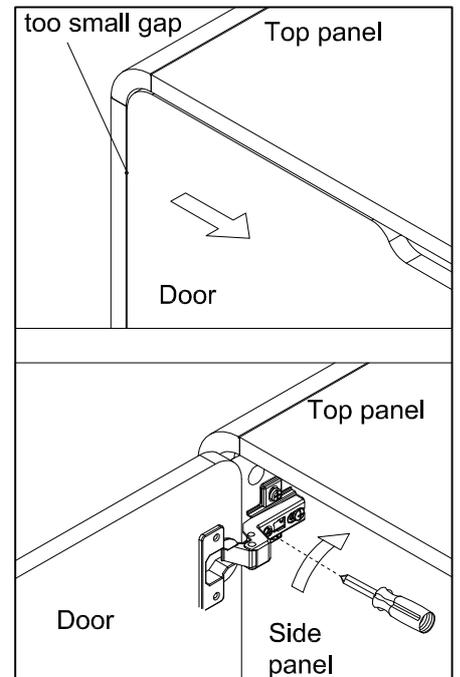

Turn the screw counterclockwise a little as shown to make the gap big.

## Step 27

You will need	
	
2 x Flat Washers (H21)	2 x Screws (H19)
	
2 x Wall straps (H20)	Phillips head screwdriver

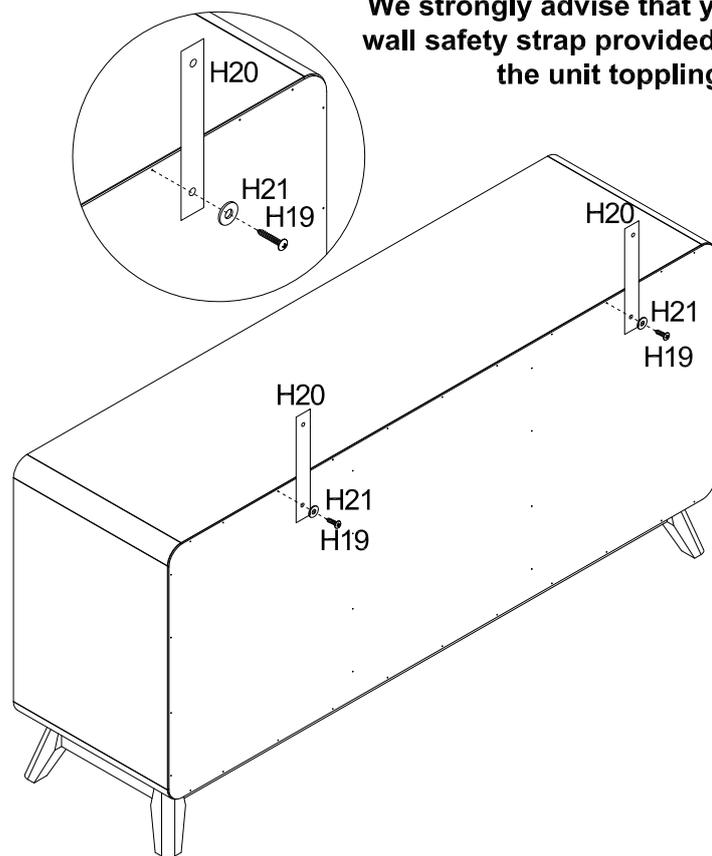

We strongly advise that you use the wall safety strap provided to prevent the unit toppling.


Use Screw (H19) to connect Wall Strap (H20) on Top Panel (P1).

## Step 28


You will need	
	
2 x Flat Washers (H21)	Phillips head screwdriver

Screw and Wall Plug which are not provided. Please use appropriate fixtures for your wall.


Move the Tallboy to the final position. Attach the safety strap to the wall. Make sure it is firmly attached and a snug fit.

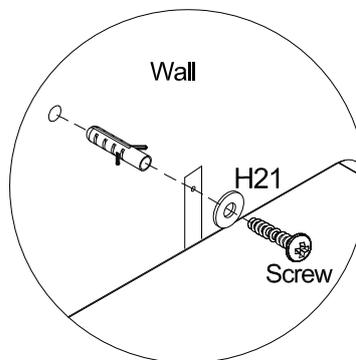

Seek advice from a qualified trades person on how to attach this safety strap to your specific wall.

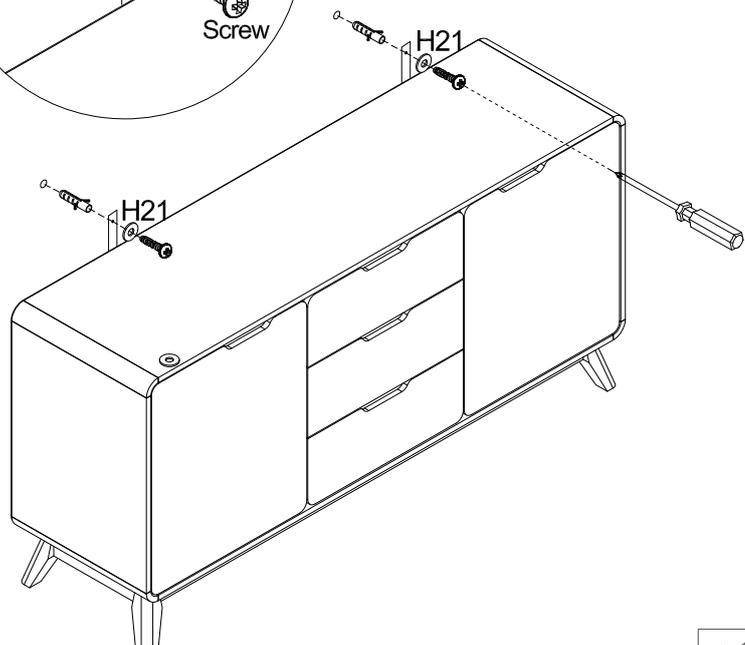

## Step 29

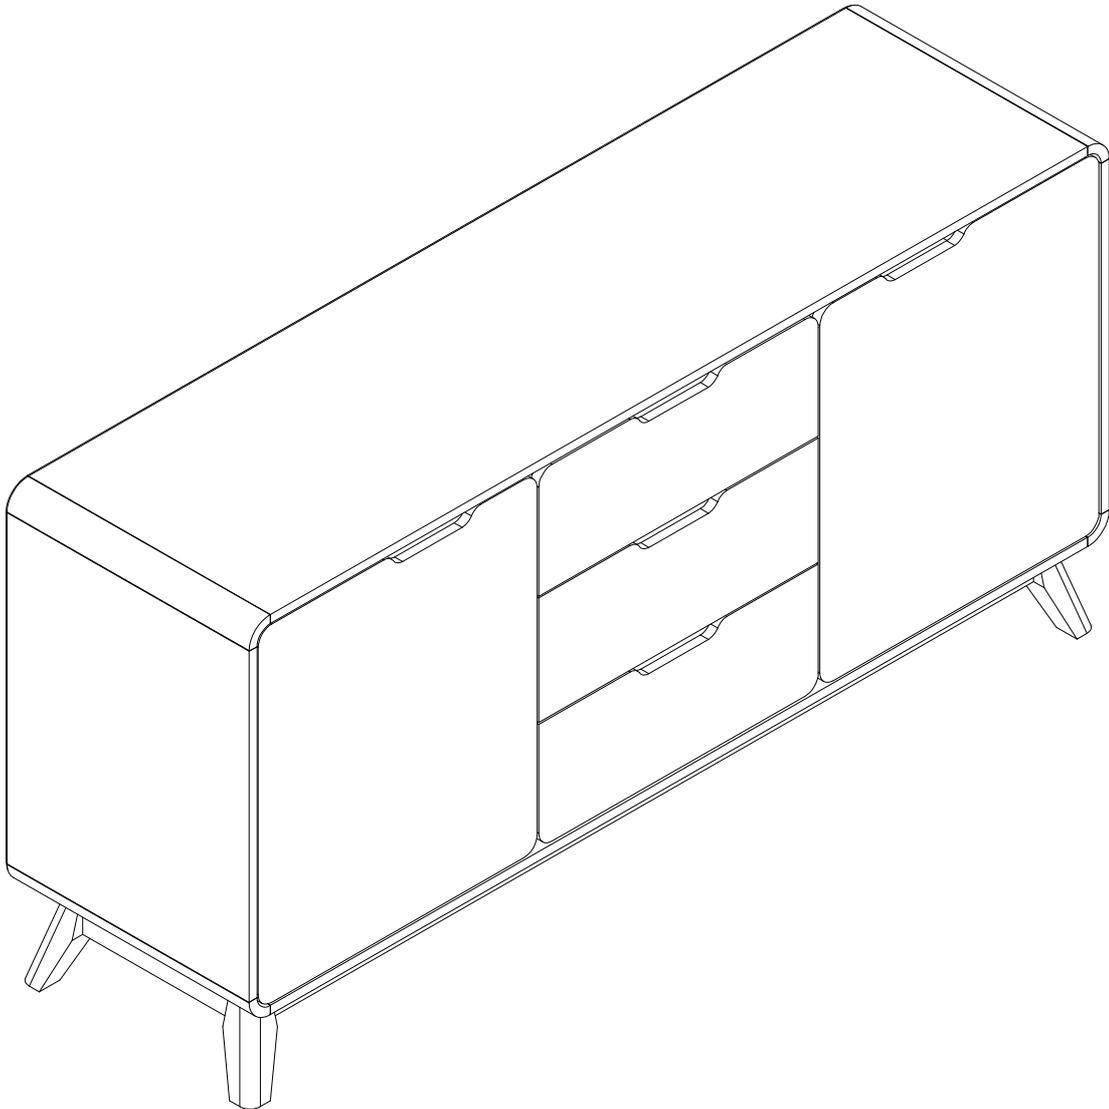

## Job Complete !

In the interest of our environment please dispose of all packaging thoughtfully.